

Orient–Survey–Evaluate–Commit: A Cognitive Task Model for SERP Evaluation

Preprint — under revision

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of April 8, 2026

Abstract. Web search interaction is typically modeled as a signal-decoding problem: click models, neural rankers, and hundred-feature cursor classifiers all treat the user’s behavior as a stream to be mapped onto relevance. We argue that this misses a critical dimension. The user is running a *cognitive task*, and when that task is modeled explicitly—with the vocabulary of psychology and HCI task analysis—structure pops out of the same data that end-to-end learners leave on the table. We make this argument concrete with a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—grounded in eye-tracking evidence from 2,776 product search trials (AdSERP dataset, 47 participants). Saccade amplitude analysis reveals a *survey phase* hypothesized by Zhang, Abualsaud & Smucker (CHIIR 2018) in the context of immediate query: ~ 3.5 wide saccades (117 px median) over ~ 1 s, during which users sample the result set before committing to reading. The survey–evaluate transition is marked by an amplitude drop detectable at $p = 10^{-61}$ within individual trials. Survey duration is fixed and does not respond to SERP content, but its output—an impression of result set composition—modulates subsequent evaluation strategy. We operationalize SERP difficulty as *relevance spread* (variance in query-result embedding similarity) and show it predicts page coverage, click position, and trial duration within-participant. Forward evaluation and regressive re-evaluation are shown to be distinct sub-processes under the same task. Taken together, the results are an instance of the larger point: task modeling recovers structure that pure-CS SERP modeling misses.

1 Introduction

Twenty years of web search modeling has been dominated by a single move: treat user behavior as a signal stream and learn a mapping from that stream to relevance. Click models Craswell et al. [2008], Chapelle and Zhang [2009], Dupret and Piwowarski [2008], Chuklin et al. [2015] encode examination and stopping as statistical parameters. Cursor-feature classifiers extract 638-dimensional feature bags from mouse trajectories Arapakis and Leiva [2016]. Transformer-based sequence models now learn end-to-end maps from raw (x, y, t) to click Villaizán-Vallelado et al. [2025], Brückner et al. [2021]. These approaches have produced real engineering gains and are the default framing in SIGIR, CIKM, and WSDM.

Our argument is that this framing misses a critical dimension: the user is running a *cognitive task*, and when the task is modeled explicitly—using the vocabulary of

psychology and HCI task analysis that the field already has Pirolli and Card [1999], Fu and Pirolli [2007], Liu et al. [2014]—structure comes out of the data that pure signal-decoding leaves untouched. Phase boundaries become testable. Content-independent vs. content-modulated subprocesses separate. Forward vs. regressive evaluation stop being one blob. The gains are not about squeezing more accuracy from the same regression; they are about seeing variables that were never in the regression to begin with.

We make the argument concrete with a four-phase cognitive task model for SERP evaluation—ORIENT, SURVEY, EVALUATE, COMMIT—and show that each phase has saccade-level, pupillometric, and behavioral signatures that do not collapse into one another. Every phase in the model has precedent in the literature taken in isolation: orientation is implicit in click models’ position-bias assumptions; scanning-then-reading appears in Liu et al.’s two-stage model Liu et al. [2014]; the SURVEY phase was hypothesized by Zhang, Abualsaud & Smucker Zhang et al. [2018] as a “result inspection phase” gating the stay-or-reformulate decision; committed evaluation is the subject of decades of relevance assessment research; satisficing as a stopping rule is central to the foraging account; scroll regressions are documented by Lorigo et al. Lorigo et al. [2008]. What has not been done is to identify these as phases of a single task with measurable transitions between them, and to draw out the consequences for how SERP behavior should be modeled.

The empirical anchor is a saccade amplitude transition at fixation ~ 5 ($p = 10^{-61}$), operationalizing the survey phase Zhang et al. hypothesized seven years earlier. Click models cannot see this because they examine clicks, not saccades; end-to-end cursor learners cannot see it because they lack the task-level concept of a phase boundary to look for. The decomposition is recoverable only if the analyst is looking for phase structure in the first place.

We test the decomposition on a forced-choice product search task (AdSERP) that eliminates two of the three natural exit paths from SERP evaluation—reformulation and abandonment. This isolates the orient–survey–evaluate–commit sequence but cannot characterize the full foraging decision (stay, refine, or quit). Validating the complete model requires production log data with natural stopping

behavior.

2 Related Work

Each phase of our model has precedent in the literature. The contribution is not any single phase but the identification of measurable transitions between them.

2.1 Process models of information seeking

Stub. Kuhlthau ISP, Marchionini 8 sub-processes, Bates berrypicking, Belkin ASK. These model the full search session. Our work zooms into Marchionini’s “examine results” sub-process and decomposes it further. Session-level models don’t predict within-SERP behavior.

2.2 Click models as implicit task models

Stub. Cascade [Craswell et al. \[2008\]](#) assumes serial top-down examination with a stopping rule—implicitly modeling EVALUATE + COMMIT. DBN [Chapelle and Zhang \[2009\]](#) adds skip/examine decisions—implicitly modeling what we call the survey impression. UBM [Dupret and Piwowarski \[2008\]](#) adds position-dependent examination probability—implicitly modeling orientation effects. Each encodes one or two phases as statistical parameters without identifying the cognitive operations that generate them.

2.3 Two-stage examination models

Stub. Liu et al. [Liu et al. \[2014\]](#): skimming → reading. Closest prior work—explicitly identifies two temporal phases. Our model adds ORIENT before skimming, decomposes their “skimming” into SURVEY (gist, wide saccades) and early EVALUATE (committed reading, narrow saccades), and provides the saccade amplitude marker for the transition.

2.4 Eye tracking on SERPs

Stub. Granka et al. [Granka et al. \[2004\]](#): initial scan then re-examination—evidence for phase structure, not formalized. Cutrell & Guan [Cutrell and Guan \[2007\]](#): snippet length shifts evaluation effort—the survey phase determines how much reading is needed. Lorigo et al. [Lorigo et al. \[2008\]](#): $\sim 2/3$ of scanpaths are non-sequential—challenges cascade assumption, consistent with survey-phase sampling. Buscher et al. 2010: distinct ad vs. organic fixation patterns—visual classification during orientation.

2.5 Foraging theory and satisficing

Stub. Pirolli & Card [Pirolli and Card \[1999\]](#): information scent guides patch assessment—the theoretical account for what the survey phase computes. SNIF-ACT [Fu and Pirolli \[2007\]](#): ACT-R implementation of scent-based navigation—models the EVALUATE → COMMIT transition as spreading activation. Payne & Duggan: satisficing with aspiration levels—models the commit decision. Brumby & Howes [Brumby and Howes \[2004\]](#): “good enough but I’ll just check”—directly models the survey → evaluate transition as attentional refocusing.

2.6 Task analysis in HCI

Stub. GOMS (Card, Moran & Newell 1983) provides the methodology for decomposing tasks into cognitive, perceptual, and motor operators. Hornof & Kieras 1997: CPM-

GOMS for menu search—interleaved systematic and opportunistic scanning within a display, directly analogous to survey + evaluate. The language and tools exist in HCI but have not been applied at the SERP evaluation granularity.

3 The Model

3.1 Orient

Layout recognition. For familiar SERP layouts, this is a learned prior: 58% of AdSERP trials show first fixation already on a result (0 ms orientation). No learning effect across 60 trials ($\rho = 0.02$, $p = 0.30$).

3.2 Survey

Wide saccades (117 px median), ~ 3.5 fixations, ~ 1 s. Gist sampling: the user builds an impression of result set composition without committed reading. Duration is *fixed*—does not correlate with any difficulty measure (all $p > 0.3$). The survey’s output, not its duration, modulates subsequent behavior.

3.3 Evaluate

Narrow saccades (76 px median). Consecutive fixations on the same result connected by minor saccades (< 100 px) form *reading episodes*: mean 2.16 fixations, 499 ms. Per-fixation duration is flat (~ 220 ms across all positions). The position effect in total fixation time is driven by fixation count, not processing speed. Forward-only dwell *increases* with position ($\rho = +0.82$), consistent with working memory accumulation.

3.4 Commit

Click. Satisficing threshold crossed. In AdSERP (forced choice), every trial ends with a click. In naturalistic search, this phase competes with abandonment and query reformulation.

3.5 Regression loop

65% of trials include at least one scroll regression (Evaluate → re-Survey). Backward scrolling is ballistic ($\rho = 0.867$), with 87% of regression targets at positions 0–4. Regression velocity mediates the dwell delta ($\rho = -0.762$, $p = 0.017$).

4 Data and Methods

4.1 AdSERP dataset


AdSERP [Latifzadeh et al. \[2025\]](#): 2,776 trials, 47 participants, 60 unique product purchase queries (“buy [brand] [product]”). 10 trials per participant across 6 batches. Gazepoint GP3 HD eye tracker (150 Hz). Fixations pre-segmented by the tracker’s internal I-DT filter (FPOG stream). Mean fixation duration 219 ms, median 193 ms.

4.2 Saccade classification

Saccade amplitude computed as Euclidean distance between consecutive fixation coordinates (FPOGX, FPOGY in screen pixels). Minor saccade threshold: 100 px. Fixations < 60 ms filtered as sub-threshold artifacts (1.4% of data).

SERP Evaluation: Forced-Choice Task

AdSERP paradigm — transactional product queries, must click

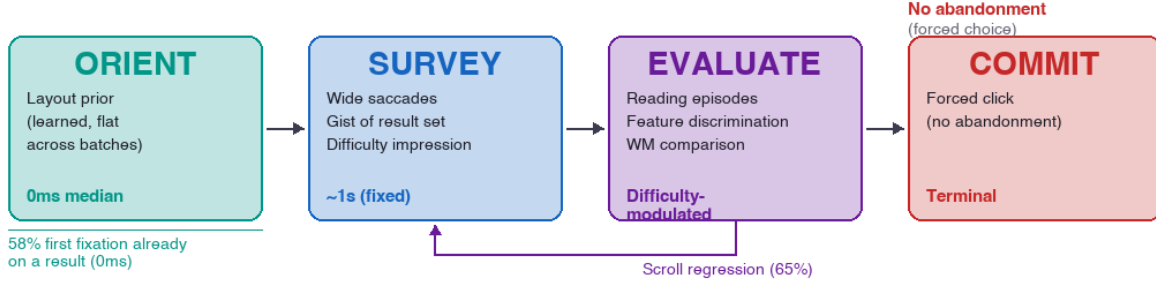

N = 2,776 trials | 47 participants | 60 unique queries | 10 trials each
 Survey: 3.5 saccades, 117px median amplitude | Evaluate: 76px median, 220ms/fixation
 Difficulty (relevance spread) □ Coverage ($p=0.098^{***}$), Click Y ($p=0.046^*$), Duration ($p=0.043^*$)

Figure 1: Orient–Survey–Evaluate–Commit task model as instantiated for the AdSERP forced-choice paradigm. Orient is collapsed (learned prior, 0 ms median). Survey is fixed-duration (~ 1 s). Evaluation duration is modulated by the difficulty impression formed during survey. No abandonment path (forced click).

4.3 Phase identification

Survey–evaluate transition: sliding window of 3 saccades. First window where mean amplitude < 100 px marks the transition. Median transition at saccade 2 (51% of trials transition within first 2 saccades).

4.4 SERP difficulty measures

Three measures computed per SERP:

- **Jaccard:** mean pairwise token-set overlap across results (mean = 0.151)
- **Relevance spread:** std of query–result cosine similarity (mxbai-embed-large, 1024-d). Low spread = all results equidistant from query = hard (mean = 0.052). The precedent for treating variance across a retrieved set as a difficulty signal is the query performance prediction literature: Cronen-Townsend et al.’s clarity score Cronen-Townsend et al. [2002] used divergence between query and collection language models, and Shtok et al.’s Normalized Query Commitment Shtok et al. [2012] used the standard deviation of top- k lexical retrieval scores. Both established that the shape of the retrieved-score distribution carries query-difficulty information. Relevance spread is the same primitive ported to dense embeddings and used here as a stimulus descriptor to test whether a system-side variance signal also predicts user-side behavioral variants (coverage, duration, click Y).
- **Distinctive density:** mean TF-IDF-weighted unique-token fraction per result (mean = 0.460)

Jaccard and relevance spread are strongly anti-correlated ($\rho = -0.450$), confirming they measure different constructs.

5 Results

5.1 Saccade amplitude distinguishes survey from evaluation

Early saccades (fixations 1–5): 117 px median, 56% major (> 100 px). Late saccades (fixations 6+): 76 px median, 40% major. Per-trial amplitude slope over first 20 saccades: mean $\rho = -0.128$, $p = 1.5 \times 10^{-61}$ ($N = 991$).

5.2 Orientation is a learned prior

Median orientation time: 0 ms (58% of first fixations land on a result). No learning across batches ($\rho = 0.02$, $p = 0.30$). No within-participant trend ($\rho = -0.022$, $p = 0.26$).

5.3 Survey duration is content-independent

Mean 3.5 saccades, ~ 1 s. No correlation with relevance spread ($\rho = -0.000$), distinctive density ($\rho = 0.020$), or Jaccard ($\rho = -0.012$). All $p > 0.3$.

5.4 Relevance spread predicts evaluation strategy

Table 1: Spearman correlations: difficulty measure $\times$ behavioral DV ($N = 2,334$). Spread and density: positive ρ = easier SERPs $\rightarrow$ more of DV.

	Dur.	Fix.	Cov.	Reg.	Click Y
Jaccard	-.019	-.021	-.046*	.005	-.055**
Spread	.043*	.047*	.098***	.035	.046*
Density	.014	.015	.071***	.004	-.052*

Within-participant: relevance spread $\rightarrow$ coverage ($\bar{\rho} = 0.089$, $p < 0.001$) and duration ($\bar{\rho} = 0.042$, $p = 0.031$).

Tercile analysis (relevance spread): hard SERPs (low spread) produce 49.0% page coverage vs. 53.3% for easy SERPs ($p < 0.001$). Click Y: 814 px (hard) vs. 870 px (easy, $p = 0.047$).

5.5 Reading episodes and SERP difficulty

Episode pooling (minor saccade threshold 100 px): 95,328 episodes across 2,334 trials. 50.5% single-fixation, 49.5% multi-fixation (mean 2.16 fixations, 499 ms). Proportion of multi-fixation episodes is higher on hard SERPs ($p = 0.004$).

5.6 Fixation decomposition

Per-fixation duration flat at ~ 220 ms (range 202–228 ms across positions 0–9). Fixation count declines with position (~ 10 at position 0 $\rightarrow \sim 7$ at position 9). The position effect is an allocation decision, not a processing speed change.

6 Discussion

6.1 What the survey phase is

Stub. Not orientation (layout is known). Not reading (saccades too wide). It's patch quality assessment—estimating the decision landscape before investing in evaluation. Fixed duration suggests a sampling routine, not a content-driven process. Output modulates strategy: satisfice early vs. explore deeply.

6.2 Implications for click models

Stub. Cascade model assumes serial top-down. Survey violates this—users sample 3–5 results before systematic evaluation. Position bias research conflates survey exposure with evaluation exposure.

6.3 Difficulty as discriminability

Stub. Bag-of-words and embedding similarity are null within-position. Relevance spread works because it captures “is there an obvious best answer?” These are transactional queries—the user needs to discriminate, not comprehend.

6.4 Limitations

Stub. Forced-choice paradigm. Product search only. GP3 HD filter parameters unknown. 100 px threshold principled but arbitrary. No novel layout variation (all Google SERPs). Survey duration ceiling from repeat trials.

7 Conclusion

The ORIENT–SURVEY–EVALUATE–COMMIT model provides an explicit cognitive task analysis at the granularity where web search evaluation actually happens—the 3–30 seconds between SERP render and first click. Two specific contributions sit on top of that task model. First, the survey phase: a ~ 1 s, fixed-duration gist-sampling routine, hypothesized by Zhang, Abualsaud & Smucker [Zhang et al. [2018]] and operationalized here at saccade granularity, whose *output*—not its duration—modulates subsequent evaluation depth. Second, the decomposition of evaluation into forward and regressive sub-processes, each with its own kinematic profile.

The larger point is the reason for writing the paper. Click models, feature-bag cursor classifiers, and end-to-end neural rankers all treat user behavior as a signal to decode. Each of those framings has delivered real engineering progress, and none of them is wrong. But the task-level phases in this paper—survey, forward evaluation, regressive re-evaluation—are not artifacts that those models failed to optimize; they

are variables those models were never looking for in the first place. A task-model layer, built with the psychology and HCI vocabulary the field already has, recovers structure that pure-CS modeling of the same data misses. That is the claim this paper wants readers to take away: task models add a dimension, not just another feature.

References

- Ioannis Arapakis and Luis A. Leiva. Predicting user engagement with direct displays using mouse cursor information. In *Proceedings of the 39th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '16. ACM, 2016. doi: 10.1145/2911451.2911505. Mouse cursor predicts engagement with knowledge panels. Same Leiva/Arapakis team as AdSight.
- Lukas Brückner, Ioannis Arapakis, and Luis A. Leiva. A systematic examination of mouse movement length for decision making in web search. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM, 2021. doi: 10.1145/3404835.3463055. Same Leiva/Arapakis team as AdSight. Mouse movement length as decision signal.
- Duncan P. Brumby and Andrew Howes. Good enough but I'll just check: Web-page search as attentional refocusing. In *Proceedings of the 6th International Conference on Cognitive Modeling*, ICCM '04, 2004. Verified via CiteSeerX 2026-04-02.
- Olivier Chapelle and Ya Zhang. A dynamic Bayesian network click model for web search ranking. In *Proceedings of the 18th International Conference on World Wide Web*, WWW '09, pages 1–10. ACM, 2009. doi: 10.1145/1526709.1526711. Verified via ACM DL 2026-04-02.
- Aleksandr Chuklin, Ilya Markov, and Maarten de Rijke. *Click Models for Web Search*. Synthesis Lectures on Information Concepts, Retrieval, and Services. Morgan & Claypool, 2015. doi: 10.2200/S00654ED1V01Y201507ICR043. Comprehensive survey. Most models assume monotonic top-to-bottom examination; our regression data breaks this assumption.
- Nick Craswell, Onno Zoeter, Michael Taylor, and Bill Ramsey. An experimental comparison of click position-bias models. In *Proceedings of the 2008 International Conference on Web Search and Data Mining*, WSDM '08, pages 87–94. ACM, 2008. doi: 10.1145/1341531.1341545. Compares cascade, examination, and logistic position-bias models for clicks.
- Steve Cronen-Townsend, Yun Zhou, and W. Bruce Croft. Predicting query performance. In *Proceedings of the 25th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '02, pages 299–306. ACM, 2002. doi: 10.1145/564376.564429. Clarity score: KL divergence between query language model and collection language model. Founding pre-retrieval QPP predictor. DOI to re-verify against publisher metadata.
- Edward Cutrell and Zhiwei Guan. What are you looking for? An eye-tracking study of information usage in web search. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '07, pages 407–416. ACM, 2007. doi: 10.1145/1240624.1240690. Verified via ACM DL 2026-04-02.

- Georges E. Dupret and Benjamin Piwowarski. A user browsing model to predict search engine click data from past observations. In *Proceedings of the 31st Annual International ACM SIGIR Conference*, SIGIR '08, pages 331–338. ACM, 2008. doi: 10.1145/1390334.1390392. Verified via ACM DL 2026-04-02.
- Wai-Tat Fu and Peter Pirolli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806. Verified via Taylor & Francis 2026-04-02.
- Laura A. Granka, Thorsten Joachims, and Geri Gay. Eye-tracking analysis of user behavior in WWW search. In *Proceedings of the 27th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '04, pages 478–479. ACM, 2004. doi: 10.1145/1008992.1009079. Early SERP eye-tracking. Showed linear scan with rapid drop-off.
- Kayhan Latifzadeh, Jacek Gwizdka, and Luis A. Leiva. A versatile dataset of mouse and eye movements on search engine results pages. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3730325. Dataset on Zenodo: <https://zenodo.org/records/15236546>.
- Yiqun Liu, Chao Wang, Ke Zhou, Jian-Yun Nie, Min Zhang, and Shaoping Ma. From skimming to reading: A two-stage examination model for web search. In *Proceedings of the 23rd ACM International Conference on Information and Knowledge Management*, CIKM '14, pages 849–858. ACM, 2014. doi: 10.1145/2661829.2661907. Verified via ACM DL 2026-04-02. Two-phase SERP evaluation: skimming then reading. Both stages predictable from mouse. Cited by AdSight.
- Lori Lorigo, Maya Haridasan, Hrönn Brynjarsdóttir, Ling Xia, Thorsten Joachims, Geri Gay, Laura A. Granka, Fabio Pellacini, and Bing Pan. Eye tracking and online search: Lessons learned and challenges ahead. *Journal of the American Society for Information Science and Technology*, 59(7):1041–1052, 2008. doi: 10.1002/asi.20794. ~2/3 of scanpaths are nonlinear. Challenges sequential cascade assumptions.
- Peter Pirolli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643. Foundational IFT paper. Adapts optimal foraging theory to human information seeking.
- Anna Shtok, Oren Kurland, David Carmel, Fiana Raiber, and Gad Markovits. Predicting query performance by query-drift estimation. *ACM Transactions on Information Systems*, 30(2):11:1–11:35, 2012. doi: 10.1145/2180868.2180873. NQC (Normalized Query Commitment): standard deviation of top- k retrieval scores as a post-retrieval difficulty predictor. Direct conceptual ancestor of our *relevance spread* measure (std of dense query-document cosine similarity). DOI to re-verify against publisher metadata.
- Mario Villaizán-Vallelado, Matteo Salvatori, Kayhan Latifzadeh, Antonio Penta, Luis A. Leiva, and Ioannis Arapakis. AdSight: Scalable and accurate quantification of user attention in multi-slot sponsored search. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '25, Padua, Italy, 2025. ACM. doi: 10.1145/3726302.3729891. Uses same dataset as Latifzadeh et al. [2025]. Transformer predicting fixation from mouse trajectories.
- Haotian Zhang, Mustafa Abualsaud, and Mark D. Smucker. A study of immediate requery behavior in search. In *Proceedings of the 2018 Conference on Human Information Interaction & Retrieval*, CHIIR '18, pages 181–190, New Brunswick, NJ, USA, 2018. ACM. doi: 10.1145/3176349.3176400. Documents a result inspection phase: users evaluate top 2-3 results to decide whether the SERP is worth continued evaluation or immediate requery. Prior observation of what we call the Survey phase, in the context of the stay/reformulate decision that AdSERP’s forced-choice task eliminates.

A Reproducibility and Interactive Materials

All analysis code, notebooks, and interactive demos are available at:

- **Repository:** <https://github.com/andyed/attentional-foraging>
- **Interactive scanpath replays:** <https://andyed.github.io/attentional-foraging/> — 10 curated trials with foveated vision rendering, playback controls, and gaze point toggle

Notebooks (rendered via nbviewer):

Analysis	Notebook
Ski-jump decomposition	00_skijump.ipynb
Convergence & click prediction	01_convergence.ipynb
Fixation decomposition	04_fixation_coverage.ipynb
LHIPA cognitive load	05_lhipa.ipynb
Orientation & evaluation	06_orientation_evaluation.ipynb
Regressions (prevalence, triggers, kinematics)	07a-c_regressions*.ipynb
Lexical priming (null)	08_priming.ipynb
SERP difficulty & episodes	09_difficulty.ipynb
User strategies	10_strategies.ipynb
Individual differences	11_individual_differences.ipynb

Findings document: [docs/findings.md](#) — comprehensive write-up with all statistical tests (v7).