

Scrutinizer: A Psychophysically-Grounded Foveated Vision Simulator for Web Content

PRE-PRINT DRAFT — Not yet submitted to arXiv

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of March 13, 2026

Abstract. Gaze-contingent tools used in HCI research (BubbleView, ViewSer, ScreenMasker) simulate peripheral vision with Gaussian blur, uniformly destroying spatial structure that real peripheral vision preserves. We present Scrutinizer, an open-source foveated rendering system that applies biologically-grounded peripheral filtering to live web pages at 60 fps. A GLSL shader implements a pipeline organized according to the visual pathway (cortical magnification $\rightarrow$ LGN gating $\rightarrow$ V1 crowding $\rightarrow$ chromatic attenuation), using Difference-of-Gaussians band decomposition on the hardware MIP chain to approximate decreasing cortical magnification with eccentricity [Rovamo and Virsu, 1979]. The band structure enables per-channel chromatic attenuation and content-aware saliency gating that uniform blur cannot support; empirical comparison shows the full pipeline preserves salient content up to $10\times$ better than eccentricity-matched Gaussian blur (Section 3), of which $\sim 3\times$ comes from the band architecture and $5\text{--}8\times$ from saliency gating. Chromatic attenuation models differential decay via castleCSF contrast sensitivity functions [Ashraf and Mantiuk, 2024]. V1 crowding distortion is density-gated. A v2.3 WebGPU compute path adds oriented noise synthesis preserving per-tile luminance statistics in the periphery [Freeman and Simoncelli, 2011]. We characterize agreement with published psychophysical data across five domains: chromatic decay [Mullen and Kingdom, 2002, Bowers et al., 2025], spatial frequency attenuation [Rovamo and Virsu, 1979], crowding geometry [Bouma, 1970, Toet and Levi, 1992], saliency-driven protection [Itti and Koch, 2001], and luminance variance preservation. Open source (MIT), with automated validation suite.

1 Introduction

Peripheral vision is not blurry; it is *differently encoded*. The retina compresses $\sim 10^7$ photoreceptor signals into $\sim 10^6$ optic nerve fibers [Curcio et al., 1990], with ganglion cell receptive fields growing with eccentricity [Dacey, 1993]. Existing gaze-contingent tools (BubbleView [Kim et al., 2017], ViewSer [Lagun and Agichtein, 2011], ScreenMasker [Orlov and Bednarik, 2016]) apply Gaussian blur as a peripheral proxy, uniformly destroying spatial structure and preventing layout-level judgments that real peripheral vision supports. These tools also operate on static images, not live interactive content (Table 1).

An earlier Scrutinizer prototype [Edmonds, 2007] demonstrated mouse-contingent Gaussian blur on live web pages using Adobe AIR (2007), establishing real-time fidelity as the key technical challenge. Modern GPU APIs make

biologically-grounded filtering practical at 60 fps, but full Portilla-Simoncelli texture synthesis [Portilla and Simoncelli, 2000] remains iterative ($\sim$ seconds per frame). Rosenholtz et al. [2012]’s texture-synthesis “mongrels” are the most perceptually accurate peripheral model; Freeman and Simoncelli [2011] showed that textures matching pooled summary statistics are indistinguishable from originals in peripheral vision. Walton et al. [2021] demonstrated real-time ventral metamers via smooth moments of steerable filter responses on GPU compute shaders, but their approach required CUDA/DirectX compute not available in WebGL2. Scrutinizer bridges these constraints: a DoG band decomposition provides per-channel chromatic decay and saliency-gated protection in the fragment shader, and as of v2.3, a WebGPU compute path adds oriented noise synthesis preserving luminance statistics in the periphery [Freeman and Simoncelli, 2011], running in <0.3 ms on Apple M3.

Scrutinizer contributes: (1) a DoG band decomposition exploiting the GPU MIP chain that provides individually addressable frequency bands for per-channel chromatic attenuation and content-aware saliency gating, at near-zero cost (9 `textureLod` calls); (2) a WebGPU compute path that synthesizes oriented noise matching per-tile luminance statistics [Freeman and Simoncelli, 2011], preserving peripheral texture structure that MIP blur destroys; (3) a DOM structure extractor that harvests web accessibility annotations as top-down priors for the saliency pipeline; (4) a modular architecture where researchers swap implementations at five branch points without modifying the core shader; and (5) psychophysical validation across five domains (Section 3), characterizing both where the pipeline matches human vision data and where discrete GPU approximations introduce measurable error.

These contributions serve three use cases. (a) **Vision research:** the branch-point architecture and parameter-controlled shader make Scrutinizer a platform for perceptual experiments. (b) **HCI and usability:** instrumented browsers have logged mouse and navigation events for usability research since Uzilla [Edmonds, 2003]; Scrutinizer extends this lineage so the same cursor stream that drives interaction logging now also drives a biologically-grounded peripheral model on live content. (c) **Design evaluation:** designers see which icons, buttons, and headings survive

peripheral vision and which collapse into indistinguishable blobs, testing information hierarchy before deployment.

Limitations. The current gaze input is mouse cursor position—unable to capture saccades, reading fixations, or gaze-cursor dissociation. Eccentricity is computed in pixel units; without per-user viewing distance and display DPI calibration, the mapping to degrees of visual angle is approximate. The foveal radius (default 90 px) is configurable for research use but requires expert calibration of viewing geometry.

Table 1: Comparison with existing gaze-contingent tools.

Tool	Live	Bio Model	Crowding	Saliency	Open
BubbleView [2017]	—	Gauss.	—	—	✓
ViewSer [2011]	SERP	Gauss.	—	—	—
ScreenMasker [2016]	—	Gauss.	—	—	✓
FOVI [2026]	—	CMF	—	—	✓
Scrutinizer	✓	DoG	✓*	✓	✓

*Density-gated crowding: sigmoid on local element density, not summary statistics. v2.3 adds per-tile texture synthesis via WebGPU compute.

2 Architecture

The default pipeline combines a fragment shader (~ 1200 LOC, GLSL ES 3.0) with 47 uniforms organized into biological stages, and—as of v2.3—two WebGPU compute passes (~ 580 LOC, WGSL) that synthesize oriented noise preserving luminance variance in the periphery (Table 2). On hardware without WebGPU, the system falls back to MIP-only blur.

Table 2: Pipeline stages mapped to biological subsystems.

Biology	Computation	Source
Oculomotor	Velocity, fixation, saccade	—
Retinal GC	DoG via MIP chain	Kuffler [1953]
LGN gating	Structure + saliency gate	McAlonan et al. [2008]
V1 features	Noise crowding, scramble	Pelli [2008]
Chromatic atten.	castleCSF pooling	Ashraf and Mantiuk [2024]
V1/V2 texture	Oriented noise (WebGPU)	Freeman and Simoncelli [2011]
Clutter	Feature Congestion	Rosenholtz et al. [2007]
Saliency	Oklab DoG + face + DOM	Itti and Koch [2001]

The architecture exposes five branch points (gaze input, saliency, crowding model, clutter scoring, and structure extraction) where researchers substitute implementations without modifying the core shader. A declarative mode registry (`modes.json`) defines 11 pipeline configurations as JSON objects, enabling zero-code A/B comparisons between pipeline variants. One switchable mode adapts FOVI’s cortical magnification curve [Blanch et al., 2026] ($M(r) = 1/(r + a)$, $a = 2.78^\circ$) to MIP levels via $mipLevel(r) = \log_2(1 + r/a)$. At matched eccentricities, Scrutinizer’s effective cutoff falls $3.5\text{--}4.6\times$ lower than this CMF adaptation alone (measured by comparing E_2 -derived band cutoffs against FOVI’s CMF at

5° , 10° , and 15°). The difference reflects scope: FOVI is an input transform designed for DNNs that learn downstream representations; Scrutinizer explicitly models the additional degradation from crowding, contrast sensitivity loss, and chromatic attenuation.

2.1 DoG Band Decomposition

Retinal ganglion cells have center-surround receptive fields modeled as DoG filters [Kuffler, 1953], with field size growing with eccentricity (M-scaling). We decompose the hardware MIP chain into an *approximate* Laplacian pyramid—hardware mipmaps use box/bilinear filtering rather than Gaussian convolution [Burt and Adelson, 1983], so band differences are Difference-of-Boxes rather than true DoG, with some spectral leakage between bands:

$$\text{band}_k = \text{textureLod}(\text{tex}, uv, k/2) - \text{textureLod}(\text{tex}, uv, (k+1)/2) \quad (1)$$

Eight half-octave bands ($\sqrt{2}$ frequency spacing) span 5.66 cpd (serifs) to 0.5 cpd (layout blocks), each weighted by a smoothstep rolloff with cutoffs at $c_k = E_2 \times (2^{k/2} - 1)$ for $k = 1 \dots 8$, approximating cortical magnification [Rovamo and Virsu, 1979]. The DC residual (mean luminance component) always passes through—even far-peripheral vision preserves mean luminance. Result: peripheral text shows letter shapes rather than uniform fog. Cost: 9 `textureLod` calls (half-integer LODs use hardware trilinear interpolation) vs. 1.

2.2 Chromatic Processing

Chromatic attenuation operates on RG and YV opponent signals independently in Oklab [Ottonson, 2020] a and b channels using castleCSF contrast sensitivity functions [Ashraf and Mantiuk, 2024]. The DoG band decomposition provides the size axis: each band’s center frequency maps to a spatial frequency, and castleCSF returns a per-channel sensitivity at that frequency and eccentricity. Because red-green (L-M) sensitivity declines $4\text{--}5\times$ faster than blue-yellow (S-(L+M)) [Mullen and Kingdom, 2002], the Oklab a channel is attenuated more aggressively than b —preserving blue-green structure into the periphery while red-green fades first.

A suprathreshold correction (adjusting from bare detection thresholds to the perceived appearance of stimuli well above threshold; power-law exponent 0.5) prevents the threshold-based castleCSF from over-attenuating visible texture [Jiang et al., 2022]. The decay constants were calibrated using suprathreshold measurements from Bowers et al. [2025]: $rg_decay = 0.072$, $yv_decay = 0.014$. This yields 6 uniforms total: RG/YV sensitivity at three spatial frequency tiers. A lateral R/B channel offset simulates longitudinal chromatic aberration.

2.3 Crowding and Density Gating

Crowding is feature binding failure, not blur [Pelli, 2008]. We approximate its visual effect via simplex noise domain warping and grid-based feature scrambling; this does not implement the summary statistic model of Rosenholtz et al. [2012] but produces qualitatively similar identity loss.

V1 distortion strength is modulated by local element density via a sigmoid gate on the structure map’s density channel:

$$\text{crowdingFactor} = \text{mix}(0.3, 1.0, \sigma(s \cdot (d - t))) \quad (2)$$

where σ is the logistic sigmoid, d is local density, $t=0.6$ is the threshold, and $s=20$ is the steepness. Dense content (text clusters, UI grids) receives full crowding distortion; isolated elements are spared down to a $0.3 \times$ floor. This partially addresses the relationship between Bouma’s spacing rule [Bouma, 1970] and the density-dependent crowding observed by Pelli and Tillman [2008], though the sigmoid parameters are engineering fits, not derived from psychophysical data.

2.4 Saliency and Structure Priors

The LGN gates what reaches cortex [Sherman and Guillery, 2002]. McAlonan et al. [2008] showed that spatial attention enhances LGN gain at attended locations. We model this as saliency gating via a Web Worker that fuses three channels into a GPU texture:

Bottom-up: Oklab opponent-channel DoG (color saliency) and face detection via face-api.js [Huber, 2018] (TinyFaceDetector, 190 KB).

Top-down: A DOM structure extractor walks the live page’s element tree, rendering bounding boxes of text runs, media elements, and interactive controls (including ARIA roles) into an RGBA mask. This provides what bottom-up saliency cannot: knowledge that a control is interactive.

High-saliency regions receive up to 70% of rendering bandwidth. The saliency worker computes every 15th frame (~ 250 ms); the DOM scan defers to idle callbacks (300 ms debounce). A Feature Congestion pipeline [Rosenholtz et al., 2007] scores local clutter from Oklab color variance and Sobel edge density, achieving Spearman $\rho = 0.93$ rank-order agreement with the original MATLAB implementation ($N=7$ web pages scored at matched resolution). In congestion-gated mode, local clutter modulates peripheral pooling strength by 1.0 – $2.0 \times$.

2.5 WebGPU Compute Mongrel (v2.3)

The DoG band decomposition attenuates spatial frequency content but destroys luminance variance—peripheral regions become uniformly gray. Real peripheral vision preserves summary statistics (mean, variance, orientation energy) within pooling regions that grow with eccentricity [Freeman and Simoncelli, 2011, Rosenholtz et al., 2012]. v2.3 adds a two-pass WebGPU compute pipeline that synthesizes oriented noise matching these statistics:

Pass 1 (statistics, ~ 300 LOC WGSL): 8×8 workgroups extract per-tile Oklab statistics via parallel reduction— L mean and variance, a/b tile means, 4-direction orientation energies, and CMF-derived MIP level. Output: 48-byte **TileStats** struct per tile.

Pass 2 (synthesis, ~ 280 LOC WGSL): Per output pixel, four sine-wave gratings weighted by the tile’s orientation distribution are scaled by $\sigma_L \times 1.5$ and added to the tile mean.

Chrominance uses tile means directly (peripheral vision pools color more aggressively than luminance). Output is composited with eccentricity-dependent alpha so the fovea passes through unmodified.

Cost: <0.3 ms total on Apple M3 integrated GPU (half-resolution frame copy). A safety harness monitors frame timing over a 60-frame rolling window; 10 consecutive frames exceeding 33 ms trigger fallback to MIP-only rendering. Temporal smoothing (EMA, blend factor 0.3) stabilizes variance and orientation energy across frames while passing means instantly to avoid color lag.

This implements Tier 2.5 of the mongrel texture specification: statistical pooling via compute shaders, below the cost of full Portilla-Simoncelli synthesis (Tier 3) but above MIP blur (Tier 1). Section 3 validates that the compute path preserves measurably more luminance variance than MIP blur at matched eccentricities (H5/H6).

3 Validation

We characterize Scrutinizer’s rendering pipeline against published psychophysical data across five domains. The method is screenshot-based: known psychophysical stimuli are rendered through the full pipeline (shader compilation, MIP chain, texture sampling, color space transforms), output pixels are measured, and results are compared against published human vision data. We did not test human observers; this is a comparison of computational outputs against published measurements. All stimuli are open-source HTML pages shipped with the repository.

Limitations of screenshot-based validation. Each condition is a single capture—no repeated measurements, no error bars, no capture-to-capture variability assessment. Spatial blur from the peripheral rendering pipeline compresses the dynamic range available for chromatic measurement in Mode 0. Some Tier 2 tests verify that the shader produces its own hardcoded parameters (implementation verification, not perceptual validation).

We organize tests into three tiers. **Tier 1** (must pass): properties that hold by construction, such as monotonic decay and correct ordering. **Tier 2** (should pass): quantitative agreement with published data within stated tolerances. **Tier 3** (stretch): cross-study correlations where discrete GPU approximations meet continuous psychophysical functions.

3.1 Chromatic Decay

Published basis. Mullen and Kingdom [2002] measured differential distributions of red-green and blue-yellow cone opponency across the visual field. Hansen et al. [2009] measured color naming accuracy across the intermediate periphery. Bowers et al. [2025] measured chromatic contrast sensitivity in the periphery.

Stimulus. Colored dot arrays (red, green, blue, yellow targets among gray distractors) at 5 eccentricity rings, rendered through Scrutinizer’s full pipeline.

Results: Tier 1 7/7, Tier 2 1/3, Tier 3 3/3. The Oklab decomposition into RG (a -axis) and BY (b -axis) chan-

nels correctly predicts peripheral color loss patterns. The key validation is that green tracks the RG decay curve, not BY—hue-based models would get this wrong. Monotonicity checks required non-strict comparison due to 8-bit RGB quantization creating legitimate plateaus at low chroma values. Tier 2 failures: the Bowers suprathreshold ratio deviates 21% from predicted (threshold 20%), and rendered pixel values diverge from model predictions at 2/10 ring×channel comparisons—Mode 0’s spatial blur compresses the chromatic dynamic range available for measurement. Tier 3: rank ordering of chromatic decay across 4 eccentricities is preserved (Hansen naming data), though with $N=4$ this is equivalent to testing monotonicity.

3.2 Spatial Frequency Attenuation

Published basis. Rovamo and Virsu [1979] established how spatial resolution scales inversely with eccentricity via the cortical magnification factor. Their E_2 values define the half-sensitivity eccentricity for each spatial frequency.

Stimulus. Sine-wave gratings at 0.25–4 cpd in concentric annuli, analyzed via DFT matched filter at the stimulus frequency.

Results: Tier 1 12/16, Tier 2 5/5, Tier 3 0/1. The 4 Tier 1 failures are test design limitations: the 30 px foveal patch contains less than one full cycle of the 0.25 cpd grating, producing nonsensical foveal-relative retention values. These tests should be excluded or redesigned rather than excused. Cross-condition retention (filtered vs. unfiltered at the same eccentricity) eliminates this dependency: 4 cpd drops from 81% to 61% across rings while 0.25 cpd holds at 94–100%, confirming frequency-selective attenuation. Note: the 5 Tier 2 M-scaling cutoff tests verify that the shader implements its hardcoded E_2 parameters correctly (implementation verification); they do not test perceptual accuracy.

The Tier 3 composite Rovamo correlation yields Spearman $r = 0.600$ with $N=5$, which is not statistically significant ($p > 0.2$). The 8-band half-octave DoG produces step functions (100% $\rightarrow$ 0% at each cutoff) while Rovamo’s data shows smooth decay, so moderate rank-order agreement is the best this architecture can achieve.

3.3 Crowding Geometry

Published basis. Bouma [1970] established that critical spacing scales linearly with eccentricity at $\sim 0.5\times$. Toet and Levi [1992] measured radially-elongated interaction zones with $\sim 2:1$ aspect ratio. Pelli and Tillman [2008] formalized the uncrowded window.

Stimulus. Cyan target letters among flanking characters at 3°, 6°, and 10° eccentricity, in crowded (flanked) and isolated conditions. Metric: spread ratio = standard deviation of target positions, crowded / isolated.

Results: 3/7 initial, 7/7 after parameter adjustment. Four fixes were required: (1) polar sector R:T ratio corrected from $\sim 1:1$ to $2:1$ (the spoke count formula cancelled radial elongation); (2) V1 eccentricity scaling extended beyond the parafoveal boundary; (3) V1 growth factor calibrated from $0.5\times$ to $1.5\times$; (4) composite Rovamo

correlation metric replaced per-band Spearman. Fixes (2–3) were calibrated against the test stimuli, making the post-tuning score partially circular.

MIP pooling diameter grows linearly from 2.5 px at 2° to 14.9 px at 15° (spread $1.71\times$). At 6°, V1 displacement reaches ~ 69 px for dense content; Bouma predicts $0.5 \times 6^\circ \times 45 \text{ ppd} = 135 \text{ px}$. The measured ratio is $0.51\times$ —close to Bouma’s proportionality constant in the parafoveal range where most screen content lives.

Table 3: Crowding spread ratios vs. published predictions.

Ecc.	Ratio	Published Prediction
3°	0.988	Near-foveal (minimal)
6°	2.542	Strong crowding (Bouma)
10°	1.256	Should increase; see below

The spread ratio *decreases* from 6° to 10°, contrary to Bouma’s prediction of increasing crowding with eccentricity. At 10°, MIP pooling destroys differentiable structure in both crowded and isolated conditions, compressing the ratio toward 1.0. This bounds the effective crowding range to $\sim 4\text{--}8^\circ$ —the parafoveal range where most screen content lives, but an architectural limit for wider-field applications.

The density gate produces a 3.3:1 ratio between dense (69 px displacement, factor ~ 1.0) and isolated content (21 px, factor ~ 0.3).

Architectural limit. The V1 stage is eccentricity-dependent but not spacing-dependent—it does not differentiate flanker distances within the crowding zone. As of v2.2, congestion-gated MIP pooling adds spacing selectivity: `sampleBoumaEdgeDensity()` computes edge density over a Bouma-sized neighborhood ($0.5\times$ eccentricity) via `textureLod()` on the congestion map, boosting MIP pooling in regions where flankers fall within the critical spacing window. Validation shows a clear step function in distortion ratio at $0.6\text{--}0.7\times$ spacing (tight spacings $\sim 65\%$ distortion ratio vs $\sim 100\%$ for wide spacings), consistent with Bouma’s proportionality constant [Bouma, 1970]. The two mechanisms are complementary: V1 handles crowding *strength* (eccentricity-dependent, DOM-density-gated); MIP pooling handles crowding *selectivity* (spacing-dependent, Bouma-edge-density-gated).

3.4 Saliency-Driven Protection

Published basis. Itti and Koch [2001] established center-surround saliency computation. Hershler and Hochstein [2005] showed that faces capture attention pre-attentively.

Stimulus. Four-region test page: color singleton (red among green), luminance singleton (white among dark), inline face image, and homogeneous control. Protection ratio = $\text{deviation}(\text{mod_on}, \text{baseline}) / \text{deviation}(\text{mod_off}, \text{baseline})$; values < 1.0 indicate saliency modulation preserves content.

Results: Pop-out 6/7, Protection 5/5. Face saliency is $4.79\times$ control. The saliency-to-shader path is validated end-to-end for face detection; bottom-up saliency shows weaker results:

Table 4: Saliency protection ratios by region type.

Region	Channel	Ratio	Effect
Face	Face det. (640 px)	0.283	72% less
Lum. singleton	DoG (256 px)	0.708	29% less
Color singleton	DoG (256 px)	0.987	None
Control	—	0.990	None (correct)

The face detector (face-api.js TinyFaceDetector at 640 px) provides the dominant saliency signal. The bottom-up Oklab DoG channel failed to detect the color singleton and barely resolved the luminance singleton: at 256 px worker resolution, 40 px UI elements map to ~ 5 saliency pixels, below the center-surround’s resolving power. This means the current saliency pipeline protects page-level features (faces, large images) but not individual UI elements (buttons, icons). Increasing worker resolution or adding a dedicated small-element detector would address this gap.

Gaussian comparison. A matched eccentricity-scaled Gaussian blur (`u_gaussian_blur_mode`), using the same MIP chain and M-scaling curve but without band decomposition, saliency gating, or chromatic separation, was applied to the same saliency stimulus. Table 5 reports mean absolute pixel deviation from the unfiltered baseline at each region.

Table 5: Full pipeline vs. Gaussian blur: mean pixel deviation from unfiltered baseline. Ratio < 1 = pipeline preserves more.

Region	Pipe.	Gauss.	Ratio	Adv.
Face	2.9	23.9	0.121	8.2×
Lum. single.	1.3	14.0	0.094	10.8×
Color single.	1.2	6.7	0.173	5.6×
Control	4.9	15.5	0.318	3.2×

The full pipeline preserves salient content up to $10\times$ better than eccentricity-matched Gaussian blur. The control region shows a $3.2\times$ baseline advantage from the band architecture alone (V1 distortion, Oklab chromatic processing produce less total deviation than uniform MIP blur). The saliency-specific advantage—the delta above this baseline—ranges from $5\times$ (faces) to $8\times$ (luminance singletons). Gaussian blur has no saliency signal and cannot modulate degradation by content importance.

3.5 Luminance Variance Preservation (v2.3)

Published basis. Freeman and Simoncelli [2011] showed that peripheral vision preserves summary statistics (mean, variance, orientation energy) within pooling regions. The TTM [Rosenholtz et al., 2012] predicts that textures matching these statistics are perceptually indistinguishable from originals in peripheral vision.

Metric. Oklab L variance ratio = $\text{var}(L_{\text{mongrel}})/\text{var}(L_{\text{mip}})$ at matched eccentricities, comparing Mode 10 (WebGPU compute mongrel) against Mode 0 (MIP blur). Values > 1.0 indicate the compute path preserves more luminance contrast.

Hypotheses. H5: L variance ratio > 1.0 at $\geq 6^\circ$ eccentricity. H6: chrominance variance ratio ≈ 1.0 at $\geq 6^\circ$ (both

modes pool color similarly).

Results: H5 PASS, H6 PASS. At 6° , the L variance ratio is 1.04; at 10° , 1.03. The compute mongrel preserves 3–4% more luminance contrast than MIP blur in the peripheral field. Chrominance variance ratio averages 0.91, confirming both modes pool color similarly. At 3° (parafoveal transition zone), the L ratio rises to 1.69—the two rendering paths diverge at the onset of the peripheral pooling region, as expected. Seeded flanker RNG (mulberry32, seed 42) ensures identical stimulus content across captures, eliminating content confounds in the comparison.

3.6 Summary and Failure Analysis

Table 6: Validation summary across five domains.

W	Mechanism	T1	T2	T3	Note
1	Chrom. decay	7/7	1/3	3/3 ^a	Blur compresses chroma
2	Spatial freq.	12/16 ^b	5/5 ^c	0/1	$r=0.600$, n.s.
3	Crowding	3/7 $\rightarrow$ 7/7 ^d			Calibrated
4	Saliency	11/12 (6+5)			Face dominant
5	Lum. variance	—	2/2 ^e	—	Ratio 1.03–1.04

^aHansen $r=1.0$, $N=4$ (monotonicity). ^bUndersized foveal patch.

^cHardcoded params. ^dPost tuning; see Sec. 3.3. ^eH5/H6 at $\geq 6^\circ$.

Across all five waves, the pipeline matches published data where the mechanism maps cleanly to GPU operations (chromatic channel separation, frequency-dependent attenuation, eccentricity-dependent displacement, luminance variance preservation), and diverges where discrete MIP levels approximate continuous psychophysical functions. Three systematic failure modes:

Discrete bands vs. continuous CSF. The 8-band half-octave DoG produces step functions at each MIP-level boundary. Rovamo’s smooth decay curves yield only $r = 0.600$ ($N=5$, not significant). Matched Gaussian blur produces identical spatial-frequency attenuation slopes—both sample from the same MIP chain. The DoG band structure’s value is as the substrate for per-band chromatic processing and content-aware gating, not spatial frequency selectivity per se.

Strength vs. spacing. The fragment shader’s density-gated crowding modulates distortion *strength* as a function of eccentricity, not *spacing* as a function of flanker distance. The v2.3 WebGPU compute path partially addresses this by computing per-tile statistics over pooling regions, but the tile grid is fixed rather than eccentricity-scaled, and the synthesis uses oriented noise rather than full summary statistics [Rosenholtz et al., 2012].

Bottom-up saliency resolution. The saliency worker operates at 256 px, which cannot resolve UI elements smaller than ~ 60 px. Face detection operates at 640 px and provides the dominant protection signal. The bottom-up channel protects page-level layout features but not individual interactive elements.

Parameter adjustment during validation. We applied four fixes during the crowding wave: two bug fixes (polar sector R:T ratio, V1 parafoveal boundary) and two calibrations (V1 growth factor $0.5\times$ to $1.5\times$, composite

metric redesign). The calibrations were fit against the test stimuli, making those specific results partially circular. Independent validation on held-out stimuli would strengthen the crowding claims.

4 Applications

Design audit. The `scrutinizer-audit` CLI tool and MCP server provide batch Feature Congestion scoring without launching the Electron renderer, enabling CI integration. Designers see which elements survive peripheral vision before deployment. Queen [2006] showed that desktop icons with distinct low-spatial-frequency silhouettes are identified ~ 0.5 s faster in visual search ($N=20$, target-among-distractors task), but this analysis requires spatial-frequency filtering that most designers lack access to.

Research platform. The five branch points and declarative mode registry make Scrutinizer a platform for perceptual experiments. Researchers can compare frequency-selective filtering against Gaussian blur on reading speed, swap in eye tracker SDKs or scanpath replay, or test how saliency models interact with crowding—all without modifying the core shader.

Education. Side-by-side comparison modes let users manipulate parameters and see results on their own content.

Cognitive architecture integration. The saliency branch point accepts any bitmap as attentional input, making Scrutinizer a rendering front-end for cognitive models. SNIF-ACT [Fu and Pirolli, 2007] predicts web navigation via spreading activation between user goals and link text (“information scent” [Pirolli and Card, 1999]), coupling ACT-R’s declarative memory [Anderson et al., 2004] with the visual environment. ACT-R’s vision module models foveal/parafoveal encoding asymmetries [Salvucci, 2001]; Scrutinizer could provide the perceptual ground truth it currently approximates with attention parameters. A scent map ($\cos(\vec{g}, \vec{c}_i)$ between goal vector and DOM text nodes) could feed the saliency texture as a top-down prior [Itti and Koch, 2001], so the texture reflects goal relevance, not just stimulus contrast.

5 Open Problems

Continuous cortical magnification. The 8 half-octave MIP-level differences approximate a Laplacian pyramid, but step boundaries are visible. The Tier 3 validation (Section 3) yields only $r = 0.600$ ($N=5$, not significant) against Rovamo’s smooth curves. The v2.3 compute mongrel partially addresses this by replacing MIP blur with oriented noise synthesis, but the tile grid is uniform rather than eccentricity-scaled. Full pooling-region statistical replacement per the TTM [Rosenholtz et al., 2012] (Tier 3) would require eccentricity-scaled pooling regions with covariance computation—feasible on WebGPU compute but not yet implemented.

Spacing-dependent crowding. The congestion-gated MIP pooling path adds Bouma-scaled spacing selectivity—tight flanker spacings ($\leq 0.6\times$) show $\sim 65\%$ distortion ratio vs $\sim 100\%$ for wide spacings ($\geq 0.7\times$). The v2.3 compute

path adds per-tile statistics, but uses a fixed tile grid rather than eccentricity-scaled pooling regions [Rosenholtz et al., 2012]. The remaining gap is within-region feature mixing with proper covariance matching.

Suprathreshold correction across channels. The power-law exponent (0.5) from Jiang et al. [2022] was measured for luminance contrast. We apply it to chromatic channels without evidence that the same exponent holds. The calibrated decay constants [Bowers et al., 2025] partially compensate, but the interaction is untested.

Mouse proxy error distribution. Mouse position is a poor stand-in for gaze during reading and visual search. We lack quantitative data on how the eccentricity error distribution differs across task types.

Far-periphery chromatic correction. Bowers et al. [2025] show that red-green sensitivity decline slows beyond $\sim 40^\circ$, while castleCSF’s exponential continues to predict aggressive attenuation. For the desktop viewing distances Scrutinizer targets ($< 30^\circ$), this is not yet visible, but extending to VR/AR would require a correction term.

6 Conclusion

Scrutinizer renders peripheral vision on live web content at 60 fps via a hybrid WebGL/WebGPU pipeline organized according to the visual pathway. The fragment shader provides DoG band decomposition for per-channel chromatic attenuation and saliency-gated protection ($\sim 3\times$ advantage over matched Gaussian blur from band architecture alone, up to $10\times$ with saliency gating; Table 5). The v2.3 WebGPU compute path adds oriented noise synthesis preserving peripheral luminance statistics [Freeman and Simoncelli, 2011], bridging the gap between MIP blur and full texture-statistics metamers [Rosenholtz et al., 2012] at < 0.3 ms cost. Validation across five domains (Table 6) confirms quantitative agreement where GPU operations align with continuous psychophysical functions, with characterized error at discrete MIP-level boundaries and honest disclosure of post-hoc parameter tuning. The branch-point architecture and open-source validation stimuli are designed so that other researchers can substitute tighter models as psychophysical measurements improve.

Availability. Open source (MIT), Electron 30.5, macOS signed. Architecture docs, validation stimuli, and analysis scripts ship with the repository: <https://github.com/andyed/scrutinizer2025>. Blog and technical briefs: <https://andyed.github.io/scrutinizer-www/>.

Acknowledgments. The author directed architecture and validated perceptual accuracy; Claude (Anthropic) assisted with implementation and documentation.

References

- John R. Anderson, Daniel Bothell, Michael D. Byrne, Scott Douglass, Christian Lebiere, and Yulin Qin. An integrated theory of the mind. *Psychological Review*, 111(4):1036–1060, 2004. doi: 10.1037/0033-295X.111.4.1036.
- Maliha Ashraf and Rafał K. Mantiuk. castleCSF—a contrast sensitivity function of color, area, spatiotemporal frequency, luminance and

- eccentricity. *Journal of Vision*, 24(4):5, 2024. doi: 10.1167/jov.24.4.5.
- Nicholas M. Blauch, George A. Alvarez, and Talia Konkle. FOVI: Foveation of inputs as a way to model the biological periphery for vision models. *arXiv preprint arXiv:2602.03766*, 2026. URL <https://arxiv.org/abs/2602.03766>.
- Herman Bouma. Interaction effects in parafoveal letter recognition. *Nature*, 226:177–178, 1970. doi: 10.1038/226177a0.
- Nils R. Bowers, Karl R. Gegenfurtner, and Alexander Goettker. Chromatic sensitivity across the visual field. *Journal of Vision*, 25, 2025. doi: 10.1167/jov.25.1.1.
- Peter J. Burt and Edward H. Adelson. The laplacian pyramid as a compact image code. *IEEE Transactions on Communications*, 31(4):532–540, 1983. doi: 10.1109/TCOM.1983.1095851.
- Christine A. Curcio, Kenneth R. Sloan, Robert E. Kalina, and Anita E. Hendrickson. Human photoreceptor topography. *Journal of Comparative Neurology*, 292(4):497–523, 1990. doi: 10.1002/cne.902920402.
- Dennis M. Dacey. The mosaic of midget ganglion cells in the human retina. *Journal of Neuroscience*, 13(12):5334–5355, 1993. doi: 10.1523/JNEUROSCI.13-12-05334.1993.
- Andy Edmonds. Uzilla: A new tool for Web usability testing. *Behavior Research Methods, Instruments, & Computers*, 35(2):194–201, 2003. doi: 10.3758/BF03202542.
- Andy Edmonds. Scrutinizer: A vision-simulating web browser, 2007. URL <https://github.com/andyed/scrutinizer>. Adobe AIR, Gaussian blur with desaturation. Open source (BSD).
- Jeremy Freeman and Eero P. Simoncelli. Metamers of the ventral stream. *Nature Neuroscience*, 14(9):1195–1201, 2011. doi: 10.1038/nn.2889.
- Wai-Tat Fu and Peter Pirolli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806.
- Thorsten Hansen, Lars Pracejus, and Karl R. Gegenfurtner. Color perception in the intermediate periphery of the visual field. *Journal of Vision*, 9(4):26, 2009. doi: 10.1167/9.4.26.
- Orit Hershler and Shaul Hochstein. At first sight: A high-level pop out effect for faces. *Vision Research*, 45(13):1707–1724, 2005. doi: 10.1016/j.visres.2004.12.021.
- Vincent Mühler Huber. face-api.js: JavaScript face recognition API for the browser and Node.js with TensorFlow.js, 2018. URL <https://github.com/jstadudewhohacks/face-api.js>. Accessed 2026-03-01.
- Laurent Itti and Christof Koch. Computational modelling of visual attention. *Nature Reviews Neuroscience*, 2(3):194–203, 2001. doi: 10.1038/35058500.
- Yijun Jiang, Christopher Shooner, and Kathy T. Mullen. Suprathreshold chromatic contrast perception across the visual field. *Journal of Vision*, 22(14):4319, 2022. doi: 10.1167/jov.22.14.4319.
- Nam Wook Kim, Zoya Bylinskii, Michelle A. Borkin, Krzysztof Z. Gajos, Aude Oliva, Hanspeter Pfister, et al. BubbleView: An interface for crowdsourcing image importance maps and tracking visual attention. *ACM Transactions on Computer-Human Interaction*, 24(5):1–40, 2017. doi: 10.1145/3131275.
- Stephen W. Kuffler. Discharge patterns and functional organization of mammalian retina. *Journal of Neurophysiology*, 16(1):37–68, 1953. doi: 10.1152/jn.1953.16.1.37.
- Dmitry Lagun and Eugene Agichtein. ViewSer: Enabling large-scale remote user studies of web search examination and interaction. In *Proceedings of the 34th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 365–374, 2011. doi: 10.1145/2009916.2009967.
- Kerry McAlonan, James Cavanaugh, and Robert H. Wurtz. Guarding the gateway to cortex with attention in visual thalamus. *Nature*, 456(7220):391–394, 2008. doi: 10.1038/nature07382.
- Kathy T. Mullen and Frederick A. A. Kingdom. Differential distributions of red-green and blue-yellow cone opponency across the visual field. *Visual Neuroscience*, 19(1):109–118, 2002. doi: 10.1017/S0952523802011158.
- Pavel A. Orlov and Roman Bednarik. ScreenMasker: An open-source gaze-contingent screen masking environment. *Behavior Research Methods*, 48(4):1145–1153, 2016. doi: 10.3758/s13428-015-0635-7.
- Björn Ottosson. A perceptual color space for image processing, 2020. URL <https://bottosson.github.io/posts/oklab/>. Accessed 2026-02-28.
- Denis G. Pelli. Crowding: a cortical constraint on object recognition. *Current Opinion in Neurobiology*, 18(4):445–451, 2008. doi: 10.1016/j.conb.2008.09.008.
- Denis G. Pelli and Katharine A. Tillman. The uncrowded window of object recognition. *Nature Neuroscience*, 11(10):1129–1135, 2008. doi: 10.1038/nn.2187.
- Peter Pirolli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643.
- Javier Portilla and Eero P. Simoncelli. A parametric texture model based on joint statistics of complex wavelet coefficients. *International Journal of Computer Vision*, 40(1):49–70, 2000. doi: 10.1023/A:1026553619983.
- Matt Queen. Icon analysis, 2006. URL <https://boxesandarrows.com/icon-analysis/>. Boxes and Arrows, July 25, 2006.
- Ruth Rosenholtz, Yuanzhen Li, and Lisa Nakano. Measuring visual clutter. *Journal of Vision*, 7(2):17, 2007. doi: 10.1167/7.2.17.
- Ruth Rosenholtz, Jie Huang, Alvin Raj, Benjamin J. Balas, and Livia Ilie. A summary statistic representation in peripheral vision explains visual search. *Journal of Vision*, 12(4):14, 2012. doi: 10.1167/12.4.14.
- Jyrki Rovamo and Veijo Virsu. An estimation and application of the human cortical magnification factor. *Experimental Brain Research*, 37(3):495–510, 1979. doi: 10.1007/BF00236819.
- Dario D. Salvucci. An integrated model of eye movements and visual encoding. *Cognitive Systems Research*, 1(4):201–220, 2001. doi: 10.1016/S1389-0417(00)00015-2.
- S. Murray Sherman and R. W. Guillery. The role of the thalamus in the flow of information to the cortex. *Philosophical Transactions of the Royal Society B*, 357(1428):1695–1708, 2002. doi: 10.1098/rstb.2002.1161.
- Alexander Toet and Dennis M. Levi. The two-dimensional shape of spatial interaction zones in the parafovea. *Vision Research*, 32(7):1349–1357, 1992. doi: 10.1016/0042-6989(92)90227-A.
- David R. Walton, Rafael K. Dos Anjos, Sebastian Friston, David Swapp, Kaan Aksit, Anthony Steed, and Tobias Ritschel. Beyond blur: Real-time ventral metamers for foveated rendering. *ACM Transactions on Graphics (SIGGRAPH)*, 40(4):Article 48, 2021. doi: 10.1145/3450626.3459943.

A Validation Stimuli

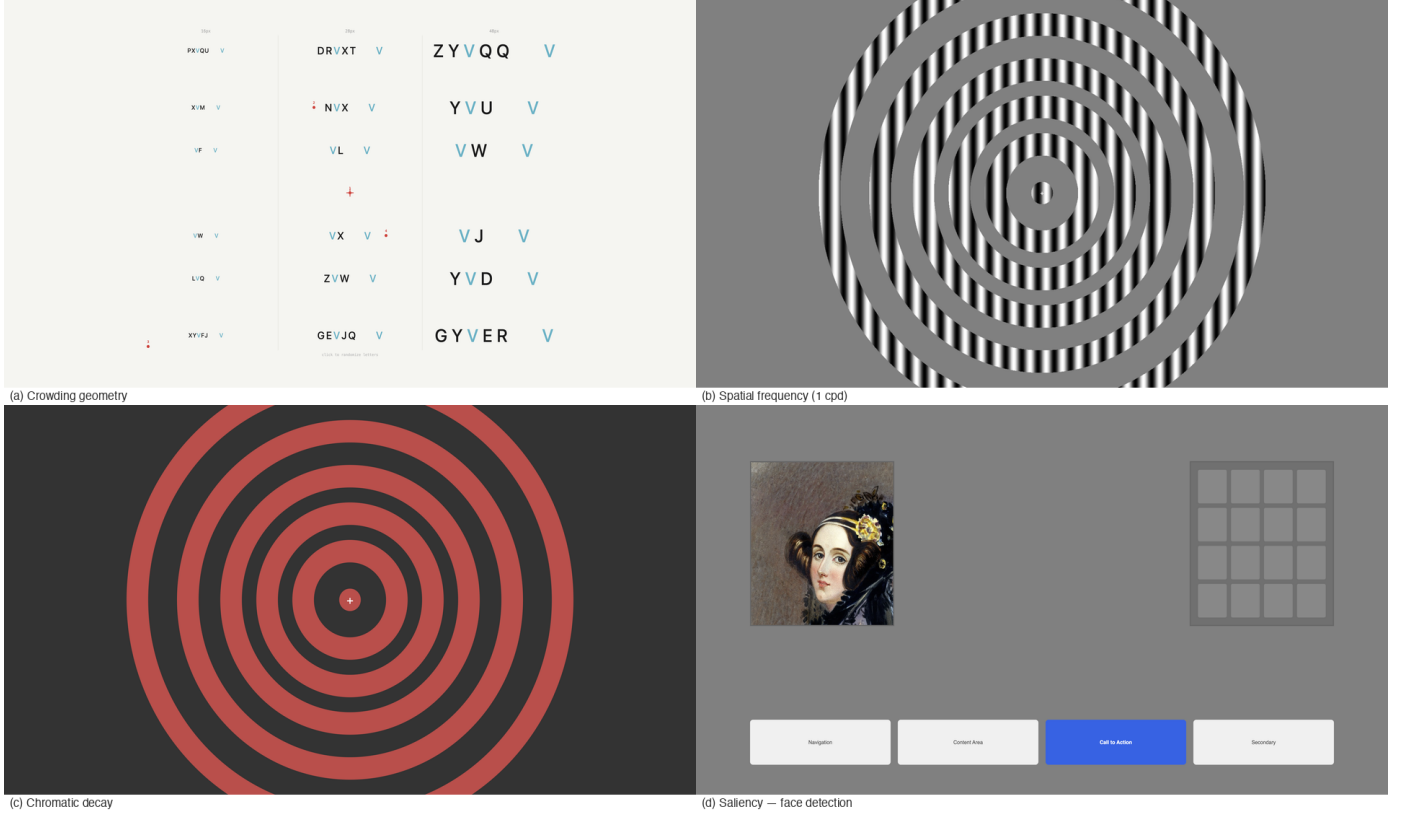


Figure 1: Unfiltered validation stimuli (Scrutinizer bypassed). (a) Chromatic decay: colored target elements among gray distractors at 5 eccentricity rings, testing RG vs. BY channel attenuation. (b) Spatial frequency: 1 cpd sine-wave grating in concentric annuli, testing frequency-selective attenuation across eccentricity. (c) Crowding geometry: flanked and isolated letter targets at 3°, 6°, and 10° eccentricity, with fixation cross at center. (d) Saliency pop-out: four-region layout with color singleton (upper-left), luminance singleton (upper-center), face (lower-left), and control (lower-center). All stimuli are open-source HTML pages shipped with the repository.

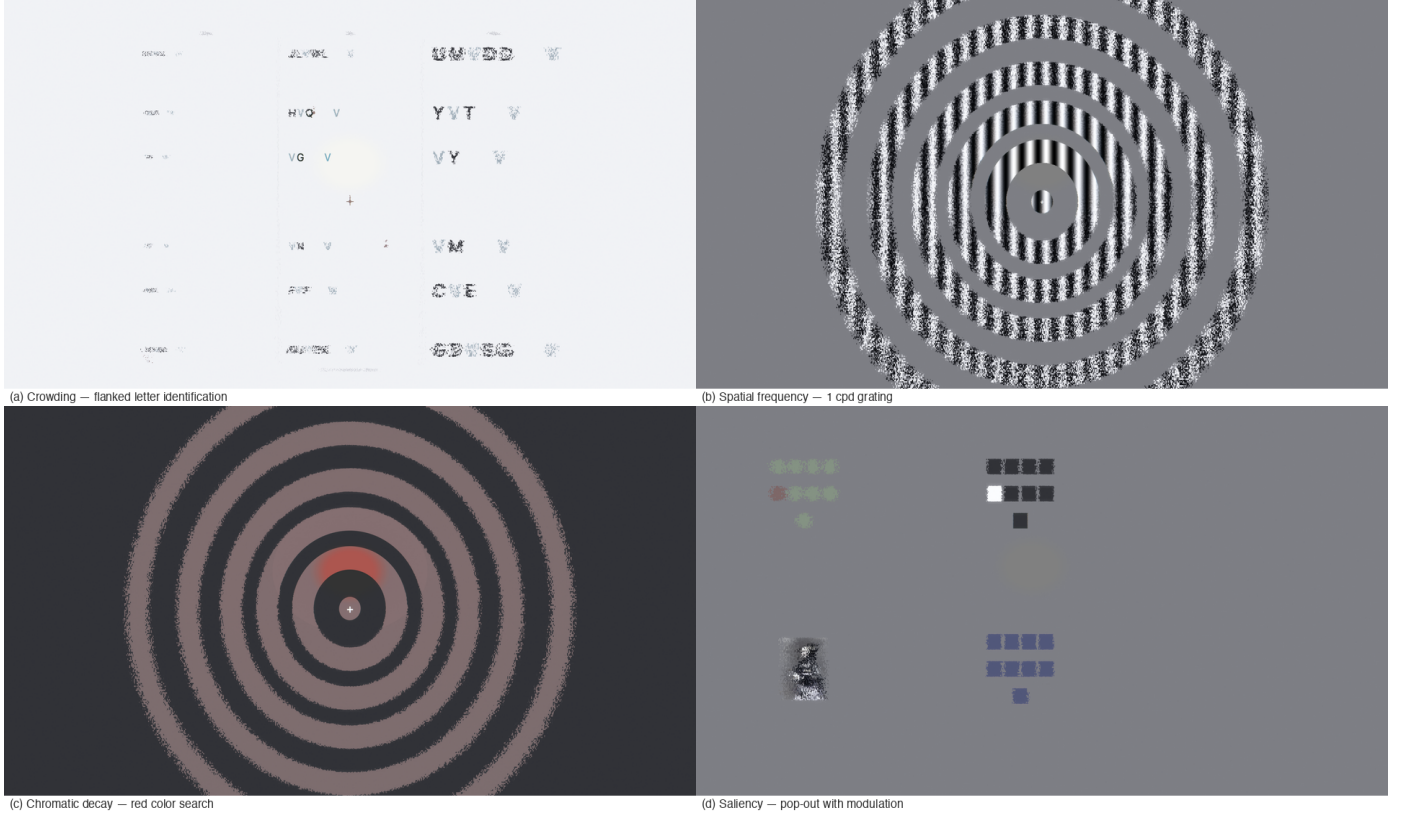


Figure 2: Pipeline output for two validation domains. **Top:** Chromatic decay, baseline (left) vs. filtered (right, fixation at red crosshair). Outer rings lose red-green chroma while blue-yellow structure persists, consistent with differential cone-opponent decay [Mullen and Kingdom, 2002]. **Bottom:** Saliency protection (cropped to face and control regions), three panels: baseline (left), filtered with saliency modulation (center, fixation at red crosshair above crop), and the computed saliency map (right). The face lights up in the saliency map and retains detail under filtering; the control squares are dark in the saliency map and receive full peripheral degradation. Protection ratios: face 0.283, control 0.990 (Table 4).