

Scrutinizer: A Psychophysically-Grounded Foveated Vision Simulator for Web Content

PRE-PRINT DRAFT — Not yet submitted to arXiv

Andy Edmonds

Independent Researcher, San Francisco, CA

andyed@alum.cmu.edu

Draft of March 21, 2026

Abstract. Restricted Focus Viewers (RFVs) use mouse position as a gaze proxy to study visual attention on interactive content. Since the original RFV [Jansen et al., 2003], through mouse-view.js [Anwyl-Irvine et al., 2021], every tool in this lineage has used Gaussian blur as its peripheral model—destroying spatial structure that real peripheral vision preserves. We present Scrutinizer, an open-source RFV that replaces Gaussian blur with a biologically-grounded peripheral pipeline, running on live web pages at 60 fps. A GLSL shader implements four visual pathway stages using Difference-of-Gaussians band decomposition on the hardware MIP chain, enabling per-channel chromatic decay and content-aware saliency gating. The full pipeline preserves salient content up to $10\times$ better than eccentricity-matched blur. Mouse-gaze alignment is a known limitation of all RFVs: cursor and eye diverge during reading and scanning [Huang et al., 2012]. Scrutinizer inherits this constraint and does not claim gaze-level accuracy. Screenshot-based validation across five psychophysical domains characterizes where the pipeline matches published data and where GPU approximations introduce measurable error. Open source (MIT).

1 Introduction

The Restricted Focus Viewer (RFV) paradigm uses mouse position as a proxy for gaze, revealing content within a cursor-centered aperture while degrading the surround. Jansen et al. [2003] introduced the RFV to study visual attention without eye-tracking hardware; Bednarik and Tukiainen [2007] validated it against eye-movement data, finding that mouse-contingent apertures produce fixation patterns consistent with gaze-contingent ones for spatial attention tasks. Chetverikov et al. [2018] showed that mouse-contingent and gaze-contingent displays produce equivalent implicit processing effects in change blindness paradigms, providing direct evidence that cursor-directed apertures can substitute for eye tracking in attention research. The paradigm has been adopted in BubbleView [Kim et al., 2017], ViewSer [Lagun and Agichtein, 2011], ScreenMasker [Orlov and Bednarik, 2016], and most recently mouseview.js [Anwyl-Irvine et al., 2021], which demonstrated reliable web-based attention tracking with cursor-directed apertures.

Every tool in this lineage uses Gaussian blur as its peripheral model. In 2006, Queen [2006] showed that desktop icons with distinct low-spatial-frequency silhouettes are identified ~ 0.5 s faster—but performing that analysis requires spa-

tial frequency filtering most designers lack access to. The problem is general: peripheral vision loses resolution, not structure [Rosenholtz et al., 2012]. A designer testing information hierarchy with these tools sees uniform fog where real peripheral vision would preserve layout cues, color contrasts, and salient landmarks. The peripheral model, not the mouse proxy, is the weak link.

Vision science offers a richer account of peripheral processing: cortical magnification [Rovamo and Virsu, 1979], crowding [Pelli, 2008, Bouma, 1970], differential chromatic decay [Mullen and Kingdom, 2002], texture statistics pooling [Freeman and Simoncelli, 2011, Rosenholtz et al., 2012], and saliency-driven gating [McAlonan et al., 2008]. Translating these into a real-time tool is an engineering problem: full texture synthesis [Portilla and Simoncelli, 2000] takes seconds per frame, and the most faithful real-time approaches [Walton et al., 2021] require CUDA/DirectX compute not available in browsers.

Scrutinizer upgrades the peripheral model while staying in the RFV paradigm. An earlier prototype [Edmonds, 2007] demonstrated mouse-contingent blur on live web pages using Adobe AIR (2007); instrumented browsers have logged mouse and navigation events for usability research since Uzilla [Edmonds, 2003]. The current system implements four visual pathway stages in a GLSL fragment shader, with a WebGPU compute path for texture synthesis, running at 60 fps. It contributes:

- (1) A DoG band decomposition on the GPU MIP chain providing individually addressable frequency bands for chromatic attenuation and saliency gating, at near-zero cost (13 `textureLod` calls).
- (2) A WebGPU compute path synthesizing oriented noise that preserves per-tile luminance statistics [Freeman and Simoncelli, 2011].
- (3) Isotropic cortical sampling tiling the visual field into locally-square pooling regions derived from FOVI’s cortical magnification function [Blauch et al., 2026].
- (4) A DOM structure extractor harvesting web accessibility annotations as top-down saliency priors.
- (5) A modular architecture with five branch points where researchers swap implementations without modifying the core shader.
- (6) Validation across five psychophysical domains (Section 3), characterizing where the pipeline matches published data and where GPU approximations introduce measurable error.

Mouse-gaze alignment. The mouse proxy is a known limitation of all RFVs, but recent work reframes it as a complementary signal rather than a poor substitute. [Chen et al. \[2001\]](#) found that mouse position correlates with gaze during web browsing; [Huang et al. \[2012\]](#) showed that cursor and gaze diverge during reading and scanning. Critically, this divergence carries cognitive signal: [Stone and Chapman \[2023\]](#) demonstrated that eye-mouse coordination breakdown reveals UX friction points that neither signal detects alone, and [Zhu et al. \[2023\]](#) showed that cross-attention fusion of gaze and mouse improves activity classification by 7.4% over either signal independently. Scrutinizer currently uses mouse position only. v2.4 adds a reading span implementation [[Rayner, 1998](#)] that shifts the foveal protection zone asymmetrically in the reading direction during horizontal pursuit over text content—extending $\sim 5^\circ$ rightward and $\sim 1.3^\circ$ leftward, gated by velocity, directionality, and DOM text structure. This partially compensates for the mouse-gaze lag during reading tasks. The system is suitable for spatial attention tasks, design evaluation, and coarse reading-difficulty assessment, though saccade-level analysis requires eye-tracker integration via the gaze-input branch point. Combining both streams would access the coordination signal these studies characterize.

Viewing geometry. Eccentricity is computed in pixel units. The menu provides nine foveal radius presets (20–450 px) so users can match their display size and viewing distance without formal calibration. For controlled research, the foveal radius maps directly to pixels-per-degree at the user’s viewing geometry; citation metadata in screenshot exports includes the active `fovea_deg` and `px_per_deg` values for reproducibility.

Table 1: Comparison with existing gaze-contingent tools.

Tool	Live	Bio Model	Crowding	Saliency	Open
RFV [2003]	–	Gauss.	–	–	–
BubbleView [2017]	–	Gauss.	–	–	✓
ViewSer [2011]	SERP	Gauss.	–	–	–
ScreenMasker [2016]	–	Gauss.	–	–	✓
mouseview.js [2021]	–	Gauss.	–	–	✓
FOVI [2026]	–	CMF	–	–	✓
Scrutinizer	✓	DoG	✓*	✓	✓

*Density-gated crowding: sigmoid on local element density, not summary statistics. v2.3 adds per-tile texture synthesis via WebGPU compute.

2 Architecture

The default pipeline combines a fragment shader (~ 1200 LOC, GLSL ES 3.0) with 47 uniforms organized into biological stages, and—as of v2.3—two WebGPU compute passes (~ 580 LOC, WGSL) that synthesize oriented noise preserving luminance variance in the periphery (Table 2). On hardware without WebGPU, the system falls back to MIP-only blur.

Table 2: Pipeline stages mapped to biological subsystems.

Biology	Computation	Source
Oculomotor	Velocity, fixation, saccade	—
Retinal GC LGN gating	DoG via MIP chain Structure + saliency gate	Kuffler [1953] , Rodieck [1965] McAlonan et al. [2008]
V1 features	Noise crowding, scramble	Pelli [2008]
Chromatic atten. V1/V2 texture	castleCSF pooling Oriented noise (WebGPU)	Ashraf and Mantiuk [2024] Freeman and Simoncelli [2011]
Clutter CMF geometry	Feature Congestion Isotropic sectors (FOVI)	Rosenholtz et al. [2007] Blauch et al. [2026]
Saliency	Oklab DoG + face + DOM	Itti and Koch [2001]

Tradeoff scope. The real-time constraint forces specific compromises: displacement instead of summary-statistic pooling, hardware MIP instead of continuous receptive fields, box-filtered frequency bands instead of Gaussian convolution. These are architectural constraints, not parameter choices—they define the boundary between what Scrutinizer can model at 60 fps and what requires offline computation.

The architecture exposes five branch points (gaze input, saliency, crowding model, clutter scoring, and structure extraction) where researchers substitute implementations without modifying the core shader. A declarative mode registry (`modes.json`) defines 11 pipeline configurations as JSON objects, enabling zero-code A/B comparisons between pipeline variants. One switchable mode adapts FOVI’s cortical magnification curve [[Blauch et al., 2026](#)] ($M(r) = 1/(r + a)$, $a = 2.78^\circ$) to MIP levels via $mipLevel(r) = \log_2(1 + r/a)$. At matched eccentricities, Scrutinizer’s effective cutoff falls $3.5\text{--}4.6\times$ lower than this CMF adaptation alone (measured by comparing E_2 -derived band cutoffs against FOVI’s CMF at 5° , 10° , and 15°). The difference reflects scope: FOVI is an input transform designed for DNNs that learn downstream representations; Scrutinizer explicitly models the additional degradation from crowding, contrast sensitivity loss, and chromatic attenuation.

2.1 DoG Band Decomposition

Retinal ganglion cells have center-surround receptive fields modeled as DoG filters [[Kuffler, 1953](#)], with field size growing with eccentricity (M-scaling). The GPU MIP chain is a low-pass filter with power-of-2 resolution steps—a blunt instrument, but one that runs at hardware speed. We decompose it into an *approximate* Laplacian pyramid by subtracting adjacent levels. Hardware mipmaps use box/bilinear filtering rather than Gaussian convolution [[Burt and Adelson, 1983](#)], so band differences are Difference-of-Boxes rather than true DoG, with spectral leakage between bands. This is a deliberate tradeoff: the MIP chain was not designed to model the retina—it was built for texture filtering. They converge on the same structure because progressive spatial pooling is a good solution to the same problem:

$$\text{band}_k = \text{textureLod}(\text{tex}, uv, k/2) - \text{textureLod}(\text{tex}, uv, (k+1)/2) \quad (1)$$

Twelve half-octave bands ($\sqrt{2}$ frequency spacing) span 5.66 cpd (serifs) to 0.088 cpd (large-scale structure), each weighted by a smoothstep rolloff with cutoffs at $c_k = E_2 \times (2^{k/2} - 1)$ for $k = 1 \dots 12$, approximating cortical magnification [Rovamo and Virsu, 1979]. The DC residual (mean luminance component) always passes through—even far-peripheral vision preserves mean luminance. The result turns that blunt instrument into graded frequency loss: serifs drop while panel layout survives. Cost: 13 `textureLod` calls (half-integer LODs use hardware trilinear interpolation) vs. 1.

2.2 Chromatic Processing

Peripheral color sensitivity decays at different rates for red-green vs. blue-yellow channels [Mullen and Kingdom, 2002]. The DoG bands provide the frequency axis; castleCSF [Ashraf and Mantiuk, 2024] returns per-channel sensitivity at each frequency and eccentricity. Red-green is attenuated 4–5 $\times$ more aggressively than blue-yellow, calibrated against suprathreshold measurements from Bowers et al. [2025].

2.3 Crowding and Density Gating

Crowding—feature binding failure in clutter [Pelli, 2008]—is approximated via simplex noise domain warping, gated by local element density from the DOM structure map. Dense content (text clusters, UI grids) receives full distortion; isolated elements are spared. The sigmoid parameters are engineering fits, not derived from psychophysical data.

2.4 Saliency and Structure Priors

The LGN gates what reaches cortex [Sherman and Guillery, 2002]. McAlonan et al. [2008] showed that spatial attention enhances LGN gain at attended locations. We model this as saliency gating via a Web Worker that fuses three channels into a GPU texture:

Bottom-up: Oklab opponent-channel DoG (color saliency) and face detection via face-api.js [Huber, 2018] (TinyFaceDetector, 190 KB).

Top-down: A DOM structure extractor walks the live page’s element tree, rendering bounding boxes of text runs, media elements, and interactive controls (including ARIA roles) into an RGBA mask. This provides what bottom-up saliency cannot: knowledge that a control is interactive.

High-saliency regions receive up to 70% of rendering bandwidth. The saliency worker computes every 15th frame (~ 250 ms); the DOM scan defers to idle callbacks (300 ms debounce). A Feature Congestion pipeline [Rosenholtz et al., 2007] scores local clutter from Oklab color variance and Sobel edge density, achieving Spearman $\rho = 0.93$ rank-order agreement with the original MATLAB implementation ($N=7$ web pages scored at matched resolution). In congestion-gated mode, local clutter modulates peripheral pooling strength by 1.0–2.0 $\times$.

2.5 WebGPU Compute Mongrel (v2.3)

The DoG band decomposition attenuates spatial frequency content but destroys luminance variance—peripheral regions become uniformly gray. Real peripheral vision preserves

summary statistics (mean, variance, orientation energy) within pooling regions that grow with eccentricity [Freeman and Simoncelli, 2011, Rosenholtz et al., 2012]. v2.3 adds a two-pass WebGPU compute pipeline that synthesizes oriented noise matching these statistics:

Pass 1 (statistics, ~ 300 LOC WGSL): 8×8 workgroups extract per-tile Oklab statistics via parallel reduction— L mean and variance, a/b tile means, 4-direction orientation energies, and CMF-derived MIP level. Output: 48-byte `TileStats` struct per tile.

Pass 2 (synthesis, ~ 280 LOC WGSL): Per output pixel, four sine-wave gratings weighted by the tile’s orientation distribution are scaled by $\sigma_L \times 1.5$ and added to the tile mean. Chrominance uses tile means directly (peripheral vision pools color more aggressively than luminance). Output is composited with eccentricity-dependent alpha so the fovea passes through unmodified.

Cost: <0.3 ms total on Apple M3 integrated GPU (half-resolution frame copy). A safety harness monitors frame timing over a 60-frame rolling window; 10 consecutive frames exceeding 33 ms trigger fallback to MIP-only rendering. Temporal smoothing (EMA, blend factor 0.3) stabilizes variance and orientation energy across frames while passing means instantly to avoid color lag.

This implements Tier 2.5 of the mongrel texture specification: statistical pooling via compute shaders, below the cost of full Portilla-Simoncelli synthesis (Tier 3) but above MIP blur (Tier 1). Section 3 validates that the compute path preserves measurably more luminance variance than MIP blur at matched eccentricities (H5/H6).

2.6 Isotropic Cortical Sampling (v2.6)

A standard log-polar grid [Schwartz, 1980] uses cortical magnification for ring spacing but keeps a fixed number of angular samples, so cells stretch tangentially at high eccentricities—aspect ratios exceeding 4:1 in the outer field. This creates a directional bias that does not exist in cortical representation: V1 neurons tile the visual field with roughly equal cortical area per receptive field, so angular and radial resolution degrade together, not at different rates.

v2.6 replaces the fixed tile grid with sector geometry derived from FOVI’s cortical magnification function [Blauch et al., 2026]. Ring boundaries are placed at uniform intervals in cortical distance:

$$w(r) = \log(r + a), \quad a = 2.78^\circ \quad (2)$$

where r is eccentricity in degrees and a is the foveal scaling constant from Blauch et al. [2026]. Successive ring boundaries r_i satisfy $w(r_{i+1}) - w(r_i) = \Delta w$ for a fixed cortical step Δw , so ring width Δr grows with eccentricity. The spoke count per ring is chosen for local isotropy:

$$n_\theta = \lfloor 2\pi r / \Delta r \rfloor \quad (3)$$

producing sectors that are approximately square in cortical coordinates (Figure 1). This replaces the fixed polar

grid where outer cells stretched into arcs with aspect ratios exceeding 4:1. The sector extent at each eccentricity parameterizes both the Bender noise frequency (crowding distortion wavelength scales with sector width) and the Cutter cell size (texture synthesis pooling region matches cortical pooling).

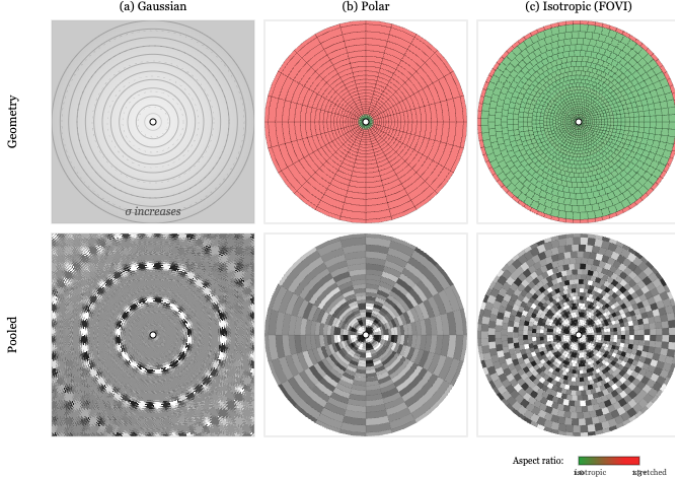


Figure 1: Cortical sampling geometry. Ring boundaries from uniform cortical sampling ($w = \log(r + a)$, $a=2.78^\circ$). (a) Gaussian blur has no discrete pooling regions. (b) Polar grid with fixed spoke count: outer cells stretch into arcs (red). (c) FOVI-derived isotropic grid: spoke count adapted per ring for locally square cells in cortical coordinates (green). Bottom row: checkerboard stimulus averaged within each cell.

2.7 Jacobian-Corrected LOD Selection

The GPU selects MIP level from screen-space derivatives of the texture coordinate—the Jacobian, a 2×2 matrix describing how the texture coordinate changes per pixel in x and y . When V1 displacement warps the sampling UV, the original Jacobian becomes wrong: it describes the undistorted coordinate field, not the warped one. The hardware picks LOD from a Jacobian that does not match the actual sampling pattern—over-blurring radially (where the warp compresses UV) and under-blurring tangentially (where it stretches).

Passing $dFdx(distortedUV)$ and $dFdy(distortedUV)$ to `textureGrad` corrects this. The MIP tiles remain square—that is a hardware constraint. But level selection now tracks the warp, so the frequency content of the sampled texel matches what the displacement pipeline expects. This is the distinction between constraints to accept (tile shape) and constraints to work around (LOD selection).

A 19-test geometry validation suite confirms: ring boundaries match the FOVI Python reference implementation to 3 decimal places, spoke counts produce aspect ratios within 0.8–1.2 across all eccentricities, and total sector count scales logarithmically with field radius. OCR readability measured via Tesseract on filtered screenshots shows monotonically declining accuracy: fovea 84%, parafovea 60%, near periph-

ery 62%, far periphery 52% (all 4 tier criteria pass). The non-monotonicity between parafovea and near periphery (60% vs 62%) is within OCR measurement noise ($\pm 5\%$).

3 Validation

We characterize the rendering pipeline against published psychophysical data via screenshot-based measurement: known stimuli rendered through the full pipeline, output pixels measured, results compared against published human vision data. We did not test human observers. All stimuli are open-source HTML pages shipped with the repository. Each condition is a single capture—no repeated measurements or error bars.

Table 3: Validation summary across six domains.

Domain	Result	Note
Chromatic decay	11/13	RG decays faster than BY (correct); Tier 2 failures from blur compressing chroma
Spatial frequency	17/22	Frequency-selective attenuation confirmed; Rovamo correlation $r=0.600$ (n.s., $N=5$)
Crowding	7/7*	*After 4 parameter fixes (2 bugs, 2 calibrations—partially circular)
Saliency	11/12	Face detection dominant ($4.79 \times$ control); bottom-up channel weak at UI scale
Lum. variance	2/2	Compute path preserves 3–4% more L variance than MIP blur
OCR readability	4/4	Fovea 84%, far periphery 52% (monotonic decline)

3.1 Gaussian Blur Comparison

The headline result: the full pipeline preserves salient content up to $10 \times$ better than eccentricity-matched Gaussian blur (Table 4). A matched Gaussian blur mode uses the same MIP chain and M-scaling curve but without band decomposition, saliency gating, or chromatic separation.

Table 4: Full pipeline vs. Gaussian blur: mean pixel deviation from unfiltered baseline. Ratio < 1 = pipeline preserves more.

Region	Pipe.	Gauss.	Ratio	Adv.
Face	2.9	23.9	0.121	$8.2 \times$
Lum. single.	1.3	14.0	0.094	$10.8 \times$
Color single.	1.2	6.7	0.173	$5.6 \times$
Control	4.9	15.5	0.318	$3.2 \times$

The $3.2 \times$ control advantage comes from the band architecture alone. The additional $5\text{--}8 \times$ for salient regions comes from saliency gating—Gaussian blur has no saliency signal and cannot modulate degradation by content importance.

3.2 Known Limitations

The pipeline matches published data where mechanisms map cleanly to GPU operations, and diverges where discrete MIP levels approximate continuous functions. The 12-band DoG produces step functions at MIP boundaries; Rovamo’s smooth curves yield only $r = 0.600$. Crowding modulates distortion *strength* by eccentricity, not *spacing* by flanker distance [Rosenholtz et al., 2012]. The saliency worker (256 px) cannot resolve UI elements smaller than ~ 60 px;

face detection (640px) provides the dominant protection signal. Two crowding calibrations were fit against test stimuli, making those results partially circular.

4 Applications

Design audit. The `scrutinizer-audit` CLI tool and MCP server provide batch Feature Congestion scoring without launching the Electron renderer, enabling CI integration. Designers see which elements survive peripheral vision before deployment. Queen [2006] showed that desktop icons with distinct low-spatial-frequency silhouettes are identified ~ 0.5 s faster in a match-to-sample task ($N=10$, 20 trial images), but this analysis requires spatial-frequency filtering that most designers lack access to.

Research platform. The five branch points and declarative mode registry make Scrutinizer a platform for perceptual experiments. Researchers can compare frequency-selective filtering against Gaussian blur on reading speed, swap in eye tracker SDKs or scanpath replay, or test how saliency models interact with crowding—all without modifying the core shader.

Education. Side-by-side comparison modes let users manipulate parameters and see results on their own content.

Cognitive architecture integration. The saliency branch point accepts any bitmap as attentional input, making Scrutinizer a rendering front-end for cognitive models such as SNIF-ACT [Fu and Pirolli, 2007] and ACT-R’s vision module [Salvucci, 2001].

5 Open Problems

Full texture-statistics pooling. The isotropic sector geometry (Section 2.6) provides eccentricity-scaled pooling regions, but the compute path synthesizes oriented noise rather than full summary statistics [Rosenholtz et al., 2012]. Covariance computation within isotropic sectors is feasible on WebGPU but not yet implemented.

Gaze-cursor coordination as cognitive signal. Stone and Chapman [2023] and Zhu et al. [2023] show that the *relationship* between gaze and cursor carries richer signal than either alone—coordination breakdown indicates friction [Stone and Chapman, 2023], and cross-modal attention learns when to trust which input [Zhu et al., 2023]. Integrating eye tracking via the gaze-input branch point would let Scrutinizer capture this coordination signal alongside the peripheral rendering, potentially connecting to information foraging models [Pirolli and Card, 1999] where gaze-cursor divergence may reflect scent evaluation.

Experiment framework integration. `mouseview.js` [Anwyl-Irvine et al., 2021] demonstrated that cursor-directed apertures integrate with jsPsych, PsychoJS, and Gorilla for web-based experiments. Scrutinizer can replace these Gaussian-blur tools with biologically-grounded filtering within the same experiment frameworks, enabling direct comparison of peripheral models on identical stimuli.

6 Conclusion

Scrutinizer is a Restricted Focus Viewer that replaces Gaussian blur with a biologically-grounded peripheral pipeline, running on live web content at 60 fps. The DoG band decomposition provides per-channel chromatic attenuation and saliency-gated content protection (up to $10\times$ advantage over matched Gaussian blur; Table 4). The WebGPU compute path adds texture synthesis preserving peripheral luminance statistics [Freeman and Simoncelli, 2011], and isotropic cortical sampling [Blanch et al., 2026] provides biologically-scaled pooling regions. The mouse proxy inherits the limitations characterized by Chen et al. [2001] and Huang et al. [2012]; eye-tracker integration is architecturally supported. The branch-point architecture and open-source validation stimuli are designed so that other researchers can swap in improved models at any pipeline stage. Scrutinizer can replace `mouseview.js` [Anwyl-Irvine et al., 2021]—which provides a jsPsych plugin for cursor-directed apertures with Gaussian blur—offering biologically-grounded peripheral filtering within the same experiment workflows.

Availability. Open source (MIT), Electron 30.5, macOS signed. Architecture docs, validation stimuli, and analysis scripts ship with the repository: <https://github.com/andyed/scrutinizer2025>. Blog and technical briefs: <https://andyed.github.io/scrutinizer-www/>.

Acknowledgments. The author directed architecture and validated perceptual accuracy; Claude (Anthropic) assisted with implementation and documentation.

References

- Alexander L. Anwyl-Irvine, Thomas Armstrong, and Edwin S. Dalmaijer. *MouseView.js: Reliable and valid attention tracking in web-based experiments using a cursor-directed aperture*. *Behavior Research Methods*, 2021. doi: 10.3758/s13428-021-01703-5.
- Maliha Ashraf and Rafał K. Mantiuk. *castleCSF—a contrast sensitivity function of color, area, spatiotemporal frequency, luminance and eccentricity*. *Journal of Vision*, 24(4):5, 2024. doi: 10.1167/jov.24.4.5.
- Roman Bednarik and Markku Tukiainen. *Validating the Restricted Focus Viewer: A study using eye-movement tracking*. *Behavior Research Methods*, 39(2):274–282, 2007. doi: 10.3758/bf03193158.
- Nicholas M. Blanch, George A. Alvarez, and Talia Konkle. *FOVI: A biologically-inspired foveated interface for deep vision models*. *arXiv preprint arXiv:2602.03766*, 2026. URL <https://arxiv.org/abs/2602.03766>.
- Herman Bouma. *Interaction effects in parafoveal letter recognition*. *Nature*, 226:177–178, 1970. doi: 10.1038/226177a0.
- Norick R. Bowers, Karl R. Gegenfurtner, and Alexander Goettker. *Chromatic and achromatic contrast sensitivity in the far periphery*. *Journal of Vision*, 25(11):7, 2025. doi: 10.1167/jov.25.11.7.
- Peter J. Burt and Edward H. Adelson. *The laplacian pyramid as a compact image code*. *IEEE Transactions on Communications*, 31(4):532–540, 1983. doi: 10.1109/TCOM.1983.1095851.
- Mon Chu Chen, John R. Anderson, and Myeong Ho Sohn. *What can a mouse cursor tell us more? correlation of eye/mouse movements on web browsing*. In *CHI '01 Extended Abstracts*, pages 281–282, 2001. doi: 10.1145/634067.634234.
- Andrey Chetverikov, Maria Kuvaldina, W. Joseph MacInnes, Ómar I. Jóhannesson, and Árni Kristjánsson. *Implicit processing during change blindness revealed with mouse-contingent and gaze-contingent displays*. *Attention, Perception, & Psychophysics*, 80(4):844–859, 2018. doi: 10.3758/s13414-017-1468-5.

- Andy Edmonds. Uzilla: A new tool for Web usability testing. *Behavior Research Methods, Instruments, & Computers*, 35(2):194–201, 2003. doi: 10.3758/BF03202542.
- Andy Edmonds. Scrutinizer: A vision-simulating web browser, 2007. URL <https://github.com/andyed/scrutinizer>. Adobe AIR, Gaussian blur with desaturation. Open source (BSD).
- Jeremy Freeman and Eero P. Simoncelli. Metamers of the ventral stream. *Nature Neuroscience*, 14(9):1195–1201, 2011. doi: 10.1038/nn.2889.
- Wai-Tat Fu and Peter Piroli. SNIF-ACT: A cognitive model of user navigation on the World Wide Web. *Human-Computer Interaction*, 22(4):355–412, 2007. doi: 10.1080/07370020701638806.
- Jeff Huang, Ryen White, and Georg Buscher. User see, user point: Gaze and cursor alignment in web search. In *Proceedings of CHI '12*, 2012. doi: 10.1145/2207676.2208591.
- Vincent Mühler Huber. face-api.js: JavaScript face recognition API for the browser and Node.js with TensorFlow.js, 2018. URL <https://github.com/justadudewhohacks/face-api.js>. Accessed 2026-03-01.
- Laurent Itti and Christof Koch. Computational modelling of visual attention. *Nature Reviews Neuroscience*, 2(3):194–203, 2001. doi: 10.1038/35058500.
- Anthony R. Jansen, Alan F. Blackwell, and Kim Marriott. A tool for tracking visual attention: The Restricted Focus Viewer. *Behavior Research Methods, Instruments, & Computers*, 35(1):57–69, 2003. doi: 10.3758/bf03195497.
- Nam Wook Kim, Zoya Bylinskii, Michelle A. Borkin, Krzysztof Z. Gajos, Aude Oliva, Hanspeter Pfister, et al. BubbleView: An interface for crowdsourcing image importance maps and tracking visual attention. *ACM Transactions on Computer-Human Interaction*, 24(5):1–40, 2017. doi: 10.1145/3131275.
- Stephen W. Kuffler. Discharge patterns and functional organization of mammalian retina. *Journal of Neurophysiology*, 16(1):37–68, 1953. doi: 10.1152/jn.1953.16.1.37.
- Dmitry Lagun and Eugene Agichtein. ViewSer: Enabling large-scale remote user studies of web search examination and interaction. In *Proceedings of the 34th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 365–374, 2011. doi: 10.1145/2009916.2009967.
- Kerry McAlonan, James Cavanaugh, and Robert H. Wurtz. Guarding the gateway to cortex with attention in visual thalamus. *Nature*, 456(7220):391–394, 2008. doi: 10.1038/nature07382.
- Kathy T. Mullen and Frederick A. A. Kingdom. Differential distributions of red-green and blue-yellow cone opponency across the visual field. *Visual Neuroscience*, 19(1):109–118, 2002. doi: 10.1017/S0952523802011158.
- Pavel A. Orlov and Roman Bednarik. ScreenMasker: An open-source gaze-contingent screen masking environment. *Behavior Research Methods*, 48(4):1145–1153, 2016. doi: 10.3758/s13428-015-0635-7.
- Denis G. Pelli. Crowding: a cortical constraint on object recognition. *Current Opinion in Neurobiology*, 18(4):445–451, 2008. doi: 10.1016/j.conb.2008.09.008.
- Peter Piroli and Stuart Card. Information foraging. *Psychological Review*, 106(4):643–675, 1999. doi: 10.1037/0033-295X.106.4.643.
- Javier Portilla and Eero P. Simoncelli. A parametric texture model based on joint statistics of complex wavelet coefficients. *International Journal of Computer Vision*, 40(1):49–70, 2000. doi: 10.1023/A:1026553619983.
- Matt Queen. Icon analysis, 2006. URL <https://boxesandarrows.com/icon-analysis/>. Boxes and Arrows, July 25, 2006.
- Keith Rayner. Eye movements in reading and information processing: 20 years of research. *Psychological Bulletin*, 124(3):372–422, 1998. doi: 10.1037/0033-2909.124.3.372.
- R. W. Rodieck. Quantitative analysis of cat retinal ganglion cell response to visual stimuli. *Vision Research*, 5(11):583–601, 1965. doi: 10.1016/0042-6989(65)90033-7.
- Ruth Rosenholtz, Yuanzhen Li, and Lisa Nakano. Measuring visual clutter. *Journal of Vision*, 7(2):17, 2007. doi: 10.1167/7.2.17.
- Ruth Rosenholtz, Jie Huang, Alvin Raj, Benjamin J. Balas, and Livia Ilie. A summary statistic representation in peripheral vision explains visual search. *Journal of Vision*, 12(4):14, 2012. doi: 10.1167/12.4.14.
- Jyrki Rovamo and Veijo Virsu. An estimation and application of the human cortical magnification factor. *Experimental Brain Research*, 37(3):495–510, 1979. doi: 10.1007/BF00236819.
- Dario D. Salvucci. An integrated model of eye movements and visual encoding. *Cognitive Systems Research*, 1(4):201–220, 2001. doi: 10.1016/S1389-0417(00)00015-2.
- Eric L. Schwartz. Computational anatomy and functional architecture of striate cortex: A spatial mapping approach to perceptual coding. *Vision Research*, 20(8):645–669, 1980. doi: 10.1016/0042-6989(80)90090-5.
- S. Murray Sherman and R. W. Guillery. The role of the thalamus in the flow of information to the cortex. *Philosophical Transactions of the Royal Society B*, 357(1428):1695–1708, 2002. doi: 10.1098/rstb.2002.1161.
- Scott A. Stone and Craig S. Chapman. Unconscious frustration: Dynamically assessing user experience using eye and mouse tracking. *Proceedings of the ACM on Human-Computer Interaction*, 7(ETRA), 2023. doi: 10.1145/3591137.
- David R. Walton, Rafael K. Dos Anjos, Sebastian Friston, David Swapp, Kaan Aksit, Anthony Steed, and Tobias Ritschel. Beyond blur: Real-time ventral metamers for foveated rendering. *ACM Transactions on Graphics (SIGGRAPH)*, 40(4):Article 48, 2021. doi: 10.1145/3450626.3459943.
- Rongrong Zhu, Liang Shi, Yunpeng Song, and ZhongMin Cai. Integrating gaze and mouse via joint cross-attention fusion net for students’ activity recognition in e-learning. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 7(3), 2023. doi: 10.1145/3610876.

A Validation Stimuli

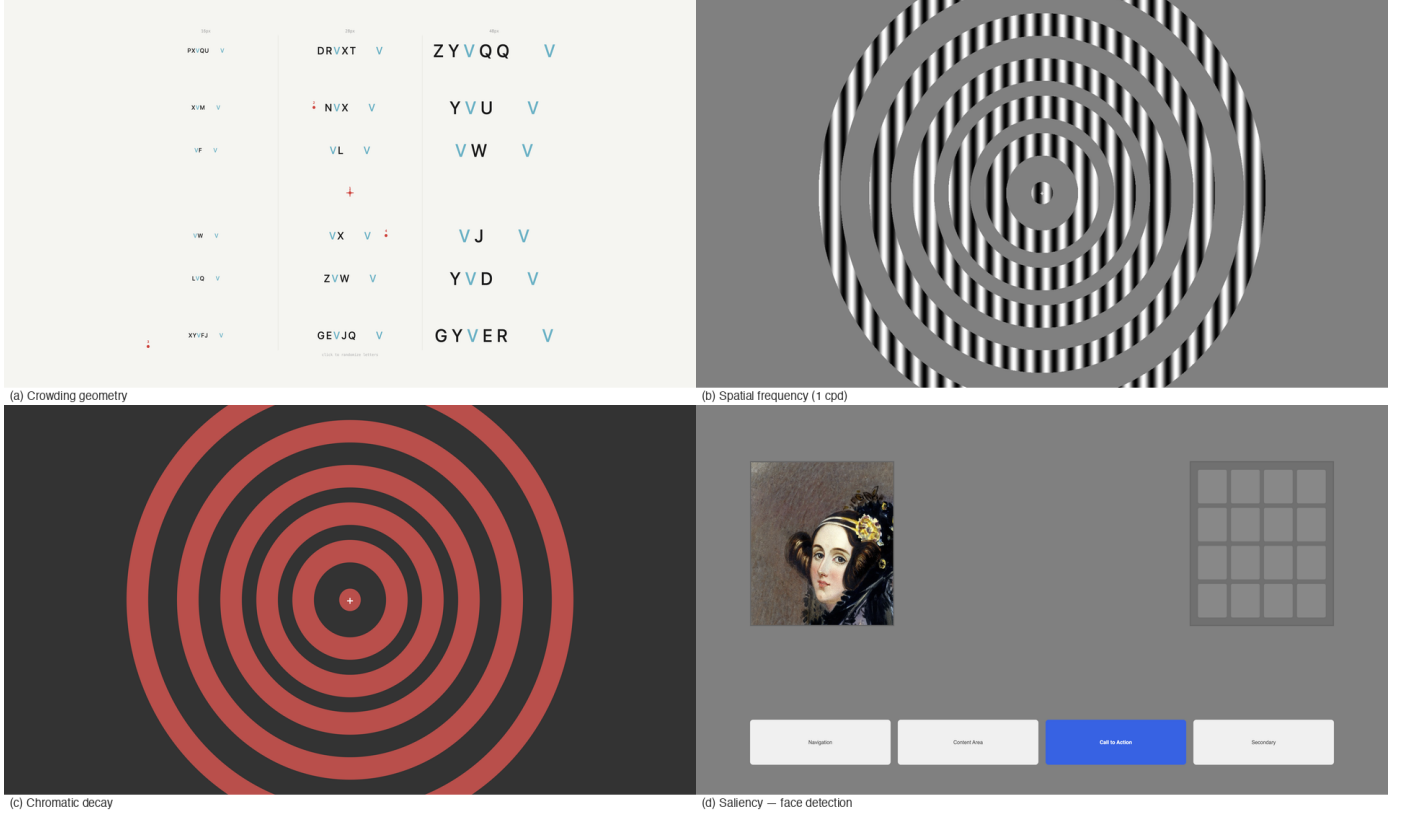


Figure 2: Unfiltered validation stimuli (Scrutinizer bypassed). (a) Chromatic decay: colored target elements among gray distractors at 5 eccentricity rings, testing RG vs. BY channel attenuation. (b) Spatial frequency: 1 cpd sine-wave grating in concentric annuli, testing frequency-selective attenuation across eccentricity. (c) Crowding geometry: flanked and isolated letter targets at 3°, 6°, and 10° eccentricity, with fixation cross at center. (d) Saliency pop-out: four-region layout with color singleton (upper-left), luminance singleton (upper-center), face (lower-left), and control (lower-center). All stimuli are open-source HTML pages shipped with the repository.

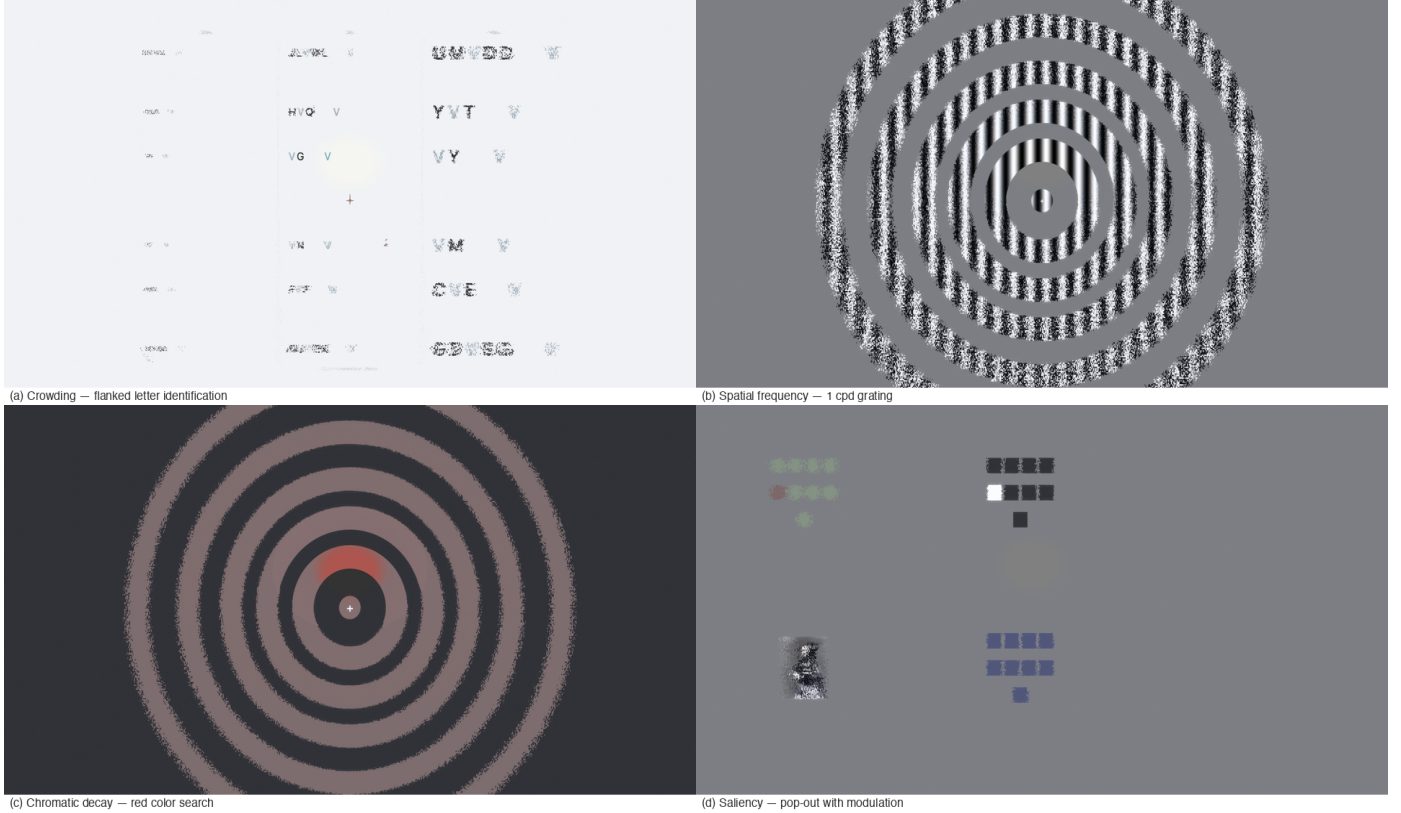


Figure 3: Pipeline output for two validation domains. **Top:** Chromatic decay, baseline (left) vs. filtered (right, fixation at red crosshair). Outer rings lose red-green chroma while blue-yellow structure persists, consistent with differential cone-opponent decay [Mullen and Kingdom, 2002]. **Bottom:** Saliency protection (cropped to face and control regions), three panels: baseline (left), filtered with saliency modulation (center, fixation at red crosshair above crop), and the computed saliency map (right). The face lights up in the saliency map and retains detail under filtering; the control squares are dark in the saliency map and receive full peripheral degradation. Protection ratios: face 0.283, control 0.990.