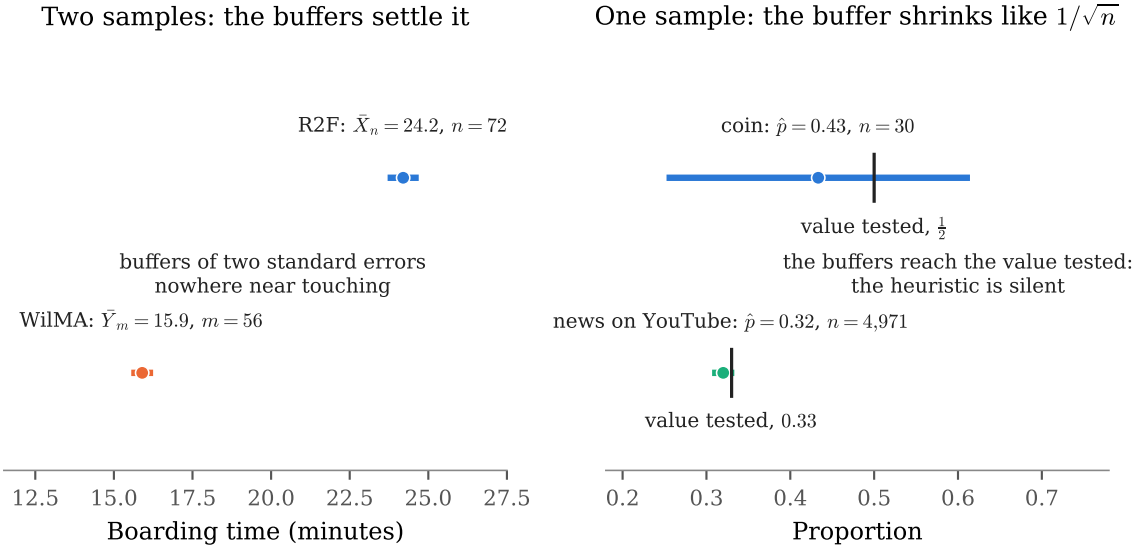
Two samples: the buffers settle it
R2F: $\bar{X}_n = 24.2$, $n = 72$
buffers of two standard errors
nowhere near touching
WilMA: $\bar{Y}_m = 15.9$, $m = 56$
12.5
15.0
17.5
20.0
22.5
25.0
27.5
Boarding time (minutes)
One sample: the buffer shrinks like $1/\sqrt{n}$
coin: $\hat{p} = 0.43$, $n = 30$
value tested, $\frac{1}{2}$
the buffers reach the value tested:
the heuristic is silent
news on YouTube: $\hat{p} = 0.32$, $n = 4{,}971$
value tested, 0.33
0.2
0.3
0.4
0.5
0.6
0.7
Proportion