

L^AT_EX: A Brief Introduction

Andrew Q. Philips*

August 15, 2016

*Ph.D Candidate, Department of Political Science, Texas A&M University, 2010 Allen Building, 4348 TAMU, College Station, TX 77843-4348. aphilips@pols.tamu.edu. <http://people.tamu.edu/~aphilips/>. This paper was originally designed for the political science graduate student “Bootcamp” course.

Contents

1	Introduction	2
2	Creating your First L^AT_EX Document	3
2.1	Downloading L ^A T _E X	3
2.2	Preamble and Packages	4
2.3	Starting the Document	6
2.4	Sections, Subsections, and Sub-Subsections	7
2.5	Itemize and Enumerate	8
2.6	Typesetting	10
3	Math and Symbols in L^AT_EX	11
3.1	Referencing	12
3.2	Subscripts	13
3.3	Greek Symbols	14
3.4	Equations in the Text	15
3.5	Symbols that are Off-Limits	16
4	Inserting Tables and Figures	16
4.1	Figures	16
4.2	Advanced Figures and Tips	18
4.3	Tables	20
5	Bibliographies	22
6	Beamer	26
7	CVs	30
8	Resources	30
8.1	Documents Included in this Introduction	31

1 Introduction

This paper is designed to introduce \LaTeX , a typesetting program that can greatly ease production of academic articles, presentation slides, and many other applications. \LaTeX (pronounced “lay-tech” or “lah-tech”) has grown in use from its creation in 1985, and is already very popular in academia. \LaTeX does have a fairly steep learning curve, but it is well worth knowing. In fact, once you create your own basic template, the start-up costs diminish substantially. The purpose of this paper is to show you the capabilities of \LaTeX —from there, you can find vast amounts of help documentation online. This is a quick overview that you may find helpful to revisit if you come upon this problem in your own work (for instance, making a table or needing to create a list of references).

\LaTeX differs from Microsoft Word in many ways. The largest is the user-interface. In Word you see the end result as you type and change the formatting—such a text compiler is known as a WYSWYG (What You See is What You Get). In \LaTeX on the other hand, the user types directly into a panel similar to notepad, not worrying about formatting or appearance. Instead, preferences are programmed as commands that can change the appearance. For instance, I could desire **bold fonts**, **colors**, or **huge fonts**—and no button is needed for changing this formatting. \LaTeX even works with bibliography packages in order to compile the citations used in your papers using a painless process. If you have ever tried to do this in Word, you know it can be frustrating.

There are many other things that make \LaTeX ideal over WYSWYGs. Kerning, or spacing of combinations of letters that become forced apart due to their shape (AV, AY, AT, PA,...) is performed automatically in \LaTeX but not in MS Word by default. \LaTeX also creates “real” capitals (capitals are a different type shape rather than just re-sized), and provides the ability to use characters from other languages (e.g. ô , á , ç , å.) It also has an advanced algorithm for dealing with white-space and line breaks, has lots of compatible fonts, and a substantial community of users who help each other online.¹

The best part about \LaTeX is it is free. Anyone can download it from the main website:

¹Other benefits of \LaTeX over WYSWYG’s can be found at <http://nitens.org/taraborelli/latex>.

<http://latex-project.org/>. In addition, there are copious amounts of help online; often, the only troubleshooting you need to know is the right search term to type into Google!

L^AT_EX is not without critiques. As discussed above, the start-up costs are quite high compared to WYSWYG editors. Moreover, experimental evidence suggests that even expert L^AT_EX users have higher error rates and are able to write less text in a given amount of time than novice Word users (Knauff and Nejasmic 2014).² However, L^AT_EX users report much higher levels of satisfaction with their typesetting package than Word users. Equations can be written faster in L^AT_EX. In addition, once you have constructed a particular template (e.g. for a document, table, or figure), all you really need to do is copy and paste.

The rest of this document proceeds as follows. We will first discuss basic template setup and typesetting. Next, we will go over the maths capabilities in L^AT_EX. Then we will discuss inserting tables and figures. We will cover bibliographies next. Finally, we will discuss Beamer, which is the L^AT_EX version of Microsoft PowerPoint.

2 Creating your First L^AT_EX Document

2.1 Downloading L^AT_EX

If it is not already on your computer, L^AT_EX must be downloaded from online. The easiest way to obtain it is by going to the core website <http://latex-project.org/>, and clicking on “Obtaining Latex”. If you have a Mac, click on the MacTeX link. This brings you to the MacTeX website, where you need to download the most current distribution. This installs a number of programs on your computer under a TeX folder in Applications. The file is quite big and can take some time to download. The two ones that we can use are TeXworks and TeXShop.³ I like TeXShop because it is very minimalist.

If you have a Windows computer, you will need to install proTeXt, which is based off of

²This study was not without its critiques. For a good summary, see [here](#).

³Or users can use a text-editing program, such as TextMate, to write and compile TeX files. In addition, there are paid TeX programs, such as WinEdt (Windows) or Texpad (Mac) that are popular. I currently use Texpad for most of my work in L^AT_EX.

MiKTeX, and available [here](#). Then you can run the setup.exe extension to install it to your computer.

2.2 Preamble and Packages

Now that we have L^AT_EX installed and opened up a blank window, we can create our first document. Unlike Word, you need define a number of things in the preamble that tells L^AT_EX how you want your document to look. This is most commonly done using the `\usepackage{ }` command. Here is how our preamble will appear (note: anything in this handout that appears as Courier font sandwiched between two horizontal lines—such as the text below—is what I actually typed in L^AT_EX):

```
% ----- Create Preamble -----  
  
\documentclass [12pt]{article}  
  
\usepackage[a4paper]{geometry}  
  
\usepackage{amsmath, amsthm, amssymb, amsfonts}  
  
\usepackage{graphicx,epsfig}  
  
\usepackage{booktabs}  
  
\usepackage{pslatex}  
  
\usepackage{caption}  
  
\usepackage{setspace}  
  
\usepackage{hyperref}  
  
\usepackage{multicol, multirow}
```

What do all these things do? Here we go:

- the `%` is L^AT_EX's version of commenting out a line. Anything after the `%` will not be read by the text compiler; this is an easy way to add notes or to say what a particular package does. In my typesetting package, this appears in **red**, which makes it easy to spot.

- `\documentclass [12pt]{article}` says we want an “article” style with 12 point font. This command is always required.
- `\usepackage[a4paper]{geometry}` defines the type of paper we want. Changing this would change the margins.
- `\usepackage{amsmath, amsthm, amssymb, amsfonts}` is a suite of math packages that let us use the align environment and other helpful math things such as symbols. We will go over this in the “Math and Symbols in L^AT_EX” section.
- We need the `\usepackage{graphicx,epsfig}` packages to insert figures into our document of various sorts.
- `\usepackage{booktabs}` is needed to produce tables that are not ugly (i.e. it gets rid of vertical lines).
- `\usepackage{pstr latex}` lets us use the Times New Roman font.
- `\usepackage{caption}` lets us label figures.
- `\usepackage{setspace}` lets us use double-spacing and single-spacing.
- `\usepackage{hyperref}` lets us create hyperlink references that you can click on to take you to a website. For example, clicking on [this link](#) brings you to my website.
- `\usepackage{multicol}` gives us the multi-column and multi-row environment which is helpful for tables.

This is only a small sample of the packages available to you. But these ones are probably the most important. Typically I just copy and paste one of my existing preambles when creating a new document. As such, it has gotten to be rather large; I have about 30 packages and 15 custom commands. This typically does not present any problems. However, there are times when L^AT_EX will not compile because two packages do not work well with one another. So in general, pursuing the “Occam’s razor” approach to packages is good practice.

2.3 Starting the Document

Now that we have the preamble set up, all we have left to do is create the title/author page. This part goes in the preamble. Here is a (somewhat simplified) version of what I did for this paper:

```
\singlespace
\title{\textbf{My Title: A Brief Introduction}}
\author{Andrew Q.\ Philips\footnote{Graduate Student,
    Department of Political Science, Texas A\&M University.}}
\date{{\normalsize \today}}
```

We first say we want single-spacing by using `\singlespace`. Next, we create our title in the `\title{ }` environment. I wanted a **bold** text, so I wrapped my title in `\textbf{ }`. If I had wanted *italics*, I could of used the `\emph{ }` command instead. I then type my name under `\author{ }` section. Note how I use a backslash after the Q., this is so \LaTeX understands this is not the end of a sentence and so does not include additional space after the “.”. Immediately after my name (but before we close the author bracket) we add the command to produce a footnote. Moving ahead, anything that we put between `\footnote{ }` in our document gets put in a footnote at the bottom of the page.⁴ Last, we say that we would like the date shown, and \LaTeX knows today’s date if we type `\today`. We asked for this in `\normalsize`, which is one of the font sizes.

Next we start the document by the following commands:

```
\begin{document}
\maketitle
\newpage
\tableofcontents
```

⁴For instance, this is a footnote.

2.5 Itemize and Enumerate

Lists (i.e. bulletpoints) are sometimes important when creating documents. In \LaTeX these are called “itemize” lists. We can create itemized lists the way I just did by using the `itemize` command. For example, typing the following in my TeX document:

```
\begin{itemize}

  \item Here is one item

  \item Here is another item

  \item Here is another item

  \item Here is another item

\end{itemize}
```

produces the following list:

- Here is one item
- Here is another item
- Here is another item
- Here is another item

We use `\begin{itemize}` to start the `itemize` environment. For each new bullet-point, we need to type `\item` and then our text. At the end we stop the environment by typing `\end{itemize}`. If we wanted to create numbers, we would replace the `itemize` with `enumerate`:

```
\begin{enumerate}

  \item Here is one item

  \item Here is another item

  \item Here is another item

\end{enumerate}
```

```
\item Here is another item
\end{enumerate}
```

And the result would be numbered:

1. Here is one item
2. Here is another item
3. Here is another item
4. Here is another item

We can also nest enumerates or itemizes within each other—for instance typing:

```
\begin{enumerate}
  \item Here is one item
    \begin{enumerate}
      \item This item is nested!
      \item This item is nested!
        \begin{enumerate}
          \item This item is double-nested
        \end{enumerate}
    \end{enumerate}
  \item Here is another item
  \item Here is another item
    \begin{enumerate}
      \item This item is nested!
      \item This item is nested!
        \begin{enumerate}
          \item This item is double-nested
```

```

\end{enumerate}

\end{enumerate}

\item Here is another item

\end{enumerate}

```

Gives us output that appears as the following:

1. Here is one item
 - (a) This item is nested!
 - (b) This item is nested!
 - i. This item is double-nested
2. Here is another item
3. Here is another item
 - (a) This item is nested!
 - (b) This item is nested!
 - i. This item is double-nested
4. Here is another item

As is clear from this example, it can start to get pretty confusing where itemizes and enumerates begin and end. Therefore (as with any coding program), it is a good idea to tab nested commands to keep them organized.

2.6 Typesetting

After we have set the preamble and written our test, the next step is to compile our \LaTeX file into a pdf. This is done using the typeset command up in the menu bar. Remember that we may need to press compile a few times in order to get all the equation, figure, and table numbers to compile

properly. If you are typesetting for the first time, this may take awhile— \LaTeX needs to read all of the graphs and preamble commands. Typically, all typesetting programs have a console that shows what it is thinking and will let you know if it gets stuck on something and fails to compile.

Unfortunately, the error message you get if your file does not compile is not typically very helpful. In my experience, if it is hard to diagnose where the error is occurring, sometimes it helps to remove all the text and add it half of it back in, see if it compiles, add half of the remaining text back in, compile,...etc. This way you can isolate out the trouble paragraph or section.

3 Math and Symbols in \LaTeX

One of the biggest advantages of \LaTeX is its ability to write complex mathematical formulas relatively easily. In this section we will go over some of the most common ones as well as how to present equations. Consider a relatively simple equation:

$$E = mc^2 \tag{1}$$

```
\begin{align}
E=mc^{2}
\end{align}
```

How did I make this? We first used the “align” environment to tell \LaTeX that we had an equation.⁶ We then typed the equation, using the carrot symbol to get the superscript. Anything that we put inside the curly brackets after the carrot gets superscripted, and anything left outside

⁶Note that we could have used the “equation” environment instead of align. To the best of my knowledge, the only difference is that the equation environment allows you to break up the equation if it runs across the entire page, although see [this link](#) for a debate.

does not. For instance, I can make the 2 turn into $(2 + 5x)$ through the following:

$$E = mc^{(2+5x)} + 1 \tag{2}$$

```
\begin{align}
E=mc^{(2+5x)}+1
\end{align}
```

3.1 Referencing

Notice also how \LaTeX automatically numbers our equations. We can reference these equation numbers by using the “label” and then “ref” commands as follows:

$$E = mc^{(2+5x)} + 1 \tag{3}$$

```
\begin{align}\label{eq:myfirstequation}
E=mc^{(2+5x)}+1
\end{align}
```

Now anytime we type:

```
\ref{eq:myfirstequation}
```

in our text (not in the align environment) we get a label for Equation 3. This is live-updated; if we were to delete an equation or move it somewhere else, \LaTeX will recognize that the order numbering has changed and update the numbering.⁷ This is a huge time-saver, especially in long papers. We just have to make sure that each new equation gets a new label, so having a labeling system like eq1, eq2, eq3...is helpful.

Note too that all equations are referenced by `\ref{eq:something}`. The `eq:` part is necessary to let the program know this is an equation, but the “something” part can be any label you want to give it. Below we will see that labeling figures in tables works in the same way, but instead of `eq:` we need `fig:` or `tab:`, respectively.

3.2 Subscripts

As with superscripts, a subscript command let the typesetting program know you want everything within the following brackets after the underscore in subscripts. It looks like the following:

$$E_t = m_t c_t \tag{4}$$

```
\begin{align}\label{eq:mysecondequation}
E_{t}=m_{t}c_{t}
\end{align}
```

See how everything in Equation 4 has been subscripted by t . We could always combine both super- and subscripts:

$$E_t = m_t c_t^{(2+5x)} \tag{5}$$

⁷Sometimes if your paper has not compiled in some time, or you had an error last time, you will get ?? instead of a number. Just keep re-compiling and it will take care of itself.

```
\begin{align}
E_{\{t\}}=m_{\{t\}}c_{\{t\}}^{\{(2+5x)\}}
\end{align}
```

Note that the order of the carrot and underscore after c does not matter, but the curly bracket rule is still in place; all brackets must be closed and everything within the bracket gets used by the preceding command.

3.3 Greek Symbols

In scientific writing, symbols (commonly Greek) are often used. They are relatively simple to add, as long as you remember the name. Capitalizing the Greek letter will call its upper-case Greek counterpart, if applicable. For instance:

$$\alpha + \beta + \gamma + \delta + \varepsilon + \mu + \theta + \Delta \tag{6}$$

```
\begin{align}
\alpha + \beta + \gamma + \delta + \varepsilon + \mu + \theta + \Delta
\end{align}
```

are some of the most common greek letters. Note how Delta is capitalized in order to get the upper-case version. A quick Google search can help you find all the others, as well as other symbols to use in L^AT_EX—like \leftarrow , \neq , \forall , or ∞ . For instance, some helpful websites for symbols are: https://www.sharelatex.com/learn/List_of_Greek_letters_and_math_symbols and <http://omega.albany.edu:8008/Symbols.html>. Depending on your typesetting distribution, you may even have hotkeys that you can press to include these symbols right into your text (i.e. MiKTeX in Windows). If not, you will have to look up/remember these symbols each time.

Thankfully, many of these commands are intuitive...i.e. the `\Delta` command makes a Δ .

3.4 Equations in the Text

So far we have given each equation a new line and its own number using the `align` environment. Other times we may want to reference or create a specific math symbol or equation in the text, such as β , or $c^{(2+5x)}$. To do so, we enclose them by using the `$`:

For instance, the sentence such as β , or $c^{(2+5x)}$ can be written as:

For instance, the sentence such as `β, or $c^{(2+5x)}$ can be written as:`

Failing to add the `$` or curly brackets to either side is one of the most common reasons why \LaTeX fails to compile (it will issue an error in the console like “missing `$` inserted”), so be sure to write these correctly.

To conclude, \LaTeX makes it really easy to write complex mathematical formulas like:

$$Z_{it} = \alpha_{it} + \delta X_{it} + \frac{\gamma X + e^{3X+\varepsilon}}{(1 - \sqrt{c_{it}^2})} \quad (7)$$

Just remember to keep track of those curly brackets:

```
\begin{align}
Z_{it} = \alpha_{it} + \delta X_{it} + \frac{\gamma X +
e^{3X + \epsilon}}{(1-\sqrt{c_{it}^2})}
\end{align}
```

The easiest way to find the specific name to write complex symbols or commands (like writing a fraction or square root) is to search online for it. Although all of the brackets and

parentheses may look daunting, they follow a set of simple rules that make writing mathematical formulae *much* easier than in other word processors.

3.5 Symbols that are Off-Limits

You may have noticed how important the `\` is to \LaTeX . If we try to put one in our document by itself, it will not compile. The same is true for the `_` (underscore), the `$`, the `%`, the `^`, and the `#`. That is because these are key parts of the \LaTeX language. For instance, as we saw above, the dollar sign was used to start and end an equation in the text. If you still want to use these special characters (called macro-parameter characters in \LaTeX), you will have to put a backslash, `\`, in order to use them (i.e. `\$`). In my experience, writing an illegal symbol in the text is the most common reason why \LaTeX fails to compile.

4 Inserting Tables and Figures

In the previous section we saw how to insert equations into our paper. In this section we will discuss how to add tables and figures into \LaTeX . This is particularly important since much of quantitative social science involves presenting results through the use of tables and figures.

4.1 Figures

Inserting a figure into \LaTeX is relatively straightforward. Assume we already created and saved a figure using R or Stata. A good extension to use is as a pdf.⁸ Also make sure that we have the packages `\usepackage{graphicx, caption}` in the preamble. We can then add a figure to our document. For instance, Figure 1 shows a bar graph I made for one of my papers. Here is how it is added into my \LaTeX document:

⁸There seems to be some contention as to the best type of file extension to use for graphics. I found a forum that found that, “For photos, screenshots and such bitmap graphics, you could use their native format (to preserve quality) if it’s jpeg or png. Otherwise convert those pictures to png or at least to lossless jpg...For drawings, plots and diagrams you better use a vector image format, because it can be scaled without quality loss. Possible vector formats are pdf and ps.” Keep in mind that not all extensions work in all compiling types. I think that in general, the best to use are .pdf or .eps.

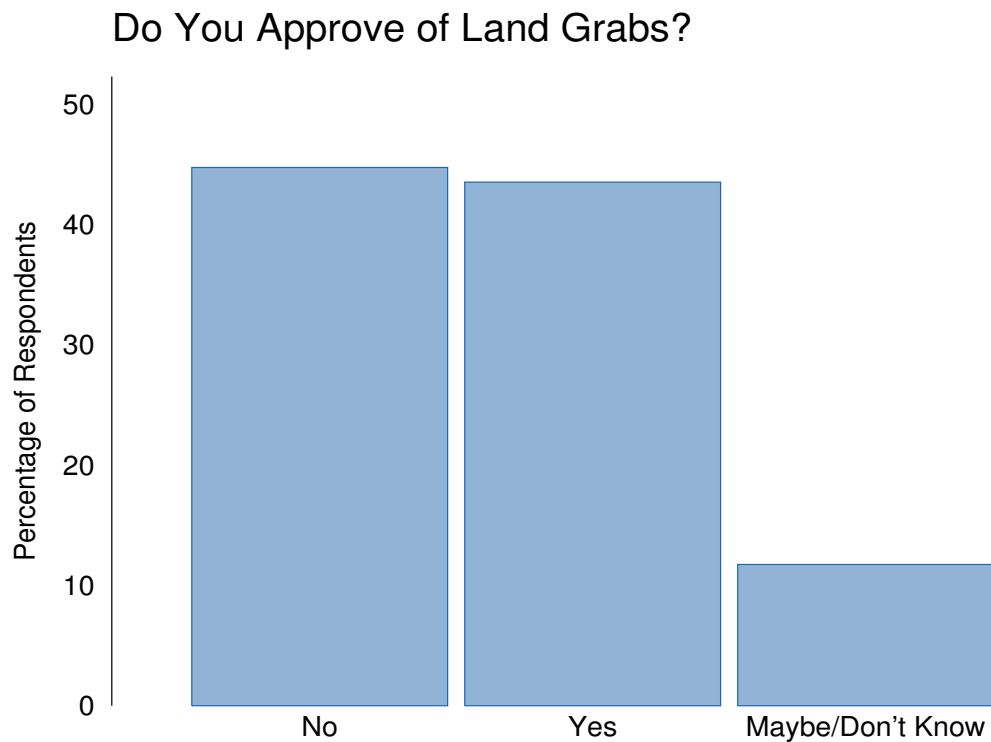


Figure 1: This is Only an Example Figure

```

\begin{figure}[htpb]\centering
  {\includegraphics[width=150mm,height=105mm]{myfigure.pdf}}
\caption{This is Only an Example Figure}
\label{fig:myfirstfigure}
\end{figure}

```

We first have to call the figure by using `\begin{figure}`. The `[htpb]` is a \LaTeX command that lets the graphs float around in order to fit them on the page the best.⁹ Next, we tell \LaTeX to center the figure using `\centering`. Then, we (inside a set of brackets) type `\includegraphics` to define the pdf we want to use. Within square brackets we type the command `[width=150mm,height=105mm]`; this defines the width and height of the figure. Depending on the figure, you may have to tweak this a bit to make the graph look good.¹⁰ Next we

⁹There are others, like `[H]`, that force compile a figure at a certain point. `[htpb]` is superior, in my opinion.

¹⁰Many books on the graphical presentation of results define the “golden” ratio as a 1.6 to 1 ratio between width

specify the filename within another set of curly brackets, this one is called “myfigure.pdf”. Then we label the figure using `\label{fig:myfirstfigure}` so that we can reference it later. Last, we use `\end{figure}` to end the figure creation.

One more note; we called the number for Figure 1 using `\ref{fig:myfirstfigure}` in the text. So it is the same as using `\ref` for the equations as we saw in the previous section, only now `fig` comes before the colon instead of `eq`.

4.2 Advanced Figures and Tips

Sometimes getting the figure width right on the page can be difficult. A quick fix is to use `width=0.9\linewidth` in the size of the figure section, which makes the width 90 percent of the width of the lines on the page. This is shown in Figure 2. The nice part about specifying only the width is that the height auto-sizes itself, so there is little risk of distorting the figure.

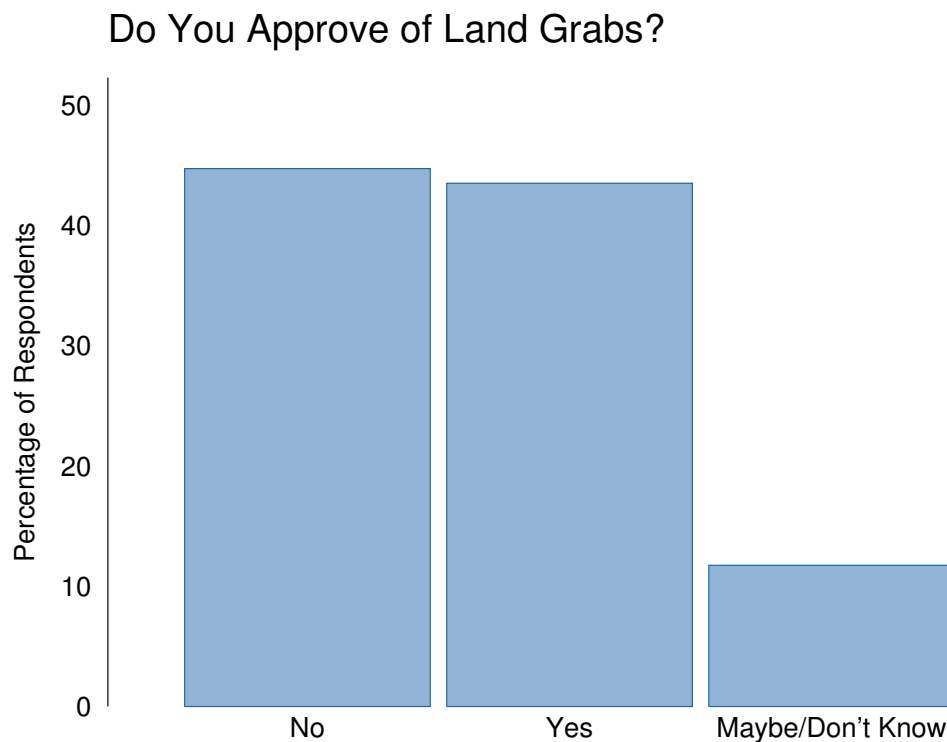


Figure 2: This is Only an Example Figure

and height, respectively. Typically though trial and error works pretty well.

```

\begin{figure}[htpb]\centering
  {\includegraphics[width=0.9\linewidth]{myfigure.pdf}}
\caption{This is Only an Example Figure}
\label{fig:myotherfigure}
\end{figure}

```


We may also want to combine figures together. Although you can do this in both Stata and R, by combining figures in \LaTeX you can reference each individual figure (labeled as 1a, 1b, 1c...), as well as the overall figure number. We first need to add `\usepackage{subcaption}` to the preamble. Then, typing the following

```


\begin{figure}[htpb]
\begin{subfigure}{.5\textwidth}
  \centering
  \includegraphics[width=1\linewidth]{myfigure.pdf}
  \caption{This is the First Figure Caption}
  \label{fig:combinedfig1}
\end{subfigure}%    <-- % is IMPORTANT!
\begin{subfigure}{.5\textwidth}
  \centering
  \includegraphics[width=1\linewidth]{mysecondfigure.pdf}
  \caption{This is the Second Figure Caption}
  \label{fig:combinedfig2}
\end{subfigure}
\caption{This Caption Labels the Entire Figure}
\label{fig:overallfigurelabel}
\end{figure}

```

produces Figure 3. We start with `\begin{figure}[htpb]`. Then we use the command `\begin{subfigure}{.5\textwidth}` to start one of the subfigures, giving it 50 percent of the total width of the figure. Next we add the figure information just like in a regular figure. It is *very important* that we put a % after we end the first subfigure. I am not sure why, but without it the figures will be on top of each other rather than next to each other. In the second half we create another subfigure. After we end the second subfigure, we add a caption and label to the overall figure. Now we can reference individual subfigures, such as 3a or 3b, as well as Figure 3.

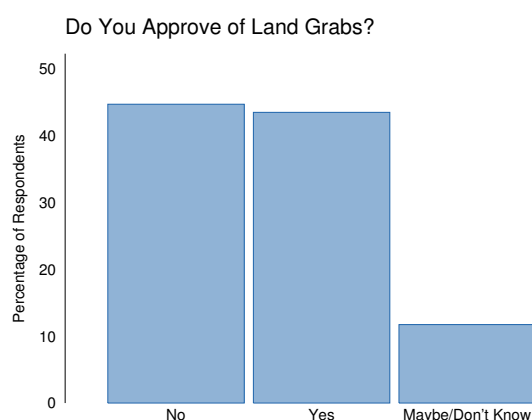

(a) This is the First Figure Caption

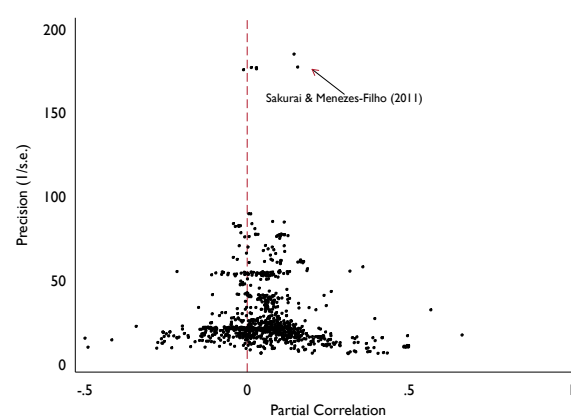

(b) This is the Second Figure Caption

Figure 3: This Caption Labels the Entire Figure

Last, for those that would like to draw figures or schematic diagrams in \LaTeX , there is a package called TikZ. This is beyond the scope of this paper (and a bit of overkill given that most of these diagrams are easier to make in PowerPoint or Keynote), but if you want to learn more you should check out [this link](#).

4.3 Tables

Tables are a bit more difficult to create by hand than most things in \LaTeX . Thankfully, often we can get our statistical packages, like Stata, to do the heavy lifting for us (we saw how to do this in Stata and R). Here is a super-basic table:

We create Table 1 by the following:

Table 1: The Title of My First Table

Column name 1	Column name 2
4.5	3.6
3.2	1.3

```

\begin{table}[htdp]
\caption{The Title of My First Table}
\begin{center}
\begin{tabular}{c c}
Column name 1 & Column name 2 \\ \hline
4.5 & 3.6 \\
3.2 & 1.3 \\ \hline
\end{tabular}
\end{center}
\label{tab:myfirsttable}
\end{table}%

```

As with creating figures, we first define the environment through `\begin{table}[htdp]`, using the `[htdp]` environment to let our table “float” through the pages. We then define the `\caption{}`, or title. Next we start a centering environment. The next part of creating a table is to start a `\begin{tabular}{c c}` environment. The `c`’s in curly brackets mean that we want two columns in our table, centered. Some other possibilities include `l` for left-aligned or `r` for right aligned.

After, we enter in the data for the table. Each entry in the table is separated by a `&`. Note too that `\\` is the command to end the line of the table, and that `\hline` is used to create the horizontal lines separating the variable names and the end of the table. And that is it...we could make as many new rows of numbers as we wanted. For more complicated Table functions (i.e. multiple columns, multiple rows, slimming down columns, etc...see online help).

5 Bibliographies

One of the most difficult parts of writing an academic paper is keeping track of (and creating) all of the citations needed. Thankfully, \LaTeX is pretty good at handling this. It uses something called a BibTeX typeset to create references. Unless you are hand-writing in authors at the end of your document (don't do this please!), most people get some sort of .bib file program.

What is a .bib file? It stores citation information written in a particular way using the BibTeX language:

```
@article{greenwade93,  
  author   = "George D. Greenwade",  
  title    = "The {C}omprehensive {T}ex {A}rchive{N}etwork ({CTAN})",  
  year     = "1993",  
  journal  = "TUGBoat",  
  volume   = "14",  
  number   = "3",  
  pages    = "342--351"  
}
```

If it looks clunky and confusing...it is. Thankfully, there are a number of free bibliography tools. These programs help look up citations on places like Google Scholar, and then show the content above via a graphical user interface (GUI). The program then saves the file as a .bib, and then we can compile the references in our \LaTeX document by making calls to the .bib file.

Graduate students and others that I know primarily use two bibliography programs: BibDesk, or JabRef. I use BibDesk, but it is only available for Mac—JabRef is available for all platforms since it utilizes Java. We will focus on JabRef since it is similar cross-platform.¹¹ First [download the program](#) and open it.¹² It should look something like Figure 4.

¹¹In fact, there even appears to be a Java applet to run JabRef in your web browser.

¹²I had particular difficulties doing this on my Mac; after downloading the .zip file from SourceForge and clicking

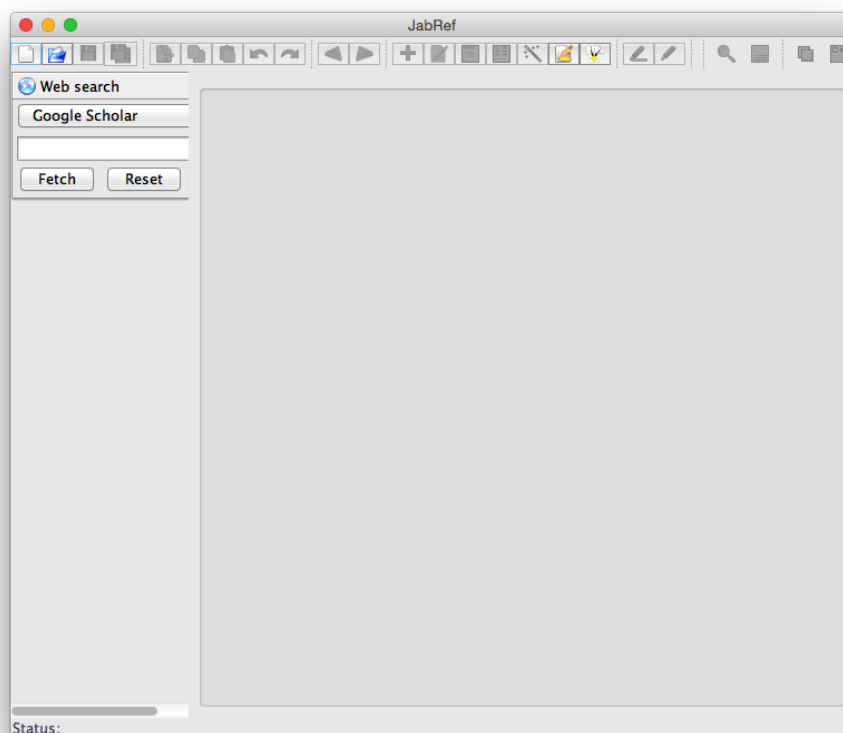


Figure 4: A Fresh JabRef

Next select a new BibTeX database. Then, under search click “Web search”. Select Google Scholar and search for a name. I searched for “Anthony Downs”. Then click on any/all relevant checkboxes of works by Downs that you want to cite, and click “OK”. A menu pops up that shows what we added. Click “OK” again and now the main screen will appear as in Figure 5.

Of course, sometimes we may not find an article/book we are searching for. Or we may want to enter or change the entry. To create a new entry, click the “Plus” button. Next, select which entry type you want (choose “Article” for this example). Then, fill out the form that pops up with the relevant information. You should not have to fill out entries by hand very often since most work is available on the web.

At the bottom of every entry is something called a Bibtexkey. This is very important, since it serves as a *unique identifier* for each entry. If you have the same Bibtexkey for two or more entries, JabRef will complain. What is a good entry key? The default is to list the first author

on it, I got a “this package is damaged and cannot be opened” window pop up. To override this (the package is *not* damaged), go to System Preferences, and under Security & Privacy change it so that your computer allows downloaded apps from “Anywhere”.

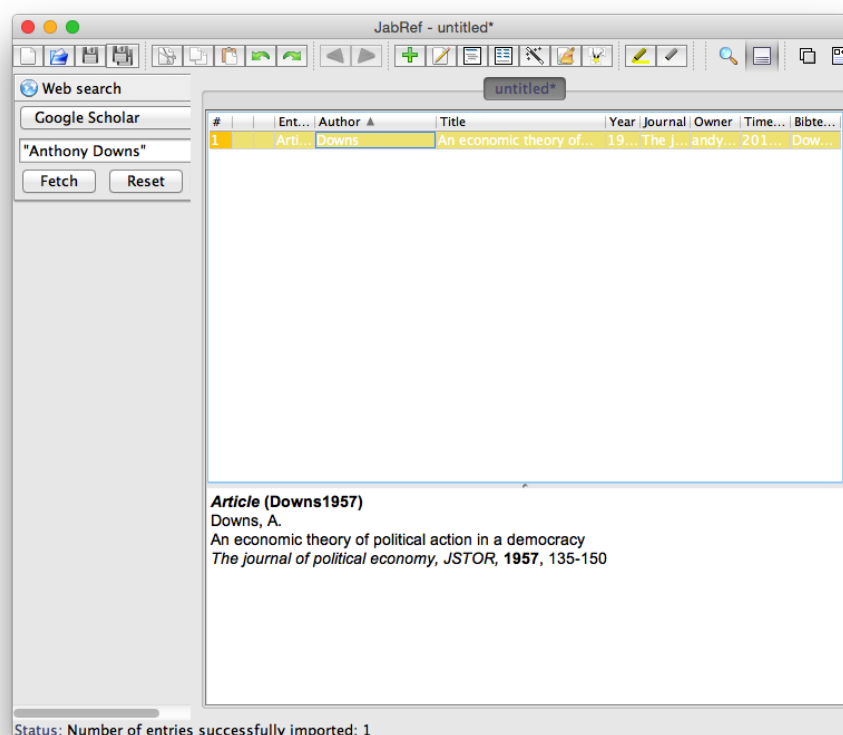


Figure 5: JabRef with One Author

and the year of publication; for instance `Downs1957`. In fact, if you click the magic wand button on the menu bar, an entry key is automatically generated. You can, of course, use whatever entry key you like, but it is probably a good idea to keep them short and consistent.

Now we are ready to save our `.bib` file (the file format that JabRef and other programs use) and put the needed author entries into \LaTeX . In the course materials, there is already a `.bib` file named “`bibliography.bib`” that has a lot of citations. To cite something, we go to the cite we want. Then we type `\cite{ }` into our \LaTeX document where we want the citation to appear. For instance, `\cite{aidt2014voting}` produces a citation that appears as: Aidt and Mooney (2014). To make this appear in both our paper and in the references there are a number of steps:

1. First, we need to add the following lines into the preamble:

```
\usepackage{natbib} % need for bibtex
\setcitestyle{aysep={}} % no commas for author-year separation
```

```
\bibliographystyle{apsr}
```

The `natbib` package is required to use `bibtex`. The next line removes the pesky commas that appear between the authors and years. The third line, `\bibliographystyle{apsr}`, is the APSR bibliography style. There are a few other bibliography styles, and based off the journal you submit your manuscript to you may have to change this, but these three lines should get you pretty far.

2. Second, the following needs to be added at the end of the document *but before* the `\end{document}` line:

```
\newpage  
\bibliography{bibliography}
```

The `\newpage` command puts the references on a new page. The `\bibliography{ }` command specifies the name of the JabRef `.bib` file. We need to make sure that the `.bib` file is in the same location as our \LaTeX document. We also need to make sure that we have the correct file name.

3. We need to compile the document in both \LaTeX and BibTeX. Make sure you have saved your `.bib` file. Then proceed as follows:
 - (a) First compile \LaTeX .
 - (b) Then compile as BibTeX (you should be able to change the typesetting from \LaTeX to BibTeX in your typesetting program).
 - (c) Now compile as \LaTeX at least twice. This part is weird and sometimes appears to take a number of BibTeX \rightarrow \LaTeX \rightarrow \LaTeX combinations. You will know if it is successful if you no longer get ? as cites.

The best part of having a .bib file is that it is rather intelligent. For instance, if an author has more than one article in a year, the program automatically adds *year-a* and *year-b* to the citations and references...for instance: (Philips, Rutherford and Whitten 2016*a,b*) was generated by `\citep{philips2016dynamic,philips2016sj}`. Notice how this citation looks different. by using `\citep{ }`, we can get citations surrounded by parentheses. By using a comma to separate entries, we can get multiple citations separated by a semi-colon.

There are a number of ways to generate citations to include parentheses, page numbers, and so on. Here are most of them:

- `\citet{aidt2014voting}` appears as: Aidt and Mooney (2014).
- `\citep{aidt2014voting}` appears as: (Aidt and Mooney 2014).
- `\citep[][pp. 412]{aidt2014voting}` appears as: (Aidt and Mooney 2014, pp. 412).
- `\citep[e.g.][pp. 412]{aidt2014voting}` appears as: (e.g. Aidt and Mooney 2014, pp. 412).

To sum up, bibliography programs such as BibTeX and JabRef greatly increase your efficiency when creating documents. You are less likely to make mistakes when citing authors, and can use the same .bib document so you don't have to keep searching for entries on Google Scholar. You can even link the actual .pdf articles to JabRef, so it serves as a sort of “document warehouse”.

6 Beamer

Beamer, like PowerPoint, is used to make presentations. Lots of people like it because it is very no-nonsense; no moving parts, works no matter the L^AT_EX distribution, and, like with documents in L^AT_EX, you only have to set up the formatting in the preamble to have it throughout the rest of the presentation. With a few exceptions, it is actually very similar to L^AT_EX. It saves the document as a .pdf, which can be read by every computer—this is ideal since some computers may not have the capability of reading a PowerPoint .ppt, or may have a depreciated version that

cannot handle all the slide animations; in contrast with a Beamer file you just open up the .pdf and go to slideshow mode and everything should work perfectly.

In the course files, you should receive a “simple beamer template” which I created for you. It will be helpful to go through this step-by-step.

Like L^AT_EX, we have to first set up the preamble, starting with the required document class:

```
\documentclass[english,xcolor=dvipsnames]{beamer}
```

In this case we ask for the beamer document class. Next we use one of the many themes available. I put them all in, but you may want to look them up [here to see how they look](#). I chose `\usetheme{Copenhagen}` but many of them look similar.

Next we define packages just like we did when creating a document. There are a few more here that are needed for Beamer. Then we create the Texas A&M colors using

```
\definecolor{aggie}{RGB}{80,0,0} % We want Aggie colors!  
\usecolortheme[named=aggie]{structure}
```

While it is perfectly fine to use something else, be careful that the colors that you choose are not too bright or too dark for presentations. While that bright yellow you picked out may look great on your laptop, it probably will induce headaches when it is up on the screen.

Next we put the A&M logo on the title bar of every slide. Comment this out too if you do not want it:

```
% This gets the A&M logo on the slide title frames:  
\addtobeamertemplate{frametitle}{}{%
```

```

\begin{textblock*}{100mm}{.85\textwidth,-1cm}

\includegraphics[height=1cm,width=1.4cm]{TAM-Logo-white.png}

\end{textblock*}}

```

Then we create the title and author information. Again, this is very similar to the document, except that we include another A&M logo as well as a small mini-title and author information to appear at the bottom of every slide. After, we start the document and create the title page:

```

% -----Start Document-----

\begin{document}

\frame{\titlepage}

```

If we were to compile the Beamer (which is still compiled in LaTeX, but just a different document class), we should get something that looks like Figure 6.

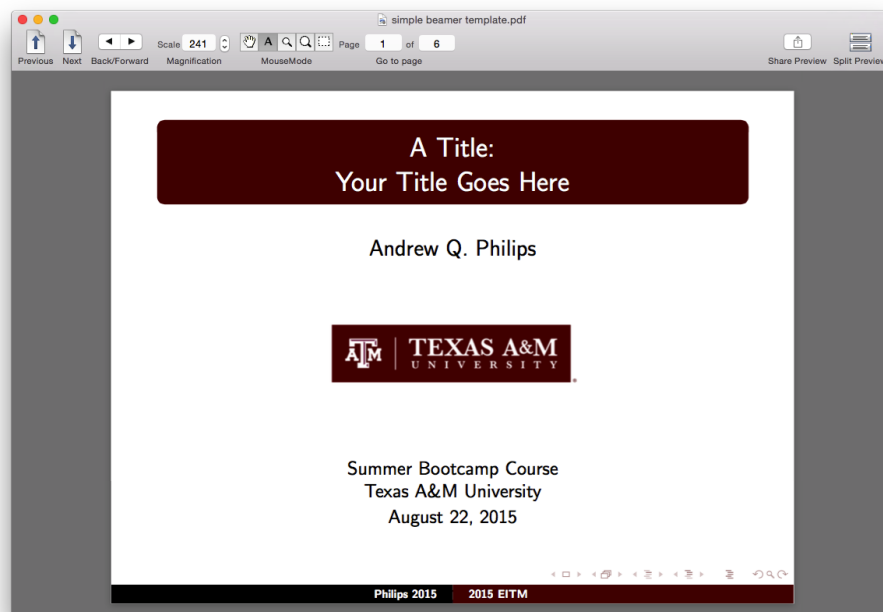


Figure 6: The Title Page of a Beamer Presentation

We can now start creating slides. Typically they appear something like the following:

```

% -----
\begin{frame}\frametitle{Maths}

    We can even create math equations just like \LaTeX:

    \begin{align}
y_{i}=\frac{3x_{i}+8}{z_{i}}
    \end{align}

    \pause

    or we:

    \begin{itemize}
        \item Can
        \item make
        \item lists
        \item just like \LaTeX
    \end{itemize}

\end{frame}

% -----

```

where the frame environment defines each slide. To create a pause (so that you will have to click through once to see the next part) we can use the `\pause` command. In addition, itemizing or enumerating are commonly done when using Beamer presentations. Note too that we could add a table or graph right into a slide, just like we can do in \LaTeX .

Last, remember that the end of the document needs the `\end{document}` line. After that, we can Typeset the document and it should compile into a .pdf that we can open and use in a slideshow format just like any other document.

To conclude, we use Beamer slides as a simple way of presenting academic work. These documents are relatively easy to create (after you have the basic template) and are highly compatible with \LaTeX . Like \LaTeX they excel at presenting mathematical formulae, graphs, and

tables.

7 CVs

L^AT_EX is a great tool for helping you create an academic CV, since these are typically full of formatting and indentations that are difficult to handle in WYSIWYGs. For some online templates check out: <https://www.sharelatex.com/templates/cv-or-resume> or <http://www.latextemplates.com/cat/curricula-vitae>.

8 Resources

The goal of this document was to get you up and running with L^AT_EX. We have covered downloading and setting up the application, typesetting the document, math symbols, and inserting tables and figures. In addition, we discussed why using a bibliography package with L^AT_EX is a really good idea. Last, we saw the advantages of using Beamer to make our presentations.

While this document is a helpful overview, it is by no means a complete introduction to L^AT_EX. Even if you frequently run into problems, there are lots of online sources (and fellow graduate students!) to help you out. Often, simply typing into Google something such as, for instance, “latex footnote to endnote” gets you a good answer. Other than the other links referenced earlier in the document, here are some other ones that I find helpful:

- At WikiBooks there is a broad overview of the capabilities and different parts of L^AT_EX: <https://en.wikibooks.org/wiki/LaTeX>.
- There is a TeX stackexchange, just like there are analogous versions for Stata and R: <http://tex.stackexchange.com/>. I estimate that I answer 90 percent of my problems using this website alone.
- There is a handy table-maker at <http://www.truben.no/latex/table/> that takes some of the

difficulty out of creating tables.

- This is a really cool site that lets you draw the symbol you want to use in \LaTeX : <http://detexify.kirelabs.org/classify.html>.
- Here is a link to more help on the main \LaTeX site: <http://latex-project.org/guides/>.

8.1 Documents Included in this Introduction

There are a number of \LaTeX -specific documents that have been included in the Bootcamp course files. You should have the following:

- A .TeX document, “simple beamer template”, which is a template you can use to create Beamer slides.
- A .TeX document, “simple latex template”, which is a template you can use to create a \LaTeX document.
- Three figures, “TAM-Logo-white.png”, “TAM-PrimaryMarkA.png”, and “TAM-Logo.png”. These are ‘official’ Texas A&M logos which are good to use when making your Beamer slides and other documents.
- A .bib document, “bibliography”, which has about 300 author entries, so you have somewhere to start when building your own library.

References

- Aidt, Toke S and Graham Mooney. 2014. "Voting suffrage and the political budget cycle: Evidence from the London Metropolitan Boroughs 1902–1937." *Journal of public economics* 112:53–71.
- Knauff, Markus and Jelica Nejasmic. 2014. "An Efficiency Comparison of Document Preparation Systems Used in Academic Research and Development." *PloS one* 9(12):e115069.
- Philips, Andrew Q, Amanda Rutherford and Guy D Whitten. 2016a. "Dynamic Pie: A Strategy for Modeling Trade-Offs in Compositional Variables over Time." *American Journal of Political Science* 60(1):268–283.
- Philips, Andrew Q, Amanda Rutherford and Guy D Whitten. 2016b. "dynsimpie: A program to examine dynamic compositional dependent variables." *Stata Journal* .