GAMING ARENA

HOW POINTS AND LEADERBOARDS WORK

The scoring logic for all 15 games on the IIT Madras BS esports platform: how a match becomes points, how points become ranks, how to run an event with any number of players or teams, and how the overall player and house rankings are built.

01 The three kinds of points
02 Event standings and tie-breaks
03 Running any number of teams
04 All 15 games, one table
05 Top players and podium cards
06 House Cup points
07 Worked example
08 Organiser checklist and edge cases
09 Where it lives in the code

Version 1 · 24 October 2026 · Website made by Angad Jangir · angadseth.github.io/pugmark

01 THE THREE KINDS OF POINTS

Every number on the site comes from one place: the match results an organiser enters. From those, the site works out three things automatically.

A
MATCH POINTS

Earned inside one event, match by match. They decide the event's own leaderboard.

B
ARENA POINTS

Earned once per finished event from your final rank. They decide the Top players rankings.

C
HOUSE POINTS

The same final-rank points, split between a team's players and sent to each player's house.

02 EVENT STANDINGS

POINTS FOR ONE MATCH

match points = placement_points[place] + kills × kill_points

An organiser can type an exact points value for a row instead; that value wins.

Each event copies its game's table when it is created, and an admin can edit it per event. Keys can be single places (`"1"`) or ranges (`"5-8"`). A place that is not in the table earns 0.

POINTS FOR THE WHOLE EVENT

event points = sum of all match points + admin adjustment

The adjustment is for penalties or corrections (for example −5 for a late lobby join). It always needs a written note and is recorded in the audit log.

RANKING AND TIE-BREAKS

1. More **event points** ranks higher.
2. Tied on points: more **wins** (matches finished 1st, the "WWCD"/chicken dinners in battle royale).
3. Still tied: more **kills / finishes**.
4. Still tied: the better **best placement** in any single match.
5. Still tied: they **share the rank** (two teams at 3rd, the next one is 5th).

Disqualified entries stay visible at the bottom marked DQ and get no rank. Before the first result, entries are listed by registration and every rank shows "–".

> Every event leaderboard also shows the top three as podium cards (GOAT, 2nd, 3rd), and a signed-in player always sees their own position pinned, even when they are far down the list.

03 RUNNING ANY NUMBER OF TEAMS

Games fall into five formats. Each one has a rule for when more players register than fit in one lobby or one bracket.


BATTLE ROYALE BGMI · FREE FIRE MAX

One lobby holds 16 squads (BGMI) or 12 squads (Free Fire MAX). With N squads and a lobby size L:

- **N ≤ L:** one lobby plays 3–4 maps; standings are the sum over all maps.
- **N > L:** make **G = ⌈N ÷ L⌉ groups** as evenly as possible. Each group plays the same number of maps. The top **⌊L ÷ G⌋** squads of each group (plus the best remaining by points, to fill the lobby) go to the final. Example: 40 BGMI squads → 3 groups of 14/13/13 → top 5 of each + the best 6th = 16 in the final.
- Run qualifiers as their own event (or label matches "Group A – Map 1"), then enter final-lobby results under the final event. The final event's standings are the official result.

HEAD-TO-HEAD TEAMS CODM · VALORANT · CS2 · POKÉMON UNITE · BRAWL STARS

Single-elimination bracket. Bracket size = the next power of two ≥ N; the gap is filled with byes for the top seeds.

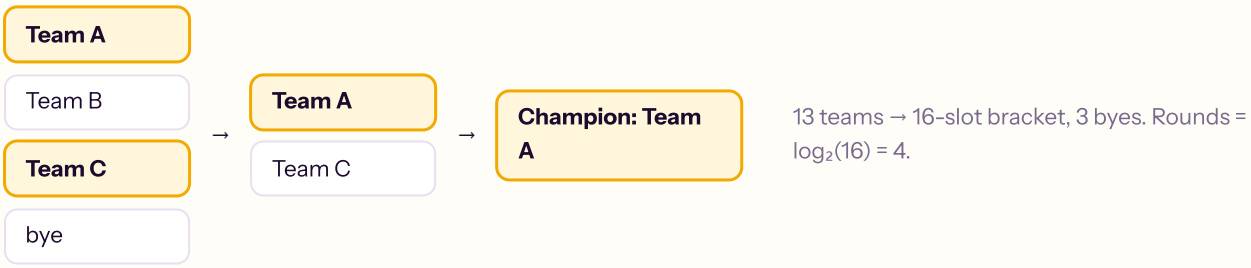

13 teams → 16-slot bracket, 3 byes. Rounds = $\log_2(16) = 4$.

How to record it: when the bracket ends, enter one row per team in a match labelled `Final` `placement`: champion 1, runner-up 2, losing semi-finalists 3 (or play a 3rd-place match), quarter-final losers 5, round-of-16 losers 9. The default table then gives 10 / 7 / 5 / 2 / 1. Individual series can also be logged for history with explicit points of 0, so they do not double count.

ONE-ON-ONE CHESS · CLASH ROYALE · EFOOTBALL · REAL CRICKET

Up to 16 players: a bracket, as above. More than 16: a **Swiss** event with **⌈$\log_2$ N⌉ rounds** (64 players → 6 rounds), win 1, draw ½, loss 0, entered round by round with explicit points. Chess runs on a lichess Swiss/Arena and the organiser copies the final table. eFootball groups use win 3, draw 1, loss 0.

RACE AND PARTY ASPHALT LEGENDS · STUMBLE GUYS

Every race or round is a match: Asphalt pays 10/8/6/5/4/3/2/1 for places 1–8; Stumble Guys pays 10/7/5. Races hold 8 (Asphalt) or 32 (Stumble Guys) players, so split bigger fields into heats, add up points across 3–5 races, and send the top of each heat to a final.

ROOM GAMES LUDO KING · SKRIBBL.IO

Ludo tables hold 4. skribbl rooms are capped by the organiser (about 8 works well). Winners of each table or room advance to the next round until one final table/room is left. That final's places 1–4 (or 1–8) are entered as the event result.

04 ALL 15 GAMES, ONE TABLE

The default settings each new event starts from. Admins can change them per event before the first result.

GAME	FORMAT	PLAYERS	PLACEMENT POINTS (MATCH)	PER KILL	TIE-BREAK AFTER POINTS
BGMI	BR	4 + 1 sub	1st 10 · 2nd 6 · 3rd 5 · 4th 4 · 5th 3 · 6th 2 · 7–8th 1	1	WWCDs › finishes › best place
Free Fire MAX	BR	4 + 1 sub	12 · 9 · 8 · 7 · 6 · 5 · 4 · 3 · 2 · 1 (1st–10th)	1	Booyahs › kills › best place
CODM	5v5	5 + 1 sub	Final placement: 10 · 7 · 5 · 4 · 2 (5–8) · 1 (9–16)	0	Map diff › round diff
Valorant	5v5	5 + 1 sub	Final placement, same table	0	Round differential
CS2	5v5	5 + 1 sub	Final placement, same table	0	Round differential
Pokémon UNITE	5v5	5 + 1 sub	Final placement, same table	0	Team score
Brawl Stars	3v3	3 + 1 sub	Final placement, same table	0	Game wins (Bo3)
Clash Royale	1v1	1	Final placement, same table	0	Game wins (Bo3)
eFootball	1v1	1	Groups: win 3 · draw 1; then final placement	0	Goal difference
Real Cricket	1v1	1	Final placement, same table	0	Net run rate
Chess	Swiss	1	Win 1 · draw ½ per round (lichess)	0	Sonneborn-Berger
Asphalt Legends	Race	1	10 · 8 · 6 · 5 · 4 · 3 · 2 · 1 per race	0	Race wins › best place
Stumble Guys	Party	1	10 · 7 · 5 per game	0	Game wins
Ludo King	Table	1	Final placement, same table	0	Table wins
skribbl.io	Room	1	Final placement, same table	0	In-game score

"Same table" = the platform default: 1st 10, 2nd 7, 3rd 5, 4th 4, 5th–8th 2, 9th–16th 1. The tie-break column is what organisers use to split teams inside a bracket or group. The site's own automatic tie-break is always points › wins › kills › best placement (section 02).

Watch out in head-to-head games: do not enter every series with places 1 and 2. The loser would get 7 points per lost series and could overtake teams that won more. Use the "Final placement" method in section 03, or give explicit points (win 3, loss 0).

05 TOP PLAYERS

When an event is marked **Completed**, every entry gets its final rank, and that rank earns **Arena points** from the event's House-points table (default 1st 10, 2nd 7, 3rd 5, 4th 4, 5th–8th 2, 9th–16th 1).

a player's Arena points = sum over completed events of points for their team's final rank

Every playing member gets the full amount (a winning squad of 4 gives each player 10). Subs get nothing.

- **Four tabs:** All games · Solo (1 player) · Duo & 3v3 (2–3 players) · Squads & 5v5 (4 or more).
- **Order:** Arena points › number of 1st places › number of podiums (top-3 finishes). Equal on all three = shared rank.
- **Shown:** GOAT / 2nd / 3rd podium cards with avatar, house and points; ranks 4–100 as a list; the signed-in player's own rank and points are always pinned, even outside the top 100.
- Banned players are removed from the rankings. Only username, avatar and house are public.

06 HOUSE CUP

The same final-rank points go to houses, but **split**: a team's points are divided equally between its playing members, and each share goes to that member's house. Mixed-house teams count fairly for every house. Events marked **House Cup** only allow one house per team, so that house takes the full amount.

house share = points for the team's final rank ÷ number of playing members

Example: a BGMI squad of 3 Gir players and 1 Corbett player finishes 1st (10 points) → Gir 7.5, Corbett 2.5. Each of the four players still gets 10 Arena points.

07 WORKED EXAMPLE: BGMI, 3 MAPS

SQUAD	ERANGEL	MIRAMAR	SANHOK	EVENT POINTS	WINS	KILLS	RANK
Tiger Claw	3rd, 6 kills = 11	1st, 9 = 19	6th, 4 = 6	**36**	1	19	1
Night Owls	1st, 8 = 18	4th, 3 = 7	2nd, 5 = 11	**36**	1	16	2
Monsoon	2nd, 2 = 8	2nd, 4 = 10	1st, 3 = 13	**31**	1	9	3

Night Owls and Tiger Claw tie on 36 points and 1 win each, so kills decide it. Tiger Claw has 19 against 16, so Tiger Claw is 1st and Night Owls 2nd. Once the event is completed, every Tiger Claw player gets 10 Arena points, every Night Owls player 7, and every Monsoon player 5.

08 ORGANISER CHECKLIST

1. Create the event from its game. Check the placement table, the per-kill points and the House-points table, then set it to **Open**.
2. When registration closes, count the entries N and choose the format from section 03 (groups, bracket size, Swiss rounds, heats).
3. After each match, go to **Admin › Events › Results** and paste one row per team: team name, username or in-game ID, place and kills. If any row is wrong, nothing is saved and every problem is listed.
4. Made a mistake? Enter the same match label again and tick **Replace**, or delete the match. Every change is recorded in the audit log.
5. Penalties, bonuses or no-shows: use the entry's **points adjustment** with a note, or **disqualify** the entry.
6. When the last result is in, set the event to **Completed**. Arena points and House points update immediately.

EDGE CASES

- **No-show:** leave the team out of the match. It gets 0 for that match.
- **Sub plays:** results belong to the team. Player and house points count only the non-sub roster.
- **Same team twice in one match:** rejected automatically.
- **Event cancelled:** no points for anyone. Only completed events count.
- **Tie that must be broken** (for example the last qualifying spot): use the game's tie-break column on page 4, or a decider match, and record it with a +0.01 adjustment and a note.

09 WHERE IT LIVES IN THE CODE

WHAT	DATABASE FUNCTION / FILE
Points for a rank, with ranges like "5-8"	`points_for_rank(table, rank)`
Record or replace one match (all rows or none)	`admin_record_match(event, label, time, rows, replace)`
Event leaderboard, tie-breaks, podium avatars	`tournament_standings(event)`
Top players by format, own rank	`player_rankings(format, season)`
House Cup table	`house_standings(season)`
Default points tables per game	`supabase/migrations/…_seed_games.sql`
Leaderboard screens	`web/src/pages/Leaderboards.tsx`, `components/Leaderboard.tsx`, `Podium.tsx`

Everything is calculated in the database from the match results each time someone opens a leaderboard. No totals are stored, so a corrected result fixes every leaderboard at once. Only staff can write results; players can only read.