
José Manuel Constanza Pineda. ID: A00159462


Evidencias

Limpieza de datos.

Pagos huérfanos

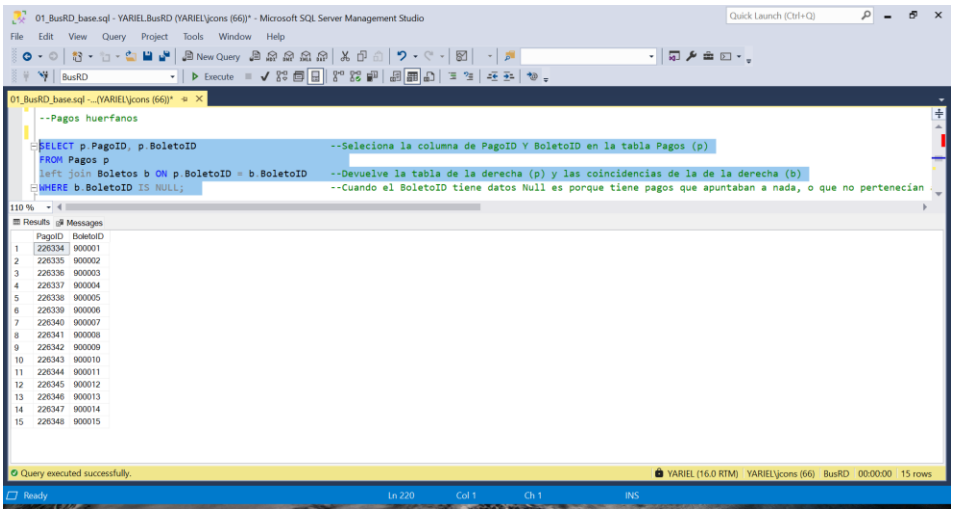


Eliminar pagos huérfanos

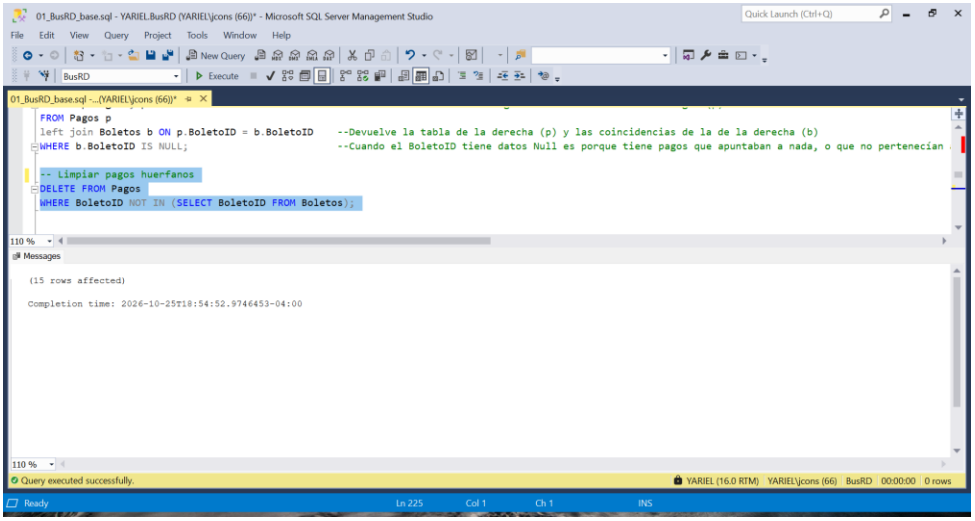


Boletos duplicados

En total son 120 los duplicados

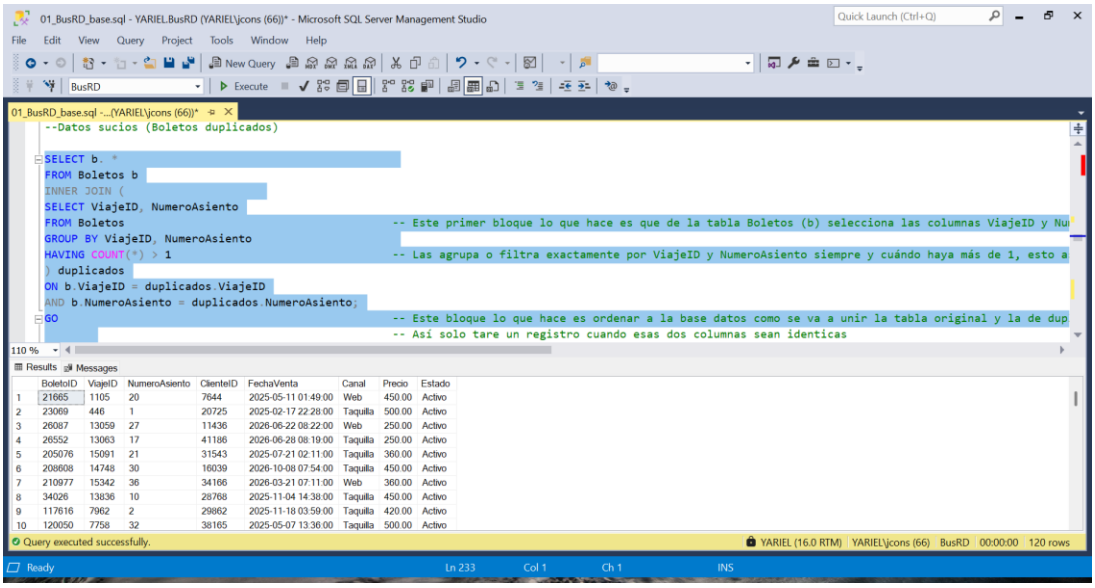


Eliminar los datos duplicados

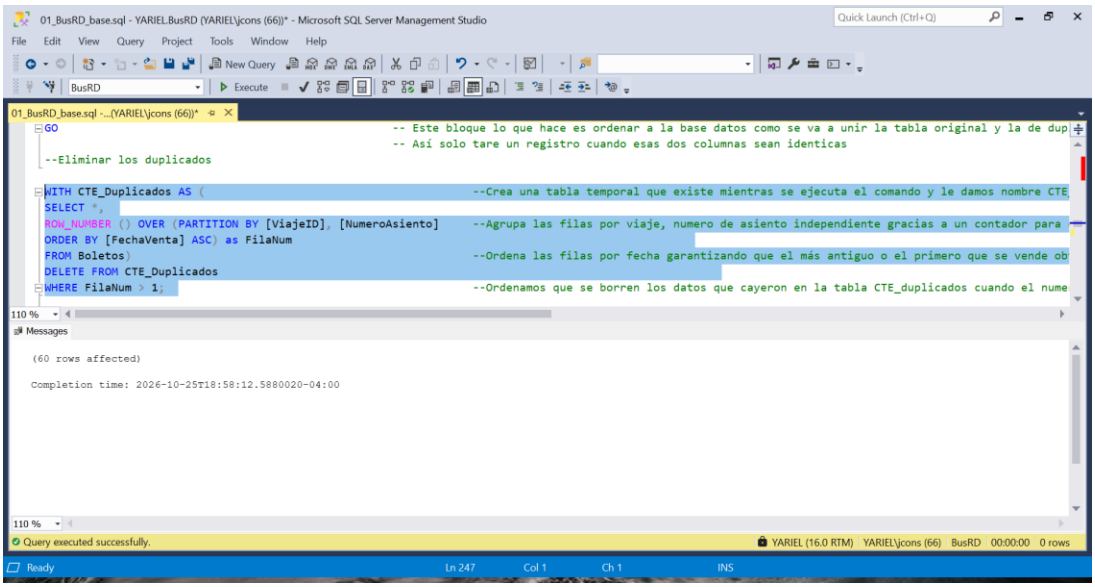



Llaves foráneas

Asientos

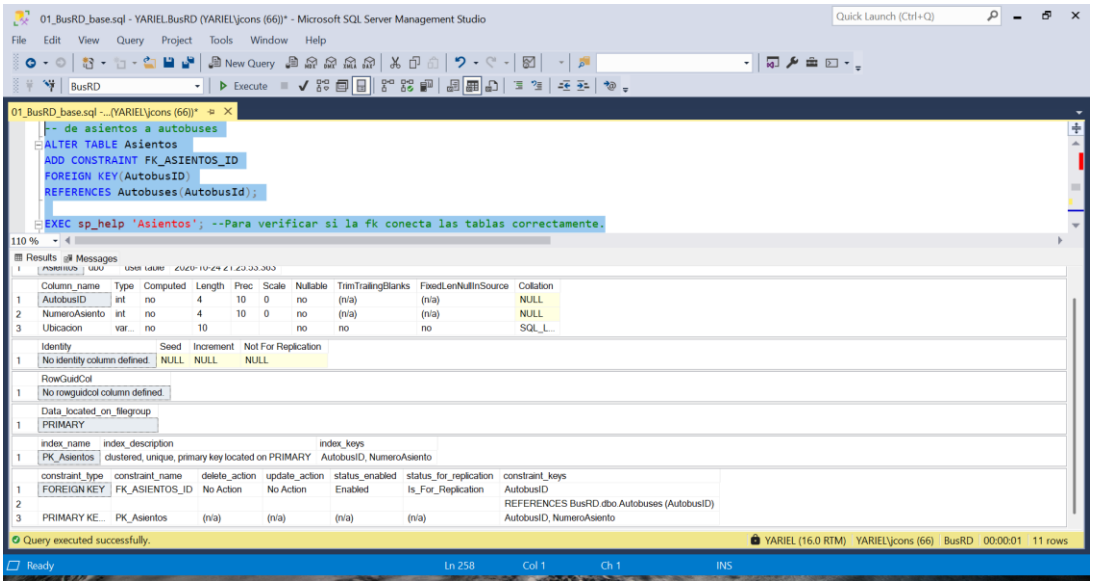



Viajes

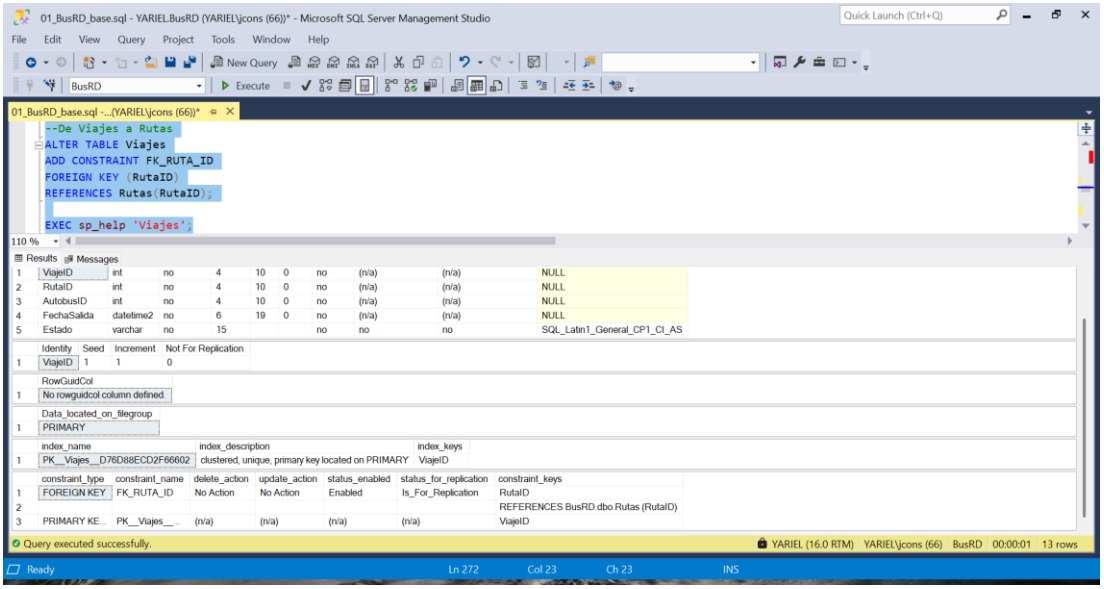

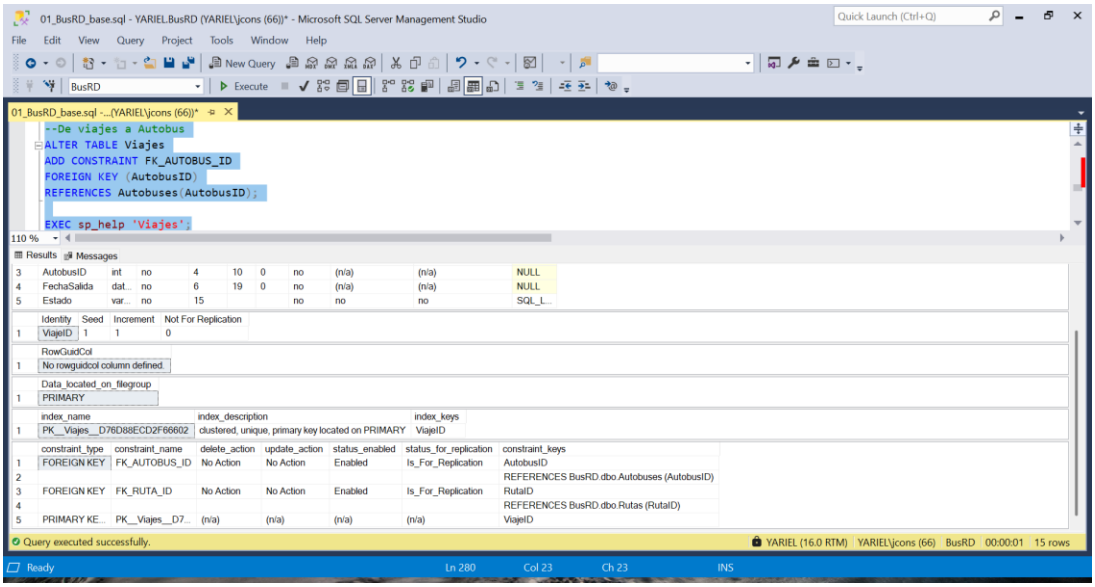

01_BusRD_base.sql - YARIEL.BusRD (YARIEL\jcons (66))* - Microsoft SQL Server Management Studio
Quick Launch (Ctrl+Q)
File Edit View Query Project Tools Window Help
New Query
BusRD
Execute
01_BusRD_base.sql -...(YARIEL\jcons (66))*
--De viajes a Autobus
ALTER TABLE Viajes
ADD CONSTRAINT FK_AUTOBUS_ID
FOREIGN KEY (AutobusID)
REFERENCES Autobuses(AutobusID);
EXEC sp_help 'Viajes';
110 %
Results
Messages
3 AutobusID int no 4 10 0 no (n/a) (n/a) NULL
4 FechaSalida dat... no 6 19 0 no (n/a) (n/a) NULL
5 Estado var... no 15 no no no SQL_L...
Identity Seed Increment Not For Replication
1 ViajeID 1 1 0
RowGuidCol
1 No rowguidcol column defined.
Data_located_on_filegroup
1 PRIMARY
index_name index_description index_keys
1 PK__Viajes__D76D88ECD2F66802 clustered, unique, primary key located on PRIMARY ViajeID
constraint_type constraint_name delete_action update_action status_enabled status_for_replication constraint_keys
1 FOREIGN KEY FK_AUTOBUS_ID No Action No Action Enabled Is_For_Replication AutobusID
2 REFERENCES BusRD.dbo.Autobuses (AutobusID)
3 FOREIGN KEY FK_RUTA_ID No Action No Action Enabled Is_For_Replication RutaID
4 REFERENCES BusRD.dbo.Rutas (RutaID)
5 PRIMARY KE... PK__Viajes__D7... (n/a) (n/a) (n/a) (n/a) ViajeID
Query executed successfully.
YARIEL (16.0 RTM) YARIEL\jcons (66) BusRD 00:00:01 15 rows
Ready
Ln 280 Col 23 Ch 23 INS

Boletos

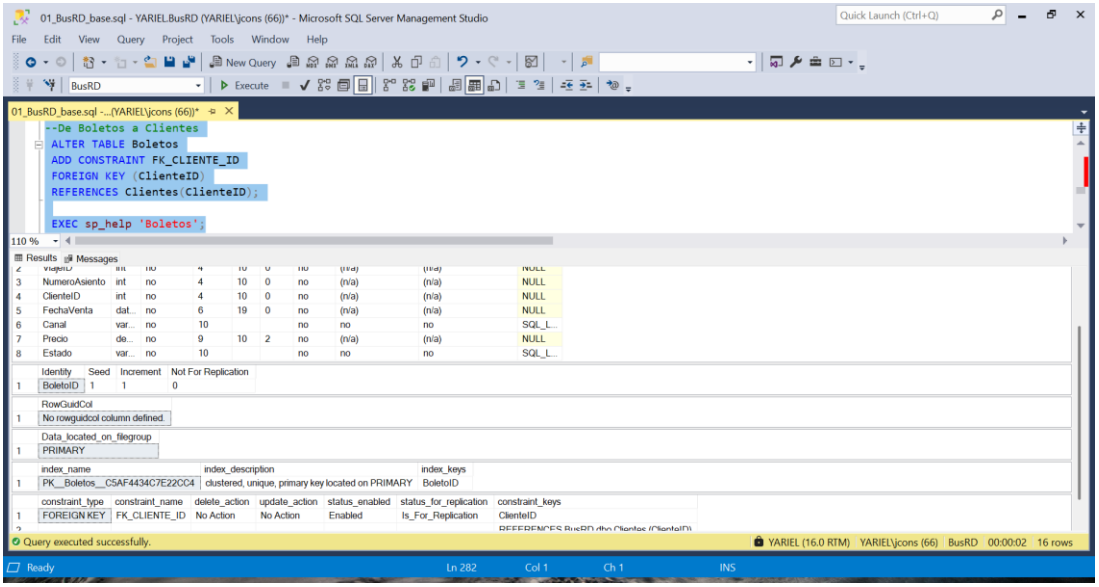
01_BusRD_base.sql - YARIEL.BusRD (YARIEL\jcons (66))* - Microsoft SQL Server Management Studio
Quick Launch (Ctrl+Q)
File Edit View Query Project Tools Window Help
New Query
BusRD
Execute
01_BusRD_base.sql -...(YARIEL\jcons (66))*
--De Boletos a Clientes
ALTER TABLE Boletos
ADD CONSTRAINT FK_CLIENTE_ID
FOREIGN KEY (ClienteID)
REFERENCES Clientes(ClienteID);
EXEC sp_help 'Boletos';
110 %
Results
Messages
3 NumeroAsiento int no 4 10 0 no (n/a) (n/a) NULL
4 ClienteID int no 4 10 0 no (n/a) (n/a) NULL
5 FechaVenta dat... no 6 19 0 no (n/a) (n/a) NULL
6 Canal var... no 10 no no no SQL_L...
7 Precio de... no 9 10 2 no (n/a) (n/a) NULL
8 Estado var... no 10 no no no SQL_L...
Identity Seed Increment Not For Replication
1 BoletoID 1 1 0
RowGuidCol
1 No rowguidcol column defined.
Data_located_on_filegroup
1 PRIMARY
index_name index_description index_keys
1 PK__Boletos__C5AF4434C7E22CC4 clustered, unique, primary key located on PRIMARY BoletoID
constraint_type constraint_name delete_action update_action status_enabled status_for_replication constraint_keys
1 FOREIGN KEY FK_CLIENTE_ID No Action No Action Enabled Is_For_Replication ClienteID
Query executed successfully.
YARIEL (16.0 RTM) YARIEL\jcons (66) BusRD 00:00:02 16 rows
Ready
Ln 282 Col 1 Ch 1 INS

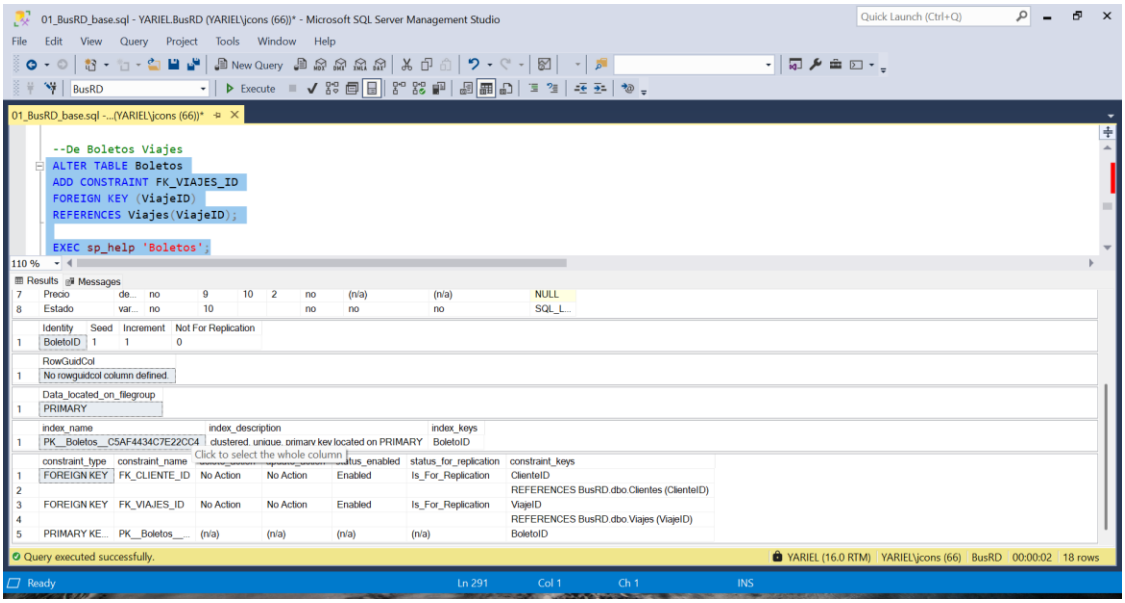

01_BusRD_base.sql - YARIEL.BusRD (YARIEL\jcons (66))* - Microsoft SQL Server Management Studio
Quick Launch (Ctrl+Q)
File Edit View Query Project Tools Window Help
New Query
BusRD
Execute
01_BusRD_base.sql -...(YARIEL\jcons (66))*
--De Boletos Viajes
ALTER TABLE Boletos
ADD CONSTRAINT FK_VIAJES_ID
FOREIGN KEY (ViajeID)
REFERENCES Viajes(ViajeID);
EXEC sp_help 'Boletos';
110 %
Results Messages
Query executed successfully.
YARIEL (16.0 RTM) YARIEL\jcons (66) BusRD 00:00:02 18 rows
Ready Ln 291 Col 1 Ch 1 INS

Pagos

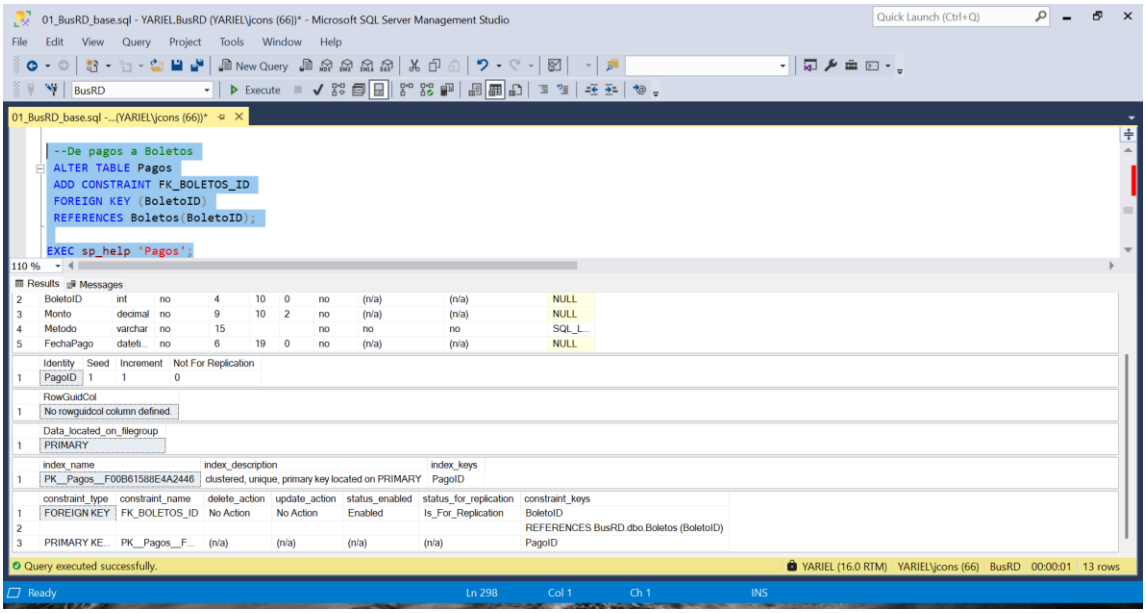

01_BusRD_base.sql - YARIEL.BusRD (YARIEL\jcons (66))* - Microsoft SQL Server Management Studio
Quick Launch (Ctrl+Q)
File Edit View Query Project Tools Window Help
New Query
BusRD
Execute
01_BusRD_base.sql -...(YARIEL\jcons (66))*
--De pagos a Boletos
ALTER TABLE Pagos
ADD CONSTRAINT FK_BOLETOS_ID
FOREIGN KEY (BoletoID)
REFERENCES Boletos(BoletoID);
EXEC sp_help 'Pagos';
110 %
Results Messages
Query executed successfully.
YARIEL (16.0 RTM) YARIEL\jcons (66) BusRD 00:00:01 13 rows
Ready Ln 298 Col 1 Ch 1 INS

Restricciones Check y Unique


Rutas

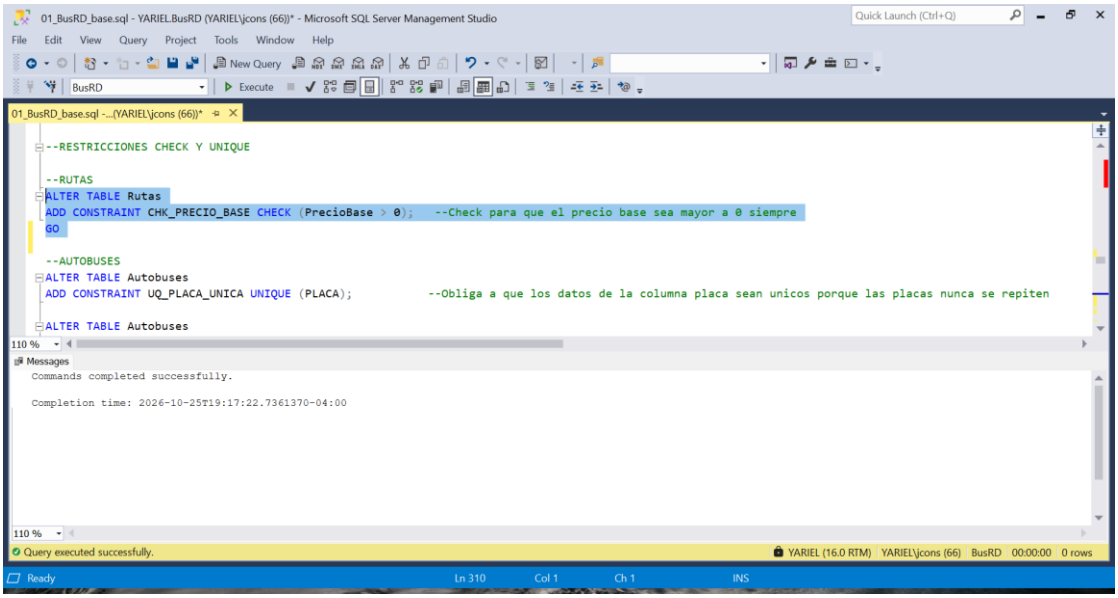


Autobuses

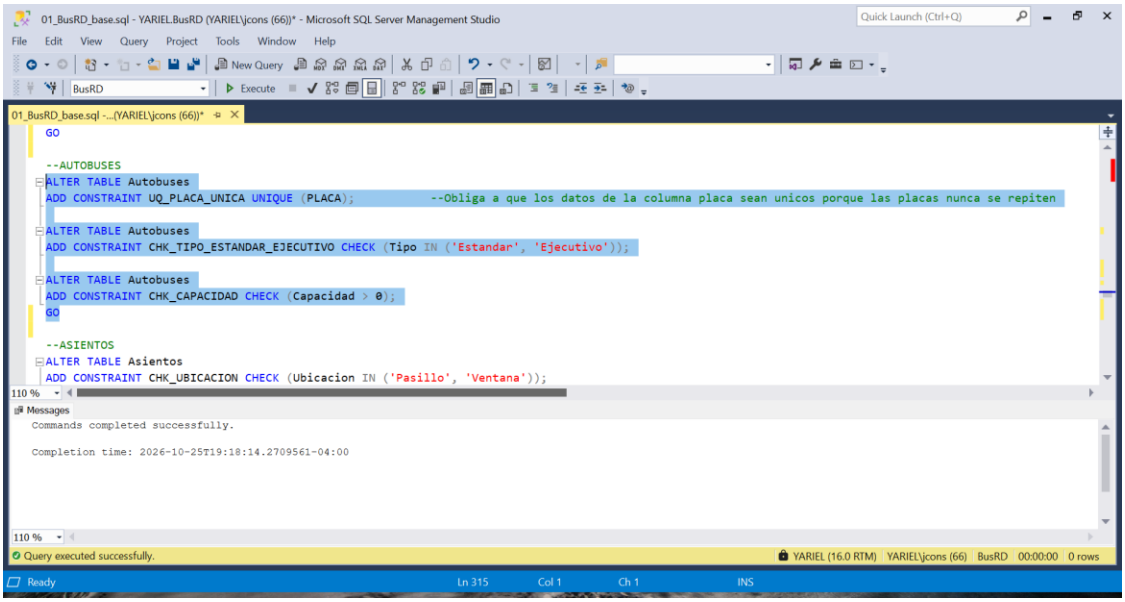


Asientos

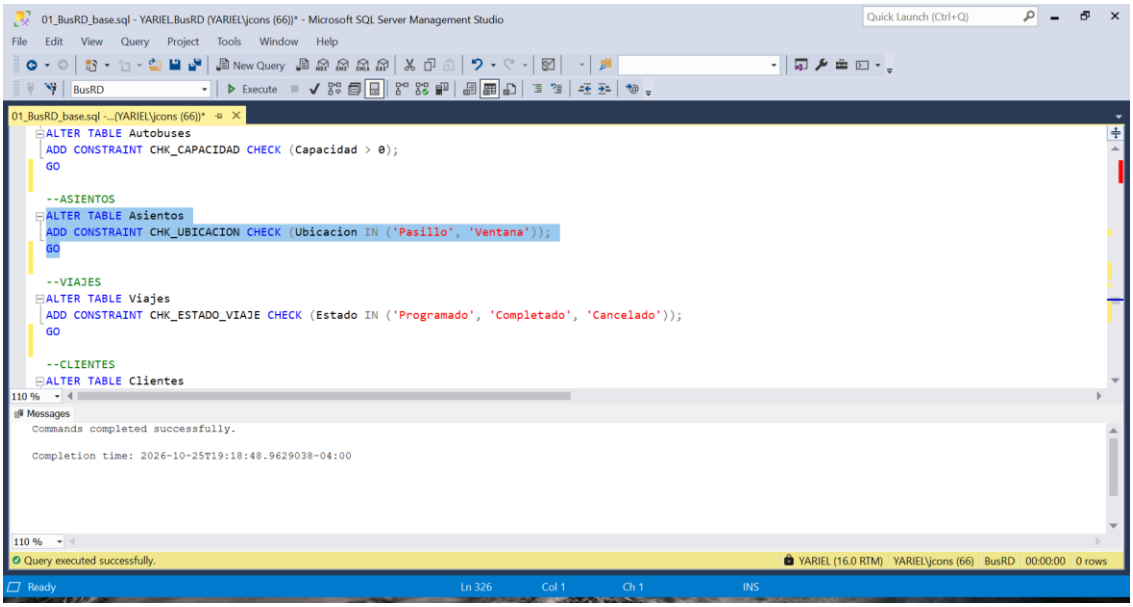


Viajes

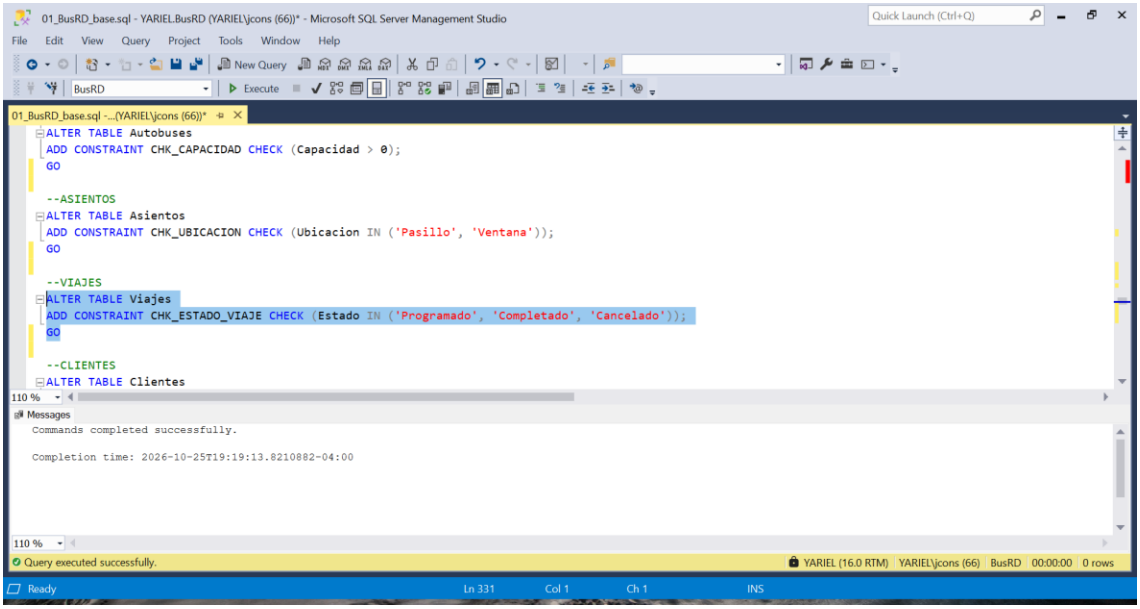


Clientes

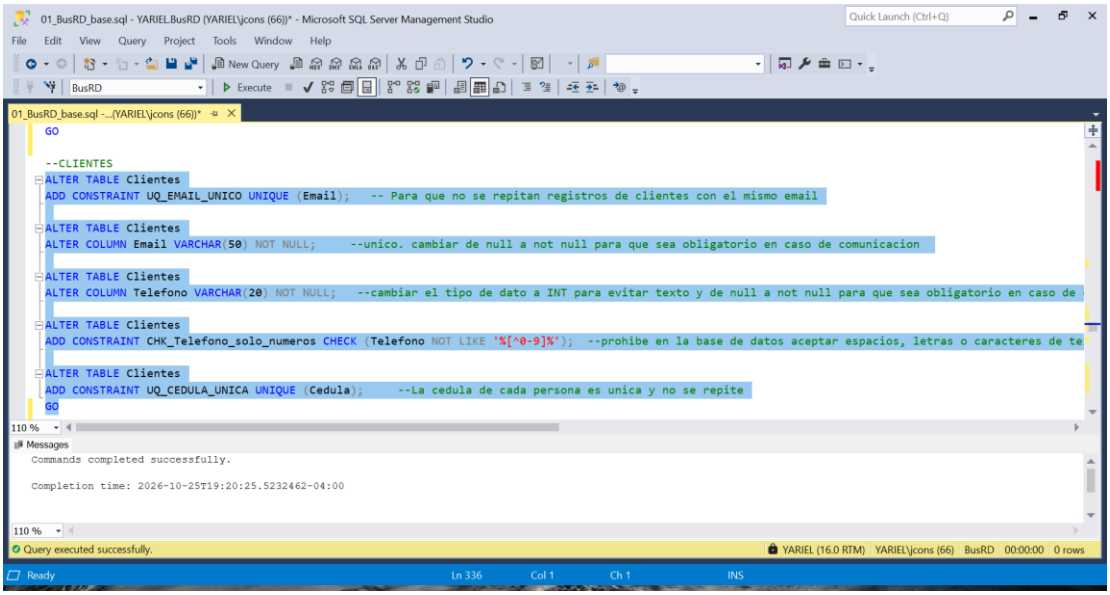

Boletos

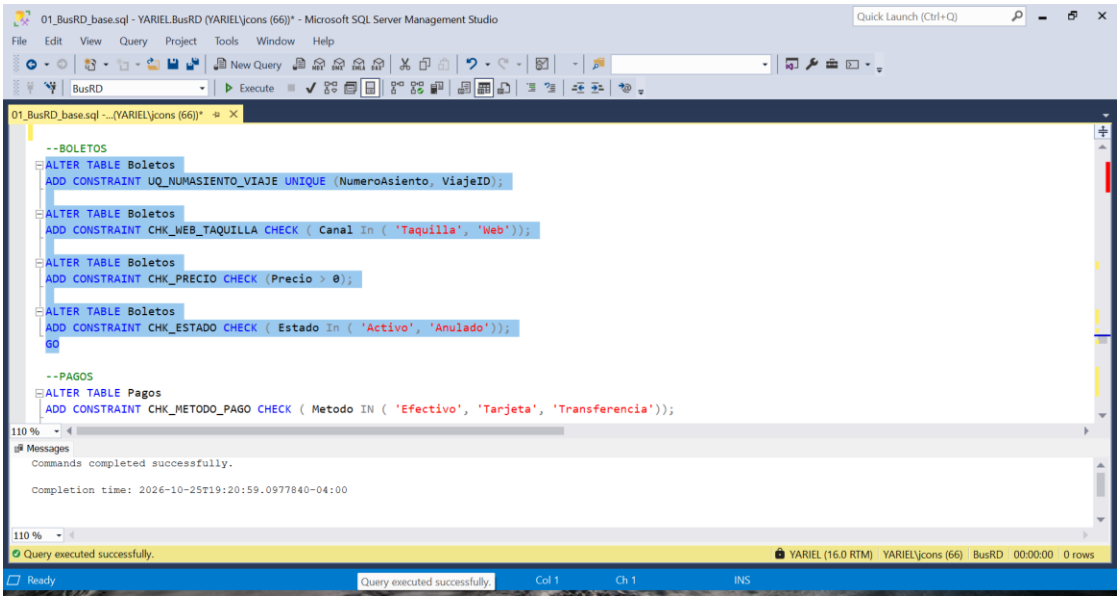


Pagos

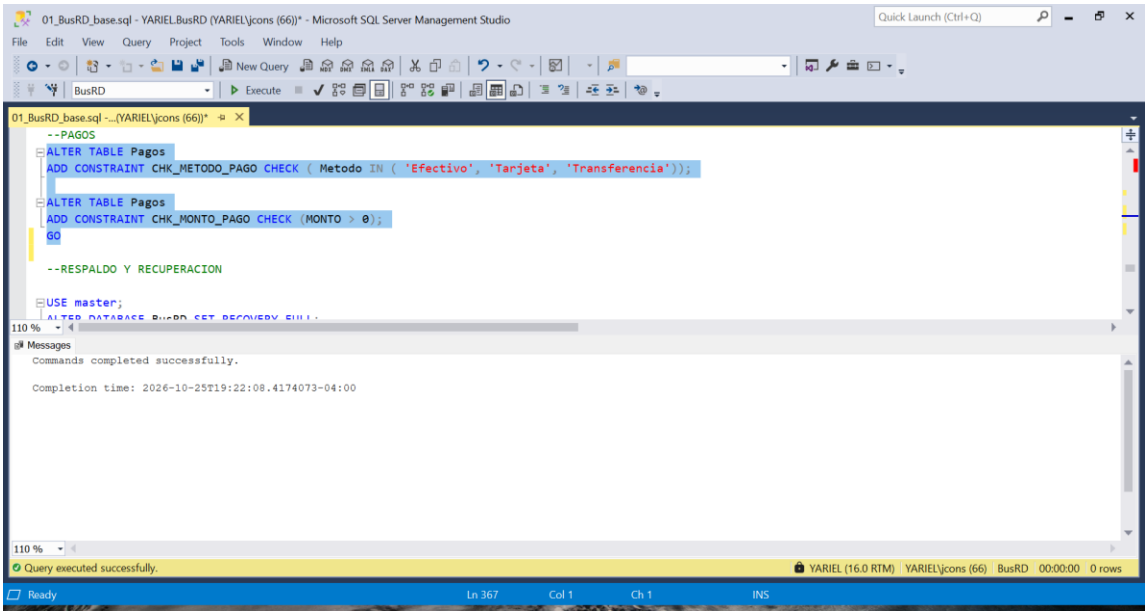


Capturas de respaldo y recuperación


Backup full

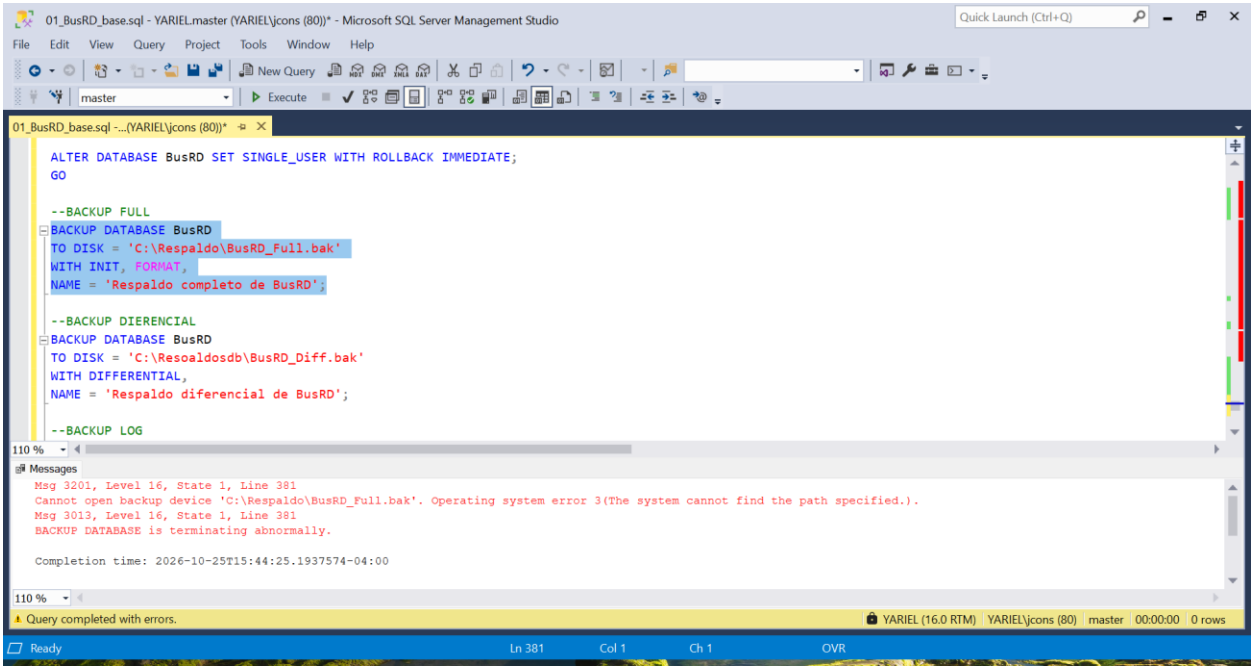


Respaldo diferencial

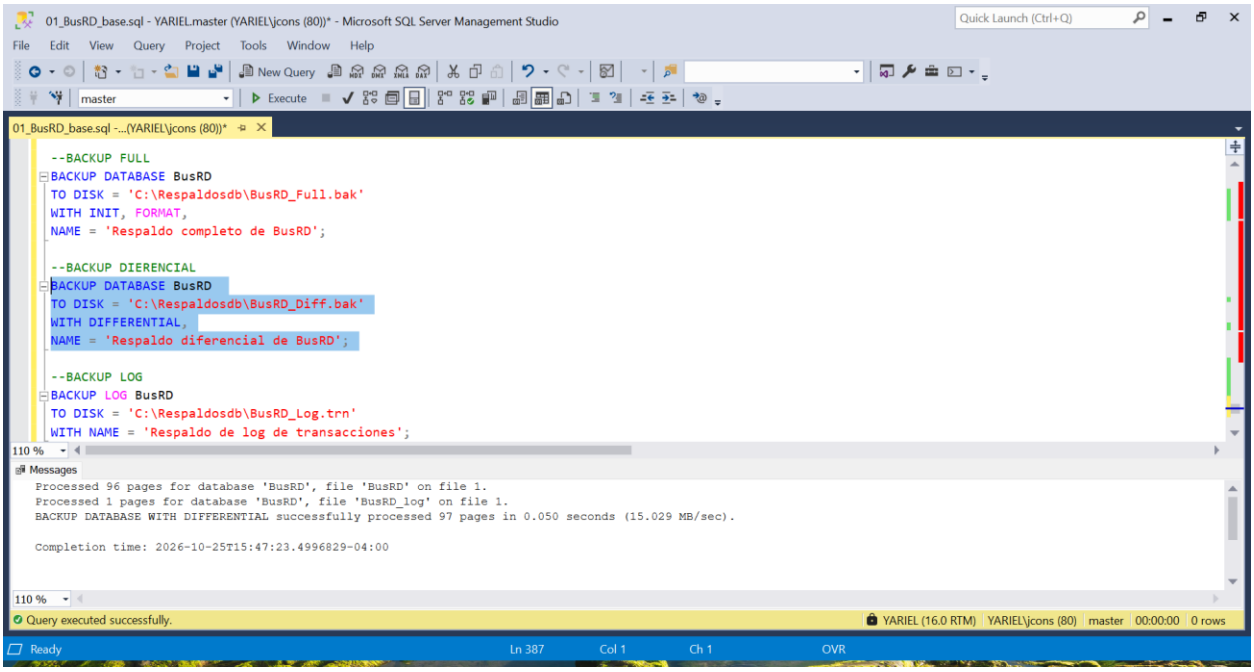


Respaldo log o transacciones

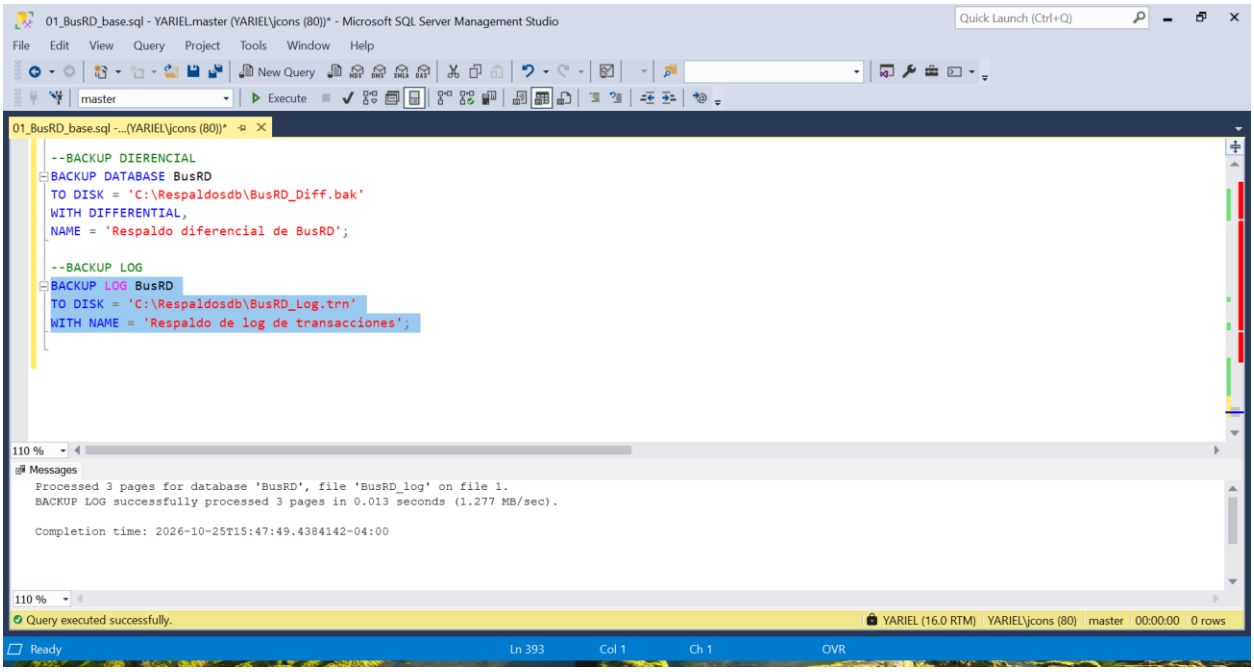


En caso de que de error al backup con (WITH NORECOVERY) porque hay transacciones en el log que no estan guardadas ejecutar esto.

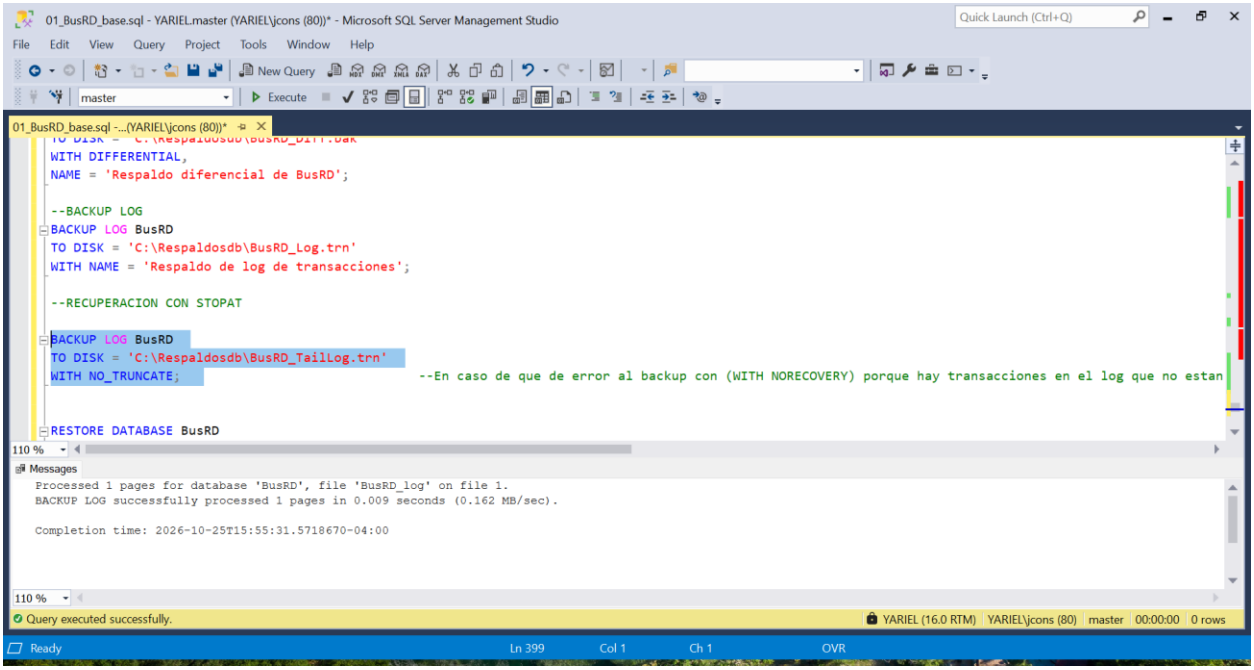


Recuperamos el backup completo

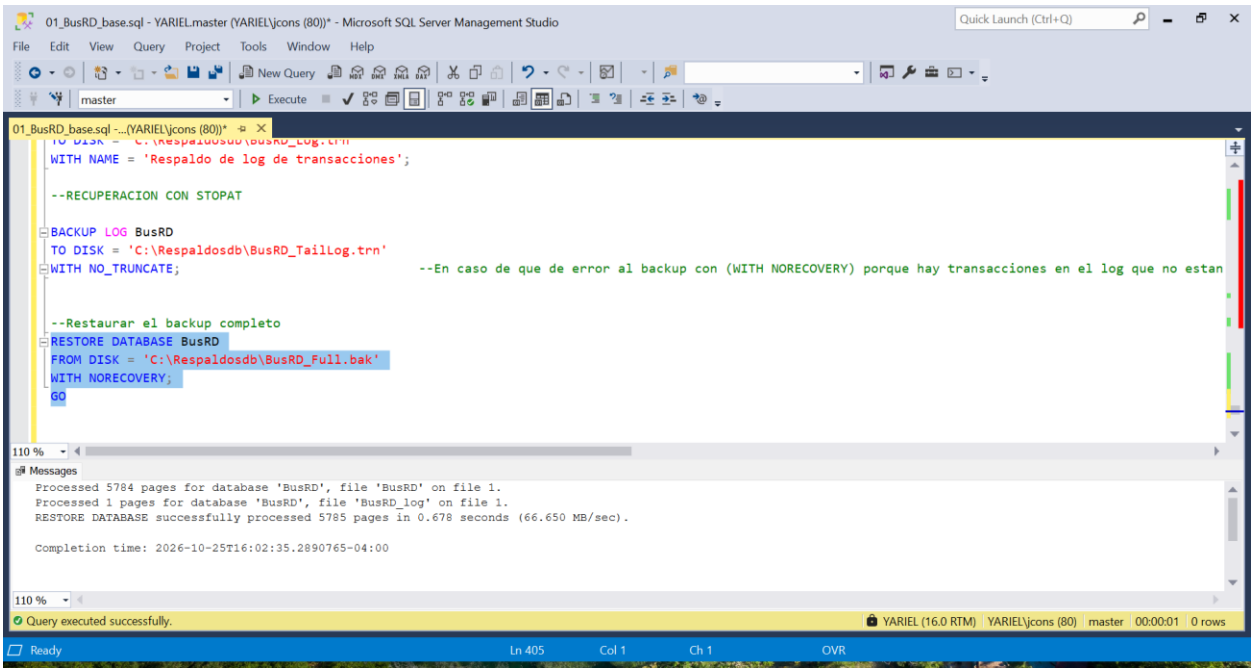


Restauramos con stopat hasta una hora en especifico

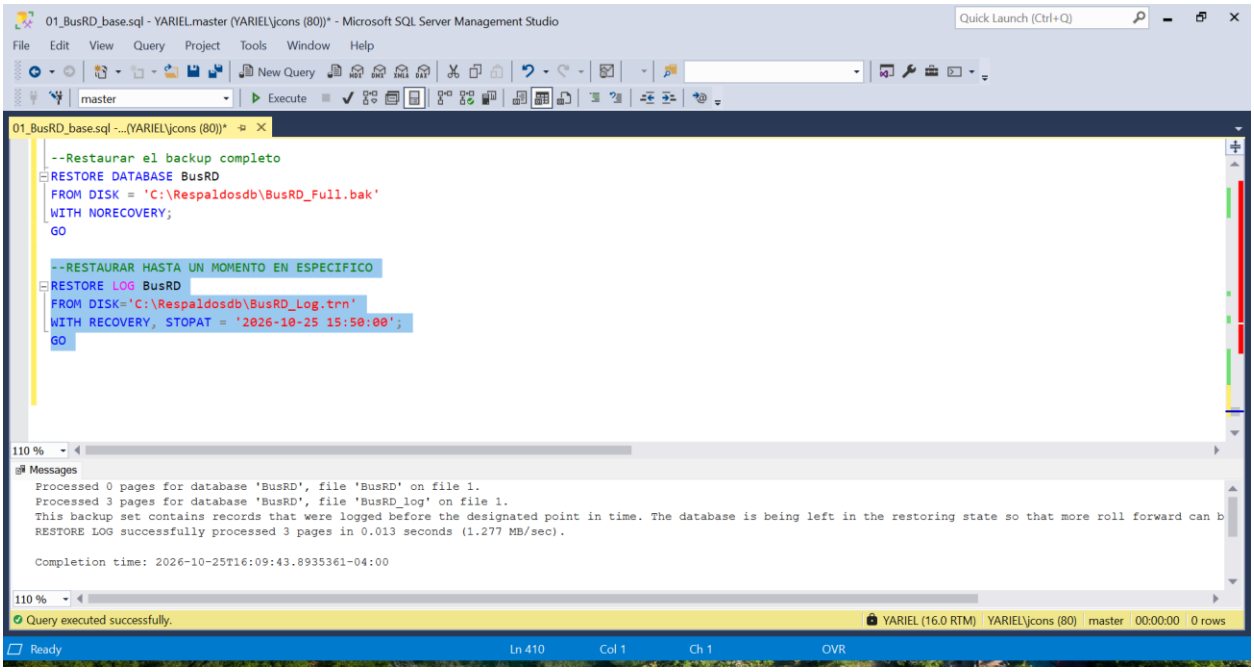

Devolvemos la db a multiusuarios para el uso

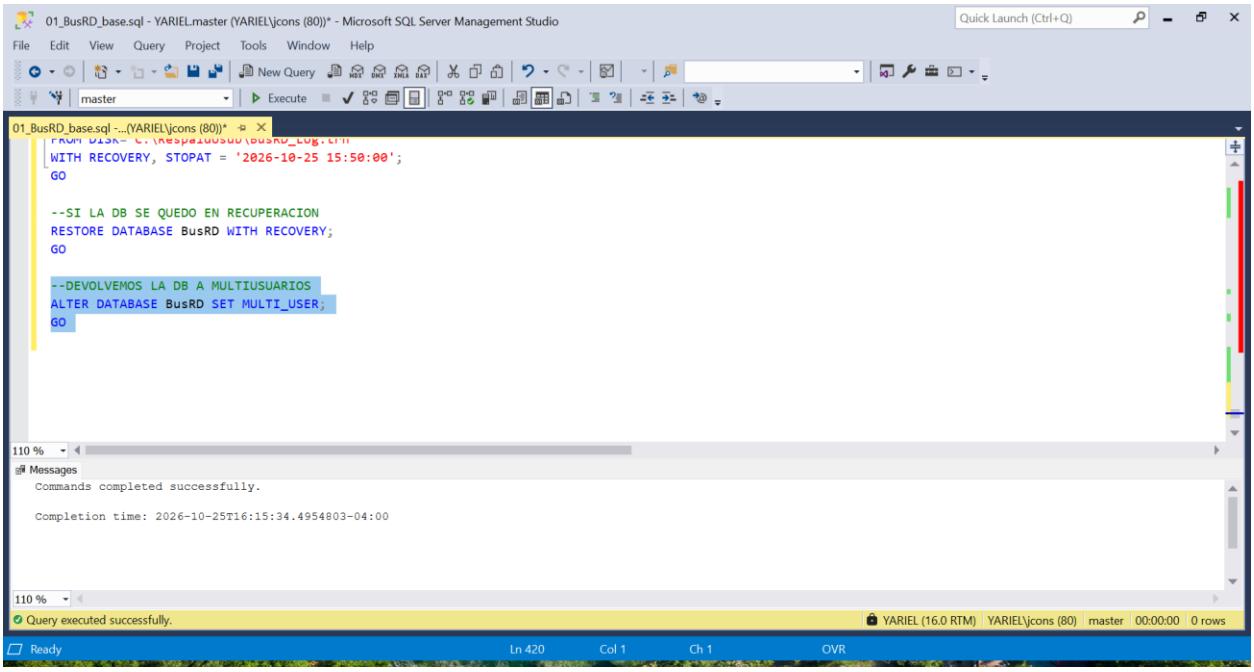

Carpeta de los backups

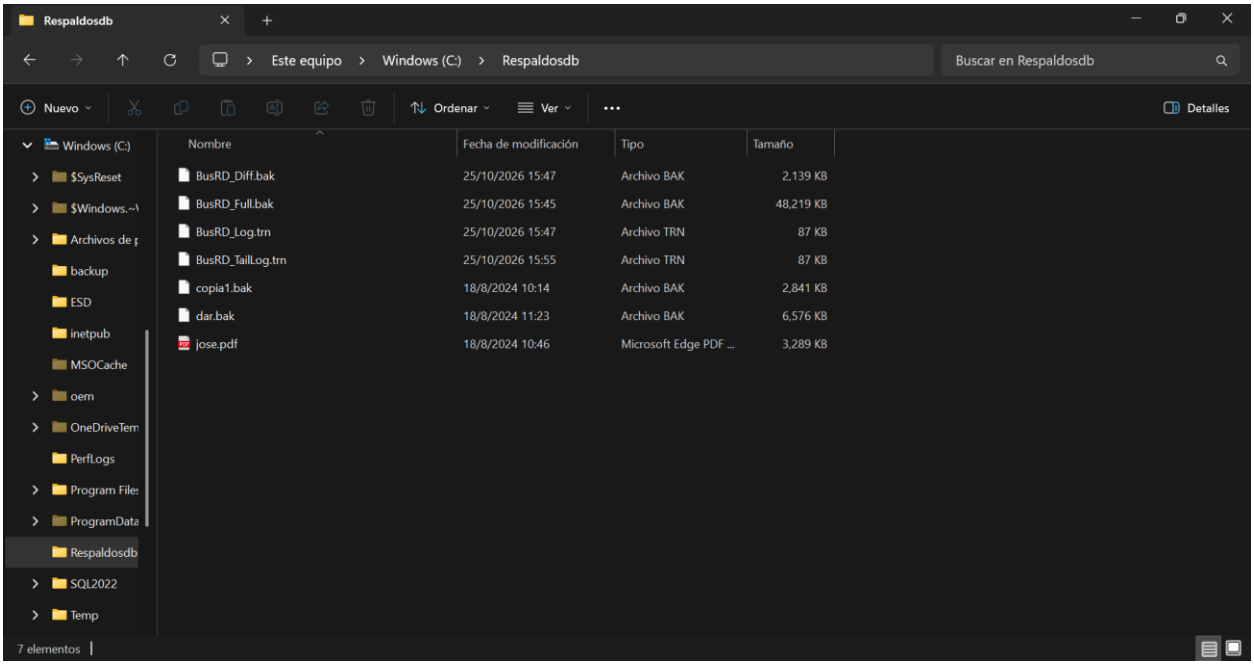

José Manuel Constanza Pineda. ID: A00159462