Class 14: Pathway Analysis from RNA-Seq Results

Angelika (PID: A17475228)

Table of contents

Background . . . 1
Data Import . . . 1
Clean up . . . 5
DESeq analysis/Setting up the DESeq object/RunningDESeq . . . 6
Getting results . . . 7
Volcano plot . . . 7
Add Annotations . . . 11
Pathway analysis . . . 13
KEGG . . . 14
GO . . . 23
Reactome . . . 25

Background

Today we will do a pathway analysis from RNA-Seq results. Pathway analysis (also known as gene set analysis or over-representation analysis), aims to reduce the complexity of interpreting gene lists via mapping the listed genes to known (i.e. annotated) biological pathways, processes and functions.

Data Import

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4

Loading required package: BiocGenerics

Loading required package: generics


Attaching package: 'generics'

The following objects are masked from 'package:base':

    as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,
    setequal, union


Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

    IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

    anyDuplicated, aperm, append, as.data.frame, basename, cbind,
    colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
    get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,
    order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,
    rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,
    unsplit, which.max, which.min


Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

    findMatches

The following objects are masked from 'package:base':

    expand.grid, I, unname
```

```
Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats


Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

    colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
    colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
    colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
    colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
    colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
    colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
    colWeightedMeans, colWeightedMedians, colWeightedSds,
    colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
    rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
    rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
    rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
    rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
    rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
    rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
    rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

    Vignettes contain introductory material; view with
    'browseVignettes()'. To cite Bioconductor, see
    'citation("Biobase")', and for packages 'citation("pkgname")'.
```

```
Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

    rowMedians

The following objects are masked from 'package:matrixStats':

    anyMissing, rowMedians
```

```r
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

# Import metadata and take a peek
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```r
# Import countdata
countData = read.csv(countFile, row.names=1)
head(countData)
```

```
                length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0         0
ENSG00000279928    718         0         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0         0
ENSG00000273547    939         0         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212
                SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
```

```
ENSG00000278566          0
ENSG00000273547          0
ENSG00000187634        258
```

Clean up

Hmm… remember that we need the countData and colData files to match up so we will need to remove that odd first column in countData namely countData$length.

> Q1. Complete the code below to remove the troublesome first column from countData

```
countData <- as.matrix(countData[,2:7])
head(countData)
```

```
                 SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000186092         0         0         0         0         0         0
ENSG00000279928         0         0         0         0         0         0
ENSG00000279457        23        28        29        29        28        46
ENSG00000278566         0         0         0         0         0         0
ENSG00000273547         0         0         0         0         0         0
ENSG00000187634       124       123       205       207       212       258
```

This looks better but there are lots of zero entries in there so let's get rid of them as we have no data for these.

> Q2. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

```
countData = countData[rowSums(countData) > 0, ]
head(countData)
```

```
                 SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000279457        23        28        29        29        28        46
ENSG00000187634       124       123       205       207       212       258
ENSG00000188976      1637      1831      2383      1226      1326      1504
ENSG00000187961       120       153       180       236       255       357
ENSG00000187583        24        48        65        44        48        64
ENSG00000187642         4         9        16        14        16        16
```

DESeq analysis/Setting up the DESeq object/RunningDESeq

Nice now lets setup the DESeqDataSet object required for the DESeq() function and then run the DESeq pipeline. This is again similar to our last day's hands-on session.

```
library(DESeq2)

dds = DESeqDataSetFromMatrix(countData= countData ,
                             colData= colData,
                             design=~condition)
```

```
Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in
design formula are characters, converting to factors
```

```
dds = DESeq(dds)
```

```
estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing
```

```
dds
```

```
class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
  ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```

Getting results

Next, get results for the HoxA1 knockdown versus control siRNA (remember that these were labeled as "hoxa1_kd" and "control_sirna" in our original colData metaFile input to DESeq, you can check this above and by running resultsNames(dds) command).

> Q3. Q. Call the summary() function on your results to get a sense of how many genes are up or down-regulated at the default 0.1 p-value cutoff.

```
res=results(dds)
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)       : 4349, 27%
LFC < 0 (down)     : 4396, 28%
outliers [1]       : 0, 0%
low counts [2]     : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

Volcano plot

```
library(ggplot2)

ggplot(res) +
  aes(log2FoldChange,
      (padj)) +
  geom_point()
```

```
Warning: Removed 1237 rows containing missing values or values outside the scale range
(`geom_point()`).
```

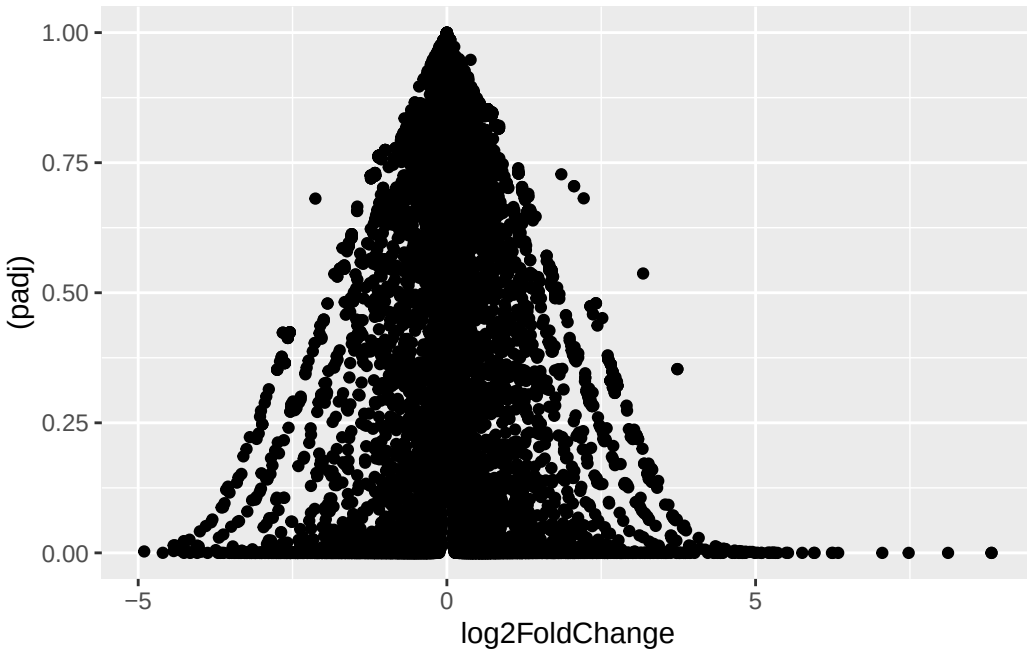


```
ggplot(res) +
  aes(log2FoldChange,
     -log(padj)) +
  geom_point()
```

```
Warning: Removed 1237 rows containing missing values or values outside the scale range
(`geom_point()`).
```

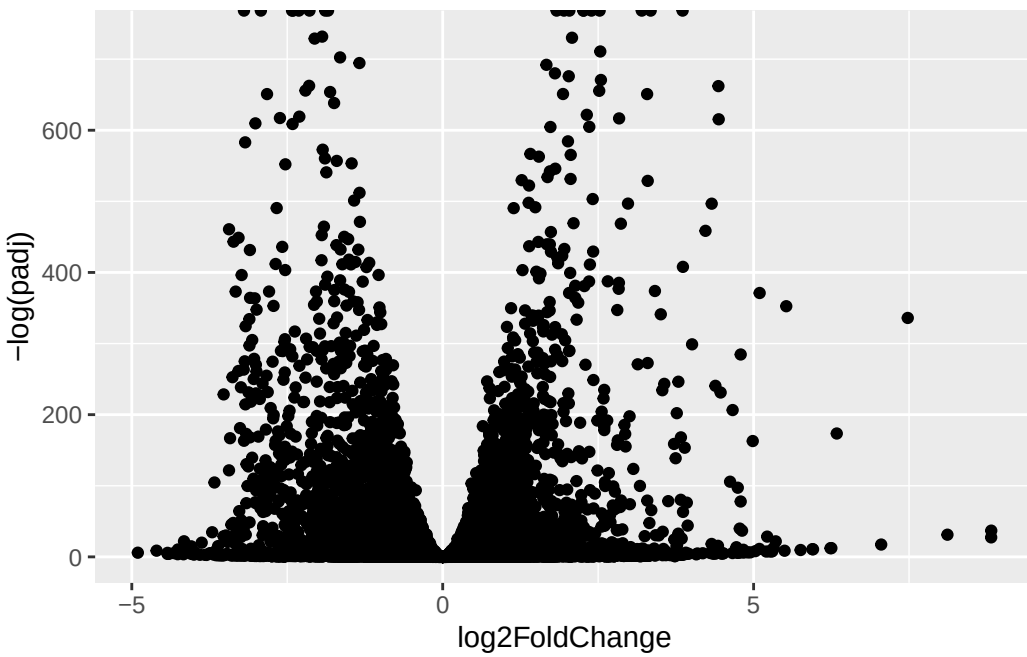

Now we will make a volcano plot, a commonly produced visualization from this type of data that we introduced last day. Basically it's a plot of log2 fold change vs -log adjusted p-value.

> Q4. Improve this plot by completing the below code, which adds color, axis labels and cutoff lines:

```
mycols <- rep("gray", nrow(res))
mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"
inds <- (res$padj <0.01) & (abs(res$log2FoldChange)>2)
mycols[inds] <- "red"

ggplot(res) +
  aes(log2FoldChange,
      -log10(padj)) +
  geom_point(color=mycols) +
  xlab("Log2(FoldChange)") +
  ylab("-Log10(Adjusted P-value)") +
  geom_vline(xintercept = c(-2,2)) +
  geom_hline(yintercept = -log10(0.05), col="pink")
```

```
Warning: Removed 1237 rows containing missing values or values outside the scale range
(`geom_point()`).
```

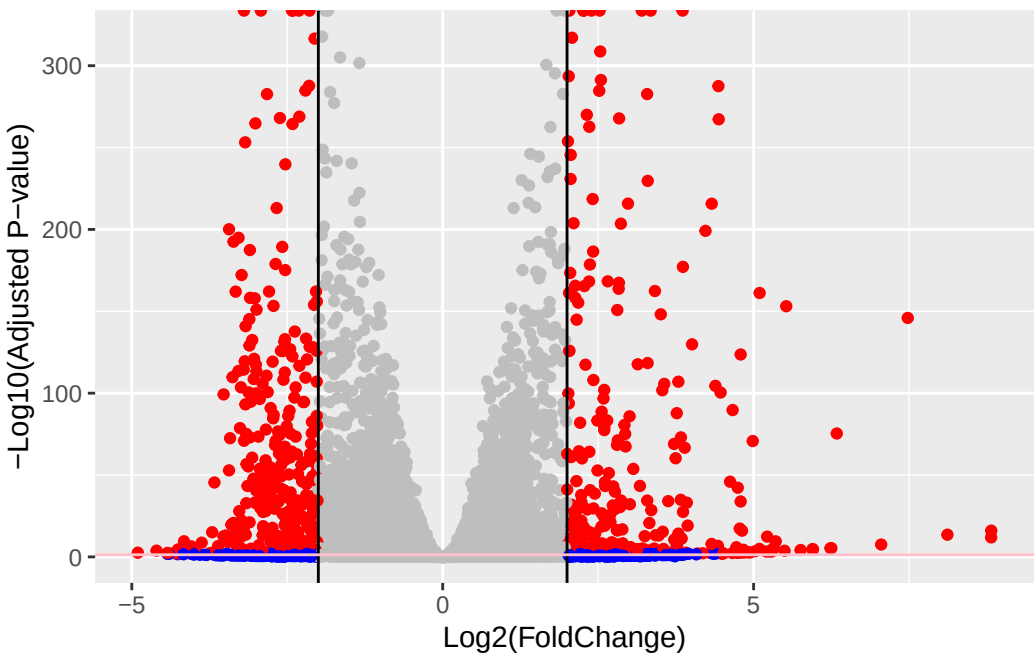


```
  labs=(title= "Volcano Plot")
```

```
mycols <- rep("gray", nrow(res))
mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"
mycols [res$padj>=0.05] <- "gray"
inds <- (res$padj < 0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "red"
plot( res$log2FoldChange,
-log(res$padj),
col=mycols,
ylab="-Log(P-value)",
xlab="Log2(FoldChange)" )
title("Volcano Plot")
abline(v=c(-2,2), col="gray", lty=2)
abline(h=-log(0.1), col="gray", lty=2)
```

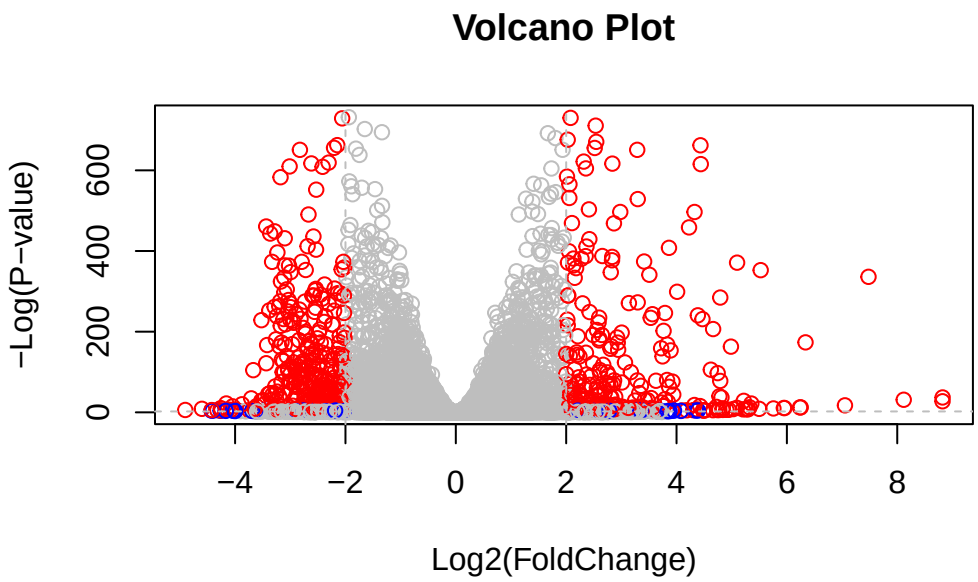

Add Annotations

Since we mapped and counted against the Ensembl annotation, our results only have information about Ensembl gene IDs. However, our pathway analysis downstream will use KEGG pathways, and genes in KEGG pathways are annotated with Entrez gene IDs. So lets add them as we did the last day.

> Q5. Use the mapIDs() function multiple times to add SYMBOL, ENTREZID and GENENAME annotation to our results by completing the code below.

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
 [1] "ACCNUM"       "ALIAS"        "ENSEMBL"      "ENSEMBLPROT"  "ENSEMBLTRANS"
 [6] "ENTREZID"     "ENZYME"       "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"     "GO"           "GOALL"        "IPI"          "MAP"
[16] "OMIM"         "ONTOLOGY"     "ONTOLOGYALL"  "PATH"         "PFAM"
```

```
[21] "PMID"         "PROSITE"      "REFSEQ"       "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
library("AnnotationDbi")
library("org.Hs.eg.db")

columns(org.Hs.eg.db)
```

```
 [1] "ACCNUM"       "ALIAS"        "ENSEMBL"      "ENSEMBLPROT"  "ENSEMBLTRANS"
 [6] "ENTREZID"     "ENZYME"       "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"     "GO"           "GOALL"        "IPI"          "MAP"
[16] "OMIM"         "ONTOLOGY"     "ONTOLOGYALL"  "PATH"         "PFAM"
[21] "PMID"         "PROSITE"      "REFSEQ"       "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="SYMBOL",
                    multiVals="first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```
res$name =   mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="GENENAME",
                    multiVals="first")
```

```
'select()' returned 1:many mapping between keys and columns
```

```r
head(res, 10)
```

```
log2 fold change (MLE): condition hoxa1 kd vs control sirna
Wald test p-value: condition hoxa1 kd vs control sirna
DataFrame with 10 rows and 9 columns
                   baseMean log2FoldChange     lfcSE       stat      pvalue
                  <numeric>      <numeric> <numeric>  <numeric>   <numeric>
ENSG00000279457   29.913579      0.1792571 0.3248216   0.551863 5.81042e-01
ENSG00000187634  183.229650      0.4264571 0.1402658   3.040350 2.36304e-03
ENSG00000188976 1651.188076     -0.6927205 0.0548465 -12.630158 1.43990e-36
ENSG00000187961  209.637938      0.7297556 0.1318599   5.534326 3.12428e-08
ENSG00000187583   47.255123      0.0405765 0.2718928   0.149237 8.81366e-01
ENSG00000187642   11.979750      0.5428105 0.5215598   1.040744 2.97994e-01
ENSG00000188290  108.922128      2.0570638 0.1969053  10.446970 1.51282e-25
ENSG00000187608  350.716868      0.2573837 0.1027266   2.505522 1.22271e-02
ENSG00000188157 9128.439422      0.3899088 0.0467163   8.346304 7.04321e-17
ENSG00000237330    0.158192      0.7859552 4.0804729   0.192614 8.47261e-01
                      padj      symbol      entrez                   name
                  <numeric> <character> <character>            <character>
ENSG00000279457 6.86555e-01          NA          NA                     NA
ENSG00000187634 5.15718e-03      SAMD11      148398 sterile alpha motif ..
ENSG00000188976 1.76549e-35       NOC2L       26155 NOC2 like nucleolar ..
ENSG00000187961 1.13413e-07      KLHL17      339451 kelch like family me..
ENSG00000187583 9.19031e-01     PLEKHN1       84069 pleckstrin homology ..
ENSG00000187642 4.03379e-01       PERM1       84808 PPARGC1 and ESRR ind..
ENSG00000188290 1.30538e-24        HES4       57801 hes family bHLH tran..
ENSG00000187608 2.37452e-02       ISG15        9636 ISG15 ubiquitin like..
ENSG00000188157 4.21963e-16        AGRN      375790                  agrin
ENSG00000237330          NA      RNF223      401934 ring finger protein ..
```

> Q. Finally for this section let's reorder these results by adjusted p-value and save them to a CSV file in your current project directory.

```r
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Pathway analysis

Here we are going to use the gage package for pathway analysis. Once we have a list of enriched pathways, we're going to use the pathview package to draw pathway diagrams, shading the molecules in the pathway by their degree of up/down-regulation

```r
library(gage)
```

```r
library(gageData)
library(pathview)
```

```
##############################################################################
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG
license agreement (details at http://www.kegg.jp/kegg/legal.html).
##############################################################################
```

KEGG

Now we can load the packages and setup the KEGG data-sets we need

```r
data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
[1] "10"   "1544" "1548" "1549" "1553" "7498" "9"

$`hsa00983 Drug metabolism - other enzymes`
 [1] "10"     "1066"   "10720"  "10941"  "151531" "1548"   "1549"   "1551"
 [9] "1553"   "1576"   "1577"   "1806"   "1807"   "1890"   "221223" "2990"
[17] "3251"   "3614"   "3615"   "3704"   "51733"  "54490"  "54575"  "54576"
[25] "54577"  "54578"  "54579"  "54600"  "54657"  "54658"  "54659"  "54963"
```

```
[33] "574537" "64816"  "7083"   "7084"   "7172"   "7363"   "7364"   "7365"
[41] "7366"   "7367"   "7371"   "7372"   "7378"   "7498"   "79799"  "83549"
[49] "8824"   "8833"   "9"      "978"

$`hsa00230 Purine metabolism`
  [1] "100"    "10201"  "10606"  "10621"  "10622"  "10623"  "107"    "10714"
  [9] "108"    "10846"  "109"    "111"    "11128"  "11164"  "112"    "113"
 [17] "114"    "115"    "122481" "122622" "124583" "132"    "158"    "159"
 [25] "1633"   "171568" "1716"   "196883" "203"    "204"    "205"    "221823"
 [33] "2272"   "22978"  "23649"  "246721" "25885"  "2618"   "26289"  "270"
 [41] "271"    "27115"  "272"    "2766"   "2977"   "2982"   "2983"   "2984"
 [49] "2986"   "2987"   "29922"  "3000"   "30833"  "30834"  "318"    "3251"
 [57] "353"    "3614"   "3615"   "3704"   "377841" "471"    "4830"   "4831"
 [65] "4832"   "4833"   "4860"   "4881"   "4882"   "4907"   "50484"  "50940"
 [73] "51082"  "51251"  "51292"  "5136"   "5137"   "5138"   "5139"   "5140"
 [81] "5141"   "5142"   "5143"   "5144"   "5145"   "5146"   "5147"   "5148"
 [89] "5149"   "5150"   "5151"   "5152"   "5153"   "5158"   "5167"   "5169"
 [97] "51728"  "5198"   "5236"   "5313"   "5315"   "53343"  "54107"  "5422"
[105] "5424"   "5425"   "5426"   "5427"   "5430"   "5431"   "5432"   "5433"
[113] "5434"   "5435"   "5436"   "5437"   "5438"   "5439"   "5440"   "5441"
[121] "5471"   "548644" "55276"  "5557"   "5558"   "55703"  "55811"  "55821"
[129] "5631"   "5634"   "56655"  "56953"  "56985"  "57804"  "58497"  "6240"
[137] "6241"   "64425"  "646625" "654364" "661"    "7498"   "8382"   "84172"
[145] "84265"  "84284"  "84618"  "8622"   "8654"   "87178"  "8833"   "9060"
[153] "9061"   "93034"  "953"    "9533"   "954"    "955"    "956"    "957"
[161] "9583"   "9615"
```

The main gage() function requires a named vector of fold changes, where the names of the values are the Entrez gene IDs.

Note that we used the mapIDs() function above to obtain Entrez gene IDs (stored in res$entrez)andwehavethefoldchangeresultsfromDESeq2analysis(storedinres$log2FoldChange).

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
     1266     54855      1465      2034      2150      6659
-2.422719  3.201955 -2.313738 -1.888019  3.344508  2.392288
```

Now, let's run the gage pathway analysis.

```r
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)
attributes(keggres)
```

```
$names
[1] "greater" "less"    "stats"
```

```r
head(keggres$less)
```

```
                                          p.geomean stat.mean        p.val
hsa04110 Cell cycle                    8.995727e-06 -4.378644 8.995727e-06
hsa03030 DNA replication               9.424076e-05 -3.951803 9.424076e-05
hsa03013 RNA transport                 1.375901e-03 -3.028500 1.375901e-03
hsa03440 Homologous recombination      3.066756e-03 -2.852899 3.066756e-03
hsa04114 Oocyte meiosis                3.784520e-03 -2.698128 3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis 8.961413e-03 -2.405398 8.961413e-03
                                            q.val set.size         exp1
hsa04110 Cell cycle                    0.001448312      121 8.995727e-06
hsa03030 DNA replication               0.007586381       36 9.424076e-05
hsa03013 RNA transport                 0.073840037      144 1.375901e-03
hsa03440 Homologous recombination      0.121861535       28 3.066756e-03
hsa04114 Oocyte meiosis                0.121861535      102 3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis 0.212222694       53 8.961413e-03
```

```r
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

```
'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04110.pathview.png
```

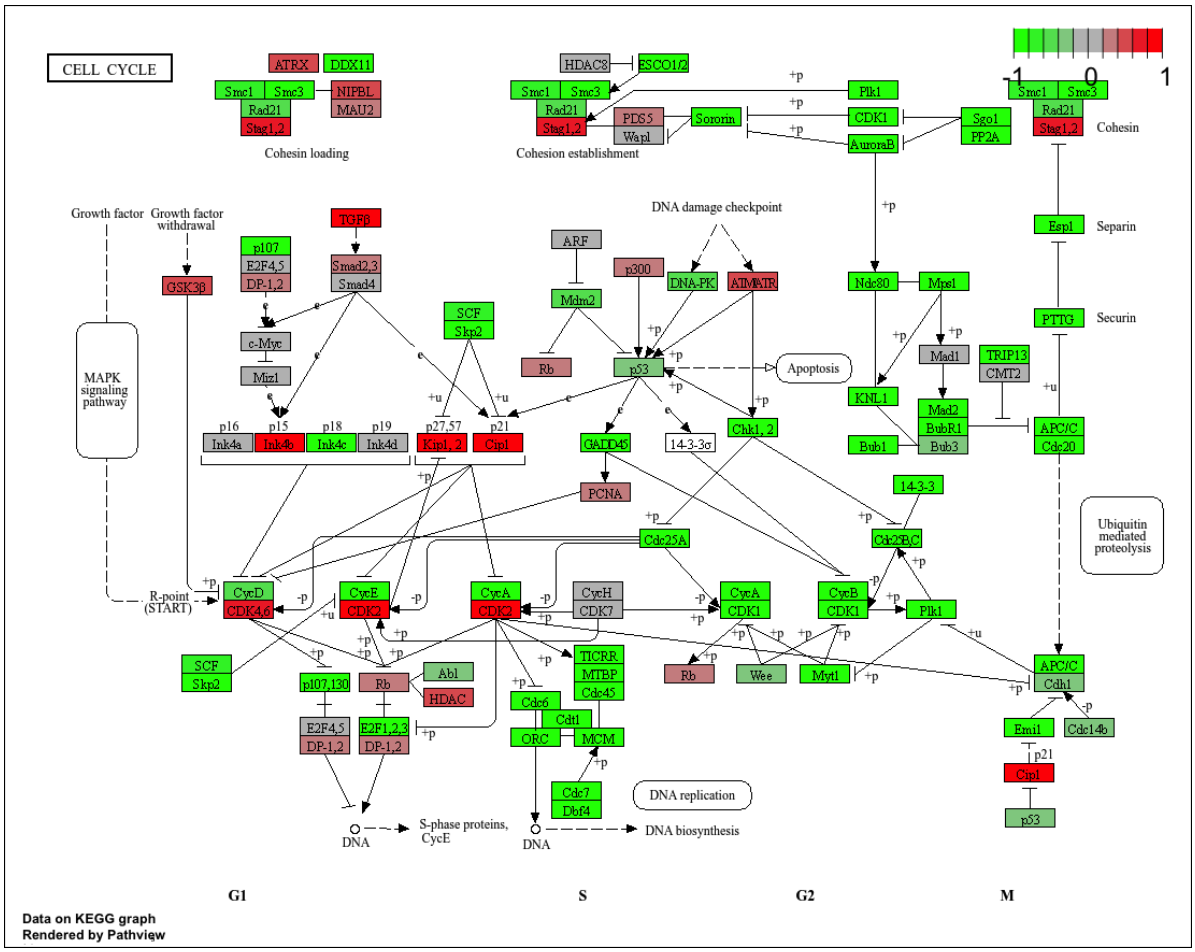


```
# A different PDF based output of the same data
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

```
'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

     [,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04110.pathview.pdf
```

```r
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

```r
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04640.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04142.pathview.png

'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/angelikapangaliman/Desktop/BIMM143/Class14

Info: Writing image file hsa04330.pathview.png
```

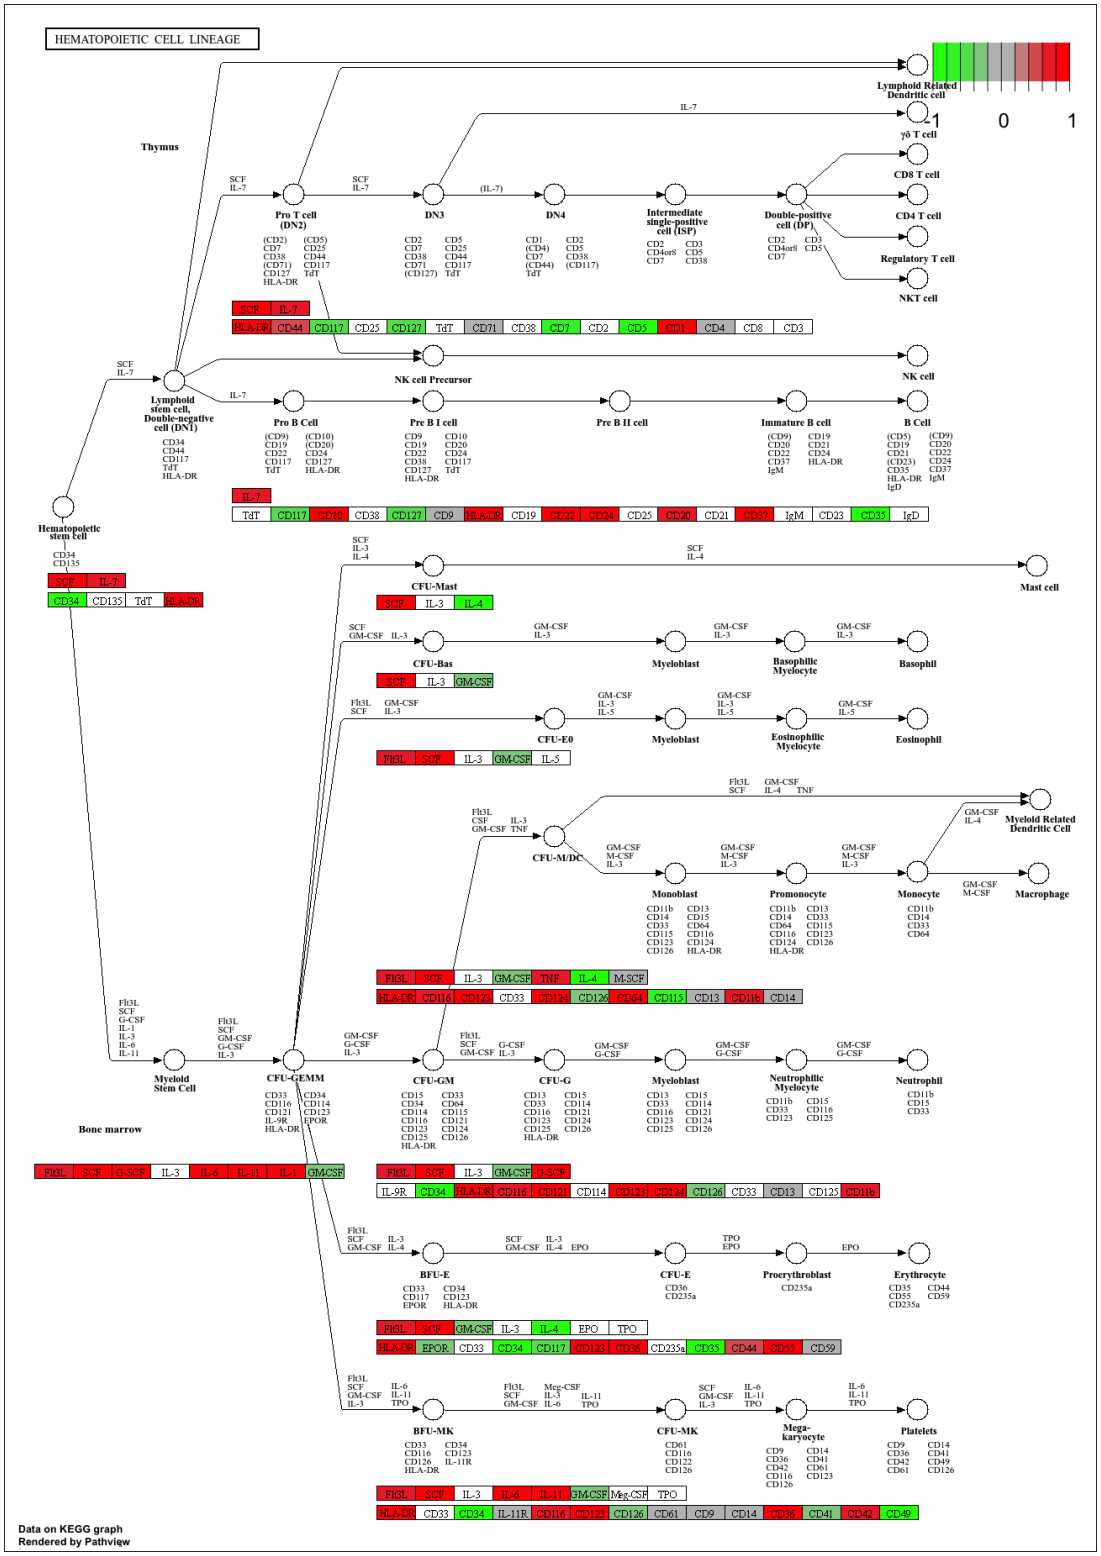
HEMATOPOIETIC CELL LINEAGE
Lymphoid Related Dendritic cell
γδ T cell
CD8 T cell
CD4 T cell
Regulatory T cell
NKT cell
Thymus
Pro T cell (DN2)
DN3
DN4
Intermediate single-positive cell (ISP)
Double-positive cell (DP)
NK cell Precursor
NK cell
Lymphoid stem cell, Double-negative cell (DN1)
Pro B Cell
Pre B I cell
Pre B II cell
Immature B cell
B Cell
Hematopoietic stem cell
CFU-Mast
Mast cell
CFU-Bas
Myeloblast
Basophilic Myelocyte
Basophil
CFU-E0
Eosinophilic Myelocyte
Eosinophil
CFU-M/DC
Myeloid Related Dendritic Cell
Monoblast
Promonocyte
Monocyte
Macrophage
Myeloid Stem Cell
CFU-GEMM
CFU-GM
CFU-G
Neutrophilic Myelocyte
Neutrophil
Bone marrow
BFU-E
CFU-E
Proerythroblast
Erythrocyte
BFU-MK
CFU-MK
Mega-karyocyte
Platelets
Data on KEGG graph
Rendered by Pathview

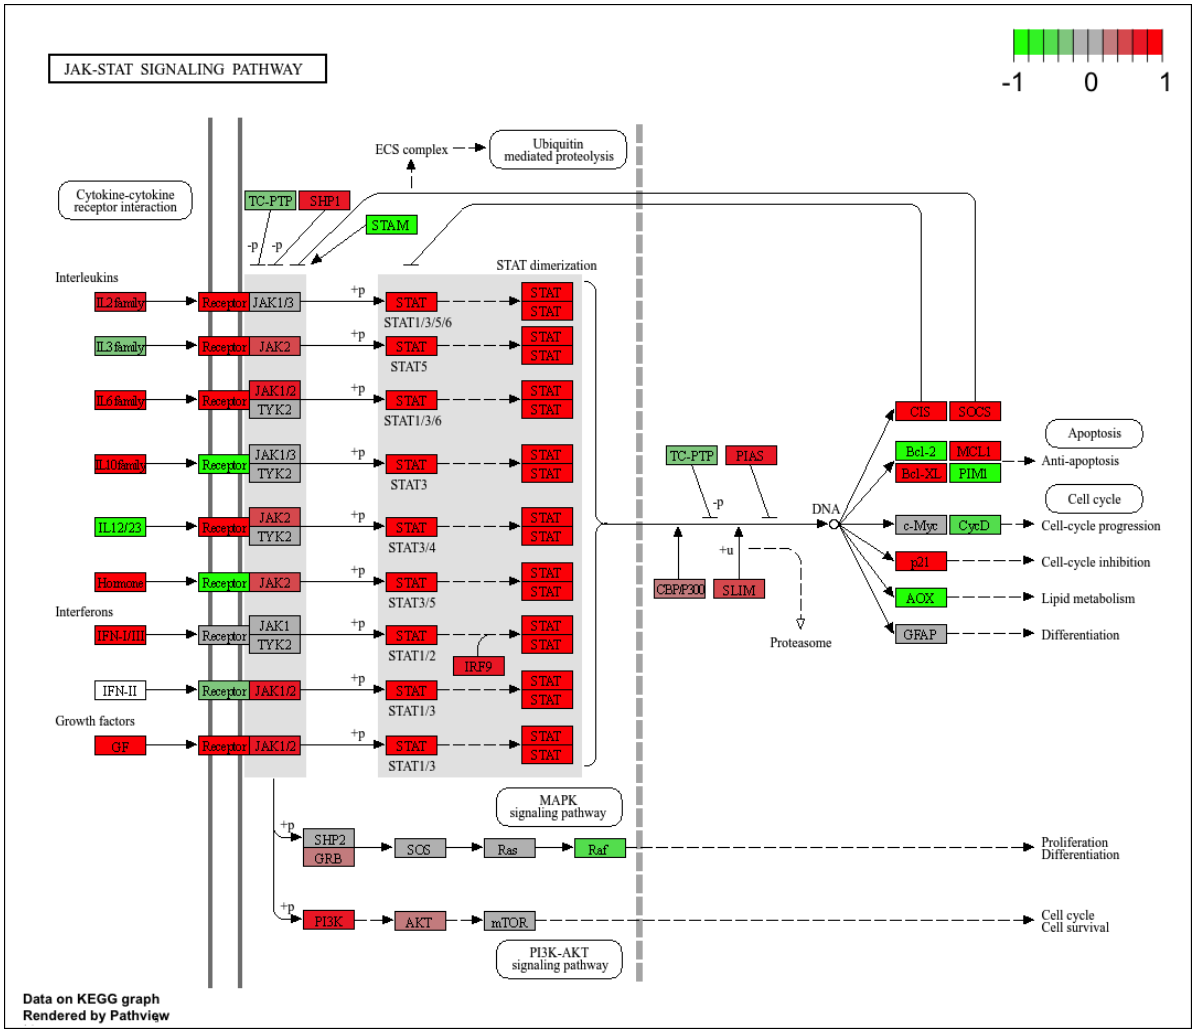
JAK-STAT SIGNALING PATHWAY
-1
0
1
ECS complex
Ubiquitin mediated proteolysis
Cytokine-cytokine receptor interaction
TC-PTP
SHP1
STAM
-p
-p
STAT dimerization
Interleukins
IL2family
IL3family
IL6family
IL10family
IL12/23
Hormone
Interferons
IFN-I/III
IFN-II
Growth factors
GF
Receptor
JAK1/3
JAK2
JAK1/2
TYK2
JAK1/3
TYK2
JAK2
TYK2
JAK2
JAK1
TYK2
JAK1/2
JAK1/2
+p
STAT
STAT1/3/5/6
STAT5
STAT1/3/6
STAT3
STAT3/4
STAT3/5
STAT1/2
STAT1/3
STAT1/3
IRF9
TC-PTP
PIAS
-p
+u
CBP/P300
SLIM
Proteasome
DNA
CIS
SOCS
Bcl-2
MCL1
Bcl-XL
PIM1
c-Myc
CycD
p21
AOX
GFAP
Apoptosis
Anti-apoptosis
Cell cycle
Cell-cycle progression
Cell-cycle inhibition
Lipid metabolism
Differentiation
MAPK signaling pathway
SHP2
GRB
SOS
Ras
Raf
Proliferation
Differentiation
PI3K
AKT
mTOR
Cell cycle
Cell survival
PI3K-AKT signaling pathway
Data on KEGG graph
Rendered by Pathview

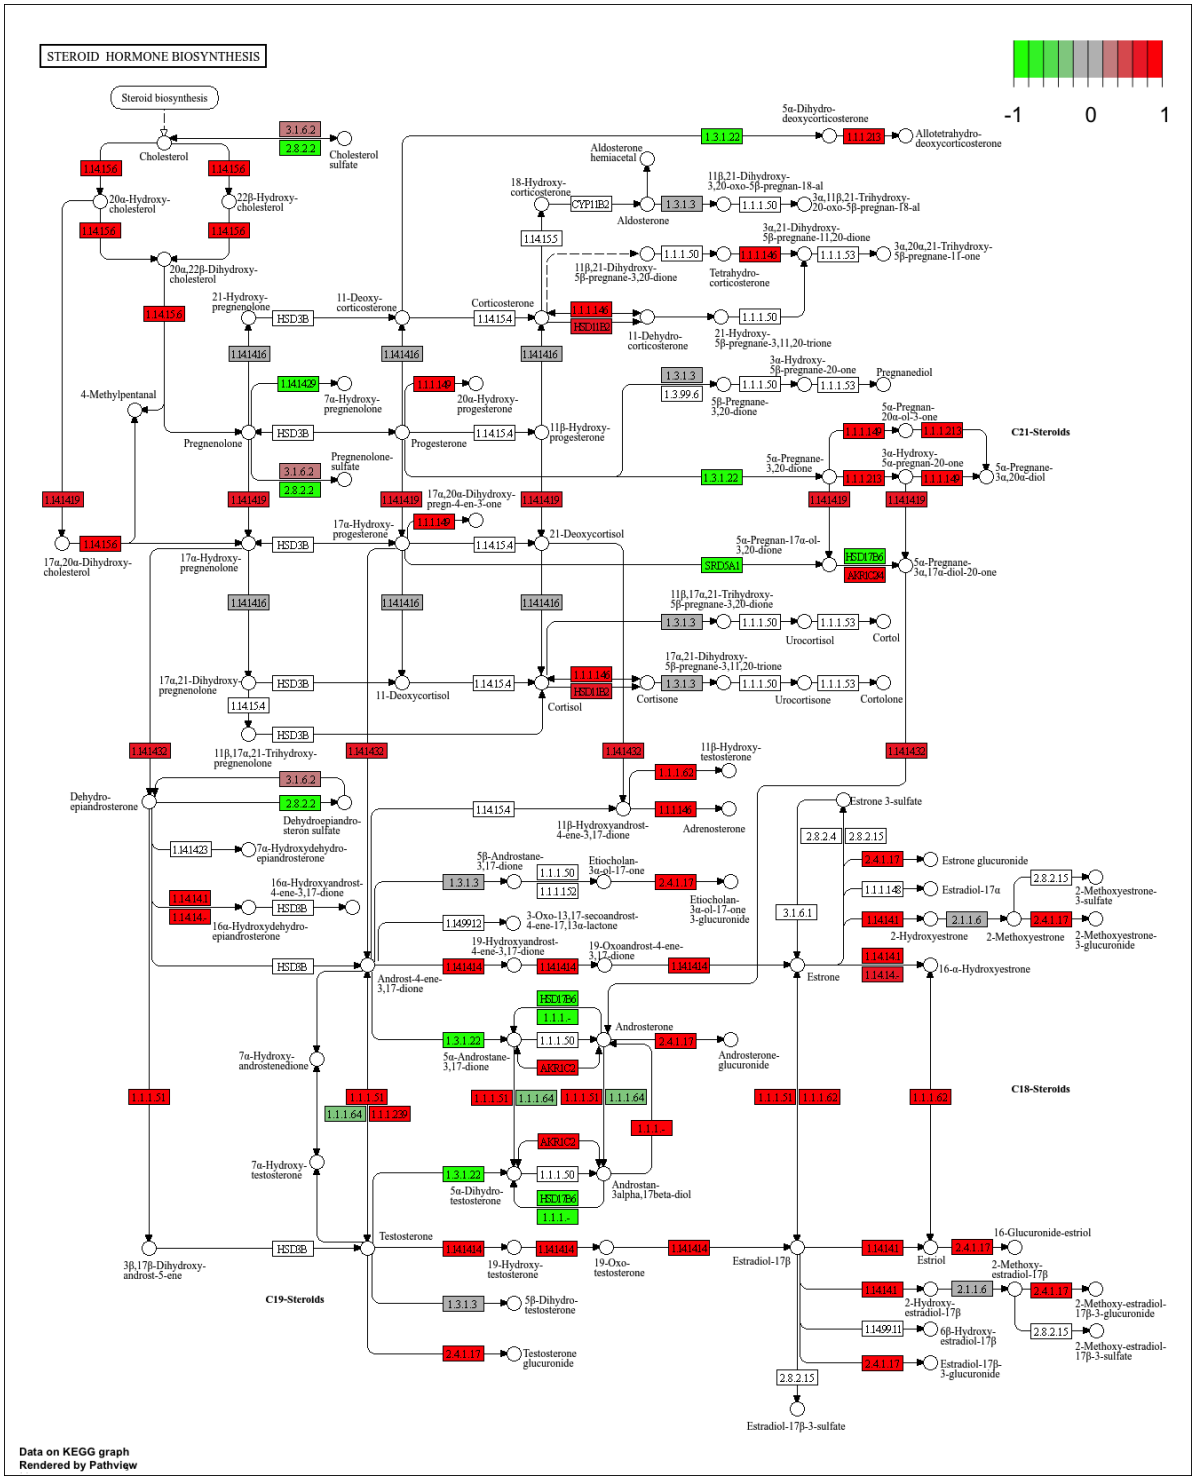
STEROID HORMONE BIOSYNTHESIS
-1
0
1
Steroid biosynthesis
Cholesterol
Cholesterol sulfate
20α-Hydroxy-cholesterol
22β-Hydroxy-cholesterol
20α,22β-Dihydroxy-cholesterol
21-Hydroxy-pregnenolone
11-Deoxy-corticosterone
Corticosterone
18-Hydroxy-corticosterone
Aldosterone
Aldosterone hemiacetal
5α-Dihydro-deoxycorticosterone
Allotetrahydro-deoxycorticosterone
11β,21-Dihydroxy-3,20-oxo-5β-pregnan-18-al
3α,11β,21-Trihydroxy-20-oxo-5β-pregnan-18-al
3α,21-Dihydroxy-5β-pregnane-11,20-dione
3α,20α,21-Trihydroxy-5β-pregnane-11-one
11β,21-Dihydroxy-5β-pregnane-3,20-dione
Tetrahydro-corticosterone
11-Dehydro-corticosterone
21-Hydroxy-5β-pregnane-3,11,20-trione
3α-Hydroxy-5β-pregnane-20-one
Pregnanediol
5β-Pregnane-3,20-dione
4-Methylpentanal
7α-Hydroxy-pregnenolone
20α-Hydroxy-progesterone
Pregnenolone
Progesterone
11β-Hydroxy-progesterone
Pregnenolone-sulfate
5α-Pregnan-20α-ol-3-one
C21-Sterolds
5α-Pregnan-3,20-dione
3α-Hydroxy-5α-pregnan-20-one
5α-Pregnane-3α,20α-diol
17α,20α-Dihydroxy-pregn-4-en-3-one
17α,20α-Dihydroxy-cholesterol
17α-Hydroxy-progesterone
17α-Hydroxy-pregnenolone
21-Deoxycortisol
5α-Pregnan-17α-ol-3,20-dione
5α-Pregnane-3α,17α-diol-20-one
11β,17α,21-Trihydroxy-5β-pregnane-3,20-dione
Urocortisol
Cortol
17α,21-Dihydroxy-pregnenolone
11-Deoxycortisol
Cortisol
17α,21-Dihydroxy-5β-pregnane-3,11,20-trione
Cortisone
Urocortisone
Cortolone
11β,17α,21-Trihydroxy-pregnenolone
11β-Hydroxy-testosterone
Dehydro-epiandrosterone
Dehydroepiandro-steron sulfate
11β-Hydroxyandrost-4-ene-3,17-dione
Adrenosterone
Estrone 3-sulfate
7α-Hydroxydehydro-epiandrosterone
5β-Androstane-3,17-dione
Etiocholan-3α-ol-17-one
Etiocholan-3α-ol-17-one 3-glucuronide
Estrone glucuronide
Estradiol-17α
2-Methoxyestrone-3-sulfate
16α-Hydroxyandrost-4-ene-3,17-dione
16α-Hydroxydehydro-epiandrosterone
3-Oxo-13,17-secoandrost-4-ene-17,13α-lactone
2-Hydroxyestrone
2-Methoxyestrone
2-Methoxyestrone-3-glucuronide
19-Hydroxyandrost-4-ene-3,17-dione
19-Oxoandrost-4-ene-3,17-dione
Androst-4-ene-3,17-dione
Estrone
16-α-Hydroxyestrone
Androsterone
5α-Androstane-3,17-dione
Androsterone-glucuronide
C18-Sterolds
7α-Hydroxy-androstenedione
7α-Hydroxy-testosterone
5α-Dihydro-testosterone
Androstan-3alpha,17beta-diol
Testosterone
3β,17β-Dihydroxy-androst-5-ene
19-Hydroxy-testosterone
19-Oxo-testosterone
Estradiol-17β
16-Glucuronide-estriol
Estriol
2-Methoxy-estradiol-17β
2-Hydroxy-estradiol-17β
2-Methoxy-estradiol-17β-3-glucuronide
6β-Hydroxy-estradiol-17β
2-Methoxy-estradiol-17β-3-sulfate
Estradiol-17β-3-glucuronide
C19-Sterolds
5β-Dihydro-testosterone
Testosterone glucuronide
Estradiol-17β-3-sulfate
Data on KEGG graph
Rendered by Pathview

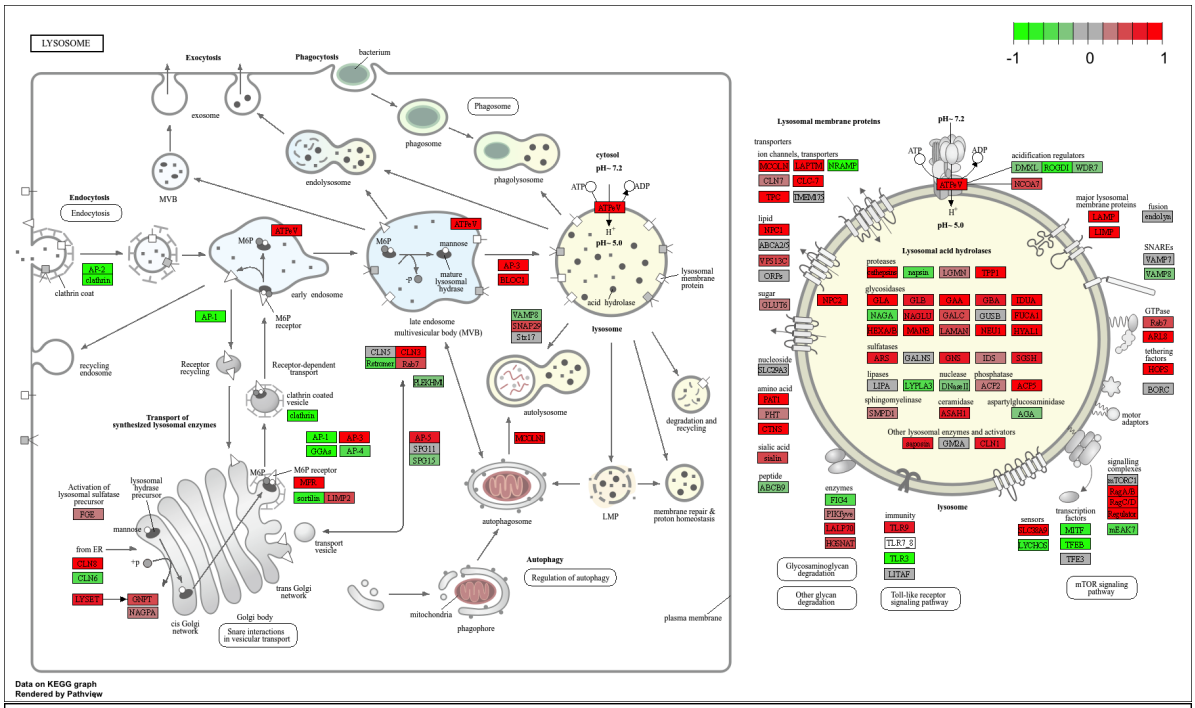

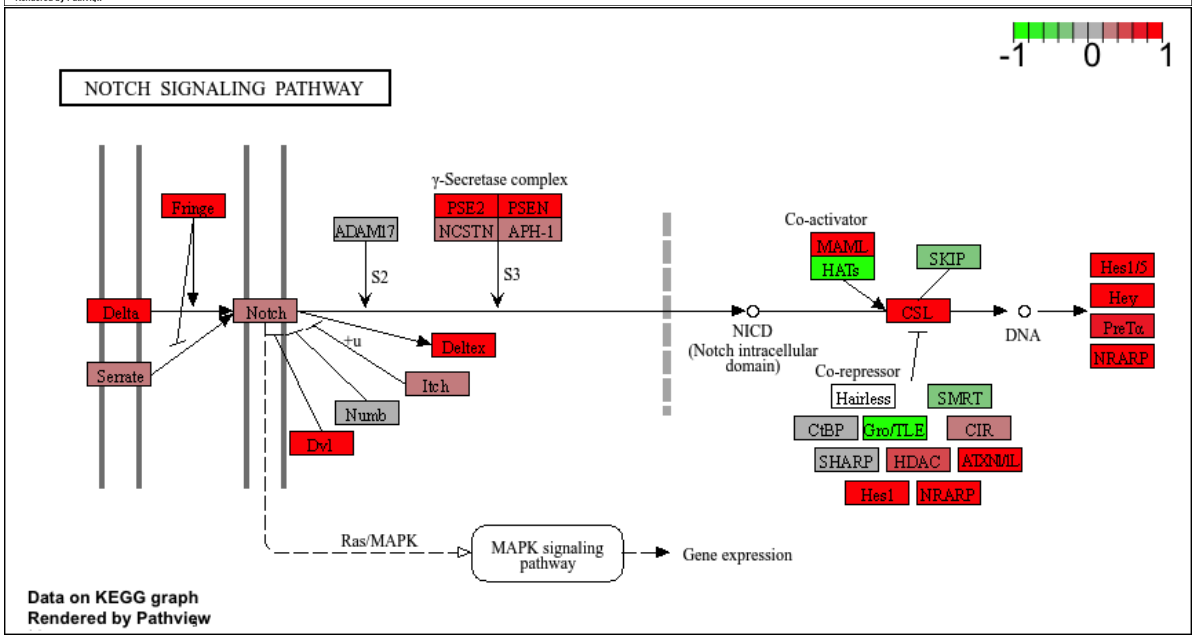

GO

We can also do a similar procedure with gene ontology. Similar to above, go.sets.hs has all GO terms. go.subs.hs is a named list containing indexes for the BP, CC, and MF ontologies. Let's

focus on BP (a.k.a Biological Process) here.

```r
data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets)

lapply(gobpres, head)
```

```
$greater
                                            p.geomean stat.mean        p.val
GO:0007156 homophilic cell adhesion       8.519724e-05  3.824205 8.519724e-05
GO:0002009 morphogenesis of an epithelium 1.396681e-04  3.653886 1.396681e-04
GO:0048729 tissue morphogenesis           1.432451e-04  3.643242 1.432451e-04
GO:0007610 behavior                       1.925222e-04  3.565432 1.925222e-04
GO:0060562 epithelial tube morphogenesis  5.932837e-04  3.261376 5.932837e-04
GO:0035295 tube development               5.953254e-04  3.253665 5.953254e-04
                                              q.val set.size         exp1
GO:0007156 homophilic cell adhesion       0.1951953      113 8.519724e-05
GO:0002009 morphogenesis of an epithelium 0.1951953      339 1.396681e-04
GO:0048729 tissue morphogenesis           0.1951953      424 1.432451e-04
GO:0007610 behavior                       0.1967577      426 1.925222e-04
GO:0060562 epithelial tube morphogenesis  0.3565320      257 5.932837e-04
GO:0035295 tube development               0.3565320      391 5.953254e-04

$less
                                              p.geomean stat.mean        p.val
GO:0048285 organelle fission             1.536227e-15 -8.063910 1.536227e-15
GO:0000280 nuclear division              4.286961e-15 -7.939217 4.286961e-15
GO:0007067 mitosis                       4.286961e-15 -7.939217 4.286961e-15
GO:0000087 M phase of mitotic cell cycle 1.169934e-14 -7.797496 1.169934e-14
GO:0007059 chromosome segregation        2.028624e-11 -6.878340 2.028624e-11
GO:0000236 mitotic prometaphase          1.729553e-10 -6.695966 1.729553e-10
                                                 q.val set.size         exp1
GO:0048285 organelle fission             5.841698e-12      376 1.536227e-15
GO:0000280 nuclear division              5.841698e-12      352 4.286961e-15
GO:0007067 mitosis                       5.841698e-12      352 4.286961e-15
GO:0000087 M phase of mitotic cell cycle 1.195672e-11      362 1.169934e-14
GO:0007059 chromosome segregation        1.658603e-08      142 2.028624e-11
```

```
GO:0000236 mitotic prometaphase          1.178402e-07       84 1.729553e-10

$stats
                                          stat.mean     exp1
GO:0007156 homophilic cell adhesion        3.824205 3.824205
GO:0002009 morphogenesis of an epithelium  3.653886 3.653886
GO:0048729 tissue morphogenesis            3.643242 3.643242
GO:0007610 behavior                        3.565432 3.565432
GO:0060562 epithelial tube morphogenesis   3.261376 3.261376
GO:0035295 tube development                3.253665 3.253665
```

Reactome

Let's now conduct over-representation enrichment analysis and pathway-topology analysis with Reactome using the previous list of significant genes generated from our differential expression results above.

```r
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```r
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

> Q: What pathway has the most significant "Entities p-value"? Do the most significant pathways listed match your previous KEGG results? What factors could cause differences between the two methods?

The cell cycle, Mitotic has the most significant "Entities p-value" Some of the most significant pathways overlap conceptually with the KEGG results especially those related to cell cycle regulation and proliferation. Differences between Reactome and KEGG occur because each database defines pathways differently, includes different gene sets, and uses slightly different enrichment structures, which can change the statistical ranking of pathways.