

Project 1: TextAnalyzer: 200 Points

Due Oct 22

[Introduction](#)

[In this project...](#)

[The code](#)

[Gradings](#)

[Tips](#)

[Extra Credit: Calculating similarity](#)

[Miscellaneous](#)

Introduction

What if there was a way to identify the author of an anonymous text? In this project, we will build the infrastructure for analyzing texts so they can be compared for similarity.


Data scientists have successfully achieved this by comparing the frequency of common words in an author's writings. These frequencies form a descriptor of an author's style, which tends to stay constant across their works. We can compare the frequencies of different writings, to see which writings are similar.

This method was able to identify "Robert Galbraith" as the pen name of JK Rowling (note the overlap of the light blue and dark blue dots in the graph).

(To try different word combinations on this graph, see [Can You Identify an Author By How Often They Use the Word "The"?](#))

The Author's Hidden Fingerprint

Despite years passing, changing genres, and evolving their writing -- authors cannot change. They leave an identifiable fingerprint in their writing. Below plots JK Rowling's Harry Potter books against the books Rowling wrote under the penname Robert Galbraith. Click the words below to change the plot and hover over a data point for more information.

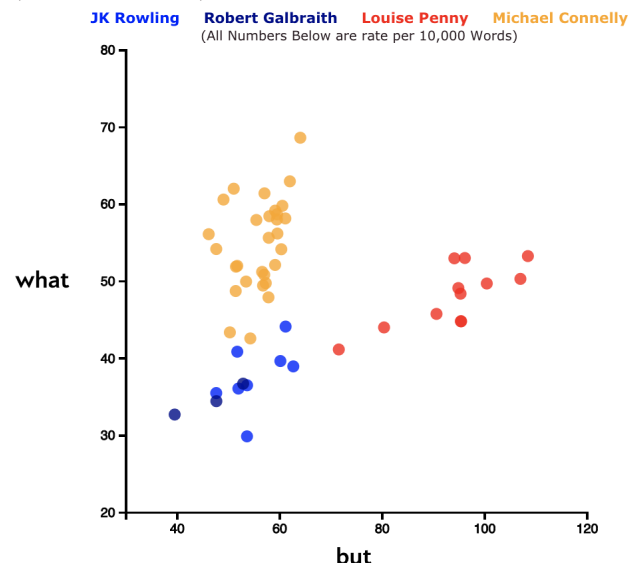

a all also an and any are as at be been but by can do down even every for from had has have her his if in into is it its may more must my no not now of on one only or our shall should so some such than that the their then there thing this to up upon was were what when which who will with would your

Created by @BenBlatt
For more information read Nabokov's Favorite Word Is Mauve

In this project...

In this project, you will develop a TextAnalyzer class. A TextAnalyzer object will read in a file and do all of the analysis needed to create the frequency “fingerprint” for that text.

Here’s an example of how the TextAnalyzer works, using a very short text.

File fightsong.txt

Hail! Hail! to Michigan,
the champions of the West!

```
sentence_count
1
word_count
9
vocabulary
['champions', 'hail', 'michigan', 'of', 'the', 'to', 'west']
frequencies
{'hail': 2, 'to': 1, 'michigan': 1, 'the': 2, 'champions': 1, 'of': 1, 'west': 1}
frequency of hail
2
percent_frequencies
{'hail': 0.2222222222222222, 'to': 0.1111111111111111, 'michigan': 0.1111111111111111, 'the': 0.2222222222222222, 'champions': 0.1111111111111111, 'of': 0.1111111111111111, 'west': 0.1111111111111111}
most common
['hail', 2]
```

The code

You will create a class called `TextAnalyzer` with the following methods. Implement the methods so that all provided test cases pass:

```
class TextAnalyzer:
    def __init__(self, filepath):
        """Initializes the TextAnalyzer object, using the file at filepath.
        Initialize the following instance variables: filepath (string),
        words (list)"""

    def sentence_count(self):
        """Returns the number of sentences in the file (seperated by .)
        Note that if there are no '.' in the sentences return 1"""

    def words(self):
        """ Returns a list of words without punctuations and all lower case. For
        example : 'Cat!' Should be 'cat'. """

    def word_count(self):
        """Returns the number of words in the file. A word is defined as any
        text that is separated by whitespace (spaces, newlines, or tabs)."""

    def vocabulary(self):
        """Returns a list of the unique words in the text, sorted in
        alphabetical order. Capitalization and punctuation should be ignored, so
        'Cat!' is the same word as 'cat'. The returned words should be all lower-
        case and without punctuations"""

    def frequencies(self):
        """Returns a dictionary of the words in the text and the count of how
        many times they appear. The words are the keys, and the counts are the
        values. All the words should be lower case and without punctuations. The order
        of the key doesn't matter."""

    def frequency_of(self, word):
        """Returns the number of times word appears in the text. Capitalization and
        punctuation should be ignored, so 'Cat!' is the same word as 'cat'. If the word
        does not exist in the text, then return 0"""

    def percent_frequencies(self):
        """Returns a dictionary of the words in the text and the frequency of the
        words as a percentage of the text. The words are the keys, and the
```

```

        counts are the values. All the words should be lower case and without
        punctuations. The order of the keys doesn't matter."""

def most_common(self):
    """Returns the most common word in the text and its frequency in a list.
        There might be a case where multiple words have the same frequency,
        in that case return one of the most common word """
    # Example output : ['so', 6]

def read_sample_csv(self):
    """Reads the sample.csv file and returns the list of fieldnames"""

def write_analysis_details(self, csvfile):
    """Writes the details of the textual analysis to the csvfile.
    Refer to sample.csv for an example of how this should look.
    Note that for most_common, just write the word and not its frequency"""

    #filepath, unique words, total words, line count, most common word

def similarity_with(self, other_text_analyzer):
    """Extra credit. Calculates the similarity between this text and
    the other text using cosine similarity."""

```

Grading

There are unit tests included in the stub code that test each method. We will use the same tests that we provide to you in order to calculate your final grade.

<i>Method</i>	<i>points</i>
<code>def __init__(self, filepath)</code>	5
<code>def sentence_count(self):</code>	20
<code>def words(self):</code>	30
<code>def word_count(self):</code>	10
<code>def vocabulary(self):</code>	15
<code>def frequencies(self):</code>	30
<code>def frequency_of(self, letter):</code>	15
<code>def percent_frequencies(self, letter):</code>	25
<code>def most_common(self):</code>	25
<code>def read_sample_csv(self):</code>	10
<code>def write_analysis_details(self, csvfile):</code>	15
Total	200
<code>def similarity_with(self, other_text_analyzer, n=10):</code>	15 pts extra credit

If all of the unit tests for a method pass, you get all of the points for that method! If only some of the tests pass, you get a fraction of the points for that method. For example, if 2 out of 3 tests related to `word_count()` pass, then you get $\frac{2}{3}$ of the possible points for `word_count` (10 points out of 15 points).

Tips

Work on one method at a time. Choose the one that you think is the easiest, and work on it until you can get all the tests related to that method to pass. This is a great strategy, since ***the solution to some methods can be used to quickly complete other methods.***

Make sure you are using Python 3!! Some of the tests won't pass if you are using Python 2.

Extra Credit: Calculating similarity - 15 points

Now let's see how one text compares to another text. Here are two different texts:

File osusong.txt

Come on, Ohio!
Smash through to victory.

File fightsong.txt

Hail! Hail! to Michigan,
the champions of the West!

One way to measure their similarity is to compare the frequencies of the different letters in these texts. We can use the frequency that's calculated by the TextAnalyzer, but let's make sure that the letters are the same in each.

Frequency for **osusong.txt**

word	Frequency
'champions'	0
'come'	1
'hail'	0
'michigan'	0
'of'	0
'ohio'	1
'on'	1
'smash'	1
'the'	0
'to'	1
'through'	1
'victory'	1
'west'	0

Frequency for **fightsong.txt**

word	Frequency
'champions'	1
'come'	0
'hail'	2
'michigan'	1
'of'	1
'ohio'	0
'on'	0
'smash'	0
'the'	2
'to'	1
'through'	0
'victory'	0
'west'	1

Only the word 'to' is included in both, so we don't expect these texts to be very similar!
These frequencies create a sort of vector for each text. We can measure the similarity of two vectors using something called the *cosine similarity*. So, we can measure the similarity between two texts using the cosine similarity as well.

The cosine similarity of two vectors is:

*The Dot product of the two vectors / (Magnitude of the first vector * Magnitude of the second vector)*

Step 1 : Get the most common word's frequency from both text

Step 2 : Create a list of the shared words

Step 3 : Calculate the dot product of the shared words (i.e) in this case it will be only 'to' which is only 1 but if there were 2 words shared words : to : 1, to : 1; champions : 1, champions : 2, then the dot product will be $1 * 1 + 1 * 2 = 3$

$$\mathbf{a} \cdot \mathbf{b} = \sum_{i=1}^n a_i b_i = a_1 b_1 + a_2 b_2 + \cdots + a_n b_n$$

More info : https://simple.wikipedia.org/wiki/Dot_product

(Tip: Note that only the words that both texts have in common actually matter in this calculation)

How to calculate the magnitude:

Step 4 : The most common word's frequency is the magnitude for each of the text

Step 5 : Now dot product / text1 mag * text 2 mag

Here the answer would be $1 / (2 * 1) = 0.5$

Miscellaneous

Useful string methods: `split()` and `strip()`

```
>>> s = "I love cats. I love every kind of cat!\n"
>>> s.split()
['I', 'love', 'cats.', 'I', 'love', 'every', 'kind', 'of', 'cat!']
>>> s = 'cats.'
>>> s.strip(".")
'cats'
>>> s = 'cat!'
>>> s.strip(".")
'cat'
```

Useful function: `sorted()`

```
>>> l = ['love', 'every', 'kind', 'of', 'cat']
>>> sorted(l)
['cat', 'every', 'kind', 'love', 'of']
>>> sorted(l, reverse = True)
['of', 'love', 'kind', 'every', 'cat']
>>> sorted(l, key = lambda x : x[-1]) # sort by the last letter
['kind', 'love', 'of', 'cat', 'every']
```

According to the Python documentation: *"It is best to think of a dictionary as an unordered set of key: value pairs"*.