


# Custom Properties



```
css-vars.css  
  
/* Custom properties */  
:root {  
  --my-prop: 50;  
  --my-color: magenta;  
}
```

Yea... but  
**what's the  
point?**

# The var() function

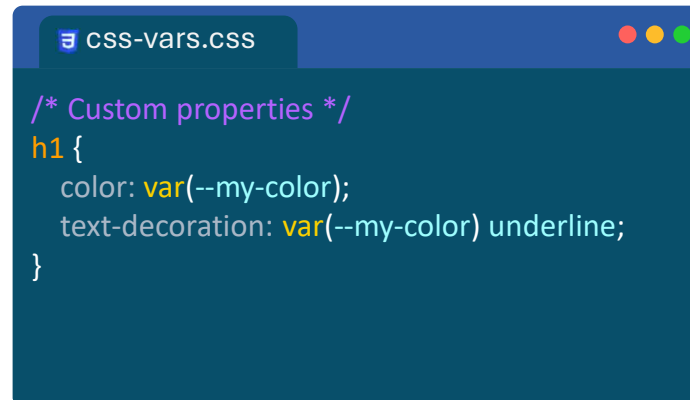

```
css-vars.css

/* Custom properties */
h1{
  color: var(--my-color);
  text-decoration: var(--my-color) underline;
}
```

- **Copies** from one property to another
- Can also have a **fallback** value  
`var(--x, 42);`
- Can even use **var** as fallback value  
`var(--x, var(--y, 42));`