

Images & Structures

Let's write two more "image processing" functions. In the last two assignments, we wrote functions that looked at every pixel and changed it in some way: inverting the colors, changing the transparency or combining pixels from two images into one.

This time, we're going to **move the pixels themselves by using structures**.


- **flip()** will **swap the pixels** from left-to-right, or top-to-bottom so that the image is flipped.
- **mirror()** **copies the pixels** on the right half to the left half, the left-half to the right half, the top to the bottom half, or the bottom half to the top.

These are **void** functions that modify the passed image. The functions are already stubbed out so you can run **make test** and see that both compile and run.


You'll also see three extra folders: **input** which contains the photos we're going to start with, **expected**, which contains the photos as they should look, and **actual**, which contains the photos after your filters have been applied. If your code fails one of the tests, the **diff** folder will also have a rudimentary "diff" image you can examine. You can look at any of the photos just by double-clicking them in the IDE.

Images & Structures

In previous assignments you used a pointer to **unsigned char** to manipulate images. Now, suppose you want to **flip an image** horizontally like this:

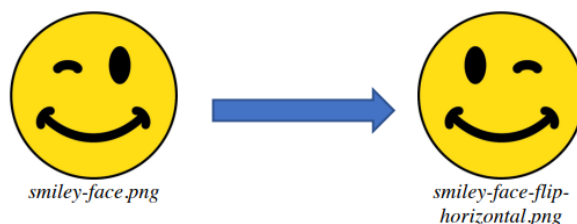

To **horizontally flip** an image, you need to take the pixel at the end of each row, and **exchange it** with the pixel at the beginning.

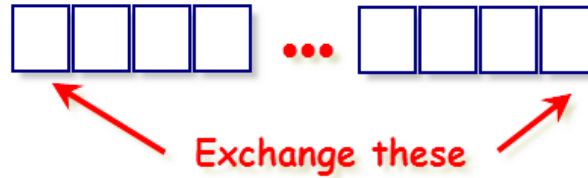

But, **you don't have a pixel**: you have a **portion** of a pixel. In the picture above, **p** points to the **red** part of the first pixel, while **end** points to the **alpha** (transparent) component of the last pixel on the row. While we **could** get around this with some **if** statements and much extra pointer movement, it's **really complicated**.

Instead, if we **could** process each element **as a pixel**, instead of a pixel component, things would be much easier. Fortunately, pointers and structures make that possible.

Type Alias, Structure & Enumeration

Open the header file and you'll find the following definitions:

```
using UC = unsigned char;
struct Pixel {UC red{0}, green{0}, blue{0}, alpha{255}};
enum class Direction {LtoR, RtoL, TtoB, BtoT};
```

- The name **UC** is a **type alias**; shorthand for **unsigned char**.
- The **struct Pixel** is a user-defined type that has a member for each color.
- The enumeration **Direction** will be used to determine whether you flip or mirror from left-to-right (**LtoR**), right-to-left (**RtoL**), top-to-bottom, (**TtoB**) or bottom-to-top (**BtoT**).

The flip Function

Copy the prototype for **flip()**, from the header file to the implementation file, remove the semicolon, and add a body. Start with this code (where **BPP** is **4**):

```
for (int row = 0; row < height; ++row)
{
    Pixel * front = img + row * width * BPP;
    Pixel * back = front + width - 1; // last pixel
    . . .
```

This is similar to the code you've written in the last few assignments. The **first byte in of any row** is at the address **img + row * width * BPP**. When **row** is **0**, then the beginning is

the starting address of **img**, plus **0**. When **row** is **1**, the beginning of the row is the starting address of **img**, plus the number of bytes in one row. For the third **row** it's twice the width of a row plus the starting address, and so on.

Introducing `reinterpret_cast`

When you compile your code, you'll get the following error:

```
error: cannot convert 'aka unsigned char*' to 'Pixel*' in
initialization
```

The pointer **front** is a pointer to **Pixel**, while the value calculated on the right is a pointer to **unsigned char**. These types are not the same, so the compiler requires you to **explicitly convert them**.

You cannot use **static_cast** for this; instead, you use a **reinterpret_cast**, which does not produce a new value, but changes the way that a **pointer interprets** the address it points to. Change the line that initializes **front** to:

```
Pixel * front = reinterpret_cast<Pixel*>(img) + row * width;
```

Now, since **front** is a **Pixel** pointer (and **not** a byte pointer, like **img**), when you add **width** to **front** **you don't need to multiply width times BPP**, since each unit is automatically the size of a **Pixel**.

Also, unlike the **end** pointer in **negative()**, the **back** pointer in **flip()** points **to** the last element in the row, **not** past it.

Now **front** will treat the values it finds as **Pixel** objects instead of **unsigned char**.



Note: using `reinterpret_cast` is machine-dependent¹ and only allowed under certain circumstances. In this case it works because a pointer to a structure is a pointer to the first member of the structure, and the types of the variables (`unsigned char`) are the same.

¹ http://en.cppreference.com/w/cpp/language/reinterpret_cast

Horizontal Flip

To complete, use the following algorithm if the **Direction** is either **LtoR** or **RtoL**.

```

For each row from 0 to height-1
  Let front to point the beginning of the row
  Let back to point to the last element in the row
  While front < back Do
    temp <- *front    // "swap" algorithm
    *front <- *back
    *back <- temp
    Increment front
    Decrement back

```

Vertical Flip

For the other two directions (**TtoB** and **BtoT**), the algorithm is similar:

```

For each col from 0 to width-1
  Let top to point the first pixel in the column
  Let bottom to point to the last pixel in the column
  While top < bottom Do
    temp <- *top      // "swap" algorithm
    *top <- *bottom
    *bottom <- temp
    top <- top + width
    bottom <- bottom - width

```

Here are the parts that are different:

1. Initialize **top** with `reinterpret_cast<Pixel *>(img) + col`
2. Initialize **bottom** with `top + width * (height - 1)`
3. Note that the decrement and increment are by **width**, not by **1**.

Try to work out the arithmetic on paper, instead of simply taking my word for it.

Go ahead and finish **flip()** by following the pseudocode from earlier in this section. You should be able to **make test**, and the first set of tests should pass. As always, if you run into problems, bring your questions to the Canvas Discussion Board, or come to my office hour.

The *mirror()* function

The **mirror()** function is almost exactly the same as **flip()** with these differences:

1. Copy the loops from **flip()**. Don't create **temp** and don't swap.
 - a. If **dir** is **LtoR**, copy ***front** to ***back**.
 - b. If **dir** is **RtoL**, copy ***back** to ***front**
2. In the second loop, copy ***top** to ***bottom** if **TtoB** and vice-versa otherwise.

Go ahead and finish **mirror()**. If you **make test**, all of the tests should pass.

Be sure to **make submit** to turn in your code for credit **before the deadline**. As always, if you run into problems, bring your questions to the discussion board, or come to my office hour.