

**BỘ GIÁO DỤC VÀ ĐÀO TẠO  
TRƯỜNG ĐẠI HỌC QUỐC GIA THÀNH PHỐ HỒ CHÍ MINH  
TRƯỜNG ĐẠI HỌC CÔNG NGHỆ THÔNG TIN**



**ĐỒ ÁN MÔN HỌC  
MÔN HỌC: QUẢN TRỊ MẠNG VÀ HỆ THỐNG**

**TP.HỒ CHÍ MINH – NĂM 2022**

# BÁO CÁO CHI TIẾT

Môn học: QUẢN TRỊ MẠNG VÀ HỆ THỐNG

Kỳ báo cáo: Đồ án

Tên chủ đề: Zabbix

GV: Trần Thị Dung

Ngày báo cáo: 24/10/2022

**Nhóm: Group02**

## 1. THÔNG TIN CHUNG:

- Lớp: NT132.N11.ATCL

STT	Họ và tên	MSSV	Email
1	Hoàng Văn Anh Đức	20520890	<a href="mailto:20520890@gm.uit.edu.vn">20520890@gm.uit.edu.vn</a>
2	Nguyễn Thái Dương	20520463	<a href="mailto:20520463@gm.uit.edu.vn">20520463@gm.uit.edu.vn</a>
3	Nguyễn Đình Kha	20520562	<a href="mailto:20520562@gm.uit.edu.vn">20520562@gm.uit.edu.vn</a>

## 2. NỘI DUNG THỰC HIỆN:

STT	Công việc	Thành viên phụ trách	Kết quả tự đánh giá về phần được phân công
1	Làm đồ án (zabbix server, monitor website), làm video demo, viết report	Hoàng Văn Anh Đức	100%
2	Làm đồ án (zabbix-agent ubuntu), làm slide, chỉnh sửa report	Nguyễn Thái Dương	90%
3	Làm đồ án (zabbix-agent window), chỉnh sửa slide, chỉnh sửa report	Nguyễn Đình Kha	90%

Phần bên dưới của báo cáo này là tài liệu báo cáo chi tiết của nhóm thực hiện.

## Mục lục

TRƯỜNG ĐẠI HỌC QUỐC GIA THÀNH PHỐ HỒ CHÍ MINH .....	0
<b>I. Introduction .....</b>	<b>2</b>
1.2. Overview .....	2
1.1. Definition of zabbix and what does it monitors .....	2
1.2. Components .....	3
1.2.1. Zabbix's Components .....	3
1.3. Operation .....	4
<b>II. Implementation and Result .....</b>	<b>4</b>
2.1. Topology .....	4
<b>2.2. Installation and Copnfiguration.....</b>	<b>5</b>
<b>2.2.1. Set up Server.....</b>	<b>5</b>
1.2.2. SET UP AGENT (Linux) AND CONFIGURE.....	6
1.2.3. MONITOR FROM SERVER (use the web interface) .....	7
2.2.4. SET UP AGENT (WINDOW) .....	10
2.2.5 SET UP (WEBSEVER / WEBSITES) FOR MONITORING .....	12
ADDITIONS : MORE ABOUT ZABBIX .....	20
<b>III. SELF-ASSESSMENT .....</b>	<b>20</b>
<b>IV. ANSWER .....</b>	<b>21</b>

## I. Introduction

### 1.2. Overview

#### 1.1. Definition of zabbix and what does it monitors

- Zabbix is an enterprise-class open-source distributed monitoring solution.
- Zabbix is a software that monitors numerous parameters of a network and the health and integrity of servers, virtual machines, applications, services, databases, websites, the cloud and more.
- Zabbix uses a flexible notification mechanism that allows users to configure e-mail based alerts for virtually any event. This allows a fast reaction to server problems
  
- Network monitoring
  - + Network performance
  - + Network health
  - + Configuration changes
  
- Server monitor

- + Server performance
- + Server availability
- + Configuration changing
  
- Cloud monitoring: Google apps, Amazon WebService, Google clouds, ...
- Application monitoring: Gitlab, Microsoft IIS, ...
- Service monitoring: Git, Active Directory, Nginx, ...

## 1.2. Components

### 1.2.1. Zabbix's Components

- Zabbix consists of several major software components, the responsibilities of which are outlined below:
  - + **Zabbix Server**
    - This is the centre of the Zabbix software.
    - The Server can remotely check networked services (such as web servers and mail servers) using simple service checks, but it is also the central component to which the Agents will report availability and integrity information and statistics
    - The Server is the central repository in which all configuration, statistical and operational data are stored, and it is the entity in the Zabbix software that will actively alert administrators when problems arise in any of the monitored systems.
  
  - + **Zabbix Agent**
    - In order to actively monitor local resources and applications (such as harddrives, memory, processor statistics etc.) on networked systems, those systems must run the Zabbix Agent.
    - The Agent will gather operational information from the system on which it is running and report these data to the Zabbix for further processing.
    - In case of failures (such as a harddisk running full, or a crashed service process), the Zabbix Server can actively alert the administrators of the particular machine that reported the failure.
    - The Zabbix Agents are extremely efficient because of use of native system calls for gathering statistical information.
  
  - + **The Web Interface**
    - In order to allow easy access to the monitoring data and the configuration of Zabbix from anywhere and from any platform, the Web-based Interface is provided.


- The Interface is a part of the Zabbix Server and is usually (but not necessarily) run on the same physical machine as the one running the Zabbix Server.

### 1.3. Operation

- Zabbix works via **three discovery mode** options:
  - **Network discovery** periodically scans an IT environment and records a device's type, IP address, status, uptimes and downtimes...
  - **Low-level discovery** automatically creates items, triggers and graphs based on the discovered device. Low-level discovery can create metrics from Simple Network Management Protocol (SNMP) object identifiers, Windows services, Open Database Connectivity (ODBC) Structured Query Language (SQL) queries, network interfaces and more.
  - **Auto-discovery** automatically starts monitoring any discovered device using a Zabbix agent
- Polling and trapping
  - Passive checks (polling):
    - Zabbix server requests a value from Zabbix agent.
    - Agent processes the request and returns the value to Zabbix server.
  - Active checks (trapping):
    - Zabbix agent requests from Zabbix server a list of active checks.
    - Agent sends the results in periodically.

## II. Implementation and Result

### 2.1. Topology

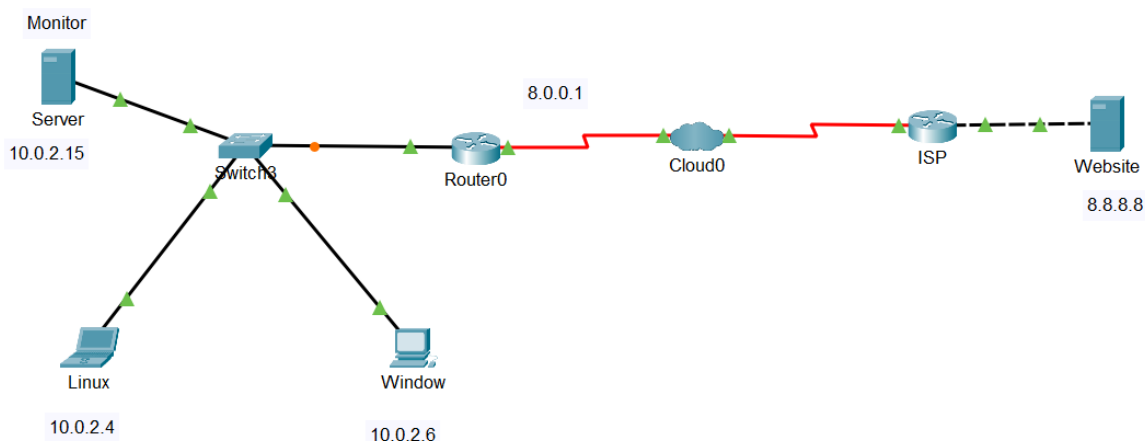

## 2.2. Installation and Copnfiguration

### 2.2.1. Set up Server

#### a. Install Zabbix repository

```
# wget https://repo.zabbix.com/zabbix/6.2/ubuntu/pool/main/z/zabbix-release/zabbix-release_6.2-2%2Bubuntu22.04_all.deb
```

```
# dpkg -i zabbix-release_6.2-2+ubuntu22.04_all.deb
```

```
# apt update
```

#### b. Install Zabbix server, frontend, agent

```
# apt install zabbix-server-mysql zabbix-frontend-php zabbix-apache-conf zabbix-sql-scripts zabbix-agent
```

Download sql-server: apt install mysql-server

#### c. Create initial database

Make sure the database server up and running.

Run the following on the host database

```
# mysql -uroot -p
password
mysql> create database zabbix character set utf8mb4 collate utf8mb4_bin;
mysql> create user zabbix@localhost identified by 'password';
mysql> grant all privileges on zabbix.* to zabbix@localhost;
mysql> set global log_bin_trust_function_creators = 1;
mysql> quit;
```

**On Zabbix server host import initial schema and data. I am prompted to enter my newly created password.**

```
# zcat /usr/share/zabbix-sql-scripts/mysql/server.sql.gz | mysql --default-character-set=utf8mb4 -uzabbix -p zabbix
```

**Disable log\_bin\_trust\_function\_creators option after importing database schema.**

```
# mysql -uroot -p password
mysql> set global log_bin_trust_function_creators = 0;
mysql> quit;
```

**d. Configure the database for Zabbix server**

Use tool for text editor like vim, nano, ... (nano /etc/zabbix/zabbix\_server.conf)

DBPassword=password

**e. Start Zabbix server and agent processes**

Start Zabbix server and agent processes and make it start at system boot.

```
# systemctl restart zabbix-server zabbix-agent apache2
```

```
# systemctl enable zabbix-server zabbix-agent apache2
```

Check server's status: systemctl status apache2

## 1.2.2. SET UP AGENT (Linux) AND CONFIGURE

**a. Install Zabbix repository**

```
# wget https://repo.zabbix.com/zabbix/6.2/ubuntu/pool/main/z/zabbix-release/zabbix-release_6.2-2%2Bubuntu22.04_all.deb
```

```
# dpkg -i zabbix-release_6.2-2+ubuntu22.04_all.deb
```

```
# apt update
```

**b. Install Zabbix agent**

```
# apt install zabbix-agent
```

**c. Config file /etc/zabbix/zabbix\_agentd.conf to change hostname of agent and ip which it want to connect**

Nano /etc/zabbix/zabbix\_agentd.conf

```
Server=10.0.2.15
```

In my work : ip of Server is 10.0.2.15

And ip of agent is : 10.0.2.4

```
ListenPort=10050
```

Listen on this port to accept connection from server

```
ServerActive=10.0.2.15
```

```
Hostname=duc-VirtualBox
```

Config Hostname = hostname of agen

To find hostname use command : hostname in the terminal of agent

```
root@duc-VirtualBox:/home/duc# hostname
duc-VirtualBox
```

```
root@duc-VirtualBox:/home/duc# ufw status
Status: inactive
root@duc-VirtualBox:/home/duc# ufw enable
Firewall is active and enabled on system startup
root@duc-VirtualBox:/home/duc# ufw allow 10050/tcp
Rule added
Rule added (v6)
root@duc-VirtualBox:/home/duc# ufw status
Status: active
```

To	Action	From
--	-----	----
10050/tcp	ALLOW	Anywhere
10050/tcp (v6)	ALLOW	Anywhere (v6)

Check if fire wall is active or not (In this work I enable it and allow it to accept port 10050/tcp )

\*If I pass this step , the agent will run normally in case the firewall is not active

#### d. Start Zabbix agent process

**Start Zabbix agent process and make it start at system boot.**

```
# systemctl restart zabbix-agent
```

```
# systemctl enable zabbix-agent
```

### 1.2.3. MONITOR FROM SERVER (use the web interface)

To monitor from server , I have to create host by doing the following steps :

1. Go to zabbix server 's display
2. Click Configuration -> hosts ->Create host



**New host** ? x

Host IPMI Tags Macros Inventory Encryption Value mapping

\* Host name

Visible name

Templates

\* Host groups

Interfaces No interfaces are defined.  
[Add](#)

Description

Fill the form with information of the agent and click add

**Host** ? x

Host IPMI Tags Macros Inventory Encryption Value mapping

\* Host name

Visible name

Templates

Name	Action
Linux by Zabbix agent	<a href="#">Unlink</a> <a href="#">Unlink and clear</a>

\* Host groups

Interfaces

Type	IP address	DNS name	Connect to	Port	Default
Agent	<input type="text" value="10.0.2.4"/>	<input type="text"/>	<input checked="" type="radio"/> IP <input type="radio"/> DNS	<input type="text" value="10050"/>	<input checked="" type="radio"/> Remove

For example : My added host


Check the connection :

Monitoring -> hosts

Name ▲	Interface	Availability	Tags	Status	Latest data
duc-VirtualBox	10.0.2.4:10050	<span style="color: green;">ZBX</span>	class: os target: linux	Enabled	Latest data 68
Zabbix server	127.0.0.1:10050	<span style="color: green;">ZBX</span>	class: os class: software target: linux ...	Enabled	Latest data 125

⇒ Working fine

Right click on the name of agent and choose the part want to see

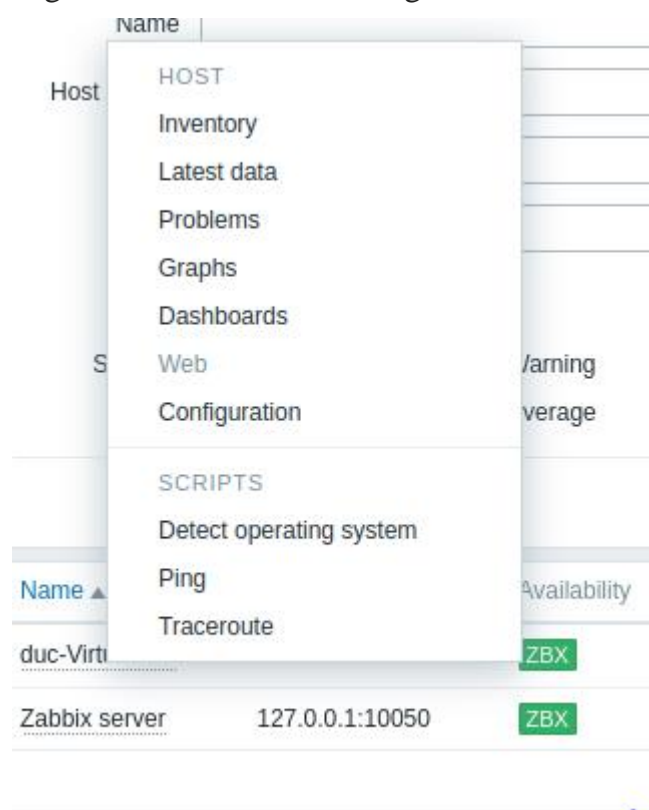

<input type="checkbox"/> Host	Name ▲	Last check	Last value	Change	Tags
<input type="checkbox"/> duc-VirtualBox	/: Free inodes in %	45s	93.3594 %		component: storage filesystem: /
<input type="checkbox"/> duc-VirtualBox	/: Space utilization ?	43s	29.5622 %		component: storage filesystem: /
<input type="checkbox"/> duc-VirtualBox	/: Total space ?	41s	48.42 GB		component: storage filesystem: /
<input type="checkbox"/> duc-VirtualBox	/: Used space ?	39s	13.58 GB		component: storage filesystem: /
<input type="checkbox"/> duc-VirtualBox	/var/snap/firefox/common/host-hunspell: Free inodes in %	44s	93.3594 %		component: storage filesystem: /var/snap/...
<input type="checkbox"/> duc-VirtualBox	/var/snap/firefox/common/host-hunspell: Space utiliz... ?	42s	29.5622 %		component: storage filesystem: /var/snap/...
<input type="checkbox"/> duc-VirtualBox	/var/snap/firefox/common/host-hunspell: Total space ?	40s	48.42 GB		component: storage filesystem: /var/snap/...
<input type="checkbox"/> duc-VirtualBox	/var/snap/firefox/common/host-hunspell: Used space ?	38s	13.58 GB		component: storage filesystem: /var/snap/...

I choose “latest data” for example

## 2.2.4. SET UP AGENT (WINDOW)

Download window agent :

[Download Zabbix agents](#)

Install and fill the ip of zabbix server.

**Host**

Host IPMI Tags Macros Inventory Encryption Value mapping

\* Host name:

Visible name:

Templates

Name	Action
Windows by Zabbix agent	Unlink Unlink and clear

type here to search

\* Host groups:

Interfaces

Type	IP address	DNS name	Connect to	Port	Default
Agent	<input type="text" value="10.0.2.6"/>	<input type="text"/>	<input checked="" type="radio"/> IP <input type="radio"/> DNS	<input type="text" value="10050"/>	<input checked="" type="radio"/> Remove


Description:

Go to server and configure client with Host name and its ip address.

=>Result :

Name ▲	Interface	Availability	Tags	Status	Latest data	Problems	Graphs	Dashboard
DESKTOP-D0I6728	10.0.2.6:10050	ZBX	class: os target: windows	Enabled	Latest data 101	1	Graphs 11	Dashboard
duc-VirtualBox	10.0.2.4:10050	ZBX	class: os target: linux	Enabled	Latest data 68	1	Graphs 14	Dashboard
Zabbix server	127.0.0.1:10050	ZBX	class: os class: software target: linux ...	Enabled	Latest data 125	Problems	Graphs 25	Dashboard

Window agent is monitored.

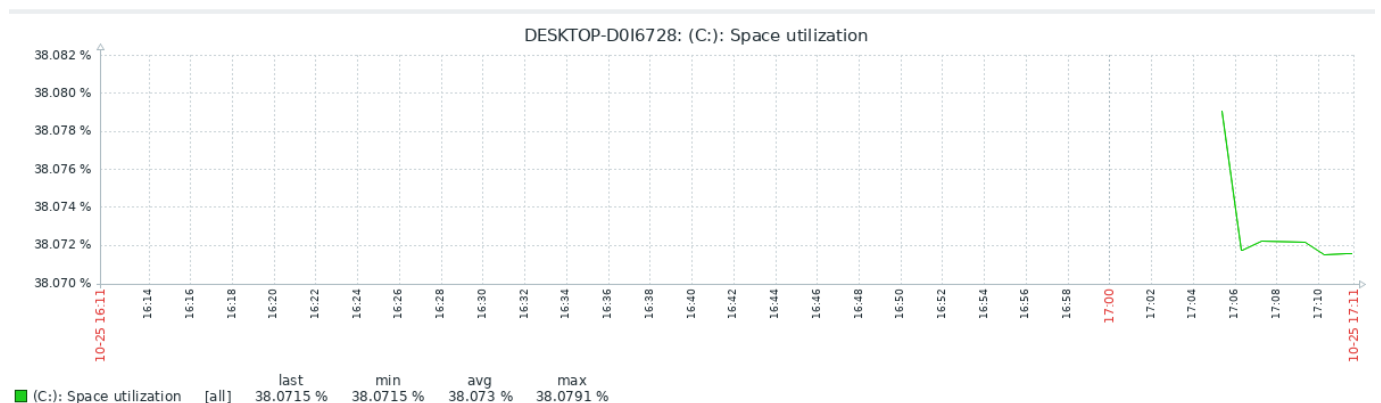



Some of its graphs 's information

## 2.2.5 SET UP (WEBSERVER / WEBSITES) FOR MONITORING


Configuration -> hosts->Create host->Add

The screenshot shows the Zabbix web interface in a browser window. The address bar shows the URL `127.0.0.1/zabbix/zabbix.php?action=host.edit`. The main content area displays the 'New host' configuration form. The 'Host name' field contains 'Web monitoring'. The 'Visible name' field also contains 'Web monitoring'. The 'Templates' field has a search box with the text 'type here to search' and a 'Select' button. The 'Host groups' field shows 'AGENTS' selected with a dropdown arrow and a 'Select' button. The 'Interfaces' section states 'No interfaces are defined.' with an 'Add' link below it. The 'Description' field is a large empty text area. At the bottom right of the form are 'Add' and 'Cancel' buttons.

Diifer from window and linux monitoring , Hostname of website can be set by my opinion .

<input type="checkbox"/>	Name ▲	Items	Triggers	Graphs	Discovery	Web	Interface	Proxy	Templates	Status	Availability	Agent er
<input type="checkbox"/>	DESKTOP-D0I6728	Items 101	Triggers 70	Graphs 11	Discovery 4	Web	10.0.2.6:10050		Windows by Zabbix agent	Enabled	ZBX	None
<input type="checkbox"/>	duc-VirtualBox	Items 68	Triggers 27	Graphs 14	Discovery 3	Web	10.0.2.4:10050		Linux by Zabbix agent	Enabled	ZBX	None
<input type="checkbox"/>	Web monitoring	Items	Triggers	Graphs	Discovery	Web				Enabled		None
<input type="checkbox"/>	Zabbix server	Items 125	Triggers 69	Graphs 25	Discovery 4	Web	127.0.0.1:10050		Linux by Zabbix agent, Zabbix server health	Enabled	ZBX	None

Click on “web” button of “Web monitoring” to configure its feature

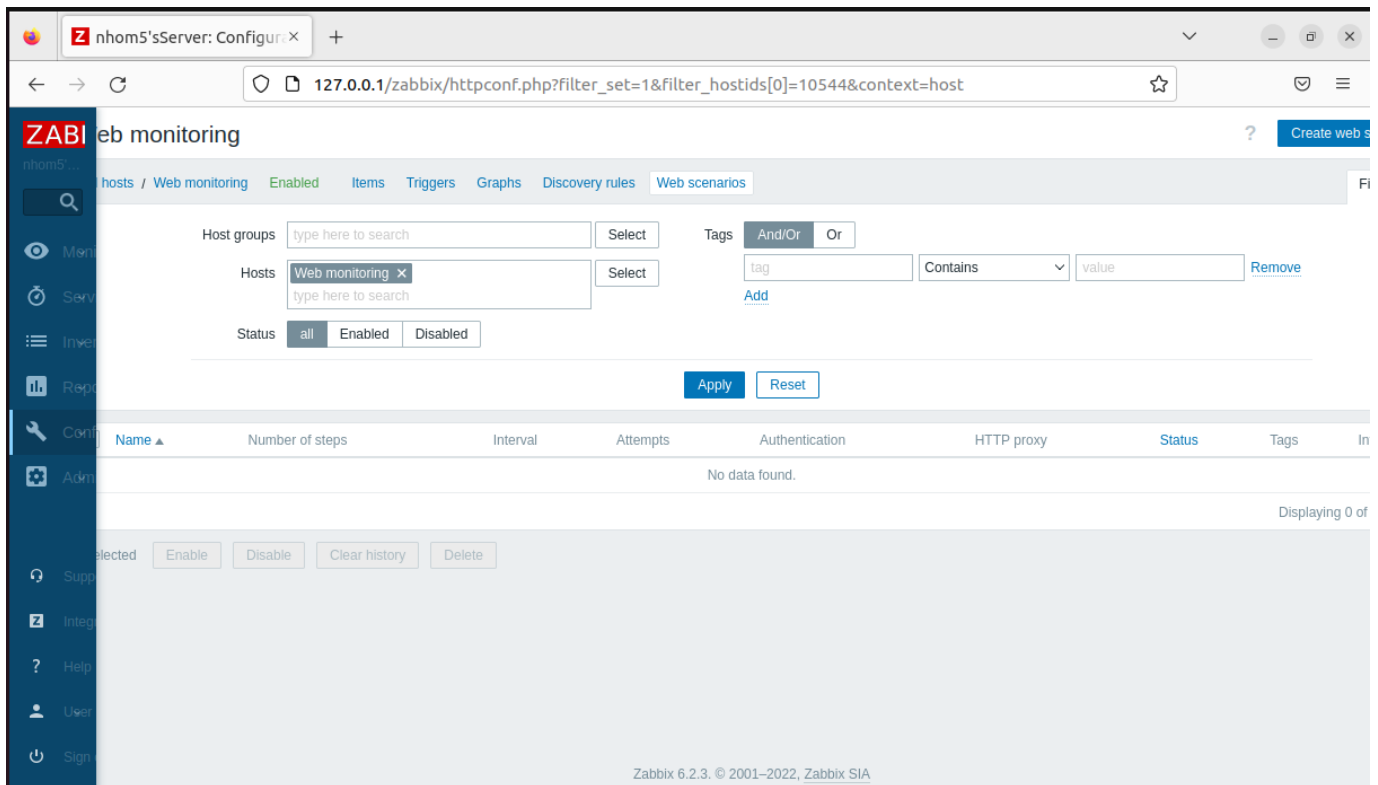

Next, “Create web scenario” in the top right corner

**Web monitoring**

All hosts / Web monitoring Enabled Items Triggers Graphs Discovery rules Web scenarios

Scenario Steps Tags Authentication

\* Name Zabbix documentation

\* Update interval 10s

\* Attempts 10

Agent Zabbix

HTTP proxy

Variables

Name	Value	
name	value	Remove

Add

Headers

Name	Value	
name	value	Remove

Add

Enabled ☒

Add Cancel

Now, I can see a lot of parameters to fill in.

Name's field is optional

**Update interval** : how often I want to check my website

**Attempts** : how many times I want to collect data from the web

**Agent** : kind of browser I want to monitor

**Variables and headers** : the purpose of these set up is to check the page is it up or is running , check the response code

Ex: Some sort of forum , I want to log in , post some sort of comments , verify that this comment is pushlished , ...

**Web monitoring**

All hosts / Web monitoring Enabled Items Triggers Graphs Discovery rules Web scenarios

Scenario Steps Tags Authentication

\* Steps

Name	Timeout	URL	Required	Status codes	Action
<a href="#">Add</a>					

[Add](#) [Cancel](#)

Move to “step” and click add

**Step of web scenario** ? x

\* Name

\* URL  [Parse](#)

Query fields

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <a href="#">Remove</a>

[Add](#)

Post type [Form data](#) [Raw data](#)

Post fields

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <a href="#">Remove</a>

[Add](#)

Variables

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <a href="#">Remove</a>

[Add](#)

[Add](#) [Cancel](#)

## Step of web scenario



Variables

Name	Value	
name	value	Remove

Add

Headers

Name	Value	
name	value	Remove

Add

Follow redirects ☒

Retrieve mode 

Body Headers Body and headers

\* Timeout

Required string

Required status codes

Add Cancel

**Post type** : post the form data or the raw data

**Post field** : what kind of post fields with the values I want to add variables and headers .This is only used if I want to login , post some content and check its conditions (for the simple monitoring I'll skip this )

**Follow redirects** : depends on webpage's configuration . Whether this url is opening the web page right away or there is some sort of redirect

**Retrieve mode** : Full body or just the header of the reponses or both . Also can apply the curl request through CLI when checking some sort of the webpage

**Time out** : what will be the timeout for this check

**Required string** : allow to check some sort of the string in the webpage I try to open . I can check for "whatever string" in the web page



The required status code : this should be http code and if everything is correct  
=>The expected code is 200

Click Add.

This demo I'll check two pages so this is the configuration of the second page :

**Step of web scenario** ? X

\* Name

\* URL  Parse

Query fields

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <span>Remove</span>

[Add](#)

Post type Form data Raw data

Post fields

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <span>Remove</span>

[Add](#)

Variables

Name	Value	
<input type="text" value="name"/>	⇒	<input type="text" value="value"/> <span>Remove</span>

[Add](#)

Add Cancel

## Step of web scenario

? X

**Variables**

Name	Value	
name	value	Remove

[Add](#)

**Headers**

Name	Value	
name	value	Remove

[Add](#)

Follow redirects ☐

Retrieve mode **Body** Headers Body and headers

\* Timeout 15s

Required string Welcome

Required status codes 200

[Add](#) [Cancel](#)

**Web monitoring** [? Create web s](#)

Web scenario added

All hosts / Web monitoring Enabled Items Triggers Graphs Discovery rules Web scenarios 1

Host groups type here to search [Select](#) Tags **And/Or** Or

Hosts Web monitoring X type here to search [Select](#) tag Contains value [Remove](#)

Status all Enabled Disabled

[Apply](#) [Reset](#)

<input type="checkbox"/> Name	Number of steps	Interval	Attempts	Authentication	HTTP proxy	Status	Tags
<input type="checkbox"/> Zabbix documentation	2	10s	10	None	No	Enabled	

Displaying 1 of

After added two steps in the scenario .Let's go to Monitoring->Hosts

Name	Interface	Availability	Tags	Status	Latest data	Problems	Graphs	Dashboards	Web
DESKTOP-D016728	10.0.2.6:10050	75%	class: os target: windows	Enabled	Latest data 101	1	Graphs 11	Dashboards 2	Web
duc-VirtualBox	10.0.2.4:10050	20%	class: os target: linux	Enabled	Latest data 68	1	Graphs 14	Dashboards 2	Web
Web monitoring				Enabled	Latest data 9	Problems	Graphs	Dashboards	Web 1
Zabbix server	127.0.0.1:10050	75%	class: os class: software target: linux ***	Enabled	Latest data 125	Problems	Graphs 25	Dashboards 4	Web

Displaying 4 of 4 found


In the “Web monitoring” has the “web” with the blue color , click on it and see its status

Host	Name	Number of steps	Last check	Status
Web monitoring	Zabbix documentation	2	7s	OK

Click “Zabbix documentaion” to have a closer look

Step	Speed	Response time	Response code	Status
First index page	49.78 KBps	299.66ms	200	OK
Second index page	72.66 KBps	209.94ms	200	OK
<b>TOTAL</b>		<b>509.6ms</b>		<b>OK</b>

I can see its speed , response time , response code , status and its graphs

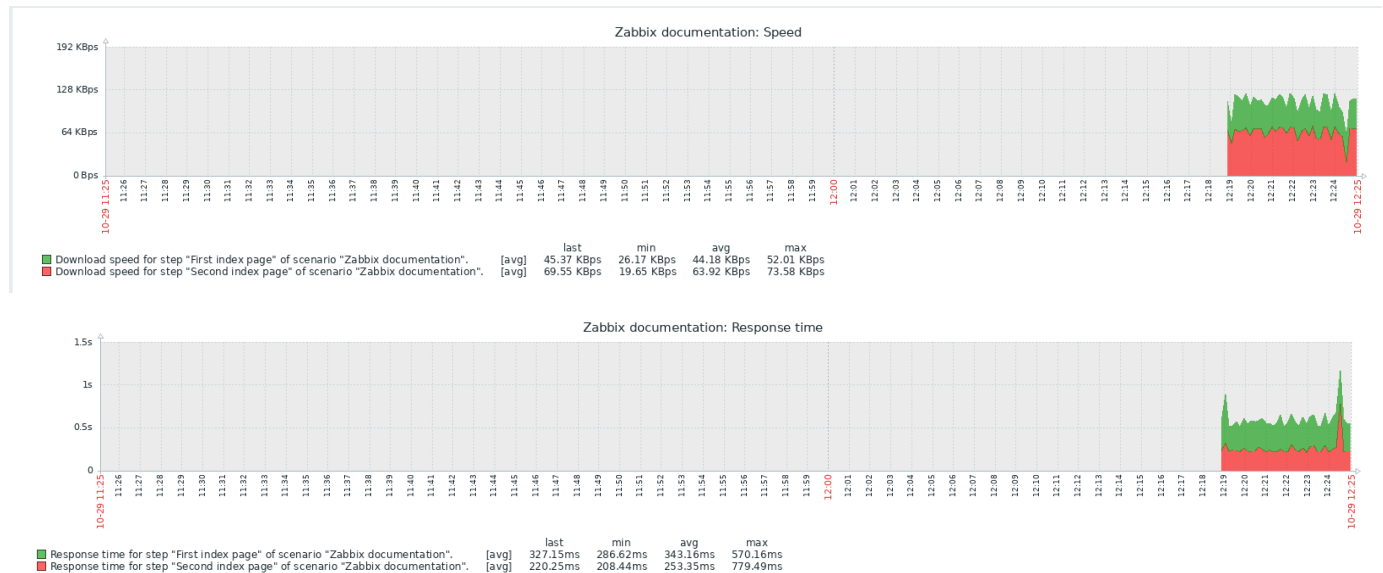

These pages don't support javascripts so as long as I log in form is using javascript most likely I will not be able to use tips and tricks or whatever else to successfully log in using the web scenario

There is no IF – ELSE . Ex : I created multiple steps no limitations , if the first step fails then all scenario fails and there is no way I can do the if else scenario

I created a trigger for my monitoring

( **Triggers** are logical **expressions** that "evaluate" **data gathered by items** and **represent the current system state** )

Configuration -> Hosts -> “Web monitoring” -> triggers -> Create triggers

Trigger Tags Dependencies

\* Name: Downloaded speed is super high

Event name: Downloaded speed is super high

Operational data:

Severity: Not classified Information Warning Average **High** Disaster

\* Expression: `last(/Web_monitoring/web.test.in[Zabbix documentation,First index page, bps]) > 5` Add

Expression constructor

OK event generation: Expression Recovery expression None

PROBLEM event generation mode: Single Multiple

OK event closes: All problems All problems if tag values match

Allow manual close: ☐

URL:

Description:

Enabled: ☒

Add Cancel

In this trigger , I set up if last value is higher than 5 then it'll be a high severity problem  
->Click add

In the previous data , the first index page's download speed is much higher than 5 . Now I go to **Monitoring -> Dashboard-> Global view** to see what are showed .

Current problems <span>⚙️ ...</span>							
Time ▼	Info	Host	Problem • Severity	Duration	Ack	Actions	Tags
12:50:53	Web monitoring		Downloaded speed is super high	1m 59s	No		
12:00							
10:06:48	DESKTOP-D0I6728		Zabbix agent is not available (for 3m)	2h 46m 4s	No		class: os component: system scope: availability ...
Today							
2022-10-25 16:52:24	duc-VirtualBox		Zabbix agent is not available (for 3m)	3d 20h	No		class: os component: system scope: availability ...

The problems are showed .

P/s : There are more informations than just download speed , ... depends on my configuration and what I want to see .

---

## **ADDITIONS : MORE ABOUT ZABBIX**

Zabbix is 100% Enterprise-ready

### **Unlimited scalability**

- From monitoring smart home to multi-tenant enterprise environments - Zabbix is scalable to any infrastructure.

### **Distributed monitoring**

- Deploy and scale a distributed Zabbix infrastructure from a central Web UI with native encryption support between all of the components.

Secured and safe

- Keep sensitive information secure by storing it in an external vault.

### **High availability**

- Ensure 24/7 uptime and negate the risk of data loss for Zabbix infrastructure with Zabbix high availability solution.

### **Flexible**

- Monitor whatever we want - Zabbix comes with many different ways to collect data, transform it, analyze and visualize it.

---

## **III.SELF-ASSESSMENT**

	1	2	3	4	overall
present			x		3
demo			x		3
theory				x	4
report				x	4

## IV. ANSWER

---

1. Can zabbix monitor while on MacOS ?

- Chúng ta chưa thể giám sát trên MacOS
- Tham khảo 1 số loại hệ điều hành khác mà chạy được zabbix server
- <https://www.zabbix.com/download>

---

2. Zabbix hoạt động có yêu cầu giao diện trong giao diện người dùng Zabbix không ?

- Có yêu cầu giao diện người dùng

---

3. What problems does Zabbix have when using a network larger than 1000+ nodes.

- Trong video demo chỉ có vài client nên cài đặt client trên UI khá dễ dàng nhưng khi có trên 1000 clients thì sẽ không thể sử dụng cách này thay vào đó sẽ dùng phương thức khác (Network discovery hoặc low-level discovery)
- 

**HẾT**