


Structure

- Inline code and results
- Inline code starts with ``r`` and ends with ```
- Results should be numerical or text, nothing complex

You can also add R code inline: The average fuel efficiency of the cars is ``r round(mean(mtcars$mpg),2)`` MPG.

You can also add R code inline: The average fuel efficiency of the cars is 20.09 MPG.

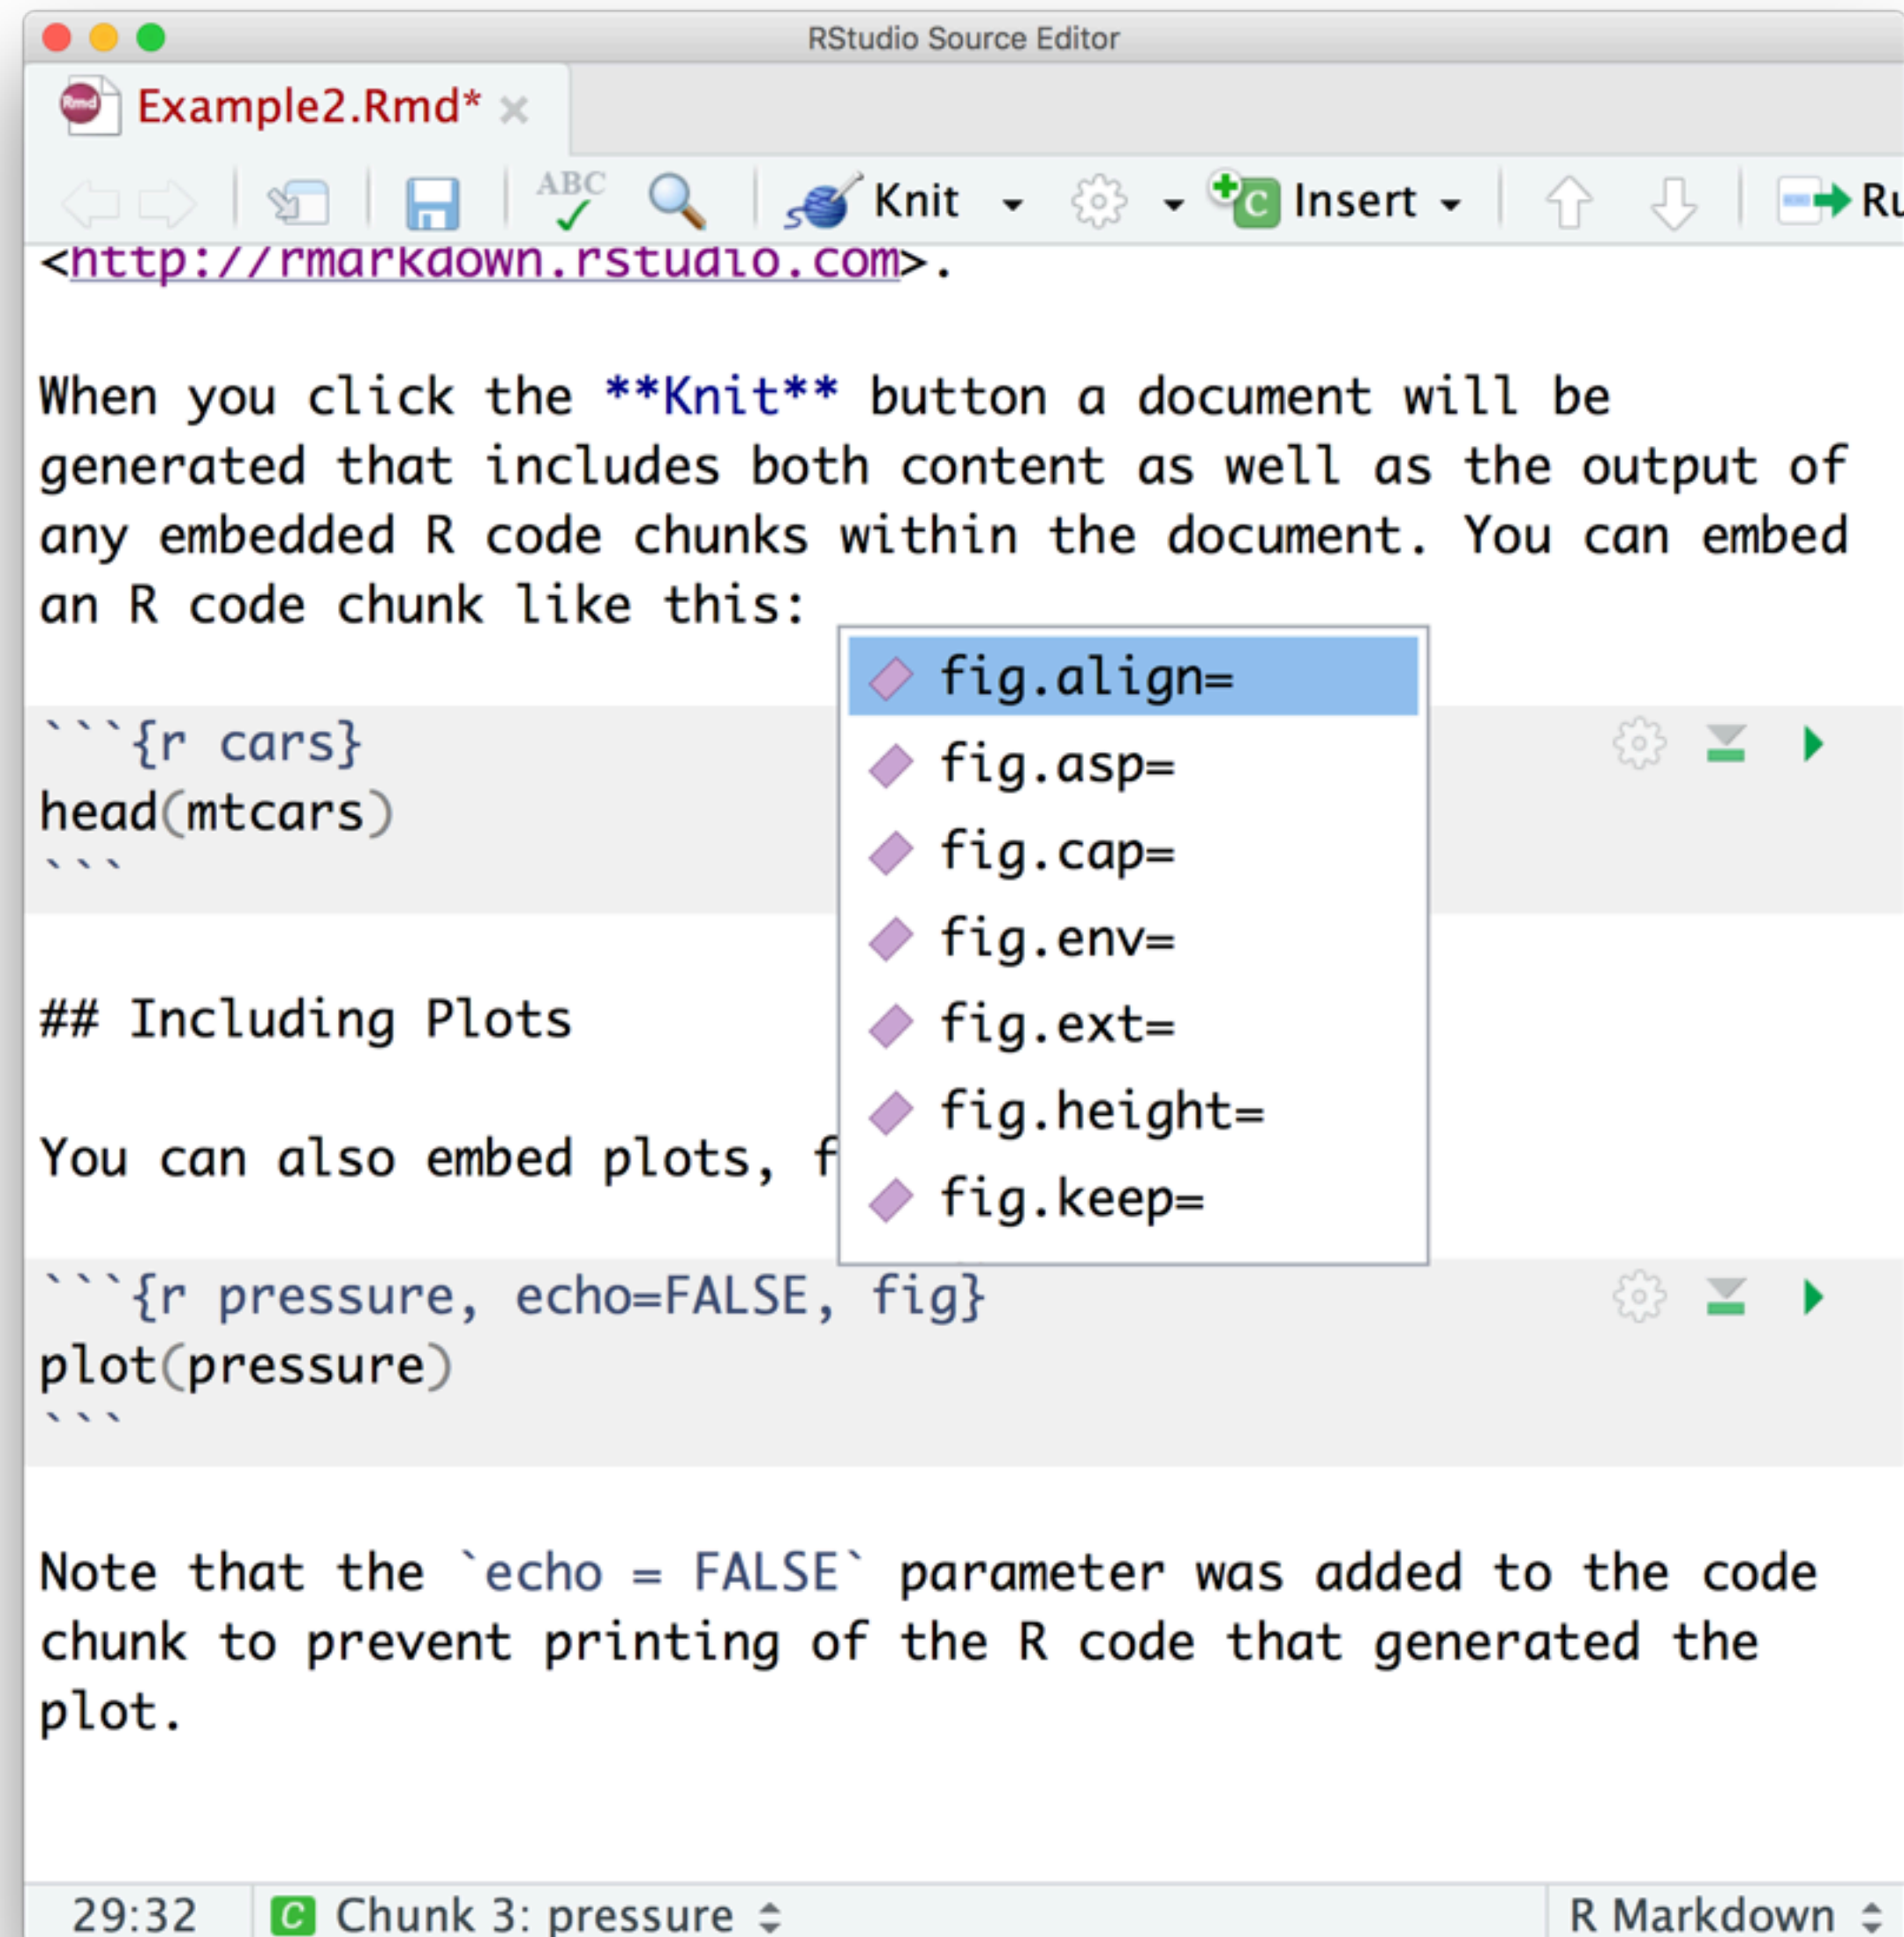

rmarkdown is baked into RStudio

- Chunk options show up as tooltips
- See the knitr documentation for all options
- <https://yihui.name/knitr>