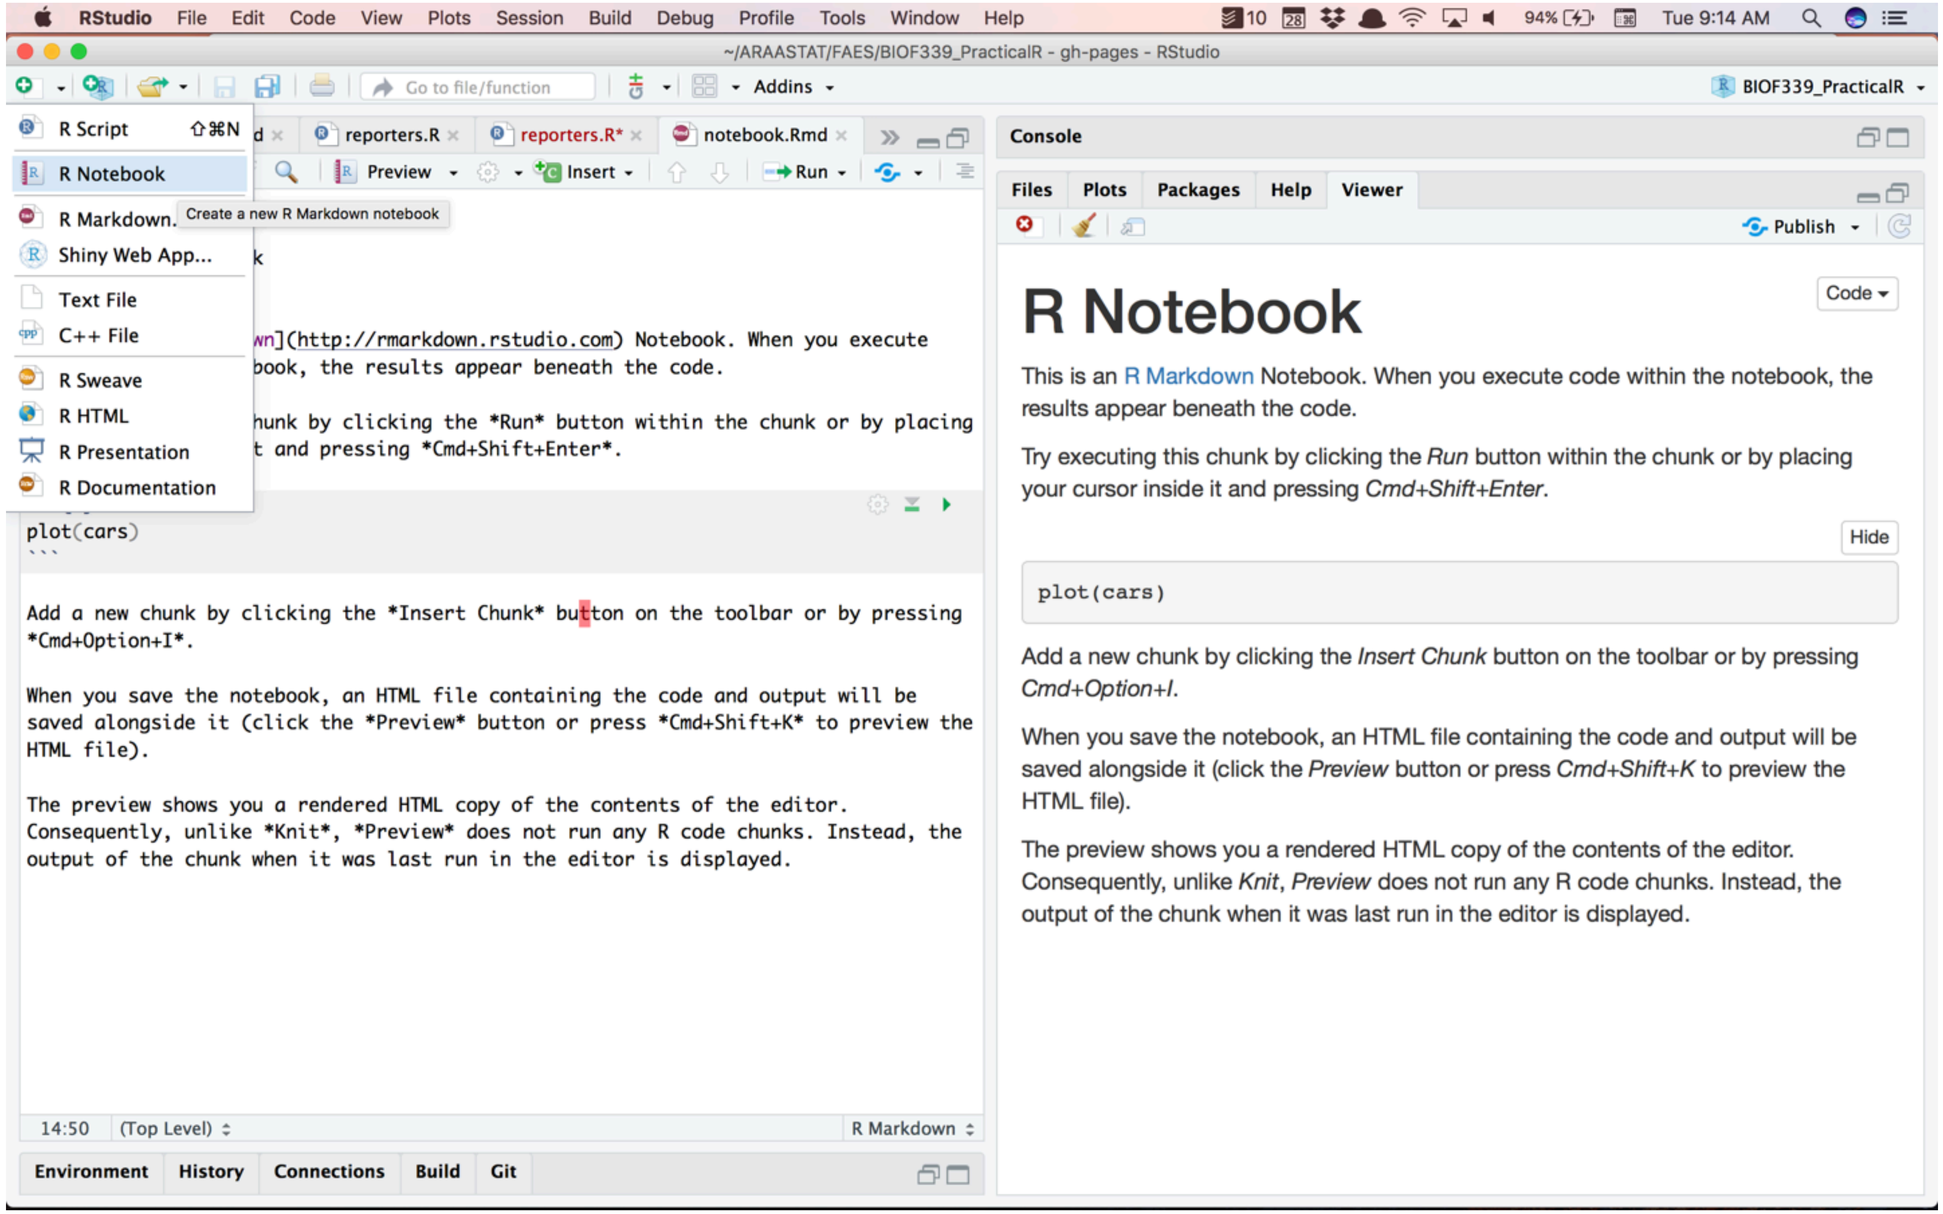
RStudio File Edit Code View Plots Session Build Debug Profile Tools Window Help
Tue 9:14 AM
~/ARAASTAT/FAES/BIOF339_PracticalR - gh-pages - RStudio
Go to file/function
Addins
BIOF339_PracticalR
R Script ⇧⌘N
R Notebook
R Markdown...
Create a new R Markdown notebook
Shiny Web App...
Text File
C++ File
R Sweave
R HTML
R Presentation
R Documentation
reporters.R
reporters.R*
notebook.Rmd
Preview
Insert
Run
plot(cars)
Add a new chunk by clicking the *Insert Chunk* button on the toolbar or by pressing *Cmd+Option+I*.
When you save the notebook, an HTML file containing the code and output will be saved alongside it (click the *Preview* button or press *Cmd+Shift+K* to preview the HTML file).
The preview shows you a rendered HTML copy of the contents of the editor. Consequently, unlike *Knit*, *Preview* does not run any R code chunks. Instead, the output of the chunk when it was last run in the editor is displayed.
14:50
(Top Level)
R Markdown
Environment
History
Connections
Build
Git
Console
Files
Plots
Packages
Help
Viewer
Publish
R Notebook
Code
This is an R Markdown Notebook. When you execute code within the notebook, the results appear beneath the code.
Try executing this chunk by clicking the Run button within the chunk or by placing your cursor inside it and pressing Cmd+Shift+Enter.
Hide
plot(cars)
Add a new chunk by clicking the Insert Chunk button on the toolbar or by pressing Cmd+Option+I.
When you save the notebook, an HTML file containing the code and output will be saved alongside it (click the Preview button or press Cmd+Shift+K to preview the HTML file).
The preview shows you a rendered HTML copy of the contents of the editor. Consequently, unlike Knit, Preview does not run any R code chunks. Instead, the output of the chunk when it was last run in the editor is displayed.

~/ARAASTAT/FAES/BIOF339_PracticalR - gh-pages - RStudio

Go to file/function | Addins | BIOF339_PracticalR

d | BiasVariance.Rmd | reporters.R | reporters.R* | notebook.Rmd

Preview | Insert | Run

```
---
title: "R Notebook"
output: html_notebook
---

This is an [R Markdown](http://rmarkdown.rstudio.com) Notebook. When you execute
code within the notebook, the results appear beneath the code.

Try executing this chunk by clicking the *Run* button within the chunk or by placing
your cursor inside it and pressing *Cmd+Shift+Enter*.

```{r}
plot(cars)
```

Add a new chunk by clicking the *Insert Chunk* button on the toolbar or by pressing
Cmd+Option+I.

When you save the notebook, an HTML file containing the code and output will be
saved alongside it (click the *Preview* button or press *Cmd+Shift+K* to preview the
HTML file).

The preview shows you a rendered HTML copy of the contents of the editor.
Consequently, unlike *Knit*, *Preview* does not run any R code chunks. Instead, the
output of the chunk when it was last run in the editor is displayed.
```

14:50 (Top Level) R Markdown

Environment | History | Connections | Build | Git

Console

Files | Plots | Packages | Help | Viewer

Publish

Code

R Notebook

This is an R Markdown Notebook. When you execute code within the notebook, the results appear beneath the code.

Try executing this chunk by clicking the *Run* button within the chunk or by placing your cursor inside it and pressing *Cmd+Shift+Enter*.

Hide

```
plot(cars)
```

Add a new chunk by clicking the *Insert Chunk* button on the toolbar or by pressing *Cmd+Option+I*.

When you save the notebook, an HTML file containing the code and output will be saved alongside it (click the *Preview* button or press *Cmd+Shift+K* to preview the HTML file).

The preview shows you a rendered HTML copy of the contents of the editor. Consequently, unlike *Knit*, *Preview* does not run any R code chunks. Instead, the output of the chunk when it was last run in the editor is displayed.