


Structure

- Code chunk
 - Starts with ````{r}`
 - Can name the chunk using ````{r name}`
 - Can add options separated by commas
 - Any valid R code can be put in chunk
 - Ends with `````

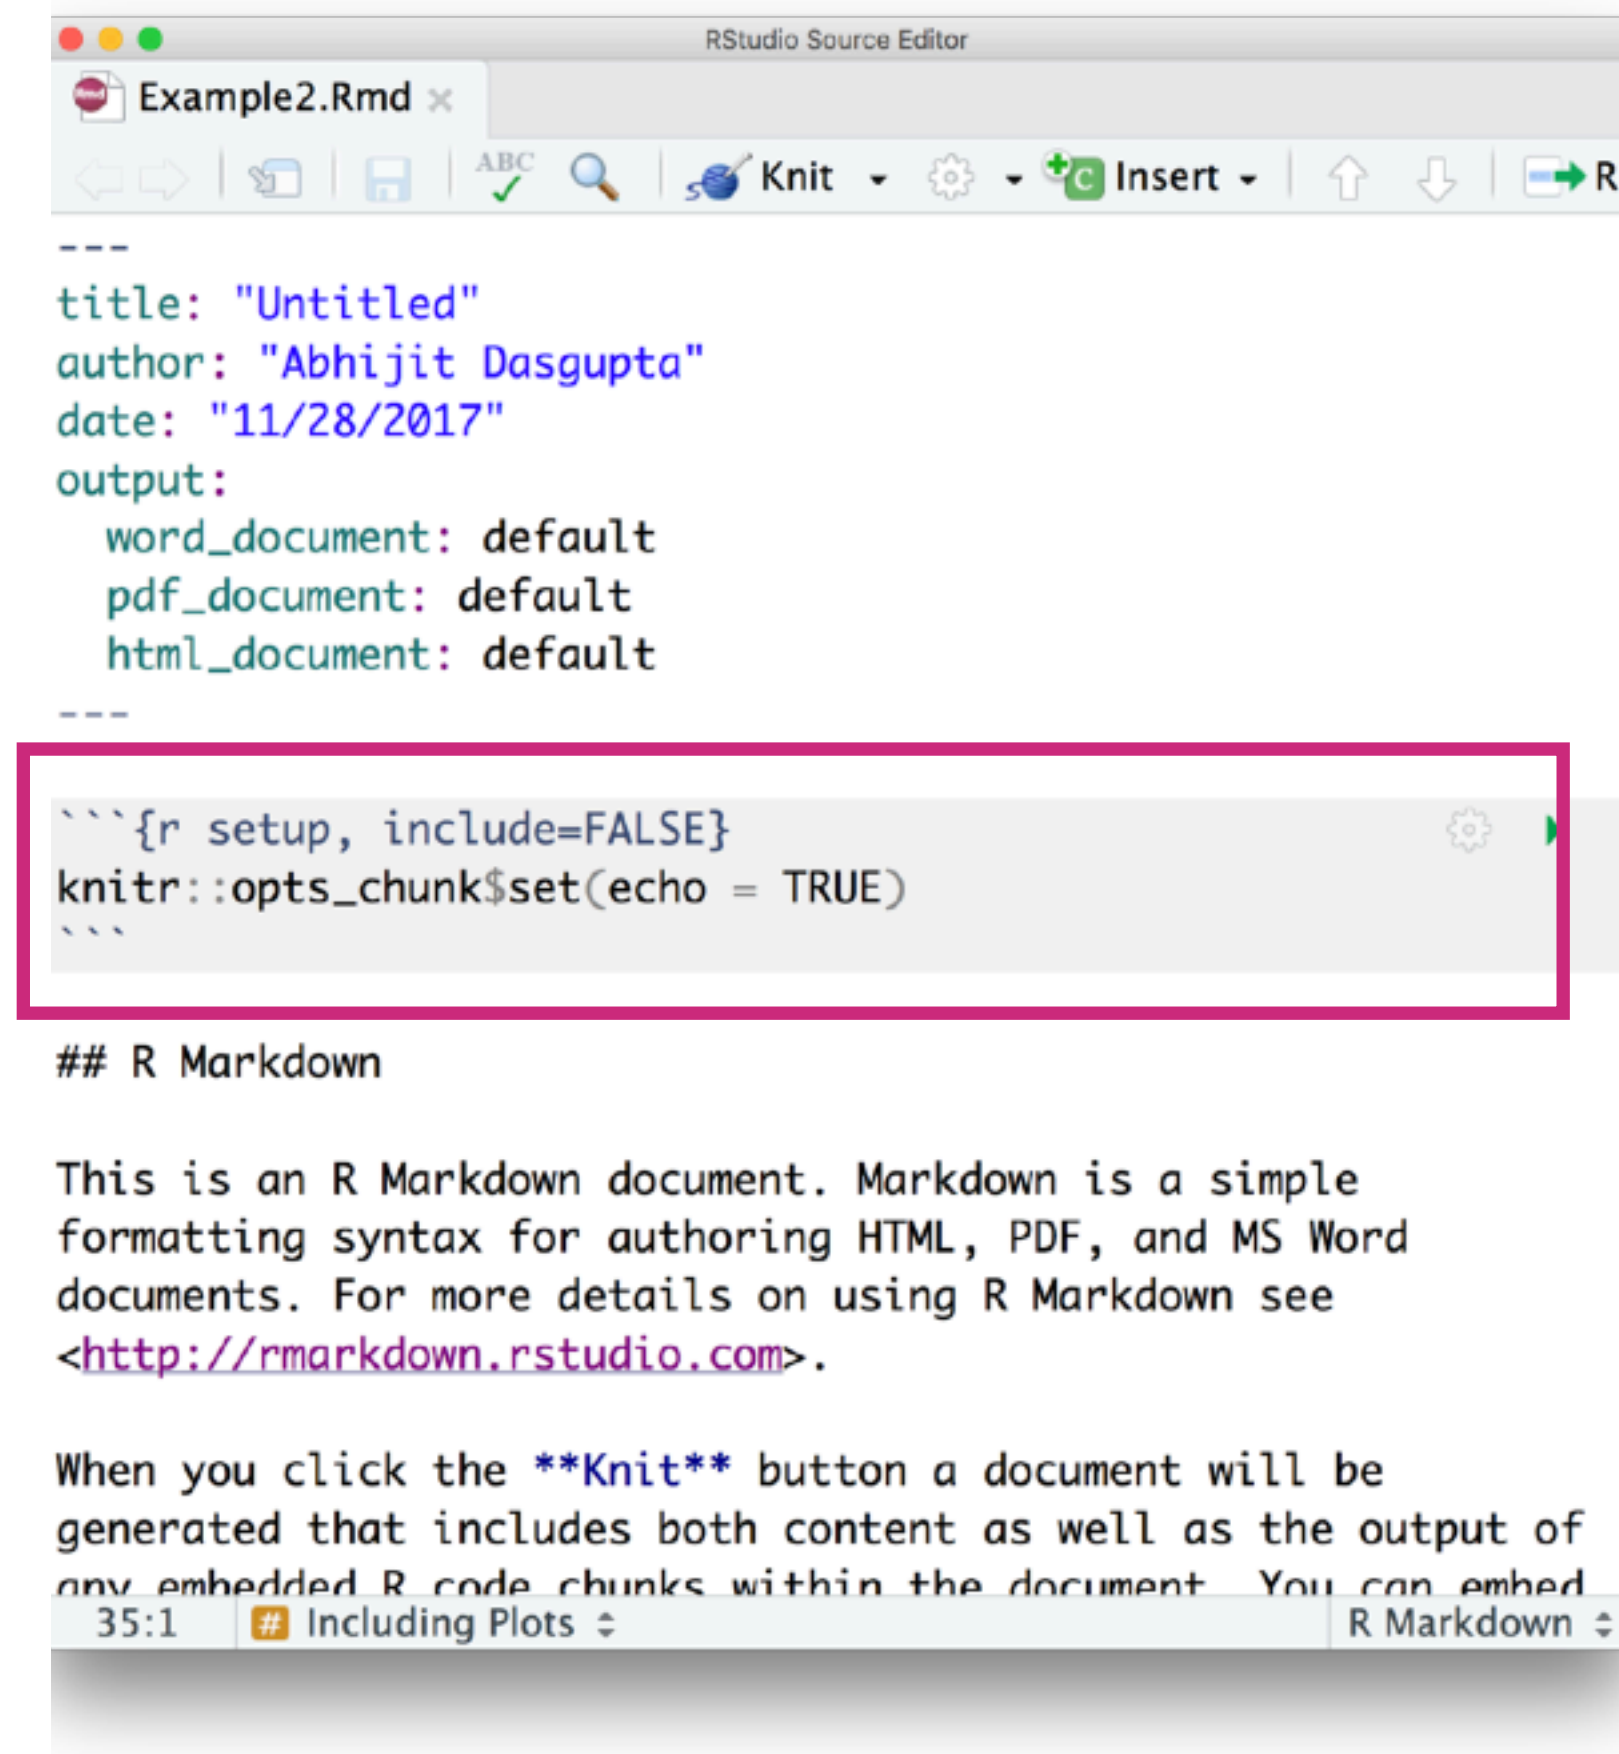

Structure

- Inline code and results
- Inline code starts with ``r`` and ends with ```
- Results should be numerical or text, nothing complex

You can also add R code inline: The average fuel efficiency of the cars is ``r round(mean(mtcars$mpg),2)`` MPG.

You can also add R code inline: The average fuel efficiency of the cars is 20.09 MPG.