

# Example RMarkdown

Andee Kaplan

8/29/2020

## Section

### Subsection

#### Subsubsection

**bold text**

*italics*

This is a bulleted list:

- one
- bullet
- two
- bullet

This is a numbered list:

1. one
2. two
3. three

## R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   : 2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```

## Including Plots

You can also embed plots, for example:

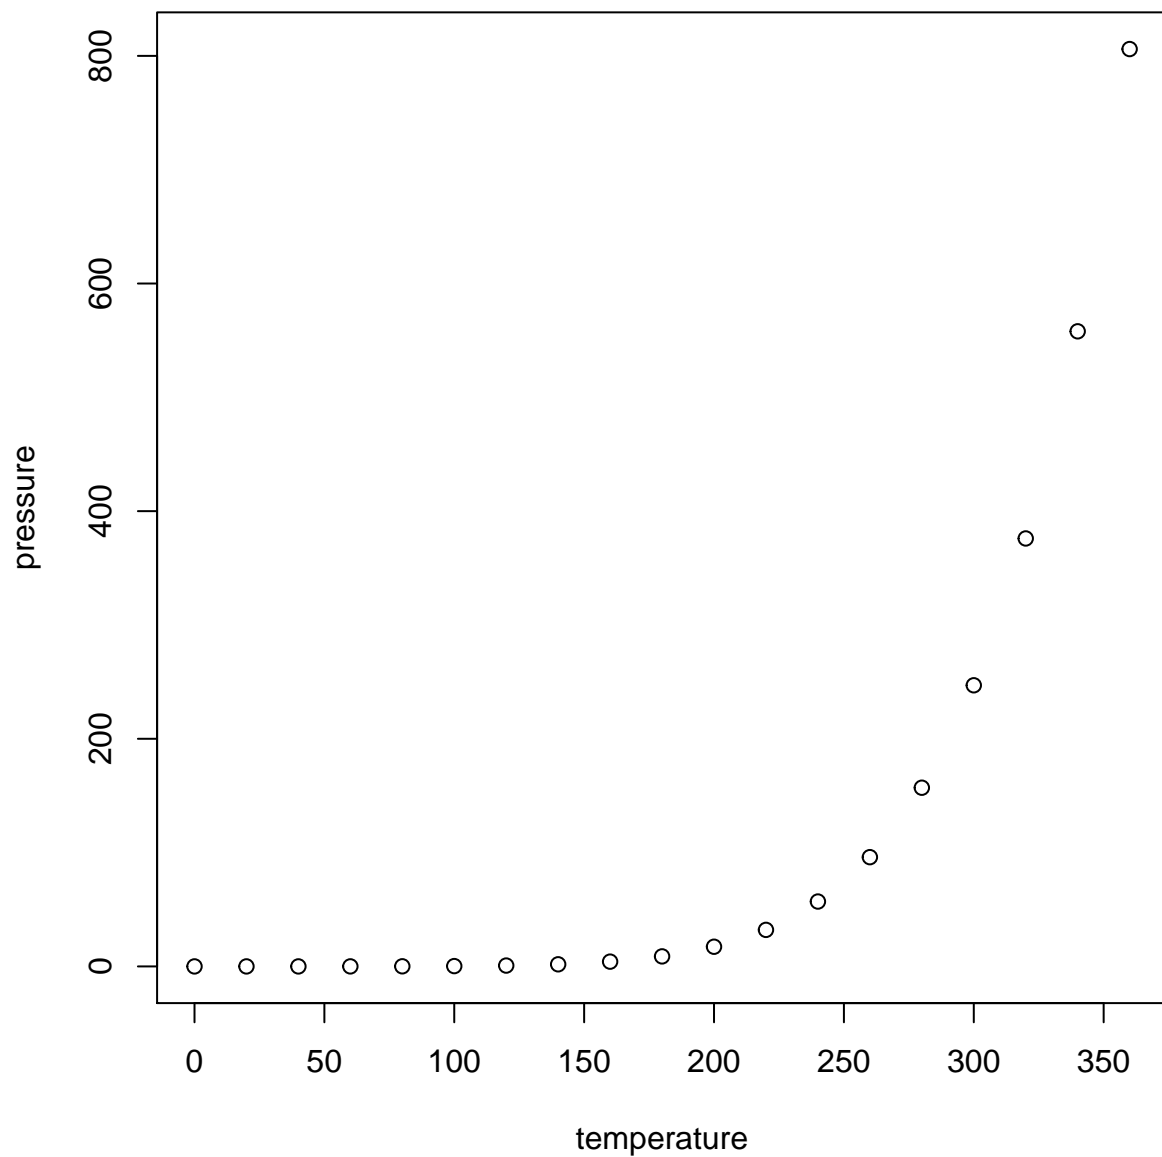


Figure 1: This is a pretty picture!

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

```
# code goes here
```