

# Lecture 8


## *Data Science for Business Analytics*

Thibault Vatter

Department of Statistics, Columbia University

04/27/2020

- This morning:
  - ▶ R markdown presentations and dashboards.
  - ▶ Interactivity
- This afternoon:
  - ▶ Guest lectures

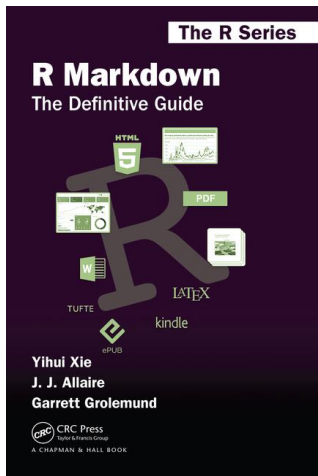

## ■ The Rmarkdown book

- ▶ Example applications
- ▶ Cheatsheets
- ▶ Syntax
- ▶ Other languages
- ▶ Interactive documents
- ▶ Output formats
- ▶ Extensions
- ▶ Books

- R Markdown to produce presentations:
  - ▶ Less visual control than with Keynote/PowerPoint.
  - ▶ But automatically inserting the R code results saves huge amounts of time.
- Presentations work by dividing your content into slides:
  - ▶ New slide beginning at each first (#) or second (##) level header.
  - ▶ Horizontal rule (----) for a slide without header.
- More in the dedicated chapter of the Rmarkdown book

Three presentations formats built-in:

1. `beamer_presentation` - PDF presentation with LaTeX Beamer.
2. `ioslides_presentation` - HTML presentation with ioslides.
3. `slidy_presentation` - HTML presentation with W3C Slidy.

Other formats are provided by packages:

4. `revealjs::revealjs_presentation` - HTML presentation with revealjs
5. `rmdshower::shower_presentation` is a wrapper around `shower`

- Useful to communicate large amounts of information visually and quickly.
- E.g., at-a-glance views of KPIs relevant to a particular objective/business process.

## flexdashboard:

- Each level 1 header (#) begins a new page in the dashboard.
- Each level 2 header (##) begins a new column.
- Each level 3 header (###) begins a new row.
- Similarly simple tools for creating sidebars, tabsets, value boxes, gauges, etc.

Any HTML format can contain interactive components:

- [htmlwidgets](#) are R packages/functions for interactive HTML visualisations.
- No knowledge of HTML or JavaScript needed to use them.
- Details are wrapped inside the package, so no need to worry about it.

Packages that provide [htmlwidgets](#):

- [DT](#) for interactive tables.
- [leaflet](#) for interactive maps.
- [dygraphs](#) for interactive time series visualisations.
- [threejs](#) for interactive 3d plots.
- ... and many more!