

Lab #2 - Gapminder Dataset

Econ 224

August 30th, 2018


Introduction

Today we'll revisit the `gapminder` dataset and use it to introduce some more advanced features of `dplyr` and `ggplot2`, building on the material from our first lab. Before you begin, make sure that you have loaded the `tidyverse` and `gapminder` packages.

Faceting - Plotting multiple subsets at once


Let's pick up where we left off in lab #1, with a plot of GDP per capita and life expectancy in 2007:

```
gapminder_2007 <- gapminder %>%  
  filter(year == 2007)  
ggplot(gapminder_2007) +  
  geom_point(aes(x = gdpPercap, y = lifeExp, color = continent, size = pop)) +  
  scale_x_log10()
```

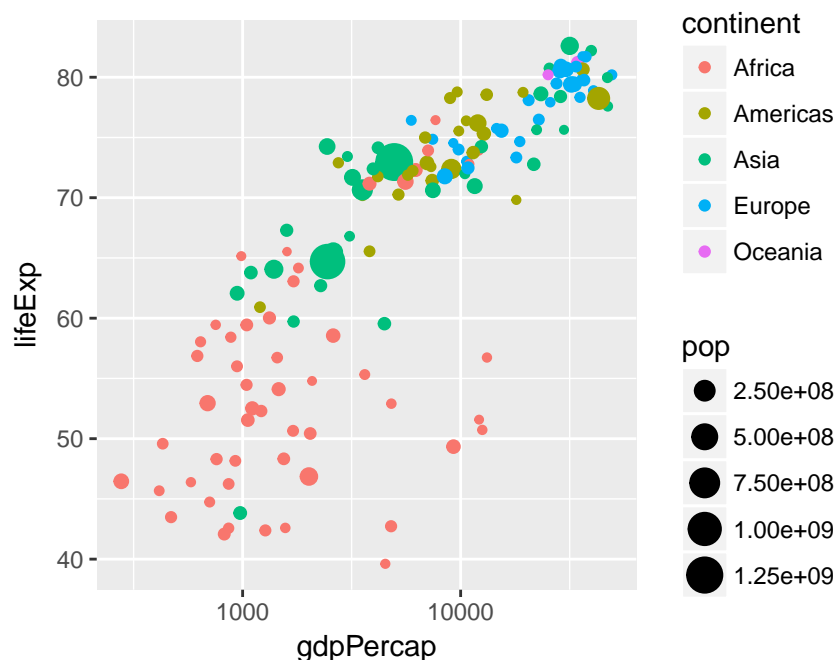

This is an easy way to make a plot for a single year. But what if you wanted to make the same plot for *every year* in the `gapminder` dataset? It would take a lot of copying-and-pasting of the preceding code chunk to accomplish this. Fortunately there's a much easier way: *faceting*. In `ggplot2` a *facet* is a subplot that corresponds to a subset of your dataset, for example the year 2007. We'll now use faceting to reproduce the plot from above for all the years in `gapminder` simultaneously:

```
ggplot(gapminder) +
  geom_point(aes(x = gdpPercap, y = lifeExp, color = continent, size = pop)) +
  scale_x_log10() +
  facet_wrap(~ year)
```

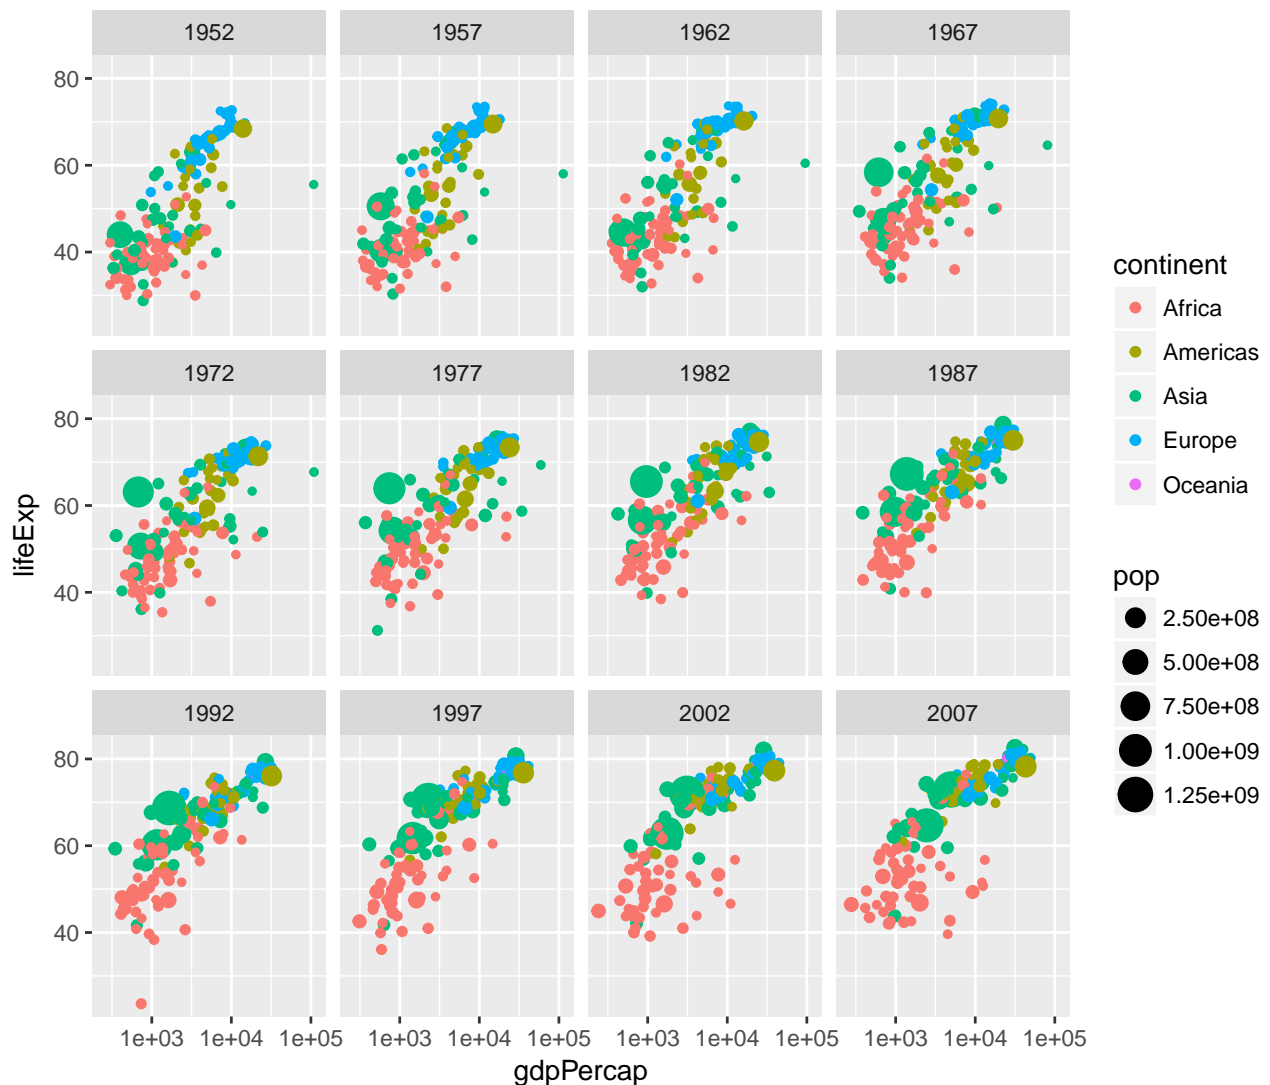

Note the syntax here: in a similar way to how we added `scale_x_log10()` to plot on the log scale, we add `facet_wrap(~ year)` to facet by `year`. The tilde `~` is important: this has to precede the variable by which you want to facet.

Now that we understand how to produce it, let's take a closer look at this plot. Notice how this plot allows us to visualize five variables *simultaneously*. By looking at how the plots change over time, we see a pattern of increasing GDP per capita and life expectancy throughout the world between 1952 and 2007. Notice in particular the dramatic improvements in both variables in the Asian economies.

Exercise #1

1. What would happen if I were to run the following code? Explain briefly.

```
ggplot(gapminder_2007) +
  geom_point(aes(x = gdpPercap, y = lifeExp, color = continent, size = pop)) +
  scale_x_log10() +
  facet_wrap(~ year)
```


2. Make a scatterplot with data from `gapminder` for the year 1977. Your plot should be faceted by continent with GDP per capita on the log scale on the x-axis, life expectancy on the y-axis, and population indicated by the size of each point.
3. What would happen if you tried to facet by `pop`? Explain briefly.

Solution to Exercise #1

Write your code and solutions here


1. We'll only get one facet since the tibble `gapminder_2007` only has data for 2007:

```
ggplot(gapminder_2007) +
  geom_point(aes(x = gdpPercap, y = lifeExp, color = continent, size = pop)) +
  scale_x_log10() +
  facet_wrap(~ year)
```

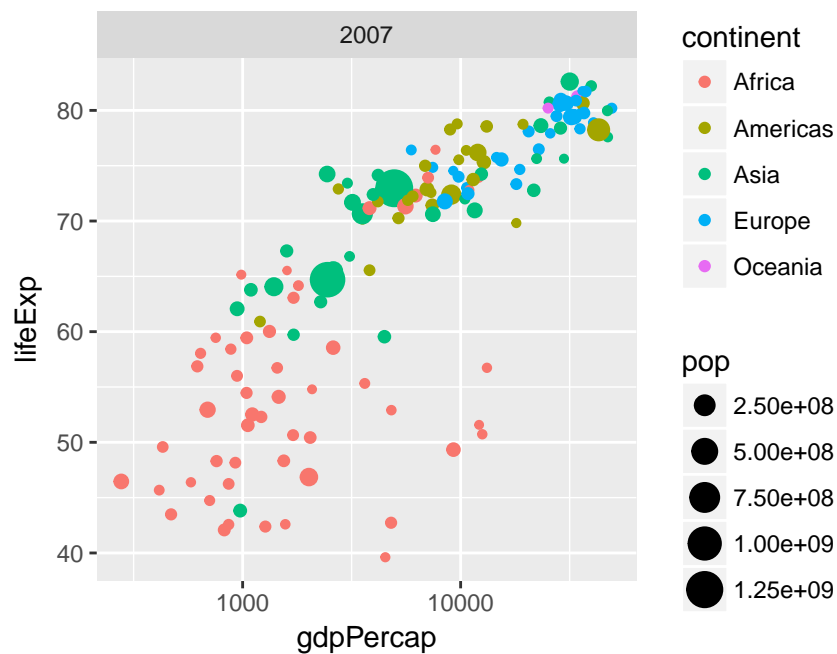

2. Use the following code:

```
gapminder_1977 <- gapminder %>%
  filter(year == 1977)
ggplot(gapminder_1977) +
  geom_point(aes(x = gdpPercap, y = lifeExp, size = pop)) +
  scale_x_log10() +
  facet_wrap(~ continent)
```

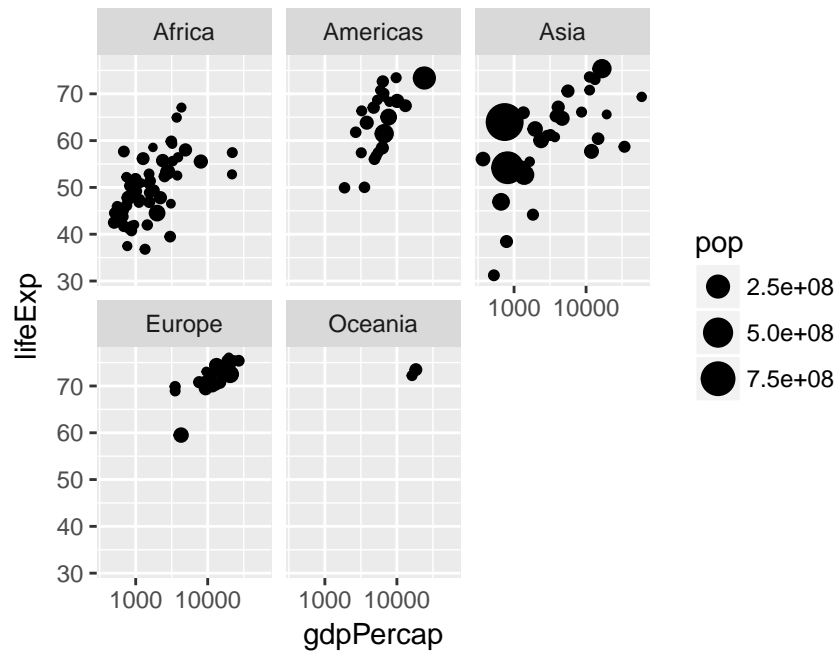

3. You'll get something crazy if you try this. Population is continuous rather than categorical so every country has a different value for this variable. You'll end up with one plot for every country, containing a single point:

```
# Not run: it takes a long time and looks nasty!
gapminder_1977 <- gapminder %>%
  filter(year == 1977)
ggplot(gapminder_1977) +
  geom_point(aes(x = gdpPercap, y = lifeExp, color = continent)) +
  scale_x_log10() +
  facet_wrap(~ pop)
```

dplyr verbs

For the next few sections we'll take a short break from `ggplot2` and turn our attention to `dplyr`. In lab #1 we learned about the pipe, `%>%`, and two `dplyr` functions: `filter()` and `arrange()`. In the parlance of the `dplyr` documentation, these are called “verbs.” In `dplyr` we use `%>%` to combine these verbs in various ways to manipulate a tibble. In this section and the following two, we'll learn three more `dplyr` verbs: `select`, `summarize` and `group_by`.

The select verb

We use the `select` verb to select columns. Using `select` we could do this as follows:

```
gapminder %>% select(pop)
```

```
# A tibble: 1,704 x 1
  pop
```

```

      <int>
1  8425333
2  9240934
3 10267083
4 11537966
5 13079460
6 14880372
7 12881816
8 13867957
9 16317921
10 22227415
# ... with 1,694 more rows

```

To display only `pop`, `country`, and `year`, use the following:

```
gapminder %>% select(pop, country, year)
```

```

# A tibble: 1,704 x 3
   pop country    year
   <int> <fct>    <int>
1  8425333 Afghanistan 1952
2  9240934 Afghanistan 1957
3 10267083 Afghanistan 1962
4 11537966 Afghanistan 1967
5 13079460 Afghanistan 1972
6 14880372 Afghanistan 1977
7 12881816 Afghanistan 1982
8 13867957 Afghanistan 1987
9 16317921 Afghanistan 1992
10 22227415 Afghanistan 1997
# ... with 1,694 more rows

```

Now suppose that we wanted to select every column *except* `pop`. Here's one way to do it:

```
gapminder %>% select(country, continent, year, lifeExp, gdpPercap)
```

```

# A tibble: 1,704 x 5
  country continent year lifeExp gdpPercap
  <fct>    <fct>    <int>   <dbl>   <dbl>
1 Afghanistan Asia      1952    28.8    779.
2 Afghanistan Asia      1957    30.3    821.
3 Afghanistan Asia      1962    32.0    853.
4 Afghanistan Asia      1967    34.0    836.
5 Afghanistan Asia      1972    36.1    740.
6 Afghanistan Asia      1977    38.4    786.
7 Afghanistan Asia      1982    39.9    978.
8 Afghanistan Asia      1987    40.8    852.
9 Afghanistan Asia      1992    41.7    649.
10 Afghanistan Asia      1997    41.8    635.
# ... with 1,694 more rows

```

but that takes a lot of typing! If there were more than a handful of columns in our tibble it would be very difficult to *deselect* a column in this way. Fortunately there's a shortcut: use the minus sign

```
gapminder %>% select(-pop)
```

```
# A tibble: 1,704 x 5
  country      continent  year lifeExp gdpPercap
  <fct>        <fct>    <int>   <dbl>   <dbl>
1 Afghanistan Asia      1952    28.8    779.
2 Afghanistan Asia      1957    30.3    821.
3 Afghanistan Asia      1962    32.0    853.
4 Afghanistan Asia      1967    34.0    836.
5 Afghanistan Asia      1972    36.1    740.
6 Afghanistan Asia      1977    38.4    786.
7 Afghanistan Asia      1982    39.9    978.
8 Afghanistan Asia      1987    40.8    852.
9 Afghanistan Asia      1992    41.7    649.
10 Afghanistan Asia      1997    41.8    635.
# ... with 1,694 more rows
```

Just as we could when *selecting*, we can *deselect* multiple columns by separating their names with a comma:

```
gapminder %>% select(-pop, -year)
```

```
# A tibble: 1,704 x 4
  country      continent lifeExp gdpPercap
  <fct>        <fct>    <dbl>   <dbl>
1 Afghanistan Asia      28.8    779.
2 Afghanistan Asia      30.3    821.
3 Afghanistan Asia      32.0    853.
4 Afghanistan Asia      34.0    836.
5 Afghanistan Asia      36.1    740.
6 Afghanistan Asia      38.4    786.
7 Afghanistan Asia      39.9    978.
8 Afghanistan Asia      40.8    852.
9 Afghanistan Asia      41.7    649.
10 Afghanistan Asia      41.8    635.
# ... with 1,694 more rows
```

It's easy to mix up the `dplyr` verbs `select` and `filter`. Here's a handy mnemonic: `filter` filters Rows while `select` selects Columns. Suppose we wanted to select only the column `pop` from `gapminder`.

Exercise #2

1. Select only the columns `year`, `lifeExp`, and `country` in `gapminder`.
2. Select all the columns *except* `year`, `lifeExp`, and `country` in `gapminder`.

Solution to Exercise #2

Write your code and solutions here

1. Use the following:

```
gapminder %>% select(year, lifeExp, country)
```

```
# A tibble: 1,704 x 3
  year lifeExp country
  <int>   <dbl> <fct>
1  1952    28.8 Afghanistan
2  1957    30.3 Afghanistan
3  1962    32.0 Afghanistan
4  1967    34.0 Afghanistan
5  1972    36.1 Afghanistan
6  1977    38.4 Afghanistan
7  1982    39.9 Afghanistan
8  1987    40.8 Afghanistan
9  1992    41.7 Afghanistan
10 1997    41.8 Afghanistan
# ... with 1,694 more rows
```

2. Use the following:

```
gapminder %>% select(-year, -lifeExp, -country)
```

```
# A tibble: 1,704 x 3
  continent      pop gdpPercap
  <fct>         <int>   <dbl>
1 Asia      8425333    779.
2 Asia      9240934    821.
3 Asia     10267083    853.
4 Asia     11537966    836.
5 Asia     13079460    740.
6 Asia     14880372    786.
7 Asia     12881816    978.
8 Asia     13867957    852.
9 Asia     16317921    649.
10 Asia     22227415    635.
# ... with 1,694 more rows
```

The summarize verb

Suppose we want to calculate the sample mean of the column `lifeExp` in `gapminder`. We can do this using the `summarize` verb as follows:

```
gapminder %>% summarize(mean_lifeExp = mean(lifeExp))
```

```
# A tibble: 1 x 1
  mean_lifeExp
  <dbl>
1      59.5
```

Note the syntax: within `summarize` we have an *assignment statement*. In particular, we assign `mean(lifeExp)` to the variable `mean_lifeExp`. The key thing to know about `summarize` is that it always returns *collapses*

a tibble with many rows into a single row. When we think about computing a sample mean, this makes sense: we want to summarize the column `lifeExp` as a single number. It doesn't actually make much sense to compute the mean of `lifeExp` because this involves averaging over different countries *and* different years. Instead let's compute the mean for a single year: 1952:

```
gapminder %>%
  filter(year == 1952) %>%
  summarize(mean_lifeExp = mean(lifeExp))
```

```
# A tibble: 1 x 1
  mean_lifeExp
    <dbl>
1         49.1
```

We can use `summarize` to compute multiple summary statistics for a single variable, the same summary statistic for multiple variables, or both:

```
gapminder %>%
  filter(year == 1952) %>%
  summarize(mean_lifeExp = mean(lifeExp),
            sd_lifeExp = sd(lifeExp),
            mean_pop = mean(pop))
```

```
# A tibble: 1 x 3
  mean_lifeExp sd_lifeExp mean_pop
    <dbl>      <dbl>      <dbl>
1         49.1        12.2 16950402.
```

Note that if we *don't* explicitly use an assignment statement, R will make up names for us based on the commands that we used:

```
gapminder %>%
  filter(year == 1952) %>%
  summarize(mean(lifeExp), median(lifeExp), max(lifeExp))
```

```
# A tibble: 1 x 3
  `mean(lifeExp)` `median(lifeExp)` `max(lifeExp)`
    <dbl>          <dbl>          <dbl>
1         49.1          45.1          72.7
```

Exercise #3

1. Use `summarize` to compute the 75th percentile of life expectancy in 1977.
2. Use `summarize` to compute the 75th percentile of life expectancy among Asian countries in 1977.

Solution to Exercise #3

Write your code and solutions here

1. The 75th percentile of life expectancy in 1977 was 70.4 years at birth.

```
gapminder %>%
  filter(year == 1977) %>%
  summarize(quantile(lifeExp, 0.75))
```

```
# A tibble: 1 x 1
  `quantile(lifeExp, 0.75)`
    <dbl>
1          70.4
```

2. The 75th percentile of life expectancy in 1977 among African countries was

```
gapminder %>%
  filter(year == 1977, continent == 'Asia') %>%
  summarize(quantile(lifeExp, 0.75))
```

```
# A tibble: 1 x 1
  `quantile(lifeExp, 0.75)`
    <dbl>
1          65.9
```

The group_by verb

The true power of `summarize` is its ability to compute grouped summary statistics in combination with another `dplyr` verb: `group_by`. In essence, `group_by` allows us to tell `dplyr` that we don't want to work with the whole dataset at once; rather we want to work with particular *subsets* or groups. The basic idea is similar to what we've done using `filter` in the past. For example, to calculate mean population (in millions) and mean life expectancy in the year 2007, we could use the following code:

```
gapminder %>%
  filter(year == 2007) %>%
  summarize(meanPop = mean(pop) / 1000000, meanLifeExp = mean(lifeExp))
```

```
# A tibble: 1 x 2
  meanPop meanLifeExp
    <dbl>    <dbl>
1   44.0      67.0
```

Using `group_by` we could do the same thing for *all* years in the dataset at once:

```
gapminder %>%
  group_by(year) %>%
  summarize(meanPop = mean(pop) / 1000000, meanLifeExp = mean(lifeExp))
```

```
# A tibble: 12 x 3
  year meanPop meanLifeExp
  <int>   <dbl>    <dbl>
1  1952    17.0      49.1
```

| | | | |
|----|------|------|------|
| 2 | 1957 | 18.8 | 51.5 |
| 3 | 1962 | 20.4 | 53.6 |
| 4 | 1967 | 22.7 | 55.7 |
| 5 | 1972 | 25.2 | 57.6 |
| 6 | 1977 | 27.7 | 59.6 |
| 7 | 1982 | 30.2 | 61.5 |
| 8 | 1987 | 33.0 | 63.2 |
| 9 | 1992 | 36.0 | 64.2 |
| 10 | 1997 | 38.8 | 65.0 |
| 11 | 2002 | 41.5 | 65.7 |
| 12 | 2007 | 44.0 | 67.0 |

Notice what has changed in the second code block: we replaced `filter(year == 2007)` with `group_by(year)`. This tells `dplyr` that, rather than simply restricting attention to data from 2007, we want to form *subsets* (groups) of the dataset that correspond to the values of the `year` variable. Whatever comes after `group_by` will then be calculated for these subsets.

Here's another example. Suppose we wanted to calculate mean life expectancy and total population in each *continent* during the year 2007. To accomplish this, we can chain together the `filter`, `group_by` and `summarize` verbs as follows:

```
gapminder %>%
  filter(year == 2007) %>%
  group_by(continent) %>%
  summarize(meanPop = mean(pop) / 1000000, meanLifeExp = mean(lifeExp))
```

```
# A tibble: 5 x 3
  continent meanPop meanLifeExp
  <fct>      <dbl>      <dbl>
1 Africa      17.9        54.8
2 Americas    36.0        73.6
3 Asia       116.         70.7
4 Europe      19.5        77.6
5 Oceania     12.3        80.7
```

We can also use `group_by` to subset over multiple variables at once. For example, to calculate mean life expectancy and total population in each continent *separately* for every year, we can use the following code:

```
gapminder %>%
  group_by(year, continent) %>%
  summarize(meanPop = mean(pop) / 1000000, meanLifeExp = mean(lifeExp))
```

```
# A tibble: 60 x 4
# Groups:   year [?]
  year continent meanPop meanLifeExp
  <int> <fct>      <dbl>      <dbl>
1  1952 Africa      4.57        39.1
2  1952 Americas   13.8        53.3
3  1952 Asia      42.3        46.3
4  1952 Europe    13.9        64.4
5  1952 Oceania     5.34        69.3
6  1957 Africa     5.09        41.3
7  1957 Americas   15.5        56.0
```

```

8 1957 Asia      47.4      49.3
9 1957 Europe   14.6      66.7
10 1957 Oceania  5.97     70.3
# ... with 50 more rows

```

Exercise #4

1. Why doesn't the following code work as expected?

```

gapminder %>%
  summarize(meanLifeExp = mean(lifeExp)) %>%
  group_by(year)

```

2. Calculate the median GDP per capita in each continent in 1977.
3. Repeat 2. but sort your results in descending order.
4. Calculate the mean and standard deviation of life expectancy for separately for each continent in every year *after* 1977. Sort your results in ascending order by the standard deviation of life expectancy.

Solution to Exercise #4

Write your code and solutions here

1. The steps are carried out in the wrong order: we need to form groups *first* and then calculate our desired summaries.
2. Use the following:

```

gapminder %>%
  filter(year == 1977) %>%
  group_by(continent) %>%
  summarize(medGDPc = median(gdpPercap))

```

```

# A tibble: 5 x 2
  continent medGDPc
  <fct>      <dbl>
1 Africa     1400.
2 Americas   6281.
3 Asia       3195.
4 Europe     14226.
5 Oceania    17284.

```

3. Use the following:

```

gapminder %>%
  filter(year == 1977) %>%
  group_by(continent) %>%
  summarize(medGDPc = median(gdpPercap)) %>%
  arrange(desc(medGDPc))

```

```
# A tibble: 5 x 2
  continent medGDPc
  <fct>      <dbl>
1 Oceania    17284.
2 Europe     14226.
3 Americas   6281.
4 Asia       3195.
5 Africa     1400.
```

4. Use the following:

```
gapminder %>%
  filter(year > 1977) %>%
  group_by(continent, year) %>%
  summarize(meanGDPc = mean(gdpPercap), sdGDPc = sd(gdpPercap)) %>%
  arrange(sdGDPc)
```

```
# A tibble: 30 x 4
# Groups:   continent [5]
  continent year meanGDPc sdGDPc
  <fct>      <int>    <dbl> <dbl>
1 Oceania    1982    18555.  1304.
2 Oceania    1987    20448.  2038.
3 Africa     1987     2283.  2567.
4 Africa     1992     2282.  2644.
5 Africa     1997     2379.  2821.
6 Africa     2002     2599.  2973.
7 Africa     1982     2482.  3243.
8 Oceania    1992    20894.  3579.
9 Africa     2007     3089.  3618.
10 Oceania   1997    24024.  4206.
# ... with 20 more rows
```

Plotting summarized data

By combining `summarize` and `group_by` with `ggplot`, it's easy to make plots of grouped data. For example, here's how we could plot total world population in millions from 1952 to 2007. First we construct a tibble which I'll name `by_year` containing the desired summary statistic grouped by year and display it:


```
by_year <- gapminder %>%
  mutate(popMil = pop / 1000000) %>%
  group_by(year) %>%
  summarize(totalpopMil = sum(popMil))
by_year
```

```
# A tibble: 12 x 2
  year totalpopMil
  <int>      <dbl>
1  1952      2407.
2  1957      2664.
3  1962      2900.
```

| | | |
|----|------|-------|
| 4 | 1967 | 3217. |
| 5 | 1972 | 3577. |
| 6 | 1977 | 3930. |
| 7 | 1982 | 4289. |
| 8 | 1987 | 4691. |
| 9 | 1992 | 5111. |
| 10 | 1997 | 5515. |
| 11 | 2002 | 5887. |
| 12 | 2007 | 6251. |

Then we make a scatterplot using `ggplot`:

```
ggplot(by_year) +
  geom_point(aes(x = year, y = totalpopMil))
```

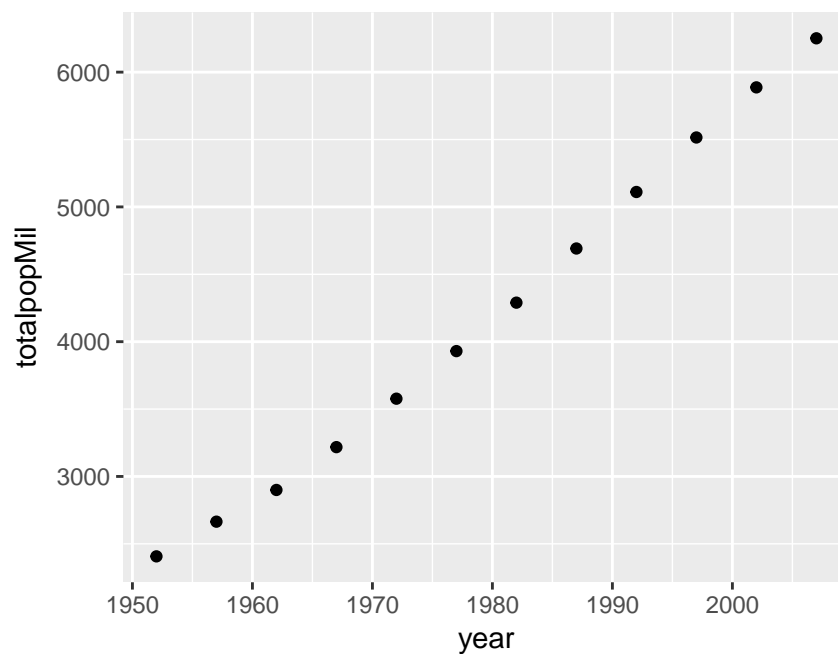


Here's a more complicated example where we additionally use color to plot each continent separately:

```
by_year_continent <- gapminder %>%
  mutate(popMil = pop / 1000000) %>%
  group_by(year, continent) %>%
  summarize(totalpopMil = sum(popMil))
by_year
```

```
# A tibble: 12 x 2
  year totalpopMil
  <int>      <dbl>
1  1952      2407.
2  1957      2664.
3  1962      2900.
4  1967      3217.
5  1972      3577.
```

| | | |
|----|------|-------|
| 6 | 1977 | 3930. |
| 7 | 1982 | 4289. |
| 8 | 1987 | 4691. |
| 9 | 1992 | 5111. |
| 10 | 1997 | 5515. |
| 11 | 2002 | 5887. |
| 12 | 2007 | 6251. |

```
ggplot(by_year_continent) +
  geom_point(aes(x = year, y = totalpopMil, color = continent))
```

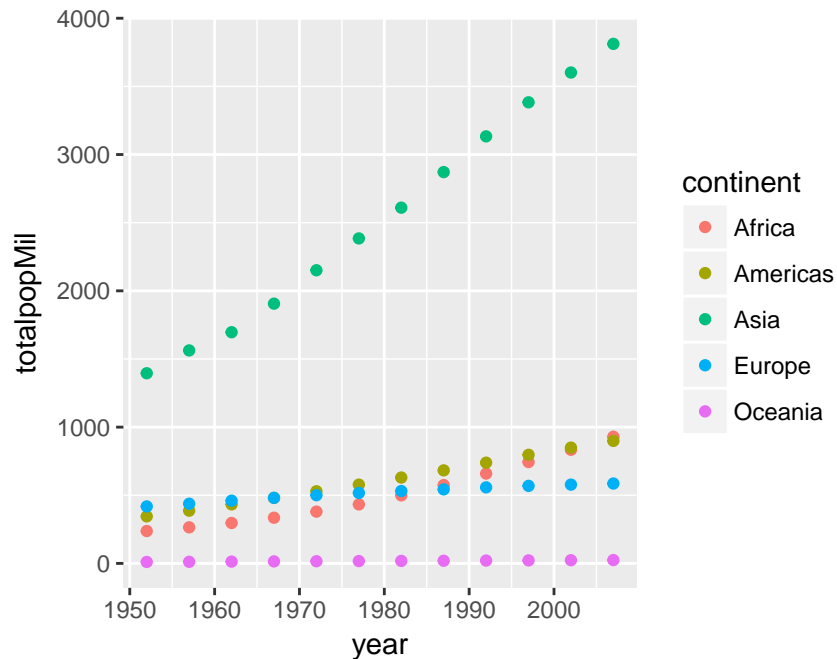

Make sure you understand how the preceding example works before attempting the exercise.

Exercise #5

1. What happens if you append `+ expand_limits(y = 0)` to the preceding `ggplot` code? Why might this be helpful in some cases?
2. Make a scatter with average GDP per capita across all countries in `gapminder` in the y-axis and `year` on the x-axis.
3. Repeat 2. broken down by continent, using color to distinguish the points. Put mean GDP per capita on the log scale.

Solution to Exercise #5


Write your code and solutions here

1. The function `expand_limits()` lets us tweak the limits of our x or y-axis in a `ggplot`. In this particular example `expand_limits(y = 0)` ensures that the y-axis begins at zero. Without using this command,

ggplot will choose the y-axis on its own so that there is no “empty space” in the plot. Sometimes we may want to override this behavior.


2. Use the following:

```
by_year <- gapminder %>%  
  group_by(year) %>%  
  summarize(meanGDPC = mean(gdpPerCap))  
ggplot(by_year) +  
  geom_point(aes(x = year, y = meanGDPC))
```

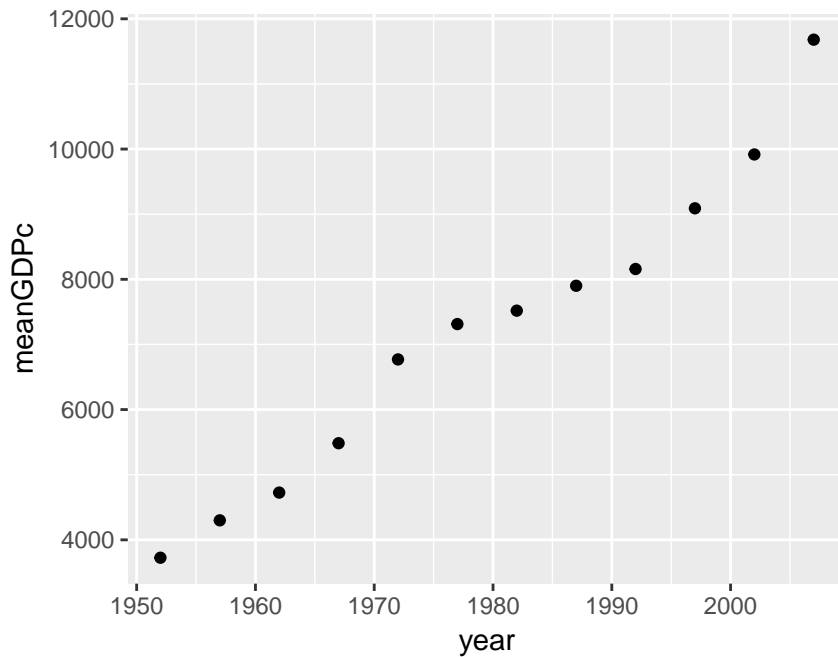

3. Use the following

```
by_year <- gapminder %>%  
  group_by(year, continent) %>%  
  summarize(meanGDPC = mean(gdpPerCap))  
ggplot(by_year) +  
  geom_point(aes(x = year, y = meanGDPC, color = continent)) +  
  scale_y_log10()
```

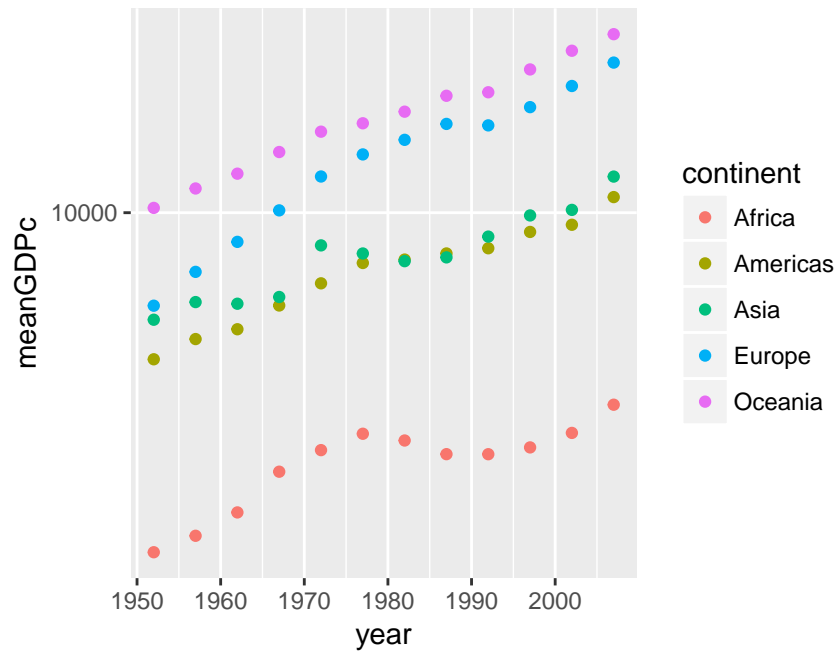

Line plots


Thus far we've only learned how to make one kind of plot with `ggplot`: a scatterplot, which we constructed using `geom_scatter()`. Sometimes we want to *connect* the dots in a scatterplot, for example when we're interested in visualizing a trend over time. The resulting plot is called a *line plot*. To make one, simply replace `geom_scatter()` with `geom_line()`. For example:

```
by_year_continent <- gapminder %>%
  mutate(popMil = pop / 1000000) %>%
  group_by(year, continent) %>%
  summarize(totalpopMil = sum(popMil))
by_year
```

```
# A tibble: 60 x 3
# Groups:   year [?]
   year continent meanGDPc
  <int> <fct>      <dbl>
1  1952 Africa      1253.
2  1952 Americas    4079.
3  1952 Asia       5195.
4  1952 Europe     5661.
5  1952 Oceania    10298.
6  1957 Africa      1385.
7  1957 Americas    4616.
8  1957 Asia       5788.
9  1957 Europe     6963.
10 1957 Oceania    11599.
# ... with 50 more rows
```



```
ggplot(by_year_continent) +
  geom_line(aes(x = year, y = totalpopMil, color = continent))
```

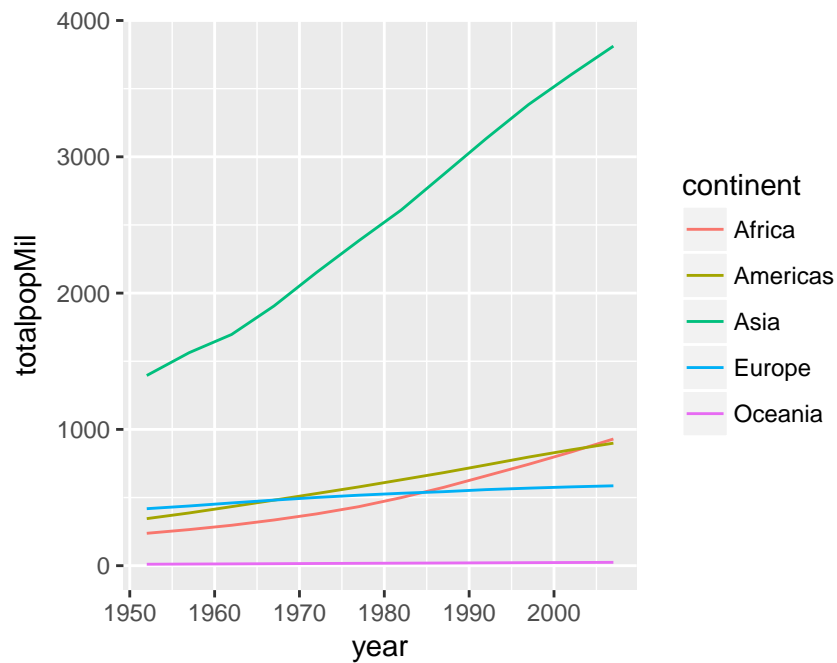


Exercise #6

Repeat exercise 5-3 with a line plot rather than a scatterplot.

Solution to Exercise #5

Write your code and solutions here

```
by_year <- gapminder %>%
  group_by(year, continent) %>%
  summarize(meanGDPC = mean(gdpPercap))
ggplot(by_year) +
  geom_line(aes(x = year, y = meanGDPC, color = continent)) +
  scale_y_log10()
```

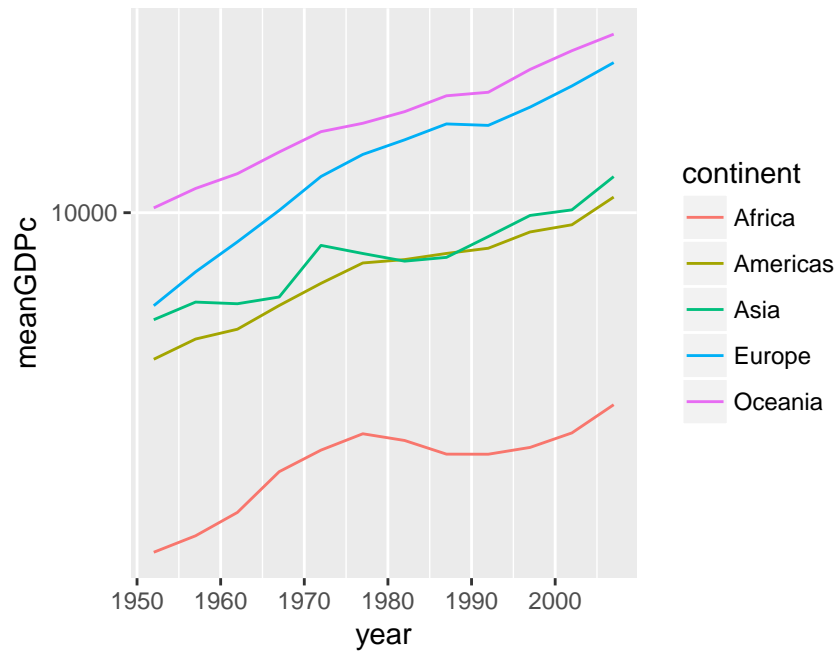

Maybe in this lecture we'll also get them started on the college dataset? Need to teach them how to import data...