


Modeling in R and Tidying Results

linear models and broom

2020-08-22

 **This is not a course in a
regression**

Modeling in R

```
lm(y ~ x + z, data = df)
```

Modeling in R

```
lm(y ~ x + z, data = df)
```



model
function

Modeling in R

```
lm(y ~ x + z, data = df)
```

variables
in your
data




your
data



Modeling in R

```
lm(y ~ x + z, data = df)
```

outcome

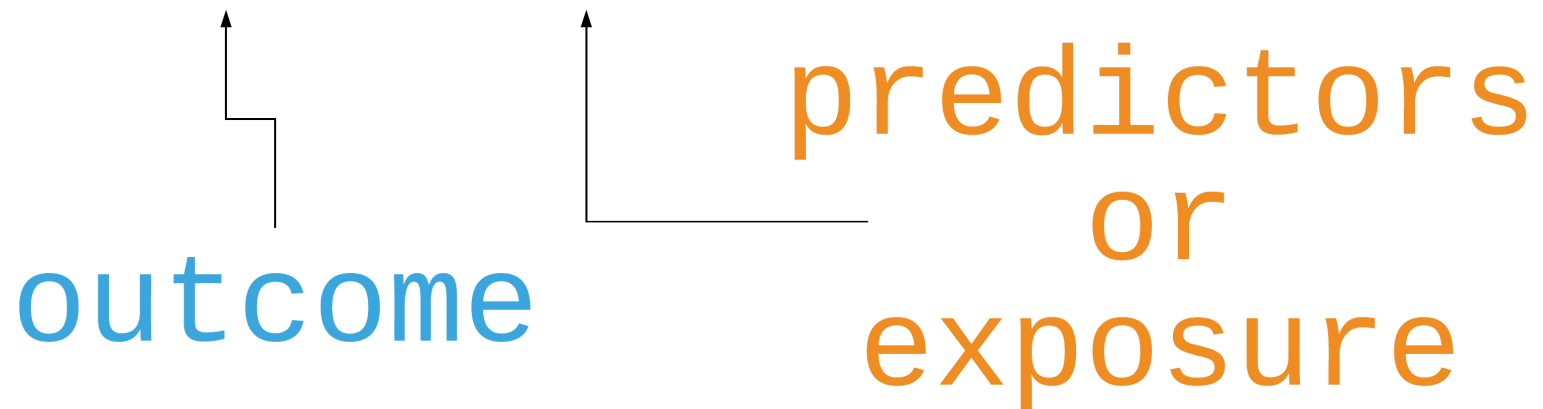

predictors
or
exposure

Modeling in R

lm() = **Linear Regression (OLS)**

Modeling in R

`lm()` = Linear Regression (OLS)

`glm()` = Generalized Linear Model
(default family = Gaussian)

Modeling in R

```
lm(price ~ carat, data = diamonds)
```

Modeling in R

```
lm(price ~ carat, data = diamonds)
```

```
##
```

```
## Call:
```

```
## lm(formula = price ~ carat, data = diamonds)
```

```
##
```

```
## Coefficients:
```

```
## (Intercept)          carat
```

```
##          -2256          7756
```

Modeling in R

```
lm(price ~ carat, data = diamonds) %>%  
  summary()
```

Modeling in R

```
##  
## Call:  
## lm(formula = price ~ carat, data = diamonds)  
##  
## Residuals:  
##      Min       1Q   Median       3Q      Max   
## -18585.3   -804.8    -18.9    537.4  12731.7   
##  
## Coefficients:  
##              Estimate Std. Error t value Pr(>|t|)      
## (Intercept) -2256.36      13.06  -172.8  <2e-16 ***   
## carat        7756.43      14.07   551.4  <2e-16 ***   
## ---  
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1  
##  
## Residual standard error: 1549 on 53938 degrees of freedom  
## Multiple R-squared:  0.8493,    Adjusted R-squared:  0.8493   
## F-statistic: 3.041e+05 on 1 and 53938 DF,  p-value: < 2.2e-16
```

Modeling in R

```
##  
## Call:  
## lm(formula = price ~ carat, data = diamonds)  
##  
## Residuals:  
##      Min       1Q   Median       3Q      Max   
## -18585.3   -804.8    -18.9    537.4  12731.7   
##  
## Coefficients:  
##              Estimate Std. Error t value Pr(>|t|)      
## (Intercept) -2256.36      13.06  -172.8  <2e-16 ***   
## carat        7756.43      14.07   551.4  <2e-16 ***   
## ---  
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1  
##  
## Residual standard error: 1549 on 53938 degrees of freedom  
## Multiple R-squared:  0.8493,    Adjusted R-squared:  0.8493   
## F-statistic: 3.041e+05 on 1 and 53938 DF,  p-value: < 2.2e-16
```

broom: tidy models

`tidy()`

`glance()`

`augment()`



broom: tidy models

tidy() = **model coefficients**

glance()

augment()



broom: tidy models

tidy()

glance() = **model fit**

augment()



broom: tidy models

tidy()

glance()

augment() = model predictions



broom: tidy models

tidy()

glance()

augment()



NOT a core member of the tidyverse. Need to load **with** library(broom)

Modeling in R

```
library(broom)  
lm(price ~ carat, data = diamonds) %>%  
  tidy()
```

Modeling in R

```
library(broom)
lm(price ~ carat, data = diamonds) %>%
  tidy()
```

```
## # A tibble: 2 x 5
##   term          estimate std.error statistic p.value
##   <chr>          <dbl>    <dbl>    <dbl>    <dbl>
## 1 (Intercept)   -2256.     13.1    -173.     0
## 2 carat         7756.     14.1     551.     0
```

Modeling in R

```
lm(price ~ carat, data = diamonds) %>%  
  glance()
```

Modeling in R

```
lm(price ~ carat, data = diamonds) %>%  
  glance()
```

```
## # A tibble: 1 x 12  
##   r.squared adj.r.squared sigma statistic p.value    df  
##   <dbl>      <dbl> <dbl>      <dbl>   <dbl> <dbl>  
## 1    0.849        0.849 1549.    304051.     0     1  
## # ... with 6 more variables: logLik <dbl>, AIC <dbl>,  
## #   BIC <dbl>, deviance <dbl>, df.residual <int>,  
## #   nobs <int>
```

Modeling in R

```
lm(price ~ carat, data = diamonds) %>%  
  augment()
```

Modeling in R

```
lm(price ~ carat, data = diamonds) %>%  
  augment()
```

```
## # A tibble: 53,940 x 8  
##   price carat .fitted .resid .std.resid   .hat .sigma  
##   <int> <dbl>   <dbl> <dbl>      <dbl>   <dbl> <dbl>  
## 1    326 0.23   -472.    798.      0.516 4.52e-5 1549.  
## 2    326 0.21   -628.    954.      0.616 4.71e-5 1549.  
## 3    327 0.23   -472.    799.      0.516 4.52e-5 1549.  
## 4    334 0.290   -7.00    341.      0.220 3.98e-5 1549.  
## 5    335 0.31    148.    187.      0.121 3.82e-5 1549.  
## 6    336 0.24   -395.    731.      0.472 4.42e-5 1549.  
## 7    336 0.24   -395.    731.      0.472 4.42e-5 1549.  
## 8    337 0.26   -240.    577.      0.372 4.24e-5 1549.  
## 9    337 0.22   -550.    887.      0.573 4.61e-5 1549.  
## 10   338 0.23   -472.    810.      0.523 4.52e-5 1549.  
## # ... with 53,930 more rows, and 1 more variable:  
## #   .cooksds <dbl>
```


Try it yourself

Work your way through the exercises. If anything in particular is giving you trouble, we'll work through it together.

Resources

R for Data Science: A comprehensive but friendly introduction to the tidyverse.
Free online.

UCLA IDRE: Useful resources on modeling in R and other languages