

R Exposure 4

Part 2: Mapping

Chuck Lanfear

Jan 25, 2020

Updated: Apr 17, 2020



This Unit


Basic Mapping in `ggplot2`

- Mapping with raw `ggplot2` using coordinates
- `ggmap` for mashing up maps with `ggplot2`
- Labeling points and using `ggrepel` to avoid overlaps

Advanced Mapping

- `sf`: Simple Features geometry for R
- `tidycensus` for obtaining Census Bureau data

Mapping in R: A quick plug

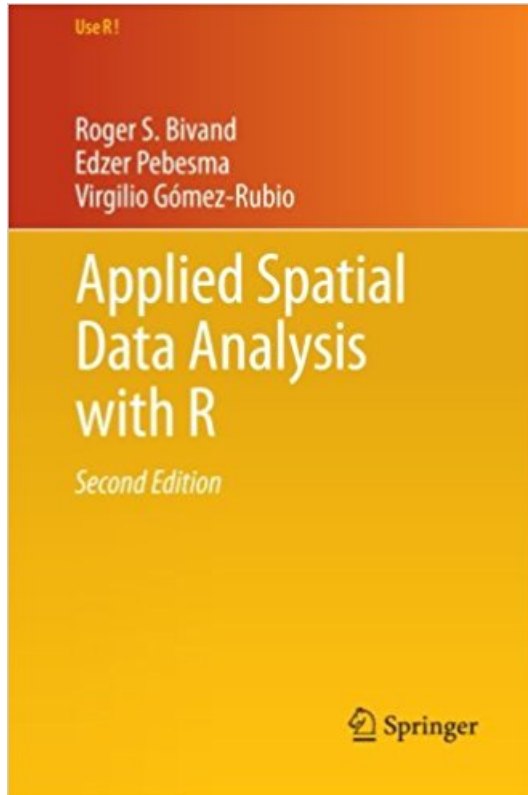

If you are interested in mapping, GIS, and geospatial analysis in R, *acquire this book*.

RSpatial.org is a great resource as well.

Basic Mapping

`ggplot2` and `ggmap`

One Day of SPD Incidents

Let's look at types and locations of incidents the Seattle Police Department responded to in a single day.

```
library(tidyverse)
```

```
spd_raw <- read_csv("https://clanfear.github.io/CSS508/Seattle_Police")
```

Taking a glimpse()

```
glimpse(spd_raw)
```

```
## Rows: 706
## Columns: 19
## $ `CAD CDW ID`      <dbl> 1701856, 1701857, 1701853, ...
## $ `CAD Event Number` <dbl> 1.6e+10, 1.6e+10, 1.6e+10, ...
## $ `General Offense Number` <dbl> 2.02e+09, 2.02e+09, 2.02e+0...
## $ `Event Clearance Code` <chr> "063", "064", "161", "245",...
## $ `Event Clearance Description` <chr> "THEFT - CAR PROWL", "SHOPL...
## $ `Event Clearance SubGroup` <chr> "CAR PROWL", "THEFT", "TRES...
## $ `Event Clearance Group` <chr> "CAR PROWL", "SHOPLIFTING",...
## $ `Event Clearance Date` <chr> "03/25/2016 11:58:30 PM", "...
## $ `Hundred Block Location` <chr> "S KING ST / 8 AV S", "92XX...
## $ `District/Sector` <chr> "K", "S", "D", "M", "M", "B...
## $ `Zone/Beat` <chr> "K3", "S3", "D2", "M1", "M3...
## $ `Census Tract` <dbl> 9100, 11801, 7200, 8002, 81...
## $ Longitude <dbl> -122, -122, -122, -122, -12...
## $ Latitude <dbl> 47.6, 47.5, 47.6, 47.6, 47....
## $ `Incident Location` <chr> "(47.598347, -122.32245)", ...
## $ `Initial Type Description` <chr> "THEFT (DOES NOT INCLUDE SH...
## $ `Initial Type Subgroup` <chr> "OTHER PROPERTY", "SHOPLIFT...
## $ `Initial Type Group` <chr> "THEFT", "THEFT", "TRESPASS...
## $ `At Scene Time` <chr> "03/25/2016 10:25:51 PM", "...
```


x, y as Coordinates

Coordinates, such as longitude and latitude, can be provided in `aes()` as `x` and `y` values.

This is ideal when you don't need to place points over some map for reference.

```
ggplot(spd_raw,  
       aes(Longitude, Latitude)) +  
  geom_point() +  
  coord_fixed() +  
  ggtitle("Seattle Police Incidents",  
          subtitle="March 25, 2016") +  
  theme_classic()
```

Sometimes, however, we want to plot these points over existing maps.

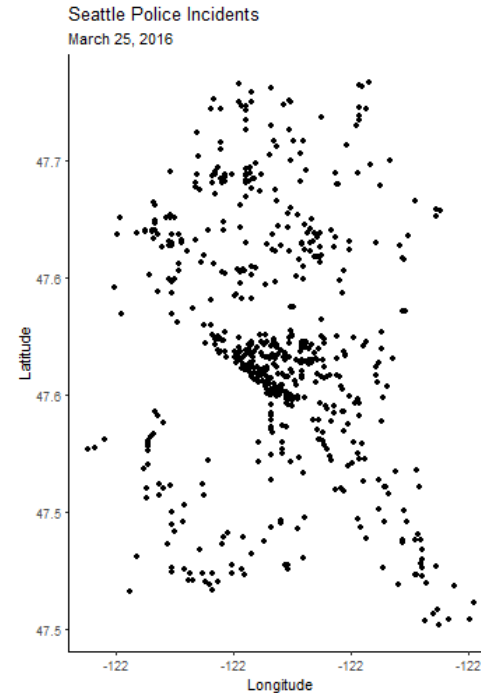

ggmap

ggmap

`ggmap` is a package that works with `ggplot2` to plot spatial data directly on map images downloaded from Google Maps¹, OpenStreetMap, and Stamen Maps (good artistic/minimal options).

What this package does for you:

1. Queries servers for a map (`get_map()`) at the location and scale you want
2. Plots the **raster** (bitmap) image as a `ggplot` object
3. Lets you add more `ggplot` layers like points, 2D density plots, text annotations
4. Additional functions for interacting with Google Maps (e.g. getting distances by bike)

[1] [Requires an API Key now.](#)

Installation

As of Apr 17, 2020, the current version of `ggmap` must be downloaded from GitHub.

This can be done using the `devtools` package.

```
if(!requireNamespace("devtools")) install.packages("devtools")  
devtools::install_github("dkahle/ggmap", ref = "tidyup")
```

```
library(ggmap)
```

This may require compilation on your computer. If you get errors during install, check with me after class.


Quick Maps with `qmpLOT()`

`qmpLOT` will automatically set the map region based on your data:

```
qmpLOT(data = spd_raw,  
        x = Longitude,  
        y = Latitude,  
        color = I("#342c5c"),  
        alpha = I(0.5))
```

All I provided was numeric latitude and longitude, and it placed the data points correctly on a raster map of Seattle.

`I()` is used here to specify *set* (constant) rather than *mapped* values.

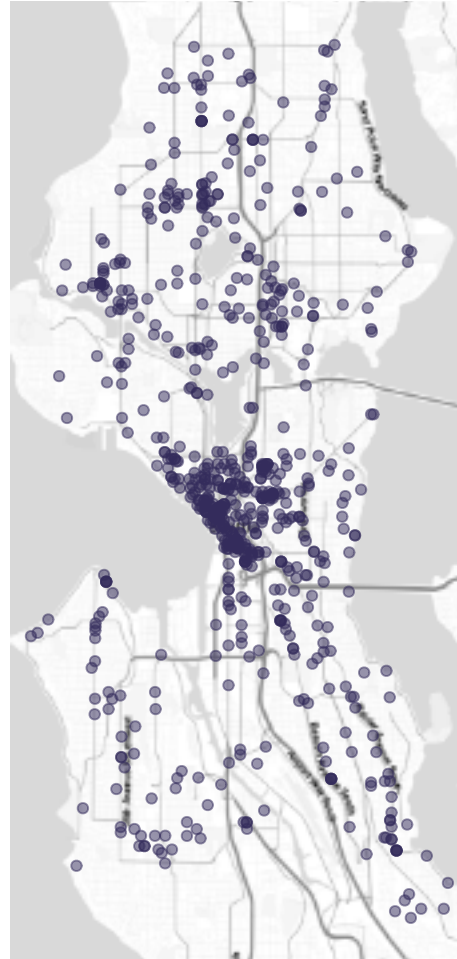

get_map()

Both `qplot()` and `qmap()` are wrappers for a function called `get_map()` that retrieves a base map layer. Some options:

- `location=` search query or numeric vector of longitude and latitude
- `zoom=` a zoom level (3 = continent, 10 = city, 21 = building)
- `source=`
 - `"google"`: Google Maps for general purpose maps¹
 - `"osm"`: OpenStreetMaps, general purpose but open access
 - `"stamen"`: Aesthetically pleasing alternatives based on OpenStreetMaps
- `maptype=`
 - Google types: `"terrain"`, `"terrain-background"`, `"satellite"`, `"roadmap"`, `"hybrid"`
 - Stamen types: `"watercolor"`, `"toner"`, `"toner-background"`, `"toner-lite"`
- `color=` `"color"` or `"bw"`


[1] Requires API key!

Adding Density Layers


Call `qplot()` with no `geom()`, and then add density layers:

```
qplot(data = spd_raw, geom = "blank",  
      x = Longitude, y = Latitude,  
      maptype = "toner-lite",  
      darken = 0.5) +  
  stat_density_2d(  
    aes(fill = stat(level)),  
    geom = "polygon",  
    alpha = .2, color = NA) +  
  scale_fill_gradient2(  
    "Incident\nConcentration",  
    low = "white",  
    mid = "yellow",  
    high = "red") +  
  theme(legend.position = "bottom")
```

`stat(level)` indicates we want
`fill=` to be based on `level` values
calculated by the layer.

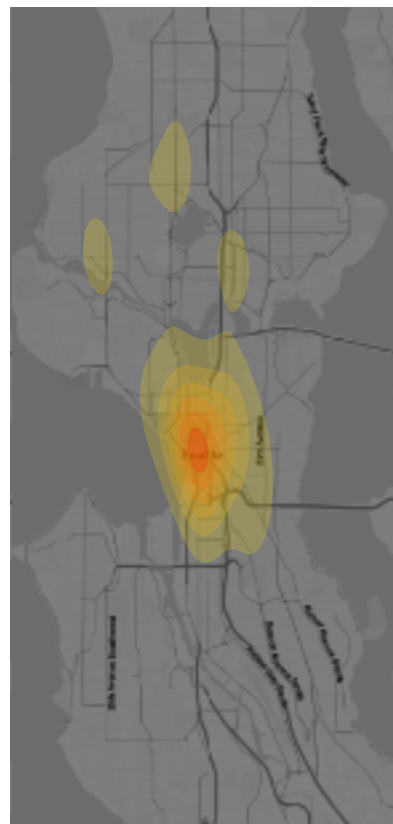

Incident
Concentration



50 100 150 200 250 300

Labeling Points

Let's label the assaults and robberies specifically in downtown:

First filter to downtown based on values "eyeballed" from our earlier map:

```
downtown <- spd_raw %>%  
  filter(Latitude > 47.58, Latitude < 47.64,  
         Longitude > -122.36, Longitude < -122.31)
```

Then make a dataframe of just assaults and robberies:


```
assaults <- downtown %>%  
  mutate(assault_label =  
    ifelse(`Event Clearance Group` %in%  
           c("ASSAULTS", "ROBBERY"),  
           `Event Clearance Description`, "")) %>%  
  filter(assault_label != "")
```

Plotting with Labels

Now let's plot the events and label them with `geom_label()` (`geom_text()` without background or border):

```
qplot(data = downtown,
      x = Longitude,
      y = Latitude,
      maptype = "toner-lite",
      color = I("firebrick"),
      alpha = I(0.5)) +
  geom_label(data = assaults,
            aes(label = assault_label),
            size=2.5)
```

Placing the arguments for `color=` and `alpha=` inside `I()` prevents them from also applying to the labels. We would get transparent red labels otherwise!

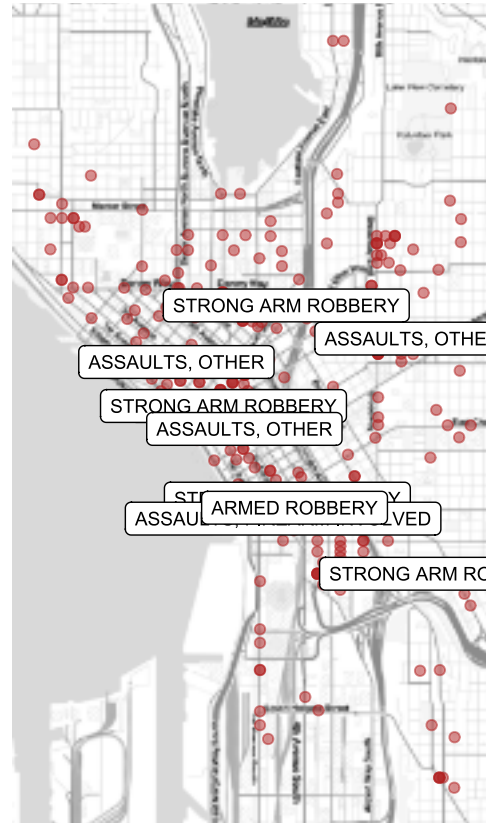


ggrepel

You can also try

`geom_label_repel()` or `geom_text_repel()` in the `ggrepel` package to fix or reduce overlaps (total space is limited here):

```
library(ggrepel)
qplot(data =
  downtown,
  x = Longitude,
  y = Latitude,
  mptype = "toner-lite",
  color = I("firebrick"),
  alpha = I(0.5)) +
  geom_label_repel(
    data = assaults,
    aes(label = assault_label),
    fill = "black",
    color = "white",
    segment.color = "black",
    size=2.5)
```

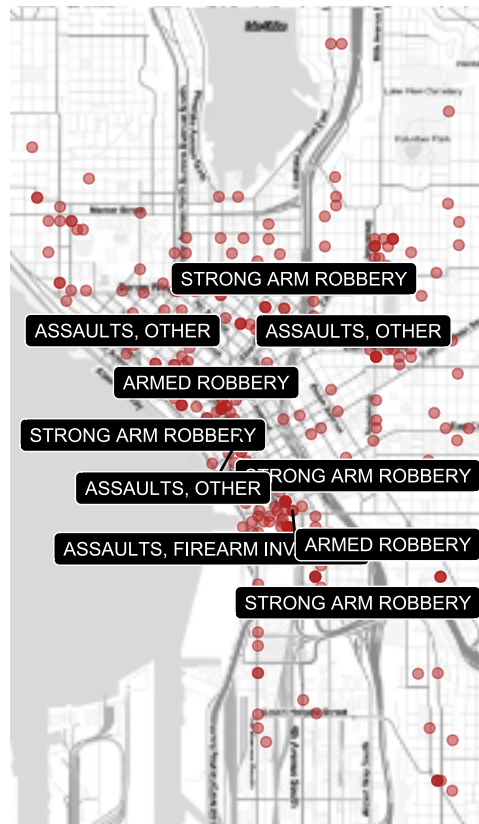

Advanced Mapping

GIS and R with `sf`

Terminology

- Simple Features (sf)
- Coordinate Reference System (CRS)
- Shapefile

sf

Until recently, the main way to work with geospatial data in R was through the `sp` package. `sp` works well but does not store data the same way as most GIS packages and can be bulky and complicated.

The more recent `sf` package implements the GIS standard of Simple Features in R.

`sf` is also integrated into the `tidyverse`: e.g. `geom_sf()` in `ggplot2`.

The package is somewhat new but is expected to *replace* `sp` eventually. The principle authors and contributors to `sf` are the same authors as `sp` but with new developers from the `tidyverse` as well.

Because `sf` is the new standard, we will focus on it today.

```
library(sf)
```

Simple Features

A **Simple Feature** is a single observation with some defined geospatial location(s). Features are stored in special data frames (class `sf`) with two properties:

- **Geometry:** Properties describing a location (usually on Earth).
 - Usually 2 dimensions, but support for up to 4.
 - Stored in a single reserved *list-column* (`geom`, of class `sfc`).¹
 - Contain a defined coordinate reference system.
- **Attributes:** Characteristics of the location (such as population).
 - These are non-spatial measures that describe a feature.
 - Standard data frame columns.

[1] A list-column is the same length as all other columns in the data, but each element contains *sub-elements* (class `sfg`) with all the geometrical components.

List-columns require special functions to manipulate, *including removing them*.

Coordinate Reference Systems

Coordinate reference systems (CRS) specify what location on Earth geometry coordinates are *relative to* (i.e. what location is (0,0) when plotting).

The most commonly used is **WGS84**, the standard for Google Earth, the Department of Defense, and GPS satellites.

There are two common ways to define a CRS:

- **EPSG codes** (`epsg` in R)
 - Numeric codes which *refer to a predefined projection*
 - Ex: WGS84 is `4326`
- **PROJ.4 strings** (`proj4string` in R)
 - Text strings which *define a projection*
 - WGS84 looks like this:

```
+init=epsg:4326 +proj=longlat +ellps=WGS84  
+datum=WGS84 +no_defs +towgs84=0,0,0
```

Shapefiles

Geospatial data is typically stored in **shapefiles** which store geometric data as **vectors** with associated attributes (variables)

Shapefiles actually consist of multiple individual files. There are usually at least three (but up to 10+):

- `.shp`: The feature geometries
- `.shx`: Shape positional index
- `.dbf`: Attributes describing features¹

Often there will also be a `.prj` file defining the coordinate system.

[1] This is just a dBase IV file which is an ancient and common database storage file format.

Using 

Selected `sf` Functions

`sf` is a huge, feature-rich package. Here is a sample of useful functions:

- `st_read()`, `st_write()`: Read and write shapefiles.
- `geom_sf()`: `ggplot()` layer for `sf` objects.
- `st_join()`: Join data by spatial relationship.
- `st_transform()`: Convert between CRS.
- `st_set_geometry(., NULL)`: Remove geometry from a `sf` data frame.
- `st_relate()`: Compute relationships between geometries (like neighbor matrices).
- `st_interpolate_aw()`: Areal-weighted interpolation of polygons.

Loading Data

We will work with King County voting data. You can obtain a shape file of King County voting precincts from the [county GIS data portal](#).

We can load the file using `st_read()`.

```
precinct_shape <- st_read("./data/district/votdst.shp",  
                          stringsAsFactors = F) %>%  
  select(Precinct=NAME, geometry)
```

If following along, click here to download a zip of the shapefile and here for the voting data

We'll pause if folks are following along.

Voting Data: Processing

```
precincts_votes_sf <-  
  read_csv("../data/king_county_elections_2016.txt") %>%  
  filter(Race=="US President & Vice President",  
         str_detect(Precinct, "SEA ")) %>%  
  select(Precinct, CounterType, SumOfCount) %>%  
  group_by(Precinct) %>%  
  filter(CounterType %in%  
         c("Donald J. Trump & Michael R. Pence",  
           "Hillary Clinton & Tim Kaine",  
           "Registered Voters",  
           "Times Counted")) %>%  
  mutate(CounterType =  
         recode(CounterType,  
                `Donald J. Trump & Michael R. Pence` = "Trump",  
                `Hillary Clinton & Tim Kaine` = "Clinton",  
                `Registered Voters`="RegisteredVoters",  
                `Times Counted` = "TotalVotes")) %>%  
  spread(CounterType, SumOfCount) %>%  
  mutate(P_Dem = Clinton / TotalVotes,  
         P_Rep = Trump / TotalVotes,  
         Turnout = TotalVotes / RegisteredVoters) %>%  
  select(Precinct, P_Dem, P_Rep, Turnout) %>%  
  filter(!is.na(P_Dem)) %>%  
  left_join(precinct_shape) %>%  
  st_as_sf() # Makes sure resulting object is an sf dataframe
```

Taking a `glimpse()`

```
glimpse(precincts_votes_sf)
```

```
## Rows: 960
## Columns: 5
## Groups: Precinct [960]
## $ Precinct <chr> "SEA 11-1256", "SEA 11-1550", "SEA 11-1552", "SE...
## $ P_Dem      <dbl> 0.771, 0.817, 0.751, 0.838, 0.833, 0.815, 0.828,...
## $ P_Rep      <dbl> 0.1561, 0.0779, 0.1342, 0.0865, 0.0859, 0.0803, ...
## $ Turnout    <dbl> 0.693, 0.727, 0.735, 0.752, 0.758, 0.771, 0.687,...
## $ geometry   <MULTIPOLYGON [US_survey_foot]> MULTIPOLYGON (((127369...
```

Notice the `geometry` column and its unusual class: `MULTIPOLYGON`



A single observation (row) has a geometry which may consist of multiple polygons.

Voting Map

We can plot `sf` geometry using `geom_sf()`.

```
ggplot(precincts_votes_sf,  
       aes(fill=P_Dem)) +  
  geom_sf(color="white",  
          size=0.1) +  
  theme_void() +  
  theme(legend.position =  
        "bottom")
```

- `fill=P_Dem` maps color inside precincts to `P_Dem`.
- `color="white"` sets boundaries to white.
- `theme_void()` removes axes and background.

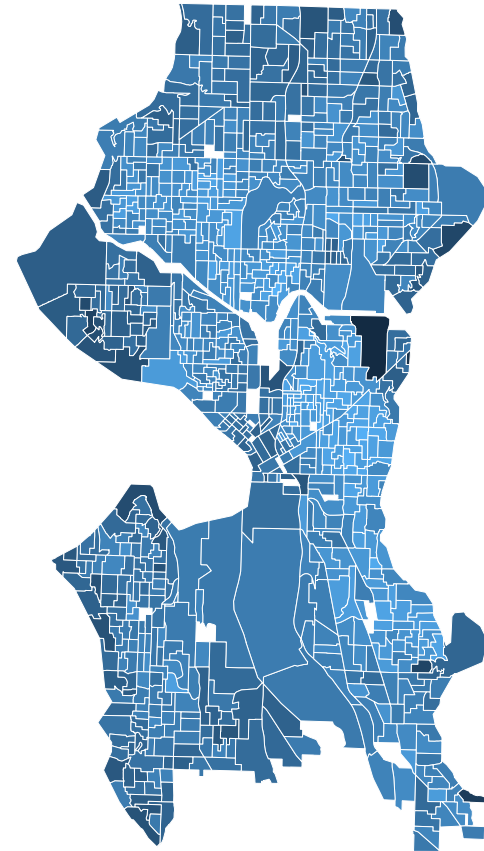

tidycensus

tidycensus

`tidycensus` can be used to search the American Community Survey (ACS) and Decennial Census for variables, then download them and automatically format them as tidy dataframes.

These dataframes include geographical boundaries such as tracts!

This package utilizes the Census API, so you will need to obtain a [Census API key](#).

Application Program Interface (API): A type of computer interface that exists as the "native" method of communication between computers, often via http (usable via `httr` package).

- R packages that interface with websites and databases typically use APIs.
- APIs make accessing data easy while allowing websites to control access.

See [the developer's GitHub page](#) for detailed instructions.

Key `tidycensus` Functions

- `census_api_key()` - Install a census api key.
 - Note you will need to run this prior to using any `tidycensus` functions.
- `load_variables()` - Load searchable variable lists.
 - `year =`: Sets census year or endyear of 5-year ACS
 - `dataset =`: Sets dataset (see `?load_variables`)
- `get_decennial()` - Load Census variables and geographical boundaries.
 - `variables =`: Provide vector of variable IDs
 - `geography =`: Sets unit of analysis (e.g. `state`, `tract`, `block`)
 - `year =`: Census year (`1990`, `2000`, or `2010`)
 - `geometry = TRUE`: Returns `sf` geometry
- `get_acs()` - Load ACS variables and boundaries.

Searching for Variables

```
library(tidycensus)
# census_api_key("PUT YOUR KEY HERE", install=TRUE)
acs_2015_vars <- load_variables(2015, "acs5")
acs_2015_vars[10:18,] %>% print()
```

```
## # A tibble: 9 x 3
##   name          label          concept
##   <chr>        <chr>        <chr>
## 1 B01001_008 Estimate!!Total!!Male!!20 years SEX BY AGE
## 2 B01001_009 Estimate!!Total!!Male!!21 years SEX BY AGE
## 3 B01001_010 Estimate!!Total!!Male!!22 to 24 years SEX BY AGE
## 4 B01001_011 Estimate!!Total!!Male!!25 to 29 years SEX BY AGE
## 5 B01001_012 Estimate!!Total!!Male!!30 to 34 years SEX BY AGE
## 6 B01001_013 Estimate!!Total!!Male!!35 to 39 years SEX BY AGE
## 7 B01001_014 Estimate!!Total!!Male!!40 to 44 years SEX BY AGE
## 8 B01001_015 Estimate!!Total!!Male!!45 to 49 years SEX BY AGE
## 9 B01001_016 Estimate!!Total!!Male!!50 to 54 years SEX BY AGE
```


Getting Data

```
king_county <- get_acs(geography="tract", state="WA",  
                        county="King", geometry = TRUE,  
                        variables=c("B02001_001E",  
                                   "B02009_001E"),  
                        output="wide")
```

What do these look like?

```
glimpse(king_county)
```

```
## Rows: 398  
## Columns: 7  
## $ GEOID      <chr> "53033032309", "53033031704", "53033032313", ...  
## $ NAME       <chr> "Census Tract 323.09, King County, Washington...  
## $ B02001_001E <dbl> 8249, 5728, 6551, 5941, 6365, 5292, 6132, 663...  
## $ B02001_001M <dbl> 457, 299, 365, 322, 275, 417, 602, 580, 311, ...  
## $ B02009_001E <dbl> 375, 633, 294, 128, 26, 80, 53, 2117, 456, 62...  
## $ B02009_001M <dbl> 246, 356, 260, 127, 37, 108, 65, 602, 287, 40...  
## $ geometry   <MULTIPOLYGON [°]> MULTIPOLYGON (((-122 47.7, ..., ...
```

With `output="wide"`, **estimates** end in **E** and *error margins* in **M**.

Processing Data

We can drop the margins of error, rename the estimates then, `mutate()` into a proportion `Any Black` measure.

```
king_county <- king_county %>%  
  select(-ends_with("M")) %>%  
  rename(`Total Population`=B02001_001E,  
         `Any Black`=B02009_001E) %>%  
  mutate(`Any Black` = `Any Black` / `Total Population`)  
glimpse(king_county)
```

```
## Rows: 398  
## Columns: 5  
## $ GEOID      <chr> "53033032309", "53033031704", "5303303...  
## $ NAME       <chr> "Census Tract 323.09, King County, Was...  
## $ `Total Population` <dbl> 8249, 5728, 6551, 5941, 6365, 5292, 61...  
## $ `Any Black`  <dbl> 0.04546, 0.11051, 0.04488, 0.02155, 0....  
## $ geometry    <MULTIPOLYGON [°]> MULTIPOLYGON (((-122 47.7...
```


Mapping Code

```
king_county %>%  
  ggplot(aes(fill=`Any Black`)) +  
  geom_sf(size=0.1, color="white") +  
  coord_sf(crs = "+proj=longlat +datum=WGS84", datum=NA) +  
  scale_fill_continuous(name="Any Black\n",  
                        low="#d4d5f9",  
                        high="#00025b") +  
  theme_minimal() + ggtitle("Proportion Any Black")
```

New functions:

- `geom_sf()` draws Simple Features coordinate data.
- `coord_sf()` is used here with these arguments:
 - `crs`: Modifies the coordinate reference system (CRS); WGS84 is possibly the most commonly used CRS.
 - `datum=NA`: Removes graticule lines, which are geographical lines such as meridians and parallels.

Proportion Any Black

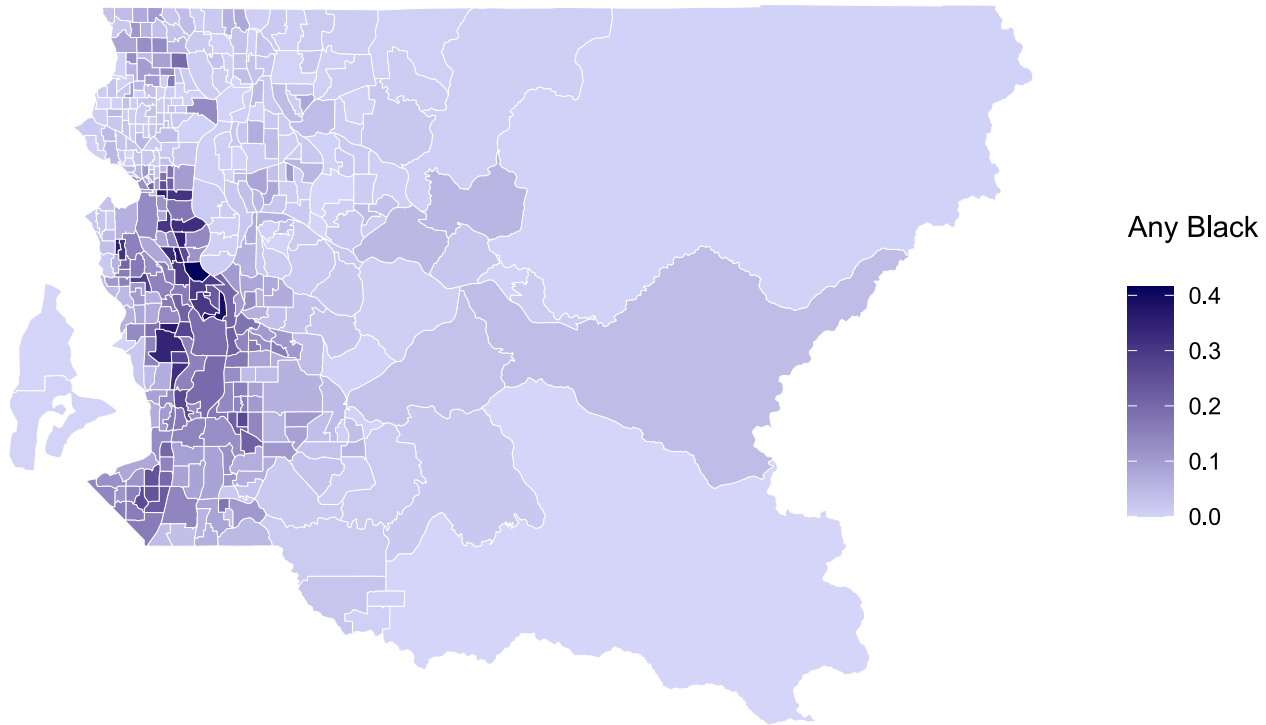

Removing Water


With a simple function and boundaries of water bodies in King County, we can replace water with empty space.

```
st_erase <- function(x, y) {  
  st_difference(x, st_make_valid(st_union(st_combine(y))))  
}  
kc_water <- tigris::area_water("WA", "King", class = "sf")  
kc_nowater <- king_county %>%  
  st_erase(kc_water)
```

- `st_combine()` merges all geometries into one
- `st_union()` resolves internal boundaries
- `st_difference()` subtracts `y` geometry from `x`
- `st_make_valid()` fixes geometry errors from subtraction
- `area_water()` obtains `sf` geometry of water bodies

Then we can reproduce the same plot using `kc_nowater`...

Proportion Any Black

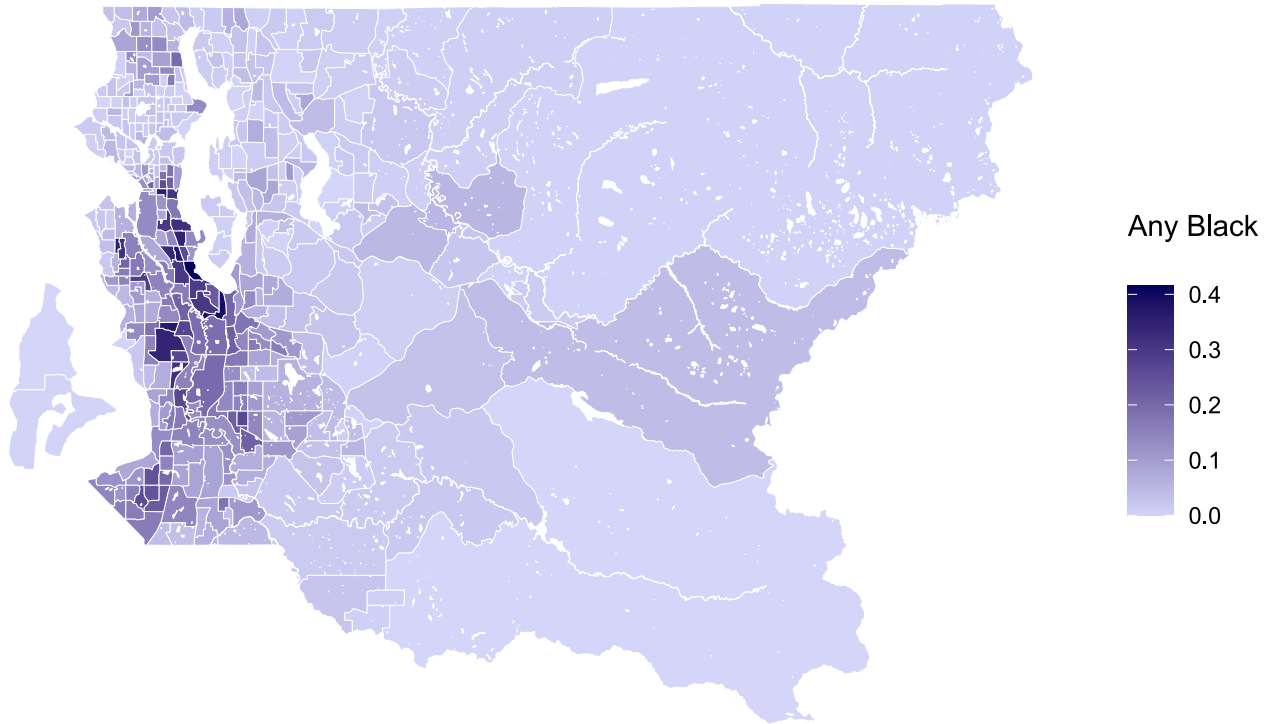


State Example Data

Let's do this again, but for the entire state of Illinois.

```
pb_state <-  
  get_acs(geography = "tract", state = "IL",  
          geometry = TRUE,  
          variables = c("B02001_001E",  
                        "B02009_001E"),  
          output = "wide") %>%  
  select(-ends_with("M")) %>%  
  rename(`Total Population`=B02001_001E,  
         `Any Black`=B02009_001E) %>%  
  mutate(`Any Black` = `Any Black` / `Total Population`)
```

State Example Plot

```
pb_state %>%  
  ggplot(aes(fill=`Any Black`)) +  
  geom_sf(lwd=0) +  
  coord_sf(crs = "+proj=longlat +datum=WGS84", datum=NA) +  
  scale_fill_continuous(name="Any Black\n",  
                        low="#d4d5f9",  
                        high="#00025b") +  
  theme_minimal()
```

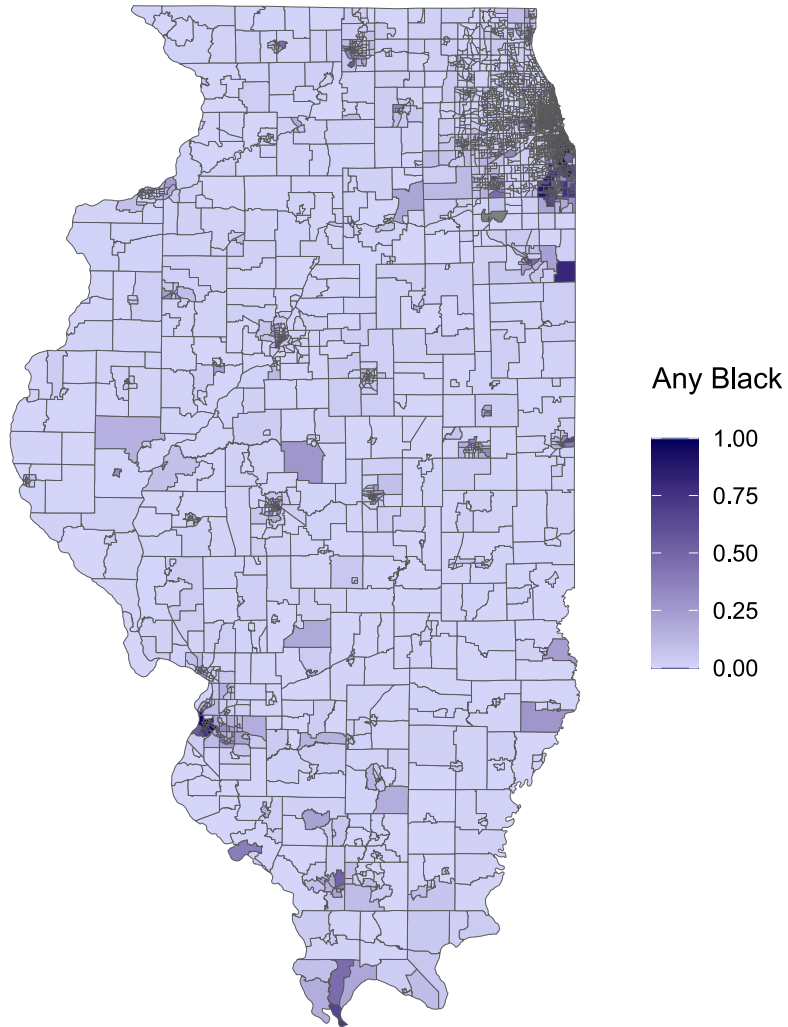End of Exposure 4, Part 2