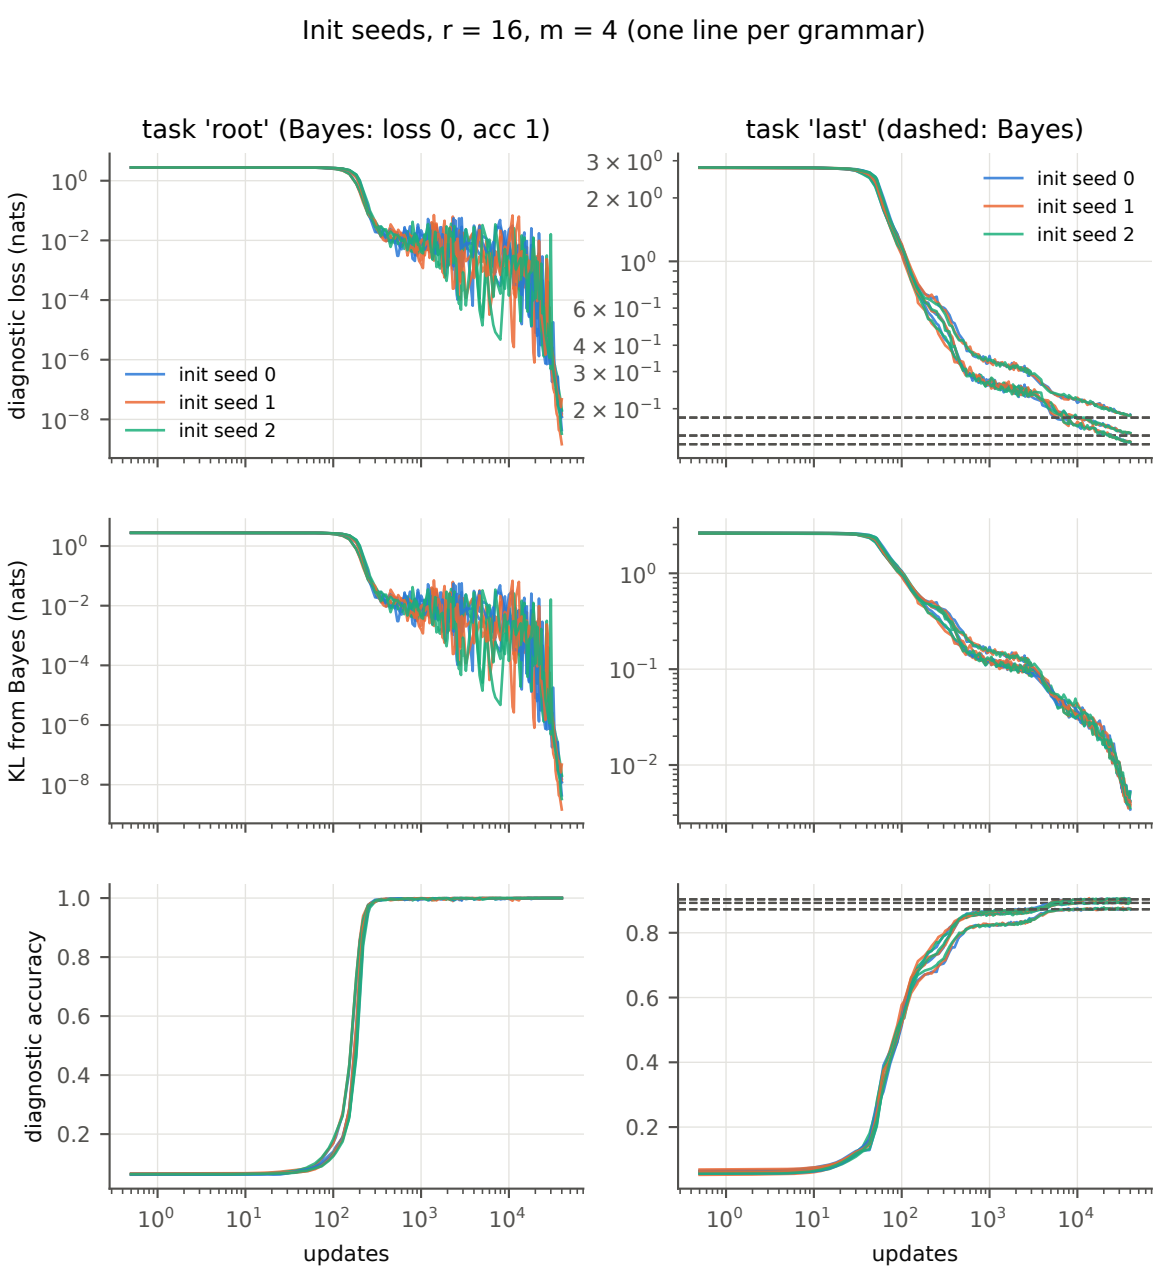

Init seeds, r = 16, m = 4 (one line per grammar)
task 'root' (Bayes: loss 0, acc 1)
task 'last' (dashed: Bayes)
diagnostic loss (nats)
KL from Bayes (nats)
diagnostic accuracy
init seed 0
init seed 1
init seed 2
updates