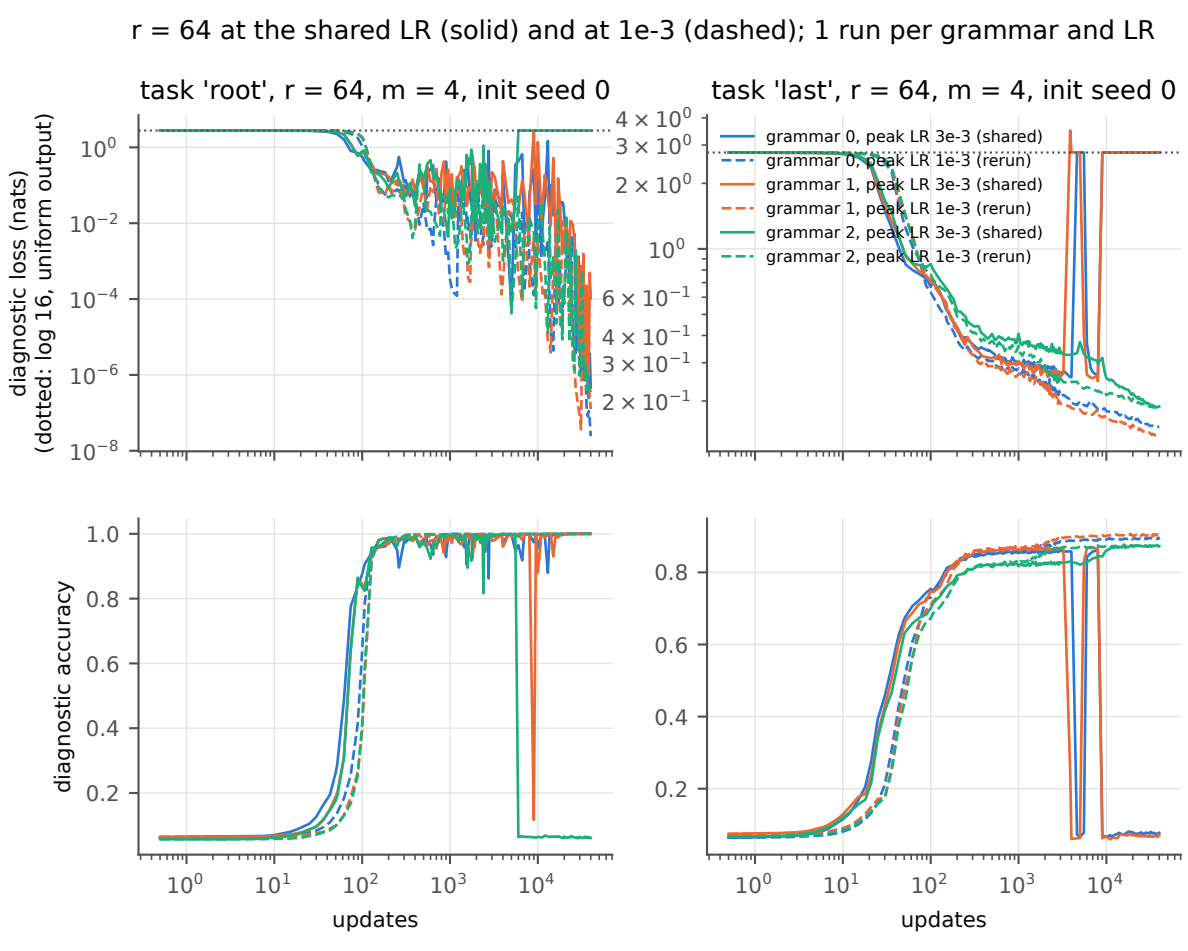
r = 64 at the shared LR (solid) and at 1e-3 (dashed); 1 run per grammar and LR
task 'root', r = 64, m = 4, init seed 0
task 'last', r = 64, m = 4, init seed 0
diagnostic loss (nats)
(dotted: log 16, uniform output)
diagnostic accuracy
updates
updates
grammar 0, peak LR 3e-3 (shared)
grammar 0, peak LR 1e-3 (rerun)
grammar 1, peak LR 3e-3 (shared)
grammar 1, peak LR 1e-3 (rerun)
grammar 2, peak LR 3e-3 (shared)
grammar 2, peak LR 1e-3 (rerun)