OPERATING SYSTEM

Computing Environment

Dr Rahul Nagpal
Computer Science

OPERATING SYSTEM

Computing Environment

Dr. Rahul Nagpal
Computer Science

Computing Environments - Traditional

- Stand-alone general purpose machines
- But blurred as most systems interconnect with others (i.e., the Internet)
- **Portals** provide web access to internal systems
- **Network computers** (**thin clients**) are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks

Computing Environments - Mobile

- Handheld smartphones, tablets, etc
- What is the functional difference between them and a “traditional” laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like ***augmented reality***
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Leaders are **Apple iOS** and **Google Android**

Computing Environments - Distributed

- Distributed computing
  - Collection of separate, possibly heterogeneous, systems networked together
    - **Network** is a communications path, **TCP/IP** most common
      - **Local Area Network** (**LAN**)
      - **Wide Area Network** (**WAN**)
      - **Metropolitan Area Network** (**MAN**)
      - **Personal Area Network** (**PAN**)
  - **Network Operating System** provides features between systems across network
    - Communication scheme allows systems to exchange messages
    - Illusion of a single system

Computing Environments – Peer-to-Peer

- Another model of distributed system
- P2P does not distinguish clients and servers
  - Instead all nodes are considered peers
  - May each act as client, server or both
  - Node must join P2P network
    - Registers its service with central lookup service on network, or
    - Broadcast request for service and respond to requests for service via ***discovery protocol***
  - Examples include Napster and Gnutella, **Voice over IP** (**VoIP**) such as Skype

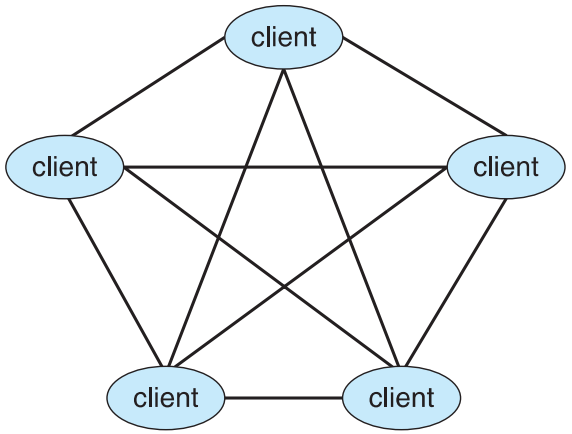

Computing Environments - Virtualization

- Allows operating systems to run applications within other OSes
  - Vast and growing industry
- **Emulation** used when source CPU type different from target type (i.e. PowerPC to Intel x86)
  - Generally slowest method
  - When computer language not compiled to native code – **Interpretation**
- **Virtualization** – OS natively compiled for CPU, running **guest** OSes also natively compiled
  - Consider VMware running WinXP guests, each running applications, all on native WinXP **host** OS
  - **VMM** (virtual machine Manager) provides virtualization services

Computing Environments - Virtualization

- Use cases involve laptops and desktops running multiple OSes for exploration or compatibility
  - Apple laptop running Mac OS X host, Windows as a guest
  - Developing apps for multiple OSes without having multiple systems
  - QA testing applications without having multiple systems
  - Executing and managing compute environments within data centers
- VMM can run natively, in which case they are also the host
  - There is no general purpose host then (VMware ESX and Citrix XenServer)

OPERATING SYSTEMS

Computing Environments - Virtualization

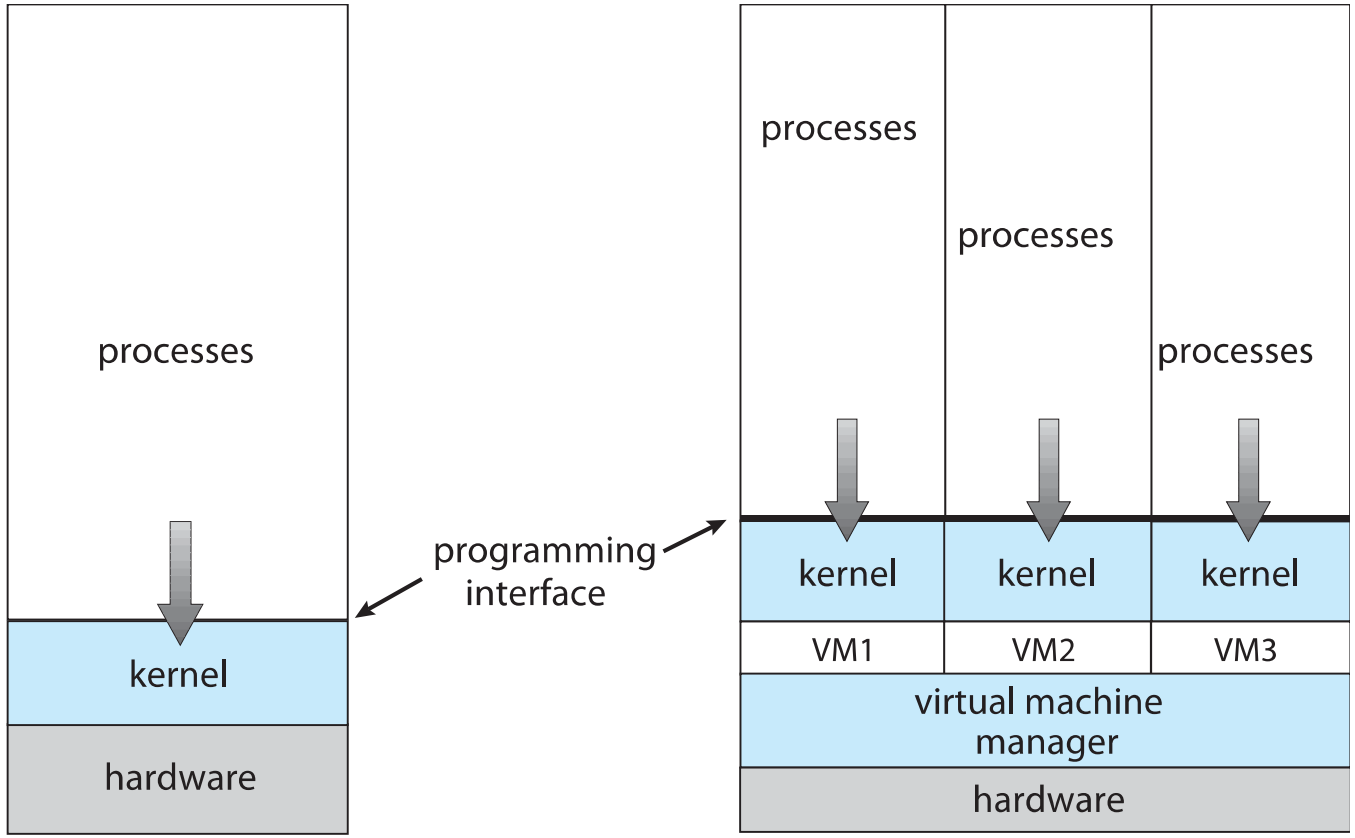

OPERATING SYSTEMS

Computing Environments - Cloud Computing

- Delivers computing, storage, even apps as a service across a network
- Logical extension of virtualization because it uses virtualization as the base for it functionality.
- Amazon EC2 has thousands of servers, millions of virtual machines, petabytes of storage available across the Internet, pay based on usage
- Many types
  - Public cloud – available via Internet to anyone willing to pay
  - Private cloud – run by a company for the company's own use
  - Hybrid cloud – includes both public and private cloud components
  - Software as a Service (SaaS) – one or more applications available via the Internet (i.e., word processor)
  - Platform as a Service (PaaS) – software stack ready for application use via the Internet (i.e., a database server)
  - Infrastructure as a Service (IaaS) – servers or storage available over Internet (i.e., storage available for backup use)

- Cloud computing environments composed of traditional OSes, plus VMMs, plus cloud management tools
  - Internet connectivity requires security like firewalls
  - Load balancers spread traffic across multiple applications

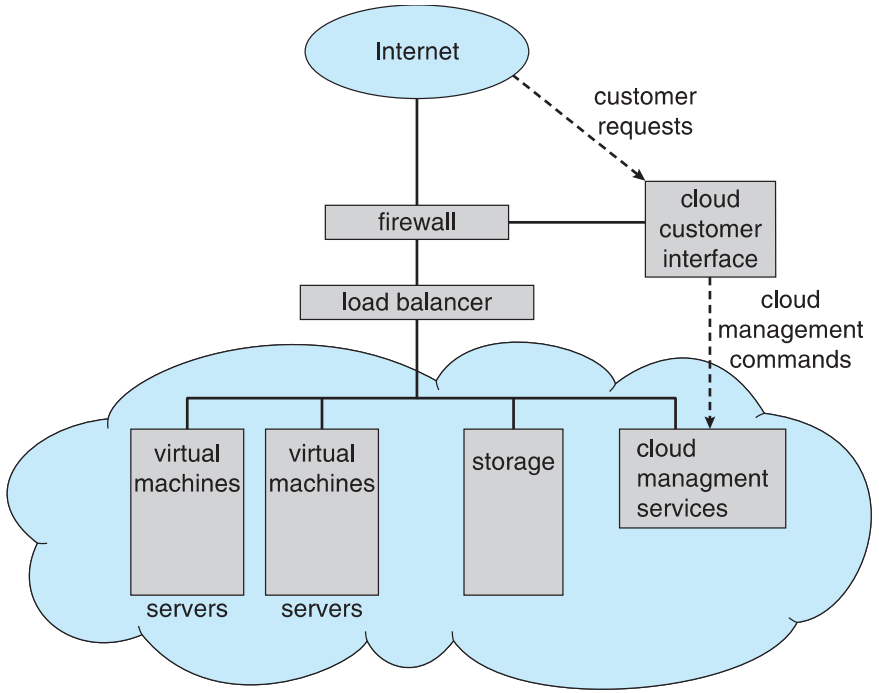

- Real-time embedded systems most prevalent form of computers
  - Vary considerable, special purpose, limited purpose OS, **real-time OS**
  - Use expanding
- Many other special computing environments as well
  - Some have OSes, some perform tasks without an OS
- Real-time OS has well-defined fixed time constraints
  - Processing ***must*** be done within constraint
  - Correct operation only if constraints met

THANK YOU

Dr Rahul Nagpal

Computer Science

rahulnagpal@pes.edu