


CI/CD DEPLYMENT FOR SPRINGBOOT APPLICATION

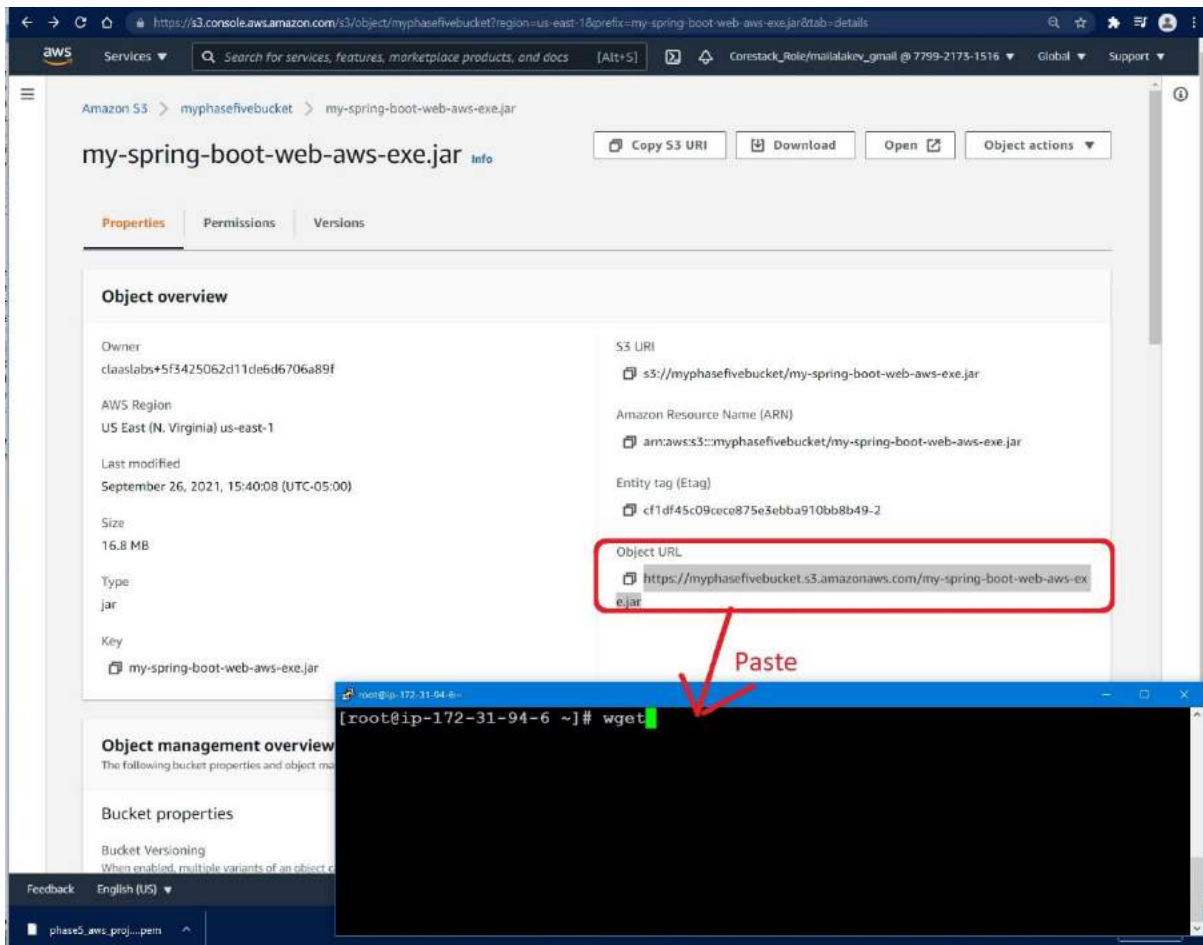

Practice Labs

PG FSD Testing in a DevOps Lifecycle

1 Class completed | 93% Self-Learning Videos Watched | 0/2 Projects Done

BACK

SELF LEARNING

LIVE CLASSES

PRACTICE LABS

ASSESSMENT

CERTIFICATE

FSD Java AWS

This Lab will get reset on 19th September 2021, 4:55 PM

Current Lab : AWS Certification - Dedicated Account

Access Information Lab Details Components Log Details Usage Details

Applications

AWS Web Console AWS API Access

AWS Web Console

Auth Url

<https://signin.aws.amazon.com/feder>

Session Expires in: 7h 59m 11s

Refresh Link

1. Session Duration is for 8 Hours. Post the session duration all the resources will be cleaned up automatically.
2. Auth URL enables Single-Sign-On, so the URL will vary for each session and the same URL will not work next time. Refresh the Access Details.

Powered by

CORESTACK

Terms & Conditions

AWS Certification - Dedicated Account

Category: Cloud Computing
Start Date: 2021-09-19 19:25
End Date: 2021-09-27 08:59
Code: SLAWS

Amazon Web Services (AWS) offers a suite of cloud-computing services that make up an on-demand computing platform. AWS has more than 70 services, spanning a wide range, including compute, storage, networking, databases, analytics, application services, deployment, management, mobile, developer tools and tools for the Internet of things.

TERMINATE LAB ACCESS

Practice Labs

AWS Management Console

<https://us-east-1.console.aws.amazon.com/console/home?region=us-east-1#>

Services

Search for services, features, marketplace products, and docs [Alt+S]

Corestack_Rohit@malakay@gmail | 7291-1173-1516 N. Virginia Support

AWS Management Console

AWS services

▼ Recently visited services
Your recently visited AWS services appear here.

► All services

Build a solution
Get started with simple wizards and automated workflows.

Launch a virtual machine
With EC2
2-3 minutes

Build a web app
With Elastic Beanstalk
6 minutes

Build using virtual servers
With Lightsail
1-2 minutes

Register a domain
With Route 53
3 minutes

Connect an IoT device
With AWS IoT
5 minutes

Start migrating to AWS
With AWS MGN
1-2 minutes

► See more

Getting Started with AWS
Learn the fundamentals and more building on AWS now. [Get Started](#) **FS**

Stay connected to your AWS resources on-the-go

AWS Console Mobile App now supports four additional regions. Download the AWS Console Mobile App to your iOS or Android mobile device. [Learn more](#)

Explore AWS



AWS Certification
Propel your career forward with AWS Certification. [Learn more](#)

Free AWS Training
Advance your career with AWS Cloud Practitioner Essentials—a free, six-hour, foundational course. [Learn more](#)

AWS Certification
Explore the resources available to help you prepare for your AWS Certification. [Learn more](#)

AWS Certification
Get a complete overview of all things AWS Certification in this free e-book. [Learn more](#)



Have feedback?

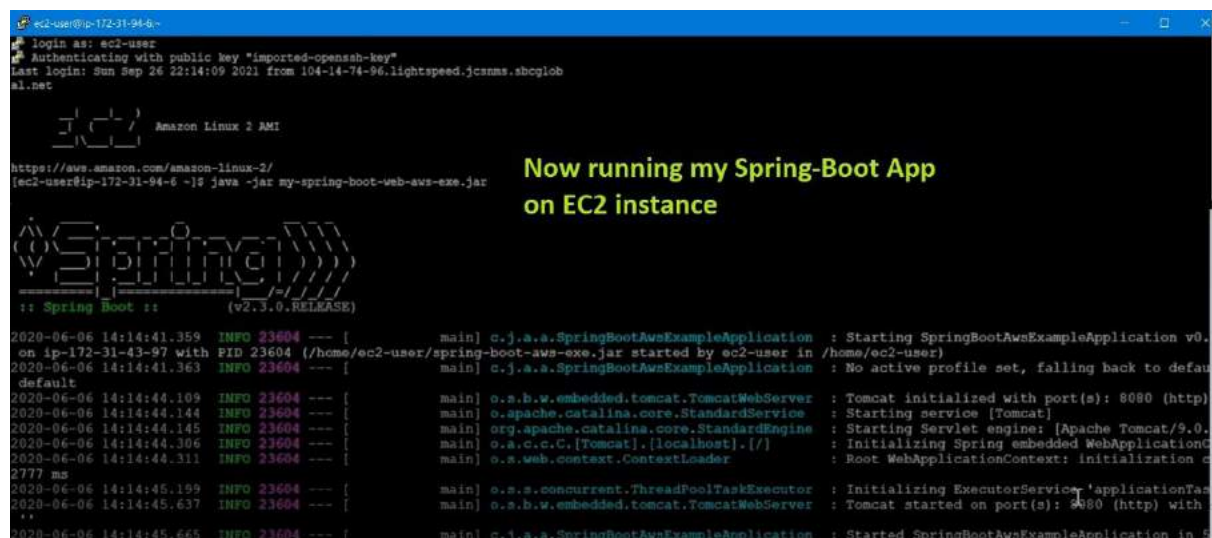
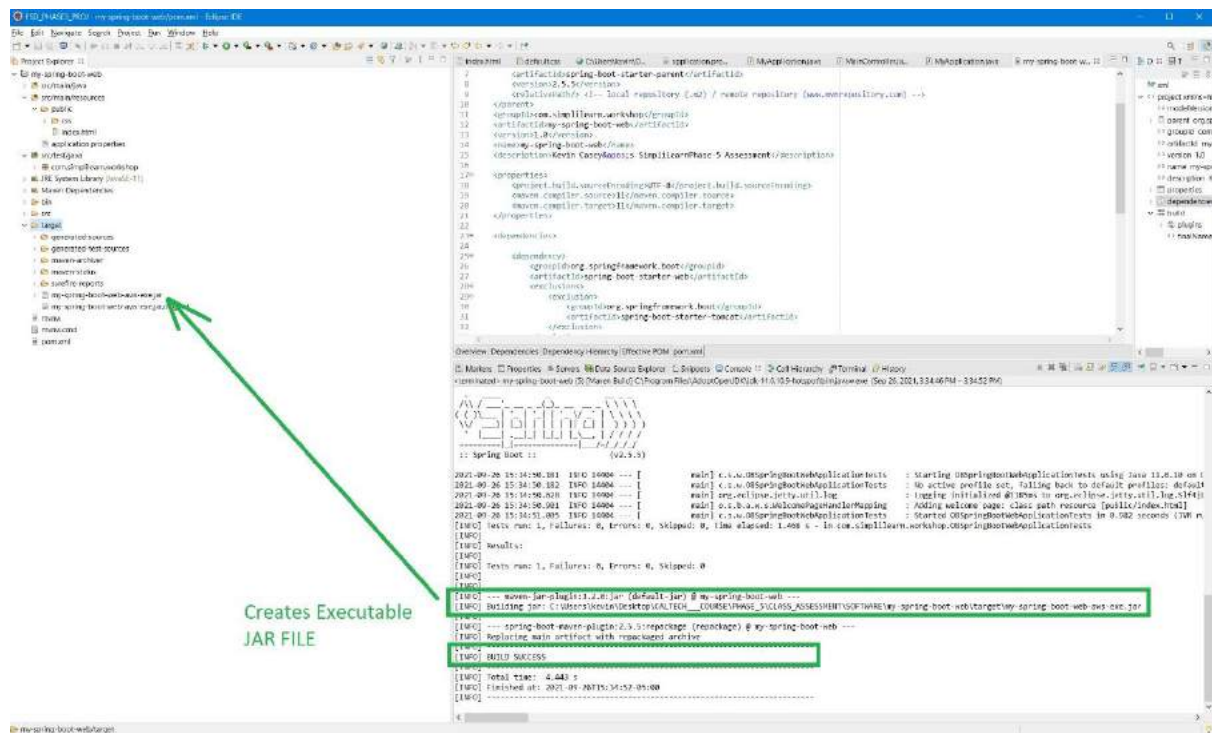


```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
3     xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.xsd">
4     <modelVersion>4.0.0</modelVersion>
5     <parent>
6         <groupId>org.springframework.boot</groupId>
7         <artifactId>spring-boot-starter-parent</artifactId>
8         <version>2.5.5</version>
9         <relativePath/> <!-- local repository (.m2) / remote repository (www.mvnrepository.com) -->
10    </parent>
11    <groupId>com.simplilearn.workshop</groupId>
12    <artifactId>my-spring-boot-web</artifactId>
13    <version>1.0</version>
14    <name>my-spring-boot-web</name>
15    <description>Kevin Casey's SimpliLearnPhase-5 Assessment</description>
16    <properties>
17        <java.version>11</java.version>
18    </properties>
19    <dependencies>
20        <dependency>
21            <groupId>org.springframework.boot</groupId>
22            <artifactId>spring-boot-starter-web</artifactId>
23            <exclusions>
24                <exclusion>
25                    <groupId>org.springframework.boot</groupId>
26                    <artifactId>spring-boot-starter-tomcat</artifactId>
27                </exclusion>
28            </exclusions>
29        </dependency>
30
31        <dependency>
32            <groupId>org.springframework.boot</groupId>
33            <artifactId>spring-boot-starter-jetty</artifactId>
34        </dependency>
35
36        <dependency>
37            <groupId>org.springframework.boot</groupId>
38            <artifactId>spring-boot-starter-test</artifactId>
39            <scope>test</scope>
40        </dependency>
41    </dependencies>
42
43    <build>
44        <plugins>
45            <plugin>
46                <groupId>org.springframework.boot</groupId>
47                <artifactId>spring-boot-maven-plugin</artifactId>
48            </plugin>
49        </plugins>
50    </build>
51
52 </project>
53

```

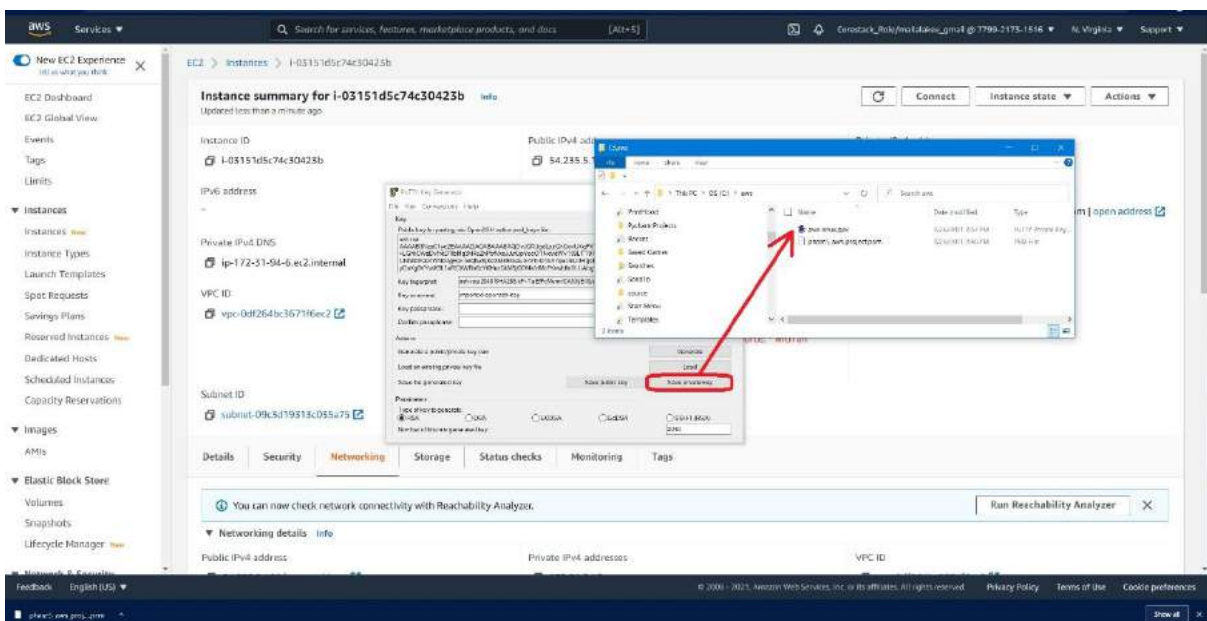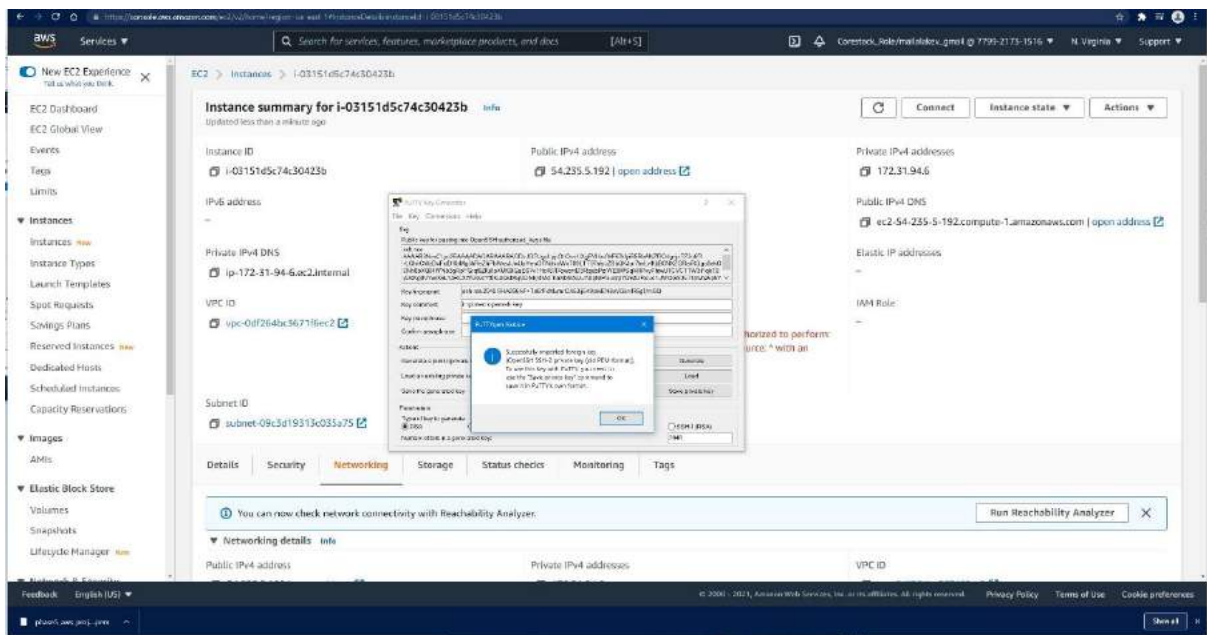

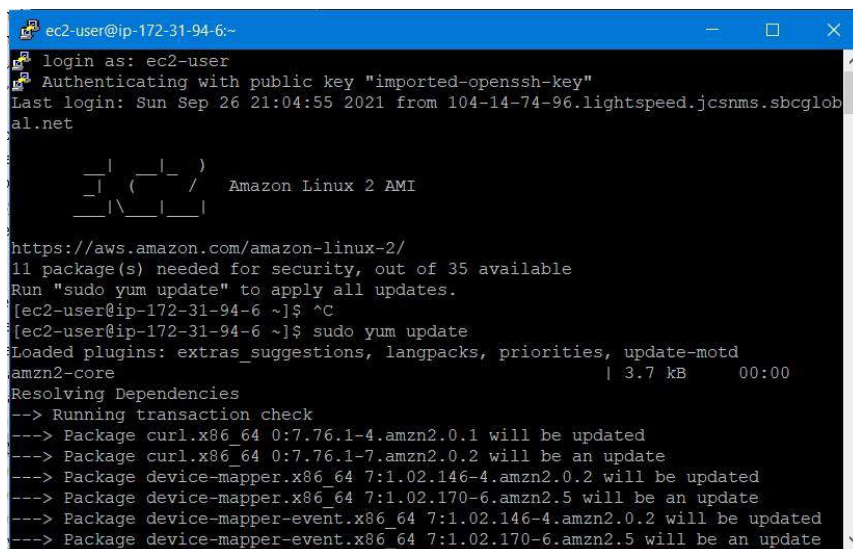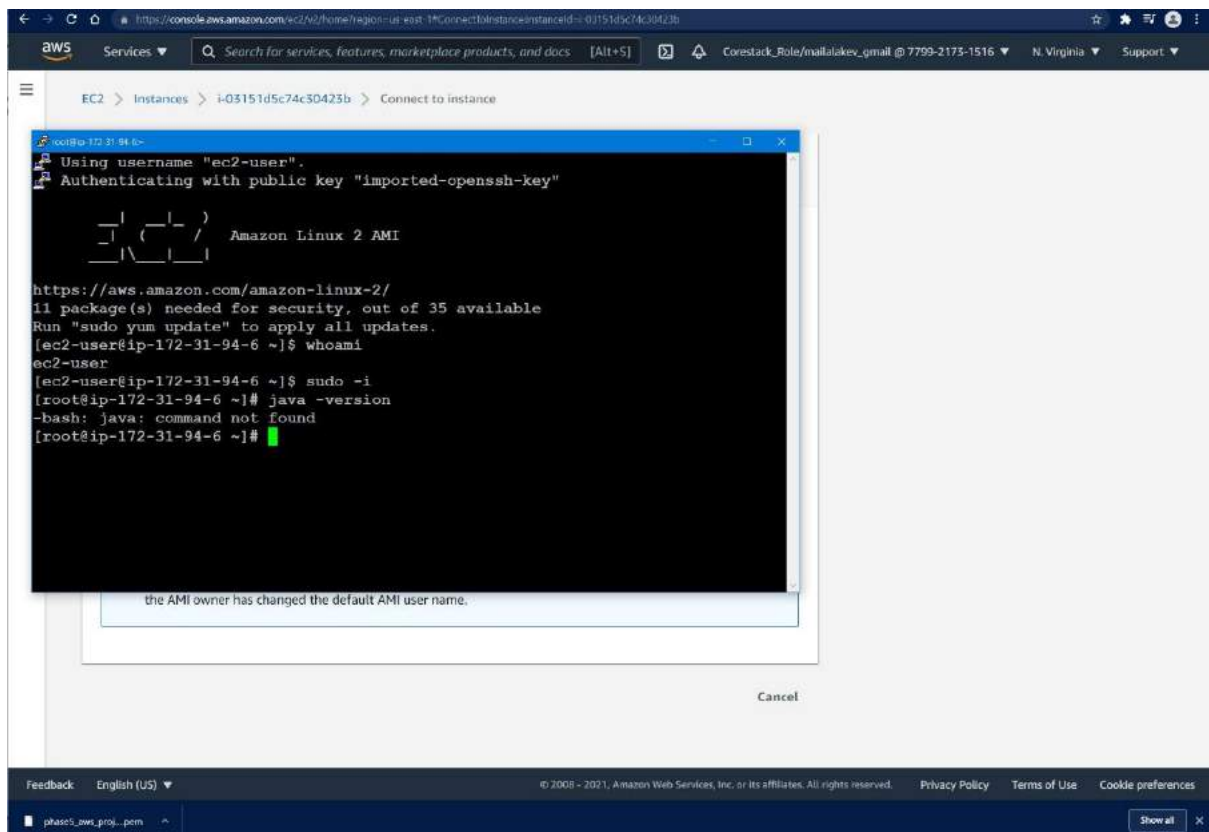


```
ec2-user@ip-172-31-94-6:~$ sudo yum install jenkins
Downloading packages:
(1/2): daemonize-1.7.7-1.el7.x86_64.rpm | 21 kB 00:00:00
(2/2): jenkins-2.303.1-1.1.noarch.rpm | 69 MB 00:00:20
-----
Total | 3.4 MB/s | 69 MB 00:00:20
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : daemonize-1.7.7-1.el7.x86_64 1/2
  Installing : jenkins-2.303.1-1.1.noarch 2/2
  Verifying : daemonize-1.7.7-1.el7.x86_64 1/2
  Verifying : jenkins-2.303.1-1.1.noarch 2/2


Installed:
jenkins.noarch 0:2.303.1-1.1



Dependency Installed:
daemonize.x86_64 0:1.7.7-1.el7

Complete!
[ec2-user@ip-172-31-94-6 ~]$ sudo systemctl start jenkins
[ec2-user@ip-172-31-94-6 ~]$ sudo systemctl status jenkins
● jenkins.service - LSB: Jenkins Automation Server
   Loaded: loaded (/etc/rc.d/init.d/jenkins; bad; vendor preset: disabled)
   Active: active (running) since Sun 2021-09-26 22:39:58 UTC; 9s ago
     Docs: man:systemd-sysv-generator(8)
   Process: 5746 ExecStart=/etc/rc.d/init.d/jenkins start (code=exited, status=0/SUCCESS)
   CGroup: /system.slice/jenkins.service
           └─5750 /usr/lib/jvm/java-1.8.0/bin/java -Djava.awt.headless=true -DJENKINS_HOME=/var/lib/jenkins -jar ...

Sep 26 22:39:58 ip-172-31-94-6.ec2.internal systemd[1]: Starting LSB: Jenkins Automation Server...
Sep 26 22:39:58 ip-172-31-94-6.ec2.internal jenkins[5746]: Starting Jenkins [ OK ]
Sep 26 22:39:58 ip-172-31-94-6.ec2.internal systemd[1]: Started LSB: Jenkins Automation Server.
[ec2-user@ip-172-31-94-6 ~]$
```

Jenkins Now Running on EC2 - as a service

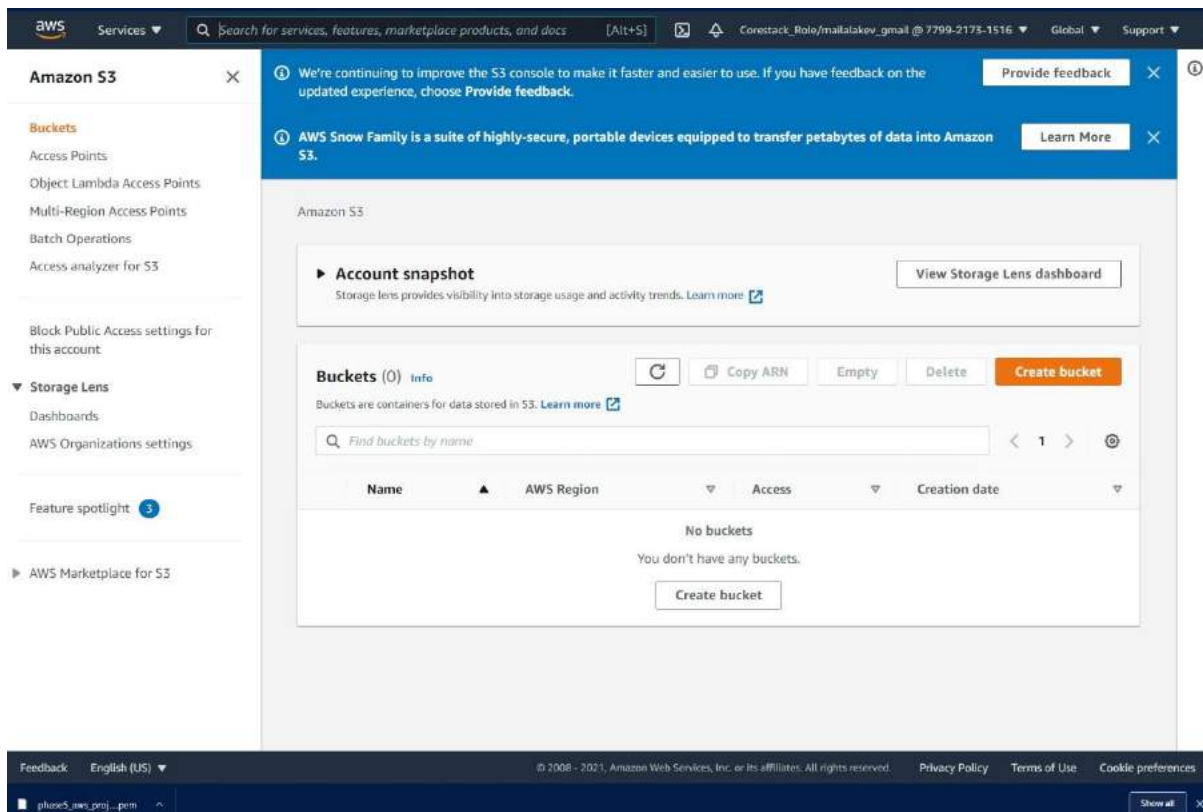

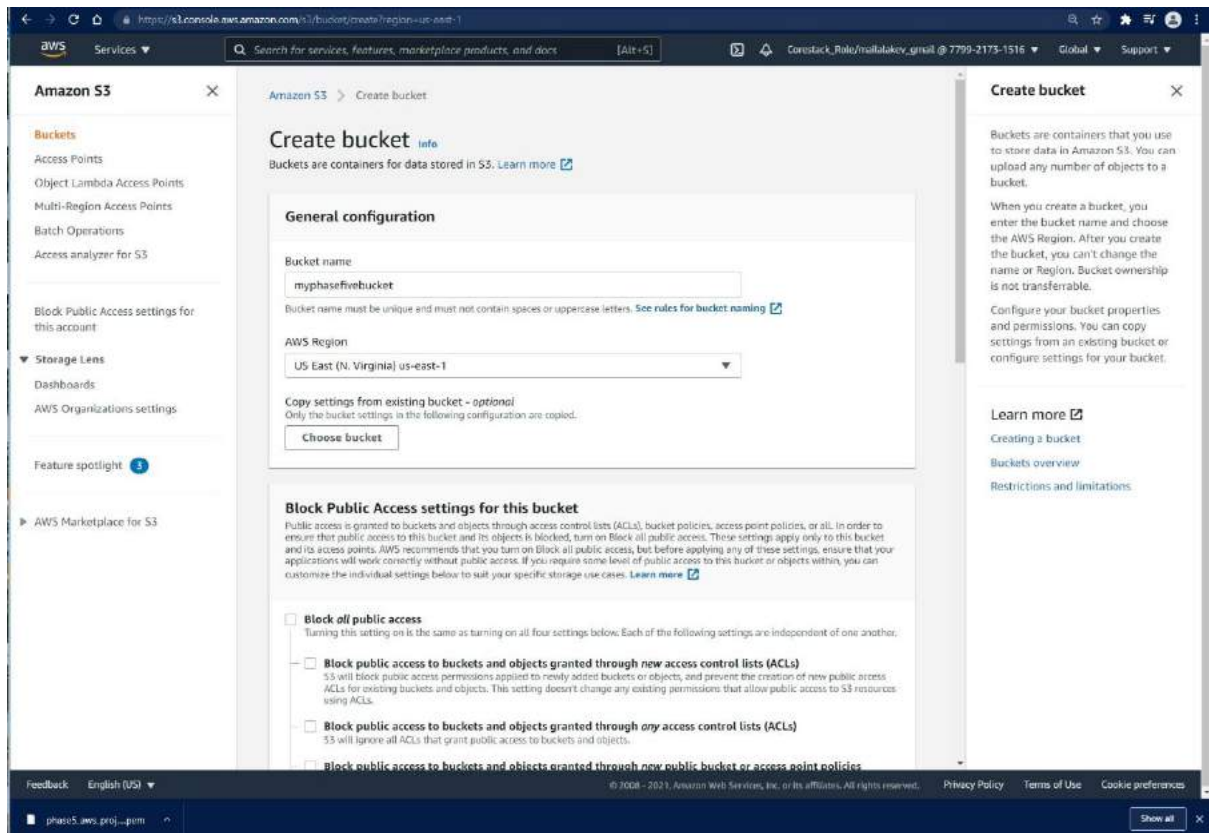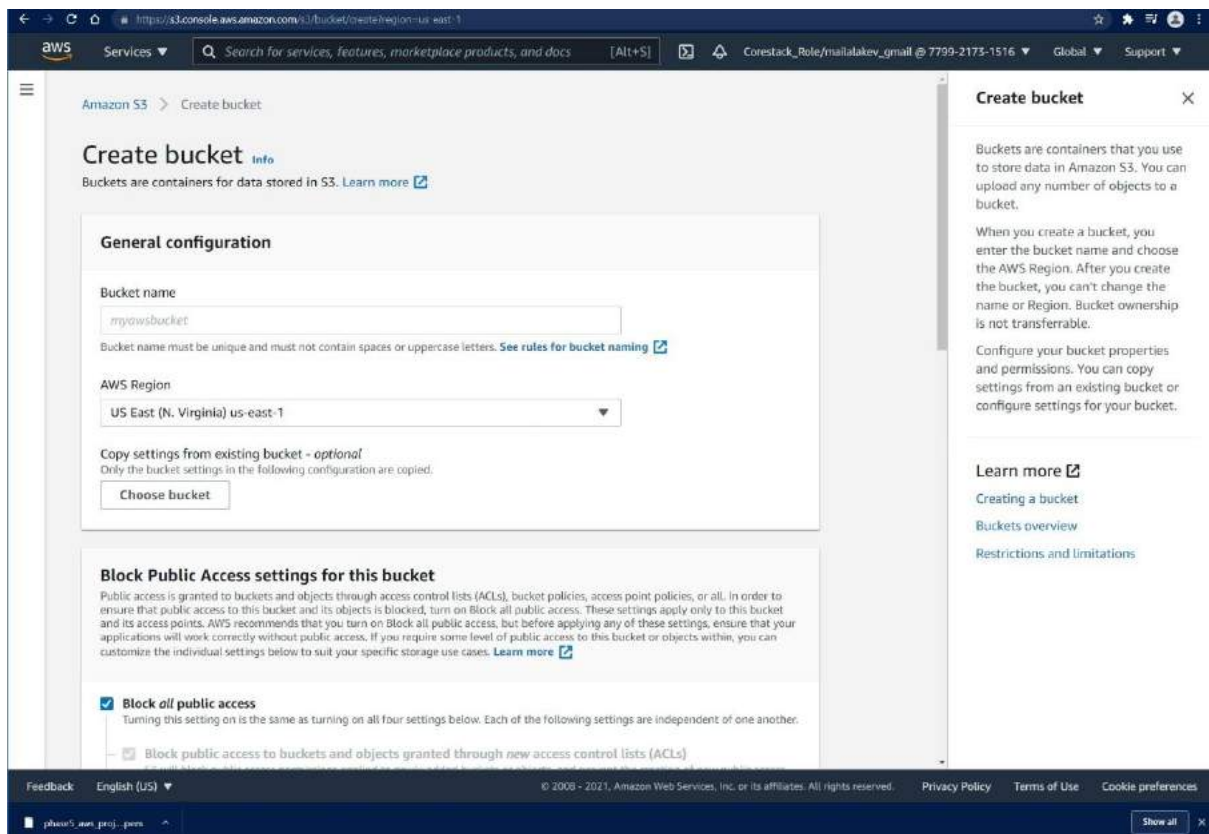

aws

Services

Search for services, features, marketplace products, and docs

[Alt+S]

CoreStack_Role@mailakiev_gmail @ 7799-2175-1516

Global

Support

Amazon S3

Buckets

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

Access analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

AWS Organizations settings

Feature spotlight

AWS Marketplace for S3

Successfully created bucket "myphasefivebucket"

To upload files and folders, or to configure additional bucket settings choose [View details](#).

Amazon S3

Account snapshot

Storage lens provides visibility into storage usage and activity trends. [Learn more](#)

[View Storage Lens dashboard](#)

Buckets (1)

Buckets are containers for data stored in S3. [Learn more](#)

Copy ARN

Empty

Delete

Create bucket

Name	AWS Region	Access	Creation date
myphasefivebucket	US East (N. Virginia) us-east-1	Objects can be public	September 26, 2021, 15:28:05 (UTC-05:00)

Buckets

Buckets are containers for objects stored in Amazon S3. You can store any number of objects in a bucket and can have up to 100 buckets in your account. To request an increase, visit the [Service Quotas Console](#). You can create, configure, empty, and delete buckets. However, you can only delete an empty bucket.

Manage access

Buckets are private and can only be accessed if you explicitly grant permissions. Use bucket policies, IAM policies, access control lists (ACLs), and S3 Access Points to manage access.

Configure your bucket

You can configure your bucket to support your use case. For example, host a static website, use S3 Versioning and replication for disaster recovery, S3 Lifecycle to manage storage costs, and logging to track requests.

Understand storage usage and activity

The S3 Storage Lens account snapshot displays your total storage, object count, and average object size for all buckets in the account. View your S3 Storage Lens dashboard to analyze your usage and activity trends by AWS Region, storage class, bucket, or prefix.

Feedback

English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

phase5_sns_proj...pem

Show all

← → ↻ 🔍

https://s3.console.aws.amazon.com/s3/buckets/myphasefivebucket/region=us-east-1/?tab=objects

🔍 ⚙️ 🏠 📄 👤

aws Services 🔻 🔍 Search for services, features, marketplace products, and docs [Alt+S] 📄 📧 Corestack_Role@mailalakev.gmail @ 7799-2175-1516 🌐 Global 📄 Support 🔻

☰

Amazon S3 > myphasefivebucket

myphasefivebucket info

Objects Properties Permissions Metrics Management Access Points

Objects (0)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

🔄

📄 Copy S3 URI

📄 Copy URL

📄 Download

🔗 Open

🗑️ Delete

⌵ Actions

Create folder

📁 Upload

🔍 Find objects by prefix

< 1 > ⚙️

☐ Name ▲ Type ▼ Last modified ▼ Size ▼ Storage class ▼

No objects

You don't have any objects in this bucket.

📁 Upload

Objects

You can view all the objects in a bucket or folder, including their name, type, last modified, size, storage class, and tags.

Objects are the fundamental entities stored in Amazon S3. You must explicitly grant others permissions to access your objects. Each object has *data*, a *key*, and *metadata*. The object key (or key name) uniquely identifies the object in a bucket.

Amazon S3 maintains a set of system and user metadata for each object and processes the system metadata as needed for storage management.

Amazon S3 has a flat structure instead of a hierarchy like you might see in a file system. However, the console supports the folder concept as a means of grouping objects, using a shared name prefix for objects in the same folder.

Use this page to see all the objects in a bucket or folder. You can open, download, delete, and copy the URL for selected objects. Choose **Actions** to perform object actions like calculate size, copy, restore, edit, and query with S3 Select. Choose **Create folder** to create a folder, and choose **Upload** to upload an object.

Feedback English (US) 🔻

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences

phase5_aws_proj...pen ⌵

Show all ✕

← → ↻ 🔍

https://s3.console.aws.amazon.com/s3/upload/myphasefivebucket?region=us-east-1

🔍 Search for services, features, marketplace products, and docs [Alt+S]

🔔 Corestack_Role@mailalakev_gmail @ 7799-2173-1516

🌐 Global

🛎 Support

Amazon S3 > myphasefivebucket > Upload

Upload

Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDK or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose [Add files](#), or [Add folders](#).

Files and folders (1 Total, 16.8 MB)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

< 1 >

<input type="checkbox"/>	Name	Folder	Type	Size
<input type="checkbox"/>	my-spring-boot-web-aws-exe.jar	-	-	16.8 MB

Destination

Destination

s3://myphasefivebucket

▶ Destination details

Bucket settings that impact new objects stored in the specified destination.

▶ Permissions

Grant public access and access to other AWS accounts.

▶ Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload

Upload

Upload one or more objects (files and folders) to the destination bucket. Drag and drop files and folders into the box, or choose [Add files](#) or [Add folders](#).

To upload objects larger than 160 GB, use the AWS CLI, SDK, or REST API.

Additional upload options

Configure additional properties for the uploaded objects, including storage class, server-side encryption settings, access control list (ACL) settings, tags, and metadata.

Learn more

[Uploading objects](#)

[Working with objects](#)

[Objects overview](#)

Feedback

English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

phase5_aws_proj...pem

Show all

aws

Services

Search for services, features, marketplace products, and docs

[Alt+S]

Corestack_Role@mailakev_gmail @ 7799-2173-1516

Global

Support

Upload succeeded

View details below.

Upload: status

Close

The information below will no longer be available after you navigate away from this page.

Summary

Destination

s3://myphasefivebucket

Succeeded

1 file, 16.8 MB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (1 Total, 16.8 MB)

Find by name

< 1 >

Name	Folder	Type	Size	Status	Error
my-spring-boot-web-aws-exe.jar	-	-	16.8 MB	Succeeded	-

Feedback

English (US)

© 2008 – 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

phase5_aws_proj_...pem

Show all

← → ↺ 🔍

https://s3.console.aws.amazon.com/s3/buckets/myphasefivebucket/object/edit_public_read_access?region=us-east-1&showversions=false

🔍 ⚙️ 📄 📧

aws Services 🔻 🔍 Search for services, features, marketplace products, and docs [Alt+S] 📄 📧 Corestack_Role@mailalakev_gmail @ 7799-2173-1516 🔻 Global 🔻 Support 🔻


☰

Amazon S3 > myphasefivebucket > Make public

🔔


Make public Info

The make public action enables public read access in the object access control list (ACL) settings. [Learn more](#)

 When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.

Specified objects

< 1 >

Name ▲	Type ▼	Last modified ▼	Size ▼
 my-spring-boot-web-aws-exe.jar	jar	September 26, 2021, 15:40:08 (UTC-05:00)	16.8 MB

Cancel Make public

Feedback English (US) 🔻

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. [Privacy Policy](#) [Terms of Use](#) [Cookie preferences](#)

Amazon S3 > myphasefivebucket > my-spring-boot-web-aws-exe.jar

my-spring-boot-web-aws-exe.jar Info

[Copy S3 URI](#) [Download](#) [Open](#) [Object actions](#)

Properties

Permissions

Versions

Object overview

Owner	claaslabs+5f3425062d11de6d6706a89f	S3 URI	s3://myphasefivebucket/my-spring-boot-web-aws-exe.jar
AWS Region	US East (N. Virginia) us-east-1	Amazon Resource Name (ARN)	arn:aws:s3:::myphasefivebucket/my-spring-boot-web-aws-exe.jar
Last modified	September 26, 2021, 15:40:08 (UTC-05:00)	Entity tag (Etag)	cf1df45c09cece875e3ebba910bb8b49-2
Size	16.8 MB	Object URL	https://myphasefivebucket.s3.amazonaws.com/my-spring-boot-web-aws-exe.jar
Type	jar		
Key	my-spring-boot-web-aws-exe.jar		

Object management overview

The following bucket properties and object metadata are displayed.

Bucket properties

Bucket Versioning

When enabled, multiple variants of an object can be stored in the bucket.

```
root@ip-172-31-94-6:~# curl -X PUT -T my-spring-boot-web-aws-exe.jar https://myphasefivebucket.s3.amazonaws.com/my-spring-boot-web-aws-exe.jar
Resolving myphasefivebucket.s3.amazonaws.com (myphasefivebucket.s3.amazonaws.com) ... 52.217.93.196
Connecting to myphasefivebucket.s3.amazonaws.com (myphasefivebucket.s3.amazonaws.com)|52.217.93.196|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 17646207 (17M) [application/x-www-form-urlencoded]
Saving to: 'my-spring-boot-web-aws-exe.jar'

100%[=====>] 17,646,207  41.7MB/s  in 0.4s

2021-09-26 20:45:54 (41.7 MB/s) - 'my-spring-boot-web-aws-exe.jar' saved [17646207/17646207]

[root@ip-172-31-94-6 ~]#
```

JAR FILE UPLOADED to EC2 INSTANCE!

https://s3.console.aws.amazon.com/s3/object/myphasefivebucket/region=us-east-1&prefix=my-spring-boot-web-aws-exe.jar&tab=details

Services Search for services, features, marketplace products, and docs [Alt+S] Corestack_Role@mailakev_gmail @ 7799-2173-1516 Global Support

Amazon S3 > myphasefivebucket > my-spring-boot-web-aws-exe.jar

my-spring-boot-web-aws-exe.jar Info Copy S3 URI Download Open Object actions

Properties Permissions Versions

Object overview

Owner claaslabs+5f3425062d11de6d6706a89f	S3 URI s3://myphasefivebucket/my-spring-boot-web-aws-exe.jar
AWS Region US East (N. Virginia) us-east-1	Amazon Resource Name (ARN) arn:aws:s3::myphasefivebucket/my-spring-boot-web-aws-exe.jar
Last modified September 26, 2021, 15:40:08 (UTC-05:00)	Entity tag (Etag) cf1df45c09cece875e3ebba910bb8b49-2
Size 16.8 MB	Object URL https://myphasefivebucket.s3.amazonaws.com/my-spring-boot-web-aws-exe.jar
Type jar	
Key my-spring-boot-web-aws-exe.jar	

Object management overview
The following bucket properties and object details are shown.

Bucket properties
Bucket Versioning
When enabled, multiple variants of an object can be stored in a bucket.

```

root@ip-172-31-94-6 ~# ls
my-spring-boot-web-aws-exe.jar
root@ip-172-31-94-6 ~#
  
```

JAR FILE ON EC2!

Practice Labs Launch instance wizard | EC2 M5.x

https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard

Services Search for services, features, marketplace products, and docs [Alt+S] Corestack_Role@mailakev_gmail @ 7799-2173-1516 N. Virginia Support

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

Step 1: Choose an Amazon Machine Image (AMI)

An AMI is a template that contains the software configuration (operating system, application server, and applications) required to launch your instance. You can select an AMI provided by AWS, our user community, or the AWS Marketplace; or you can select one of your own AMIs.

Search for an AMI by entering a search term e.g. "Windows"

Search by Systems Manager parameter

Quick Start

My AMIs

AWS Marketplace

Community AMIs

Free tier only

Amazon Linux 2 AMI (HVM), SSD Volume Type - ami-087c17d1fe0178315 (64-bit x86) / ami-029c64b3c205e60ce (64-bit ARM)

Amazon Linux 2 comes with five years support. It provides Linux kernel 4.14 tuned for optimal performance on Amazon EC2, systemd 219, GCC 7.3, Glibc 2.28, Binutils 2.29.1, and the latest software packages through extras. This AMI is the successor of the Amazon Linux AMI that is approaching end of life on December 31, 2020 and has been removed from this wizard.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Big Sur 11.6 - ami-0355f1ed5537c0368

The macOS Big Sur AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for Xcode, Amazon SSM Agent, and Homebrew. The AWS Homebrew Tap includes the latest versions of multiple AWS packages included in the AMI.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Catalina 10.15.7 - ami-0ae0b6d49088fc747

The macOS Catalina AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for Xcode, Amazon SSM Agent, and Homebrew. The AWS Homebrew Tap includes the latest versions of multiple AWS packages included in the AMI.

Root device type: ebs Virtualization type: hvm ENA Enabled: Yes

macOS Mojave 10.14.6 - ami-07279d867534aacb6

The macOS Mojave AMI is an EBS-backed, AWS-supported image. This AMI includes the AWS Command Line Interface, Command Line Tools for

Feedback English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences

Practice Lab Launch Instance Wizard (EC2) [+](#)

[http://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard](#)

Services [Alt+S] [Corestack_Role@mailakiev@gmail @ 7799-2173-1516](#) [N. Virginia](#) [Support](#)

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

Step 2: Choose an Instance Type

Amazon EC2 provides a wide selection of instance types optimized to fit different use cases. Instances are virtual servers that can run applications. They have varying combinations of CPU, memory, storage, and networking capacity, and give you the flexibility to choose the appropriate mix of resources for your applications. [Learn more about instance types and how they can meet your computing needs.](#)

Filter by: [All instance families](#) [Current generation](#) [Show/Hide Columns](#)

Currently selected: t2.micro (- ECUs, 1 vCPUs, 2.5 GHz, -, 1 GiB memory, EBS only)

	Family	Type	vCPUs	Memory (GiB)	Instance Storage (GiB)	EBS-Optimized Available	Network Performance	IPv6 Support
<input type="checkbox"/>	t2	t2.nano	1	0.5	EBS only	-	Low to Moderate	Yes
<input checked="" type="checkbox"/>	t2	t2.micro	1	1	EBS only	-	Low to Moderate	Yes
<input type="checkbox"/>	t2	t2.small	1	2	EBS only	-	Low to Moderate	Yes
<input type="checkbox"/>	t2	t2.medium	2	4	EBS only	-	Low to Moderate	Yes
<input type="checkbox"/>	t2	t2.large	2	8	EBS only	-	Low to Moderate	Yes
<input type="checkbox"/>	t2	t2.xlarge	4	16	EBS only	-	Moderate	Yes
<input type="checkbox"/>	t2	t2.2xlarge	8	32	EBS only	-	Moderate	Yes
<input type="checkbox"/>	t3	t3.nano	2	0.5	EBS only	Yes	Up to 5 Gigabit	Yes
<input type="checkbox"/>	t3	t3.micro	2	1	EBS only	Yes	Up to 5 Gigabit	Yes
<input type="checkbox"/>	t3	t3.small	2	2	EBS only	Yes	Up to 5 Gigabit	Yes

[Cancel](#) [Previous](#) [Review and Launch](#) [Next: Configure Instance Details](#)

Feedback [English \(US\)](#) © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. [Privacy Policy](#) [Terms of Use](#) [Cookie preferences](#)

[http://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard](#)

Services [Alt+S] [Corestack_Role@mailakiev@gmail @ 7799-2173-1516](#) [N. Virginia](#) [Support](#)

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

Step 3: Configure Instance Details

Configure the instance to suit your requirements. You can launch multiple instances from the same AMI, request Spot instances to take advantage of the lower pricing, assign an access management role to the instance, and more.

Number of Instances [Launch into Auto Scaling Group](#)

Purchasing option ☐ Request Spot instances

Network [Create new VPC](#)

Subnet [Create new subnet](#)

Auto-assign Public IP

Placement group ☐ Add instance to placement group

Capacity Reservation

Domain join directory [Create new directory](#)

IAM role [Create new IAM role](#)

Shutdown behavior

Stop - Hibernate behavior ☐ Enable hibernation as an additional stop behavior

Enable termination protection ☐ Protect against accidental termination

Monitoring ☐ Enable CloudWatch detailed monitoring
Additional charges apply.

Tenancy

[Cancel](#) [Previous](#) [Review and Launch](#) [Next: Add Storage](#)

Feedback [English \(US\)](#) © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. [Privacy Policy](#) [Terms of Use](#) [Cookie preferences](#)

← → ↻

https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#launch-instanceWizard

aws Services 🔽

🔍 Search for services, features, marketplace products, and docs [Alt+5]

🔔

👤 Corestack_Role@mailalakev.gmail @ 7799-2173-1516

📍 N. Virginia

🛎 Support

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

Step 4: Add Storage

Your instance will be launched with the following storage device settings. You can attach additional EBS volumes and instance store volumes to your instance, or edit the settings of the root volume. You can also attach additional EBS volumes after launching an instance, but not instance store volumes. [Learn more about storage options in Amazon EC2.](#)

Volume Type ⓘ	Device ⓘ	Snapshot ⓘ	Size (GiB) ⓘ	Volume Type ⓘ	IOPS ⓘ	Throughput (MB/s) ⓘ	Delete on Termination ⓘ	Encryption ⓘ
Root	/dev/xvda	snap-0699a041095ac5492	8	General Purpose SSD (gp2) ▾	100 / 3000	N/A	<input checked="" type="checkbox"/>	Not Encrypted ▾

Add New Volume

Free tier eligible customers can get up to 30 GB of EBS General Purpose (SSD) or Magnetic storage. [Learn more](#) about free usage tier eligibility and usage restrictions.

Cancel Previous **Review and Launch** Next: Add Tags

Feedback English (US) 📄 © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences

← → ↻

https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#launch-instanceWizard

aws Services 🔽

🔍 Search for services, features, marketplace products, and docs [Alt+5]

🔔

👤 Corestack_Role@mailalakev.gmail @ 7799-2173-1516

📍 N. Virginia

🛎 Support

1. Choose AMI 2. Choose Instance Type 3. Configure Instance 4. Add Storage 5. Add Tags 6. Configure Security Group 7. Review

Step 5: Add Tags

A tag consists of a case-sensitive key-value pair. For example, you could define a tag with key = Name and value = Webserver.
A copy of a tag can be applied to volumes, instances or both.
Tags will be applied to all instances and volumes. [Learn more](#) about tagging your Amazon EC2 resources.

Key (128 characters maximum)	Value (256 characters maximum)	Instances ⓘ	Volumes ⓘ	Network Interfaces ⓘ
This resource currently has no tags				
Choose the Add tag button or click to add a Name tag.				
Make sure your IAM policy includes permissions to create tags.				

Add Tag (Up to 50 tags maximum)

Cancel Previous **Review and Launch** Next: Configure Security Group

Feedback English (US) 📄 © 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved. Privacy Policy Terms of Use Cookie preferences

aws

Services

Search for services, features, marketplace products, and docs

Corestack_Role@mailakev_gmail @ 7799-2173-1516

N. Virginia

Support

1. Choose AMI2. Choose Instance Type3. Configure Instance4. Add Storage5. Add Tags6. Configure Security Group7. Review

Step 6: Configure Security Group

A security group is a set of firewall rules that control the traffic for your instance. On this page, you can add rules to allow specific traffic to reach your instance. For example, if you want to set up a web server and allow Internet traffic to reach your instance, add rules that allow unrestricted access to the HTTP and HTTPS ports. You can create a new security group or select from an existing one below. [Learn more about Amazon EC2 security groups.](#)

Assign a security group: ☒ Create a new security group
☐ Select an existing security group

Security group name:

Description:

Type	Protocol	Port Range	Source	Description
SSH	TCP	22	Custom 0.0.0.0/0	e.g. SSH for Admin Desktop
HTTP	TCP	80	Custom 0.0.0.0/0	e.g. SSH for Admin Desktop
HTTP	TCP	80	Custom ::0	e.g. SSH for Admin Desktop

Add Rule

Warning

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Cancel

Previous

Review and Launch

Feedback

English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

aws

Services

Search for services, features, marketplace products, and docs

Corestack_Role@mailakev_gmail @ 7799-2173-1516

N. Virginia

Support

1. Choose AMI2. Choose Instance Type3. Configure Instance4. Add Storage5. Add Tags6. Configure Security Group7. Review

Step 7: Review Instance Launch

Root device type: ebs Virtualization type: hvm

Instance Type

Edit instance type

Instance Type	ECUs	vCPUs	Memory (GiB)	Instance Storage (GB)	EBS-Optimized Available	Network Performance
t2.micro	-	1	1	EBS only	-	Low to Moderate

Security Groups

Edit security groups

Security group name: launch-wizard-1
Description: launch-wizard-1 created 2021-09-26T14:37:03.423-05:00

Type	Protocol	Port Range	Source	Description
SSH	TCP	22	0.0.0.0/0	
HTTP	TCP	80	0.0.0.0/0	
HTTP	TCP	80	::0	

Instance Details

Edit instance details

Storage

Edit storage

Volume Type	Device	Snapshot	Size (GiB)	Volume Type	IOPS	Throughput (MB/s)	Delete on Termination	Encrypted
Root	/dev/xvda	snap-0699a041095ac5492	8	gp2	100 / 3000	N/A	Yes	Not Encrypted

Tags

Edit tags

Cancel

Previous

Launch

Feedback



English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

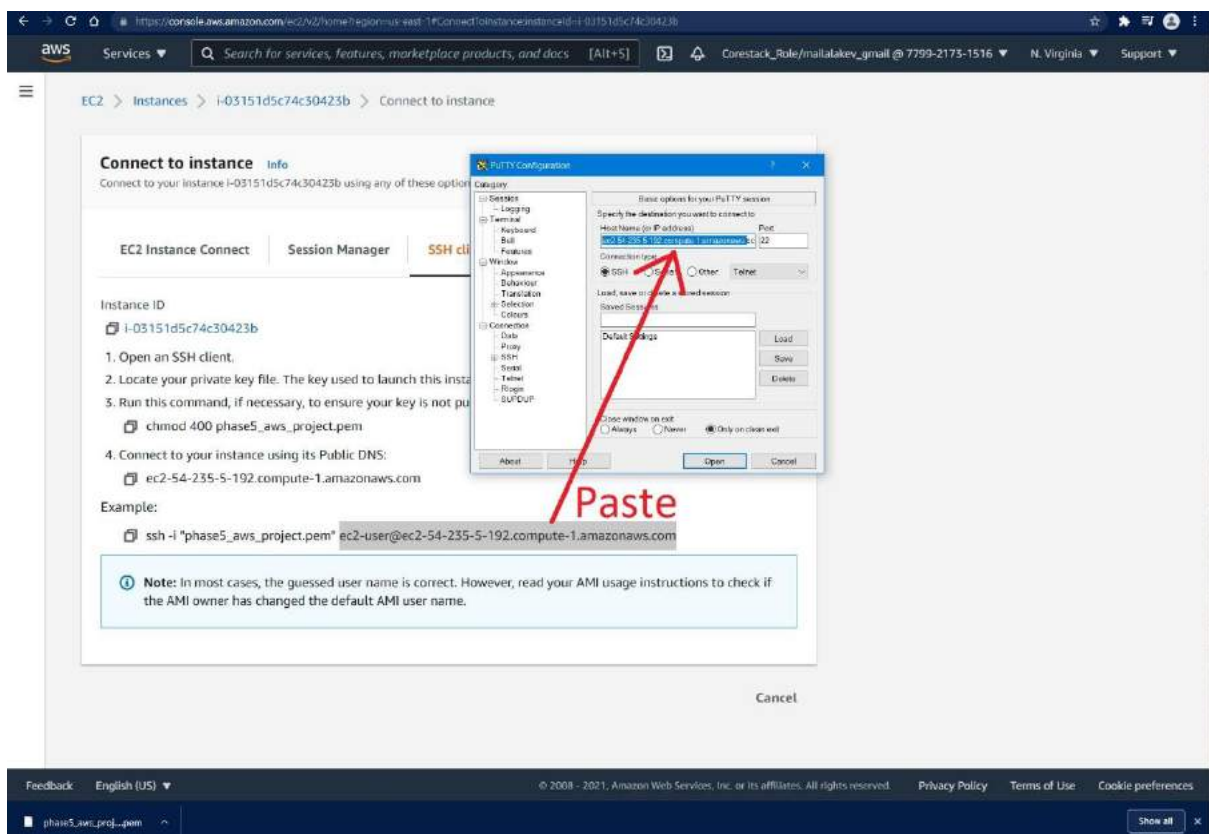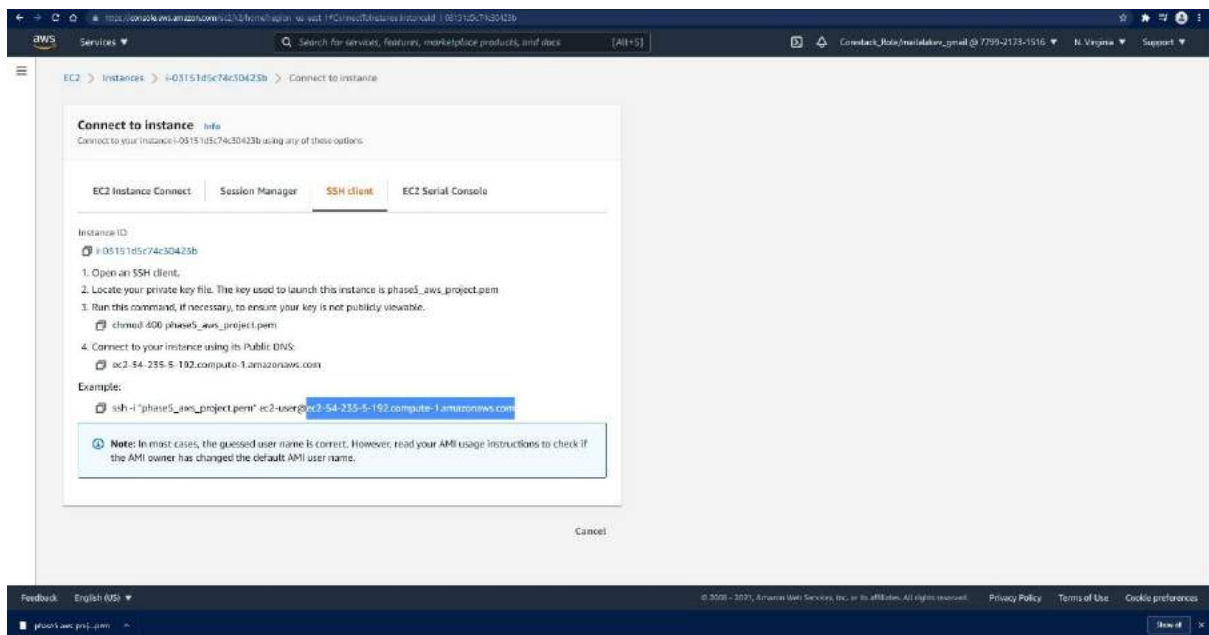

Connect to instance

EC2 Instance Connect | Session Manager | **SSH client**

Instance ID
i-03151d5c74c30423b

1. Open an SSH client.
2. Locate your private key file. The key used to launch this instance.
3. Run this command, if necessary, to ensure your key is not public:
`chmod 400 phase5_aws_project.pem`
4. Connect to your instance using its Public DNS:
`ec2-54-235-5-192.compute-1.amazonaws.com`

Example:
`ssh -i "phase5_aws_project.pem" ec2-user@ec2-54-235-5-192.compute-1.amazonaws.com`

Note: In most cases, the guessed user name is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI user name.

Putty Configuration

Category: Session

Logon details

Auto login username: **ec2-user** (Type)

When username is not specified:
☒ Prompt ☐ Use system username (Linux)

Terminal details

Terminal type string: `xterm`

Terminal speeds: `38400,38400`

Environment variables

Variable: Value: Add Remove

Open Cancel

Connect to instance

EC2 Instance Connect | Session Manager | **SSH client**

Instance ID
i-03151d5c74c30423b

Select private key file

File name: `phase5_aws_project.pem` Putty Private Key Files (.ppk)

Open Cancel

Putty Configuration

Category: Session

Options controlling SSH authentication

☒ Display pre-authentication banner (SSH 2 only)
☐ Display authentication banner (SSH 2 only)
☐ Disconnect if authentication succeeds silently

Authentication methods

☒ Attempts authentication using Pageant
☐ Attempts to use OpenSSH built-in GSSAPI
☒ Attempts "keyboard interactive" auth (SSH 2)

Private key file for authentication:
Browse

Open Cancel

Launch Status



Initiating Instance Launches

Please do not close your browser while this is loading

Creating security groups... Successful

Authorizing inbound rules... Successful

Initiating launches...

Launch Status



Your instances are now launching

The following instance launches have been initiated: j-03151d5c74c30423b [View launch log](#)



Get notified of estimated charges

Create billing alerts to get an email notification when estimated charges on your AWS bill exceed an amount you define (for example, if you exceed the free usage tier).

How to connect to your instances

Your instances are launching, and it may take a few minutes until they are in the **running** state, when they will be ready for you to use. Usage hours on your new instances will start immediately and continue to accrue until you stop or terminate your instances.

Click **View Instances** to monitor your instances' status. Once your instances are in the **running** state, you can **connect** to them from the Instances screen. [Find out](#) how to connect to your instances.



▼ Here are some helpful resources to get you started

- [How to connect to your Linux instance](#)
- [Amazon EC2: User Guide](#)
- [Learn about AWS Free Usage Tier](#)
- [Amazon EC2: Discussion Forum](#)

While your instances are launching you can also

- [Create status check alarms](#) to be notified when these instances fail status checks. (Additional charges may apply)
- [Create and attach additional EBS volumes](#) (Additional charges may apply)
- [Manage security groups](#)

[View instances](#)

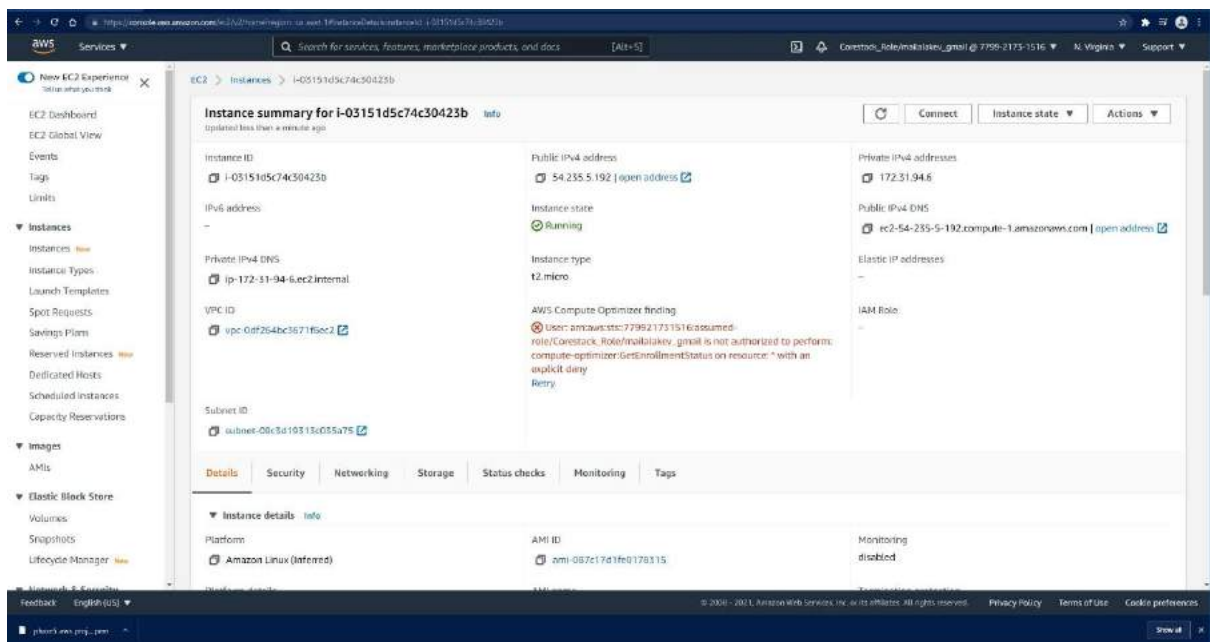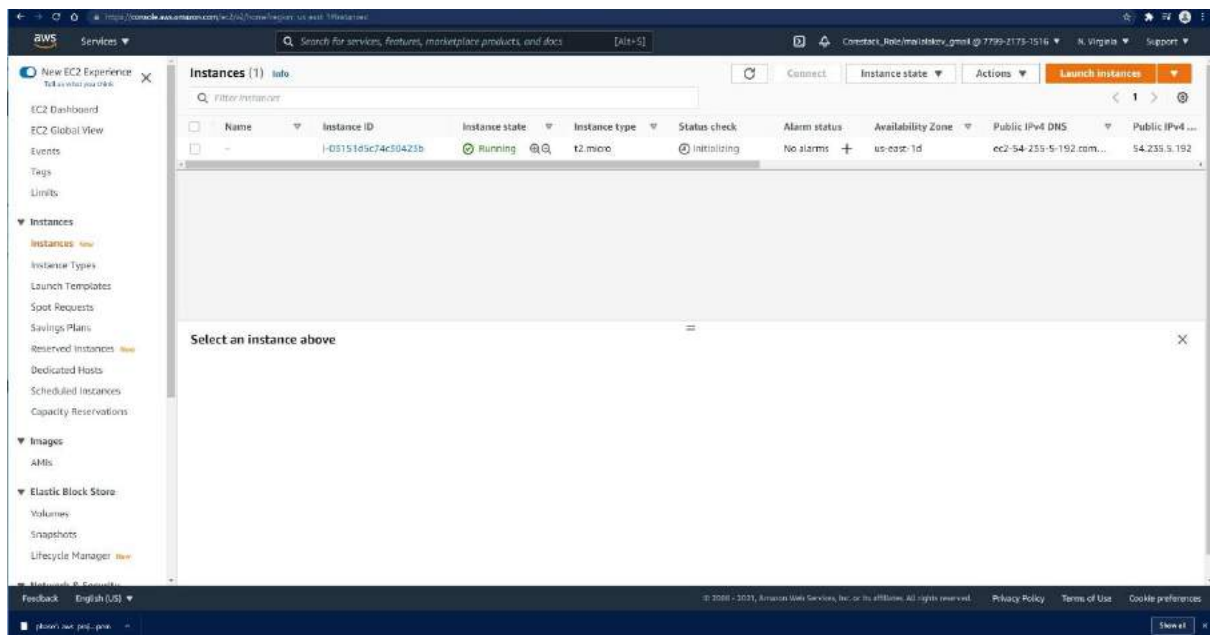

EC2 > Instances > i-03151d5c74c30423b

Instance summary for i-03151d5c74c30423b

Updated less than a minute ago

Instance ID: i-03151d5c74c30423b

Public IPv4 address: 54.235.5.192 | open address

Instance state: Running

Instance type: t2.micro

AWS Compute Optimizer finding: User: aws-iam-roles:77992731516assumed-role/Corestack_Role/mailalakes_gmail is not authorized to perform: compute-optimizer:GetInstanceStatus on resource: * with an explicit deny. Retry

Private IPv4 addresses: 172.31.94.6

Public IPv4 DNS: ec2-54-235-5-192.compute-1.amazonaws.com | open address

Elastic IP addresses: -

IAM Role: -

Subnet ID: subnet-09c3d19313c035a75

Private IPv4 DNS: ip-172-31-94-6.ec2.internal

VPC ID: vpc-0d7264bc3671f6ec2

Details | Security | **Networking** | Storage | Status checks | Monitoring | Tags

You can now check network connectivity with Reachability Analyzer. Run Reachability Analyzer

Public IPv4 address: Private IPv4 addresses: VPC ID:

EC2 > Instances > i-03151d5c74c30423b

Instance summary for i-03151d5c74c30423b

Updated less than a minute ago

Instance ID: i-03151d5c74c30423b

Public IPv4 address: 54.235.5.192 | open address

Instance state: Running

Instance type: t2.micro

AWS Compute Optimizer finding: User: aws-iam-roles:77992731516assumed-role/Corestack_Role/mailalakes_gmail is not authorized to perform: compute-optimizer:GetInstanceStatus on resource: * with an explicit deny. Retry

Private IPv4 addresses: 172.31.94.6

Public IPv4 DNS: ec2-54-235-5-192.compute-1.amazonaws.com | open address

Elastic IP addresses: -

IAM Role: -

Subnet ID: subnet-09c3d19313c035a75

Private IPv4 DNS: ip-172-31-94-6.ec2.internal

VPC ID: vpc-0d7264bc3671f6ec2

Details | Security | **Networking** | Storage | Status checks | Monitoring | Tags

You can now check network connectivity with Reachability Analyzer. Run Reachability Analyzer

Public IPv4 address: Private IPv4 addresses: VPC ID:

kalpana - my-spring-boot-web/src/main/resources/application.properties - Eclipse IDE

File Edit Navigate Search Project Run Window Help



Console Problems Debug Shell

<terminated> my-spring-boot-web [Maven Build] C:\Users\p.kalpana\p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_17.0.2.v20220201-1208\jre\bin\javaw.exe

```
[INFO] Scanning for projects...
[INFO]
[INFO] -----< com.simplilearn.workshop:my-spring-boot-web >-----
[INFO] Building my-spring-boot-web 1.0
[INFO] -----[ jar ]-----
[INFO]
[INFO] --- maven-clean-plugin:3.1.0:clean (default-clean) @ my-spring-boot-web ---
[INFO] Deleting C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Application-main\Phase5_CI-CD_Deploy
[INFO]
[INFO] --- maven-resources-plugin:3.2.0:resources (default-resources) @ my-spring-boot-web ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] Using 'UTF-8' encoding to copy filtered properties files.
[INFO] Copying 1 resource
[INFO] Copying 2 resources
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:compile (default-compile) @ my-spring-boot-web ---
[INFO] Changes detected - recompiling the module!
[INFO] Compiling 2 source files to C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Application-main\Ph
[INFO]
[INFO] --- maven-resources-plugin:3.2.0:testResources (default-testResources) @ my-spring-boot-web ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] Using 'UTF-8' encoding to copy filtered properties files.
[INFO] skip non existing resourceDirectory C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Application
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:testCompile (default-testCompile) @ my-spring-boot-web ---
[INFO] Changes detected - recompiling the module!
[INFO] Compiling 1 source file to C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Application-main\Ph
[INFO]
[INFO] --- maven-surefire-plugin:2.22.2:test (default-test) @ my-spring-boot-web ---
[INFO]
[INFO] -----
[INFO] T E S T S
[INFO] -----
[INFO] Running com.simplilearn.workshop.MyApplicationTests
13:22:03.972 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating CacheAwareContextLoaderDelegate
13:22:04.007 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating BootstrapContext using construc
13:22:04.097 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating TestContextBootstrapper for tes
13:22:04.120 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper - Neither @ContextConfig
13:22:04.127 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader - Did not detect default resourc
13:22:04.128 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader - Did not detect default resourc
13:22:04.129 [main] INFO org.springframework.test.context.support.AbstractContextLoader - Could not detect default resourc
13:22:04.130 [main] INFO org.springframework.test.context.support.AnnotationConfigContextLoaderUtils - Could not detect d
```



36°C
Sunny



 <terminated> my-spring-boot-web [Maven Build] C:\Users\p.kalpana\.p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_1

[INFO] T E S T S

[INFO] -----

```
[INFO] Running com.simplilearn.workshop.MyApplicationTests
```

```
13:22:03.972 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Cache
```

```
13:22:04.007 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Boot
```

```
13:22:04.097 [main] DEBUG org.springframework.test.context.BootstrapUtils - Instantiating Test
```

```
13:22:04.120 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.127 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader - Did
```

```
13:22:04.128 [main] DEBUG org.springframework.test.context.support.AbstractContextLoader - Did
```

```
13:22:04.129 [main] INFO org.springframework.test.context.support.AbstractContextLoader - Could not detect default resource locations for class 'org.springframework.test.context.support.AnnotationConfigContextLoaderTests': no matching resource found for '[org.springframework.test.context.support.AnnotationConfigContextLoaderTests.class]'.
```

```
13:22:04.130 [main] INFO org.springframework.test.context.support.AnnotationConfigContextLoader
```

```
13:22:04.246 [main] DEBUG org.springframework.test.context.support.ActiveProfilesUtils - Could
```

```
13:22:04.433 [main] DEBUG org.springframework.context.annotation.ClassPathScanningCandidateCom
```

```
13:22:04.436 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.807 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.809 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.863 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.876 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.927 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
```

```
13:22:04.943 [main] DEBUG org.springframework.test.context.support.AbstractDirtyContextTestE
```

```
13:22:05.123 [main] DEBUG org.springframework.test.context.support.TestPropertySourceUtils - A
```

[illegible]

\\ / _ _ _ _ _ () _ _ _ _ _ \\ \\ \\ \\

() _ | ' | ' | | ' _ | \ \ \ \

[illegible]

_____ . _____ _ / / / /

 | | | / = / / / /

```
:: Spring Boot ::                (v2.5.5)
```

```
2022-03-11 13:22:06.126 INFO 10656 --- [           main] c.s.workshop.MyApplicationTests
```

```
2022-03-11 13:22:06.135 INFO 10656 --- [           main] c.s.workshop.MyApplicationTests
```

```
2022-03-11 13:22:09.024 INFO 10656 --- [main] org.eclipse.jetty.util.log
2022-03-11 13:22:10.000 INFO 10656 --- [main] org.eclipse.jetty.util.log
```

```
2022-03-11 13:22:10.396 INFO 10656 --- [main] o.s.b.a.w.s.WelcomePageHandlerMapping
2022-03-11 13:22:10.397 INFO 10656 --- [main] o.s.b.a.w.s.WelcomePageHandlerMapping
```

```
2022-03-11 13:22:10.967 INFO 10656 --- [           main] c.s.workshop.MyApplicationTests
```

```
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 8.173 s - in com.simpli
```

[INFO]

```
[INFO] Results:
[INFO]
```

```
[INFO] ...
[INFO] ...
```

```
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
```

[INFO]
[INFO]

kalpana - my-spring-boot-web/src/main/resources/application.properties - Eclipse IDE

File Edit Navigate Search Project Run Window Help

```
<terminated> my-spring-boot-web [Maven Build] C:\Users\p.kalpana\p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_17
13:22:04.863 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
13:22:04.876 [main] DEBUG org.springframework.boot.test.context.SpringBootTestContextBootstrapper
13:22:04.927 [main] INFO org.springframework.boot.test.context.SpringBootTestContextBootstrapper
13:22:04.943 [main] DEBUG org.springframework.test.context.support.AbstractDirtiesContextTestExecution
13:22:05.123 [main] DEBUG org.springframework.test.context.support.TestPropertySourceUtils - Ad

:: Spring Boot :: (v2.5.5)

2022-03-11 13:22:06.126 INFO 10656 --- [main] c.s.workshop.MyApplicationTests
2022-03-11 13:22:06.135 INFO 10656 --- [main] c.s.workshop.MyApplicationTests
2022-03-11 13:22:09.024 INFO 10656 --- [main] org.eclipse.jetty.util.log
2022-03-11 13:22:10.396 INFO 10656 --- [main] o.s.b.a.w.s.WelcomePageHandlerMapping
2022-03-11 13:22:10.967 INFO 10656 --- [main] c.s.workshop.MyApplicationTests
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 8.173 s - in com.simplil
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO]
[INFO] --- maven-jar-plugin:3.2.0:jar (default-jar) @ my-spring-boot-web ---
[INFO] Building jar: C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Applic
[INFO]
[INFO] --- spring-boot-maven-plugin:2.5.5:repackage (repackage) @ my-spring-boot-web ---
[INFO] Replacing main artifact with repackaged archive
[INFO]
[INFO] --- maven-install-plugin:2.5.2:install (default-install) @ my-spring-boot-web ---
[INFO] Installing C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Applicati
[INFO] Installing C:\Users\p.kalpana\Downloads\Phase5_CI-CD_Deployment_for_Springboot_Applicati
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 33.851 s
[INFO] Finished at: 2022-03-11T13:22:21+05:30
[INFO] -----
```


36°C
Sunny




```

2022-03-11 13:43:06.951 INFO 13156 --- [main] com.simplilearn.workshop.MyApplicati
2022-03-11 13:43:06.956 INFO 13156 --- [main] com.simplilearn.workshop.MyApplicati
2022-03-11 13:43:08.230 INFO 13156 --- [main] org.eclipse.jetty.util.log
2022-03-11 13:43:08.553 INFO 13156 --- [main] o.s.b.w.e.j.JettyServletWebServerFac
2022-03-11 13:43:08.557 INFO 13156 --- [main] org.eclipse.jetty.server.Server
2022-03-11 13:43:08.617 INFO 13156 --- [main] o.e.j.s.h.ContextHandler.application
2022-03-11 13:43:08.618 INFO 13156 --- [main] w.s.c.ServletWebServerApplicationCon
2022-03-11 13:43:08.777 INFO 13156 --- [main] org.eclipse.jetty.server.session
2022-03-11 13:43:08.777 INFO 13156 --- [main] org.eclipse.jetty.server.session
2022-03-11 13:43:08.779 INFO 13156 --- [main] org.eclipse.jetty.server.session
2022-03-11 13:43:08.793 INFO 13156 --- [main] o.e.jetty.server.handler.ContextHand
2022-03-11 13:43:08.793 INFO 13156 --- [main] org.eclipse.jetty.server.Server
2022-03-11 13:43:09.129 INFO 13156 --- [main] o.s.b.a.w.s.WelcomePageHandlerMapping
2022-03-11 13:43:09.246 INFO 13156 --- [main] o.e.j.s.h.ContextHandler.application
2022-03-11 13:43:09.247 INFO 13156 --- [main] o.s.web.servlet.DispatcherServlet
2022-03-11 13:43:09.248 INFO 13156 --- [main] o.s.web.servlet.DispatcherServlet
2022-03-11 13:43:09.343 INFO 13156 --- [main] o.e.jetty.server.AbstractConnector
2022-03-11 13:43:09.345 INFO 13156 --- [main] o.s.b.web.embedded.jetty.JettyWebSer
2022-03-11 13:43:09.363 INFO 13156 --- [main] com.simplilearn.workshop.MyApplicati

```

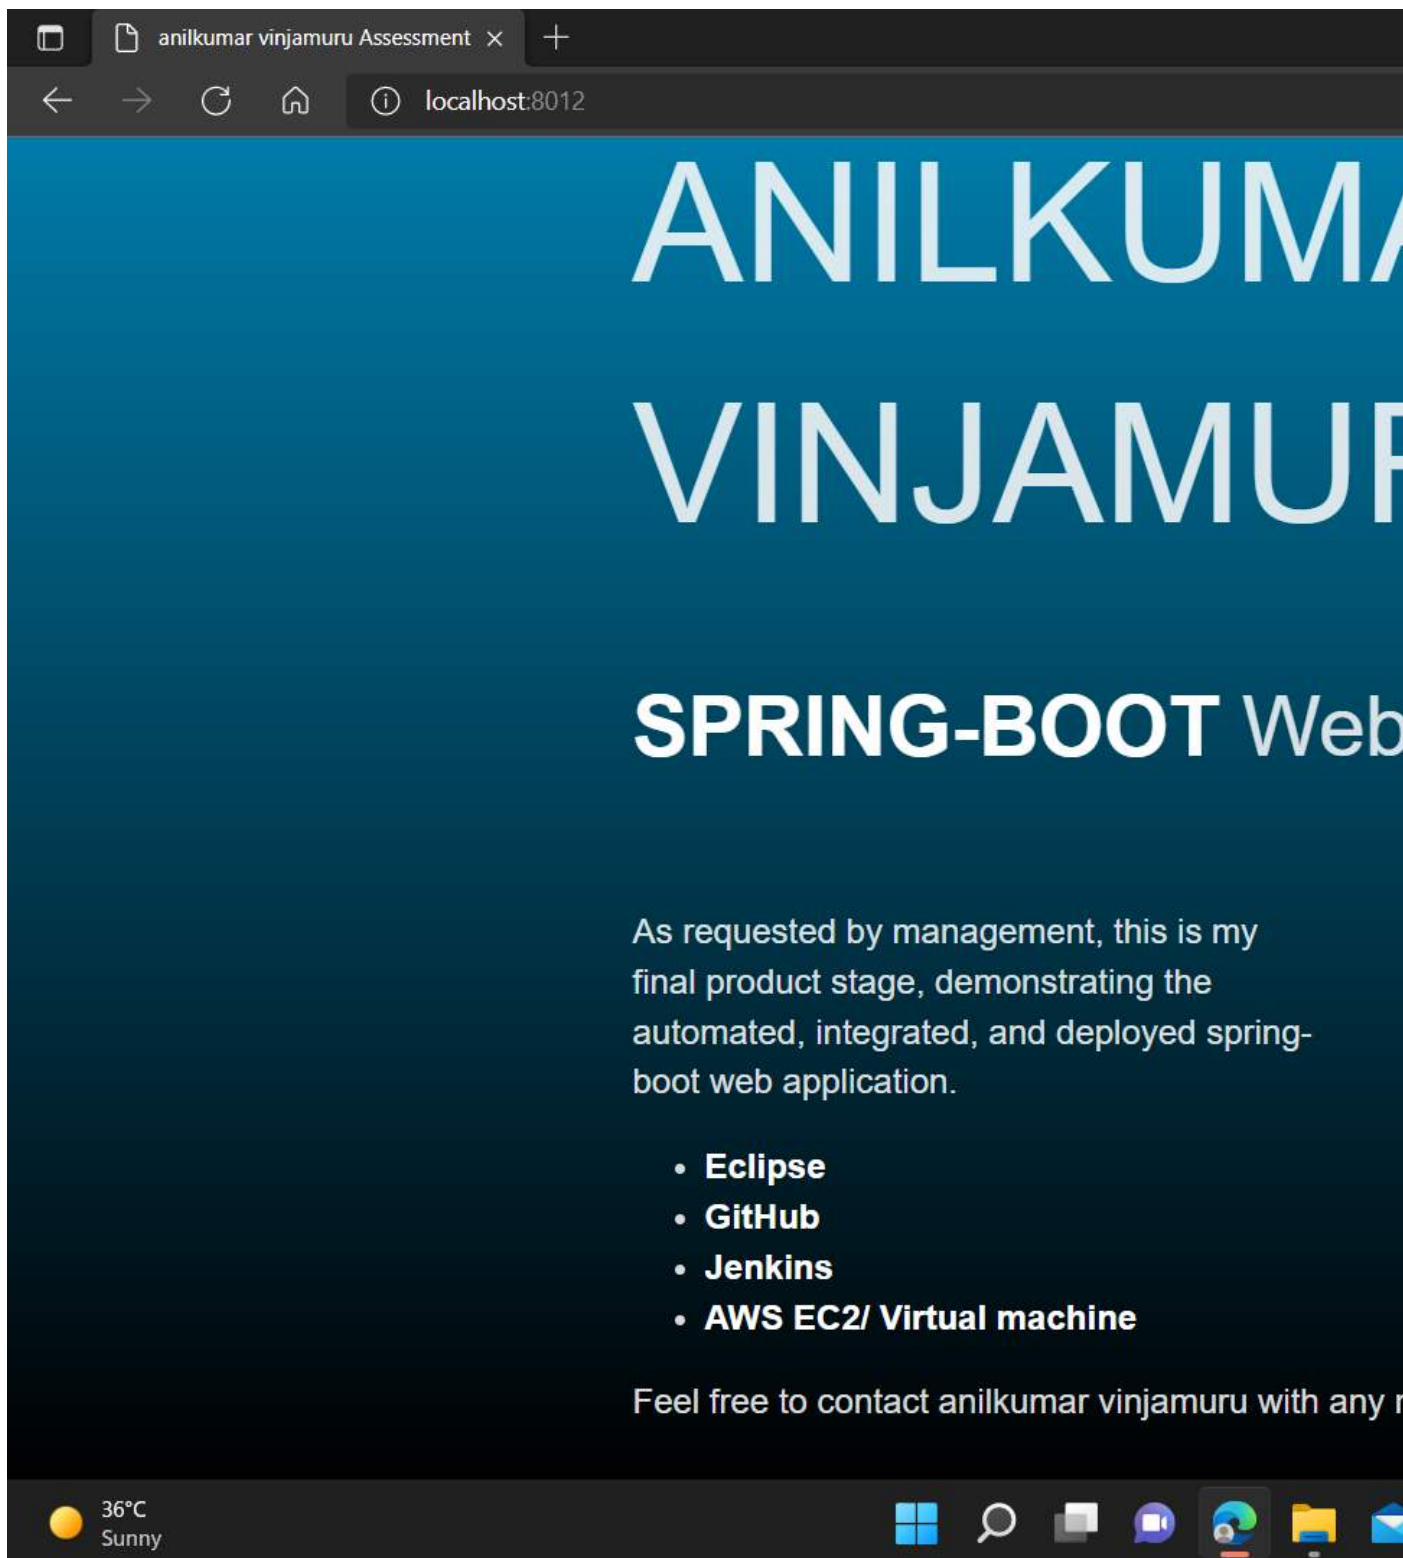

aws

Services

Search for services, features, marketplace products, and docs

[Alt+S]

Corestack_Role/mailakev_email @ 7799-2173-1516

N. Virginia

Support

1. Choose AMI

2. Choose Instance Type

3. Configure Instance

4. Add Storage

5. Add Tags

6. Configure Security Group

7. Review

Step 7: Review Instance Launch

4400 (current type: t3p) Virtualization type: x86_64

Instance Type

Instance Type	ECUs	VCPU
t2.micro	-	1

Security Groups

Security group name	Description
launch-wizard-1	launch-wizard-1

Type	Protocol
SSH	TCP
HTTP	TCP
HTTP	TCP

Instance Details

Storage

Volume Type	Device	Size
Root	/dev/xvda	8TB

Edit instance type

Network Performance

Low to Moderate

Edit security groups

Description

Edit instance details

Edit storage

Encryption

Encrypted

Not Encrypted

Cancel

Previous

Launch

Select an existing key pair or create a new key pair

A key pair consists of a **public key** that AWS stores, and a **private key file** that you store. Together, they allow you to connect to your instance securely. For Windows AMIs, the private key file is required to obtain the password used to log into your instance. For Linux AMIs, the private key file allows you to securely SSH into your instance. Amazon EC2 supports ED25519 and RSA key pair types.

Note: The selected key pair will be added to the set of keys authorized for this instance. Learn more about removing existing key pairs from a public AMI.

Create a new key pair

Key pair type

☒ RSA ☐ ED25519

Key pair name

phase5_aws_project

Download Key Pair

You have to download the **private key file** (*.pem file) before you can continue. **Store it in a secure and accessible location.** You will not be able to download the file again after it's created.

Cancel

Launch Instances

feedback

English (US)

© 2008 - 2021, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Privacy Policy

Terms of Use

Cookie preferences

