1. **In your Database 2 – DB2_LASTNAME_FirstName**

**QUERY:**

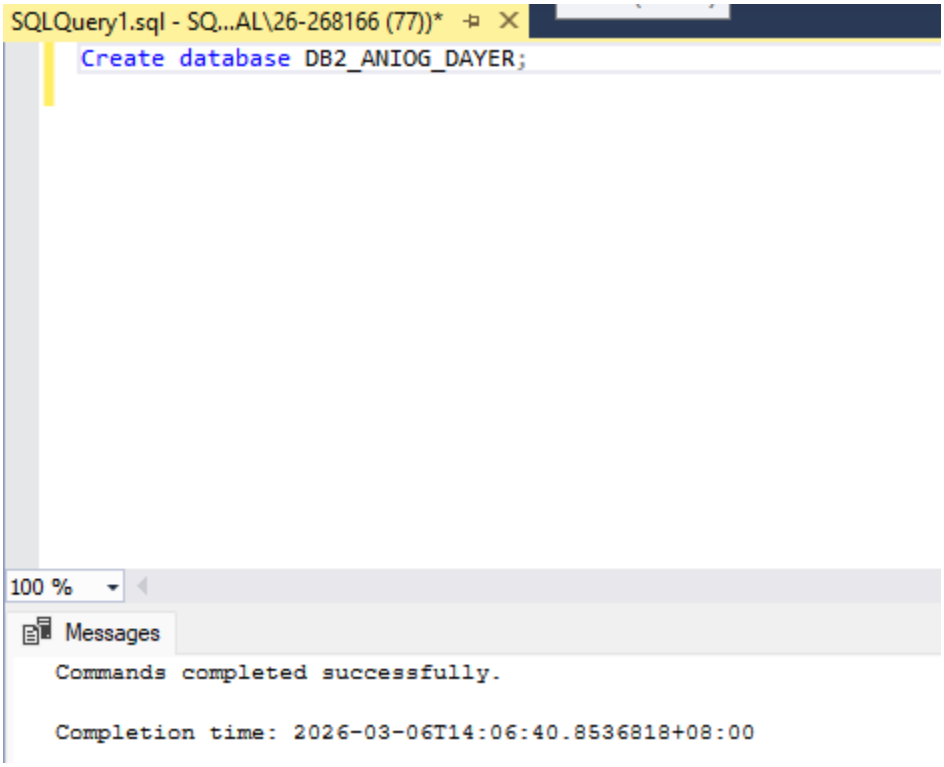


**DATABASE:**




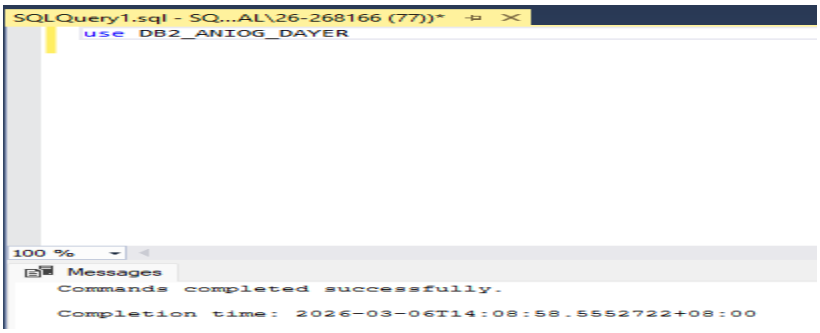

2. **Create New Table Student with the following table structure as follows below;**

**QUERY:**

SQLQuery1.sql - SQ...AL\26-268166 (77))*

```
Create table Student (
id int Primary Key,
admission_no varchar(45) not null,
first_name varchar(45) not null,
last_name varchar(45) not null,
age int null,
city varchar(25) not null,
Tuition numeric(18,2) null
);
```

100 %

Messages

```
Commands completed successfully.

Completion time: 2026-03-06T14:09:39.5016171+08:00
```

**RESULT:**

| Column Name | Data Type | Allow Nulls |
|---|---|---|
| id | int | ☐ |
| admission_no | varchar(45) | ☐ |
| first_name | varchar(45) | ☐ |
| last_name | varchar(45) | ☐ |
| age | int | ☑ |
| city | varchar(25) | ☐ |
| Tuition | numeric(18, 2) | ☑ |
| | | ☐ |

**3. Type the following data on your Student Table**

**TABLE:**

| | id | admission_no | first_name | last_name | age | city | Tuition |
|---|---|---|---|---|---|---|---|
| 1 | 1 | 3354 | Luisa | Evans | 13 | Texas | NULL |
| 2 | 2 | 2135 | Paul | Ward | 15 | Alaska | NULL |
| 3 | 3 | 4321 | Peter | Bennett | 14 | California | NULL |
| 4 | 4 | 4213 | Carlos | Patterson | 17 | New York | NULL |
| 5 | 5 | 5112 | Rose | Huges | 16 | Florida | NULL |
| 6 | 6 | 6113 | Mariela | Simmons | 15 | Arizona | NULL |
| 7 | 7 | 7555 | Antonio | Butler | 14 | New York | NULL |
| 8 | 8 | 8345 | Diego | Cox | 13 | California | NULL |
| 9 | 9 | 4152 | Jasmine | Loyola | 19 | Manila | 65000.00 |
| 10 | 13 | 3152 | Joshua | Loyola | 20 | Manila | 65000.00 |
| 11 | 17 | 3254 | Maura | Benitez | 25 | Manila | 65000.00 |
| 12 | 33 | 3257 | Eduardo | Benitez | 80 | Alaska | NULL |

**QUERY:**

SQLQuery2.sql - SQ...AL\26-268166 (84))* | SQLSERVER.DB2_ANI...YER - dbo.Student | SQLQuery1.sql - SQ...AL\26-

```sql
INSERT INTO Student (id, admission_no, first_name, last_name, age, city, Tuition) VALUES
(1, 3354, 'Luisa', 'Evans', 13, 'Texas', NULL),
(2, 2135, 'Paul', 'Ward', 15, 'Alaska', NULL),
(3, 4321, 'Peter', 'Bennett', 14, 'California', NULL),
(4, 4213, 'Carlos', 'Patterson', 17, 'New York', NULL),
(5, 5112, 'Rose', 'Huges', 16, 'Florida', NULL),
(6, 6113, 'Mariela', 'Simmons', 15, 'Arizona', NULL),
(7, 7555, 'Antonio', 'Butler', 14, 'New York', NULL),
(8, 8345, 'Diego', 'Cox', 13, 'California', NULL),
(9, 4152, 'Jasmine', 'Loyola', 19, 'Manila', 65000.00),
(13, 3152, 'Joshua', 'Loyola', 20, 'Manila', 65000.00),
(17, 3254, 'Maura', 'Benitez', 25, 'Manila', 65000.00),
(33, 3257, 'Eduardo', 'Benitez', 80, 'Alaska', NULL);
```

100 %

Messages

```
(12 rows affected)

Completion time: 2026-03-06T14:11:22.4002747+08:00
```

**4. Use SQL SERVER Operator commands on the following:**

**a. Update the Tuition data with 60,000.00 student with age between 13 to 16**

**QUERY:**

SQLQuery3.sql - SQ...AL\26-268166 (94))* SQLQuery2.sql - SQ...AL\26-268166 (84))* SQLQuery1.sql - SQ...AL\26-268166 (77))*

```
Update Student
Set Tuition = 60000.00 where age BETWEEN 13 and 16;
```

100 %

Messages

```
(7 rows affected)

Completion time: 2026-03-06T14:15:07.5417608+08:00
```

**RESULT:**

Results | Messages

| | id | admission_no | first_name | last_name | age | city | Tuition |
|---|---|---|---|---|---|---|---|
| 1 | 1 | 3354 | Luisa | Evans | 13 | Texas | 63000.00 |
| 2 | 2 | 2135 | Paul | Ward | 15 | Alaska | 60000.00 |
| 3 | 3 | 4321 | Peter | Bennett | 14 | California | 63000.00 |
| 4 | 4 | 4213 | Carlos | Patterson | 17 | New York | 63000.00 |
| 5 | 5 | 5112 | Rose | Huges | 16 | Florida | 60000.00 |
| 6 | 6 | 6113 | Mariela | Simmons | 15 | Arizona | 60000.00 |
| 7 | 7 | 7555 | Antonio | Butler | 14 | New York | 63000.00 |
| 8 | 8 | 8345 | Diego | Cox | 13 | California | 63000.00 |
| 9 | 9 | 4152 | Jasmine | Loyola | 19 | Manila | 65000.00 |
| 10 | 13 | 3152 | Joshua | Loyola | 20 | Manila | 65000.00 |
| 11 | 17 | 3254 | Maura | Benitez | 25 | Manila | 65000.00 |
| 12 | 33 | 3257 | Eduardo | Benitez | 80 | Alaska | NULL |

**b. Update the Tuition data with 63,000.00 student living in California, New York and Texas – NOTE use IN operator**

**QUERY:**

```
Update Student
Set Tuition = 63000.00 where city IN ('California','New York','Texas');
```

100 %

Messages

```
(5 rows affected)

Completion time: 2026-03-06T14:19:20.0608105+08:00
```

**RESULT:**

Results | Messages

| | id | admission_no | first_name | last_name | age | city | Tuition |
|---|---|---|---|---|---|---|---|
| 1 | 1 | 3354 | Luisa | Evans | 13 | Texas | 63000.00 |
| 2 | 2 | 2135 | Paul | Ward | 15 | Alaska | 60000.00 |
| 3 | 3 | 4321 | Peter | Bennett | 14 | California | 63000.00 |
| 4 | 4 | 4213 | Carlos | Patterson | 17 | New York | 63000.00 |
| 5 | 5 | 5112 | Rose | Huges | 16 | Florida | 60000.00 |
| 6 | 6 | 6113 | Mariela | Simmons | 15 | Arizona | 60000.00 |
| 7 | 7 | 7555 | Antonio | Butler | 14 | New York | 63000.00 |
| 8 | 8 | 8345 | Diego | Cox | 13 | California | 63000.00 |
| 9 | 9 | 4152 | Jasmine | Loyola | 19 | Manila | 65000.00 |
| 10 | 13 | 3152 | Joshua | Loyola | 20 | Manila | 65000.00 |
| 11 | 17 | 3254 | Maura | Benitez | 25 | Manila | 65000.00 |
| 12 | 33 | 3257 | Eduardo | Benitez | 80 | Alaska | NULL |

**c. Update the salary data with 70,000.00 students with salary is NULL**

**QUERY:**

```
UPDATE Student
SET Tuition = 70000.00 WHERE Tuition IS NULL;
```

100 %

Messages

```
(1 row affected)

Completion time: 2026-03-06T14:22:04.4752937+08:00
```

**RESULT:**

Results | Messages

| | id | admission_no | first_name | last_name | age | city | Tuition |
|---|---|---|---|---|---|---|---|
| 1 | 1 | 3354 | Luisa | Evans | 13 | Texas | 63000.00 |
| 2 | 2 | 2135 | Paul | Ward | 15 | Alaska | 60000.00 |
| 3 | 3 | 4321 | Peter | Bennett | 14 | California | 63000.00 |
| 4 | 4 | 4213 | Carlos | Patterson | 17 | New York | 63000.00 |
| 5 | 5 | 5112 | Rose | Huges | 16 | Florida | 60000.00 |
| 6 | 6 | 6113 | Mariela | Simmons | 15 | Arizona | 60000.00 |
| 7 | 7 | 7555 | Antonio | Butler | 14 | New York | 63000.00 |
| 8 | 8 | 8345 | Diego | Cox | 13 | California | 63000.00 |
| 9 | 9 | 4152 | Jasmine | Loyola | 19 | Manila | 65000.00 |
| 10 | 13 | 3152 | Joshua | Loyola | 20 | Manila | 65000.00 |
| 11 | 17 | 3254 | Maura | Benitez | 25 | Manila | 65000.00 |
| 12 | 33 | 3257 | Eduardo | Benitez | 80 | Alaska | 70000.00 |

**d. Update the age of Eduardo Benitez from 80 to 20**

**QUERY:**

SQLQuery3.sql - SQ...AL\26-268166 (94))* SQLQuery2.sql - SQ...AL\26-268166 (84))* SQLQuery1.sql - SQ...AL\26-268166 (77))*

```
Update Student
Set age = 20 where age = 80 and first_name = 'Eduardo';
```

100 %

Messages

```
(1 row affected)

Completion time: 2026-03-06T14:23:16.5097245+08:00
```

**RESULT:**

Results | Messages

| | id | admission_no | first_name | last_name | age | city | Tuition |
|---|---|---|---|---|---|---|---|
| 1 | 1 | 3354 | Luisa | Evans | 13 | Texas | 63000.00 |
| 2 | 2 | 2135 | Paul | Ward | 15 | Alaska | 60000.00 |
| 3 | 3 | 4321 | Peter | Bennett | 14 | California | 63000.00 |
| 4 | 4 | 4213 | Carlos | Patterson | 17 | New York | 63000.00 |
| 5 | 5 | 5112 | Rose | Huges | 16 | Florida | 60000.00 |
| 6 | 6 | 6113 | Mariela | Simmons | 15 | Arizona | 60000.00 |
| 7 | 7 | 7555 | Antonio | Butler | 14 | New York | 63000.00 |
| 8 | 8 | 8345 | Diego | Cox | 13 | California | 63000.00 |
| 9 | 9 | 4152 | Jasmine | Loyola | 19 | Manila | 65000.00 |
| 10 | 13 | 3152 | Joshua | Loyola | 20 | Manila | 65000.00 |
| 11 | 17 | 3254 | Maura | Benitez | 25 | Manila | 65000.00 |
| 12 | 33 | 3257 | Eduardo | Benitez | 20 | Alaska | 70000.00 |

**e. Display the first name, last name, age, and city of all Students with last name ends with letter a**

**QUERY AND RESULT:**

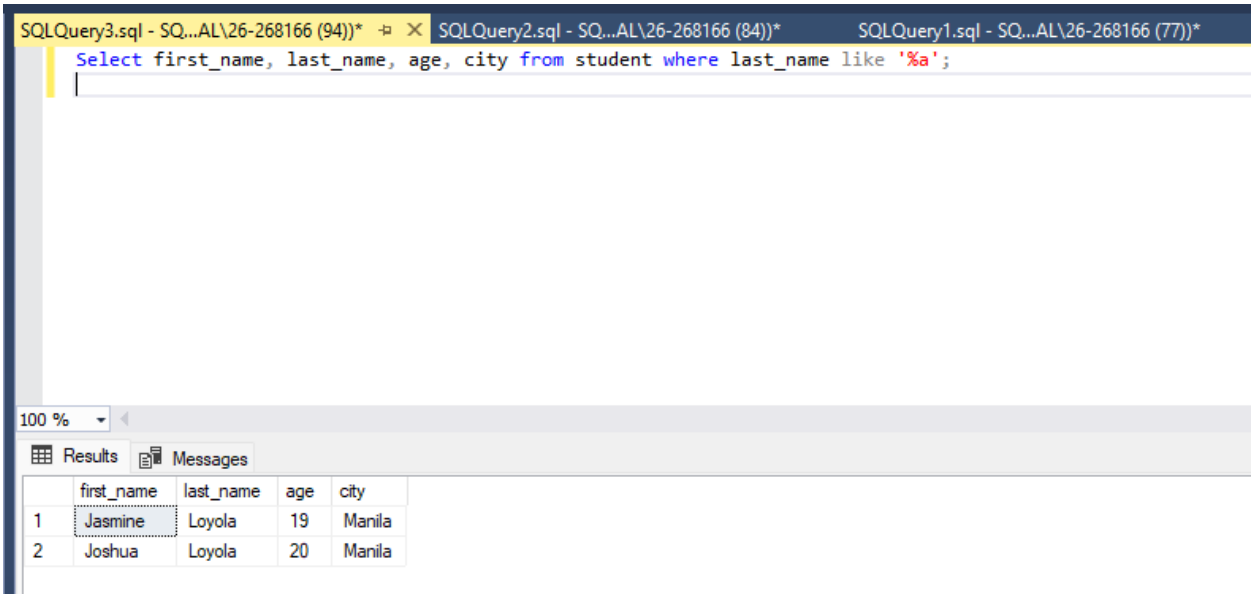


**f. Display the first name, last name, age, and city of all Students with last name starts with letter B**

**QUERY AND RESULT;**

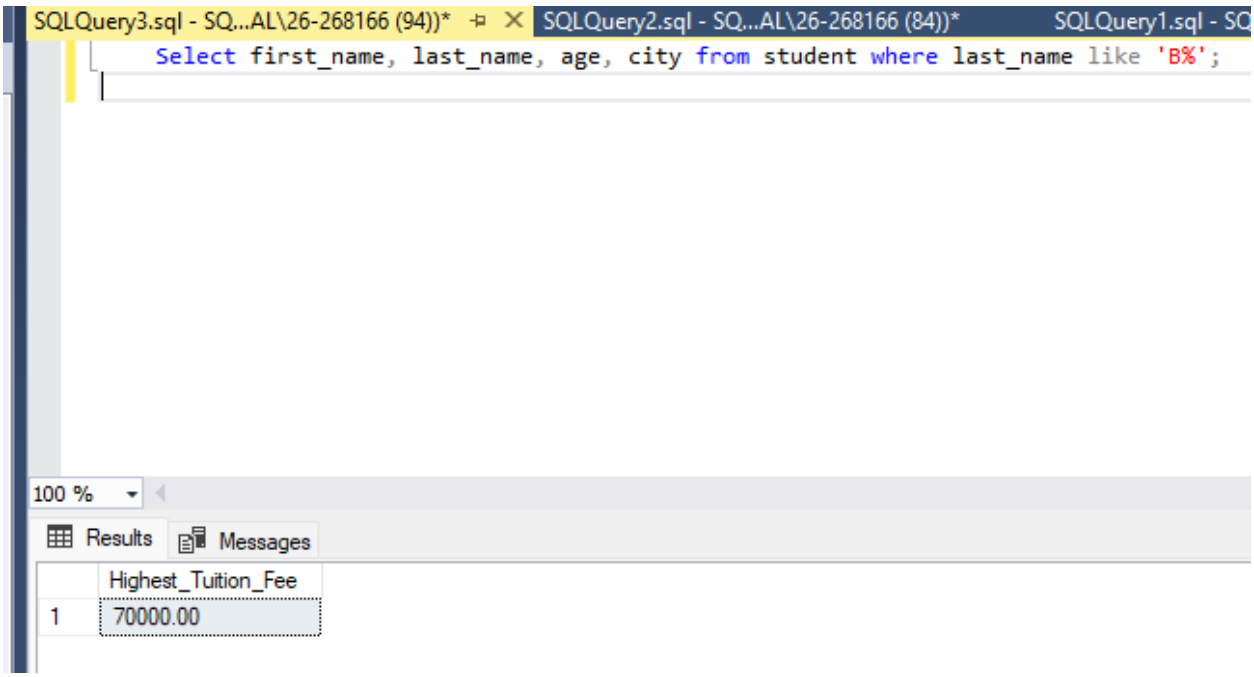

**g. Display the first name, last name, tuition of all Students with the second number of admission_no is 1 – NOTE use wildcard characters**

**QUERY AND RESULT:**

SQLQuery3.sql - SQ...AL\26-268166 (94))* | SQLQuery2.sql - SQ...AL\26-268166 (84))* | SQLQuery1.sql - S

```
Select first_name, last_name, Tuition from student where admission_no like '_1%';
```

100 %

Results | Messages

| | first_name | last_name | Tuition |
|---|---|---|---|
| 1 | Paul | Ward | 60000.00 |
| 2 | Rose | Huges | 60000.00 |
| 3 | Mariela | Simmons | 60000.00 |
| 4 | Jasmine | Loyola | 65000.00 |
| 5 | Joshua | Loyola | 65000.00 |

**h. Display the highest tuition fee and assign "Highest Tuition Fee" as column alias name**

**QUERY AND RESULT:**

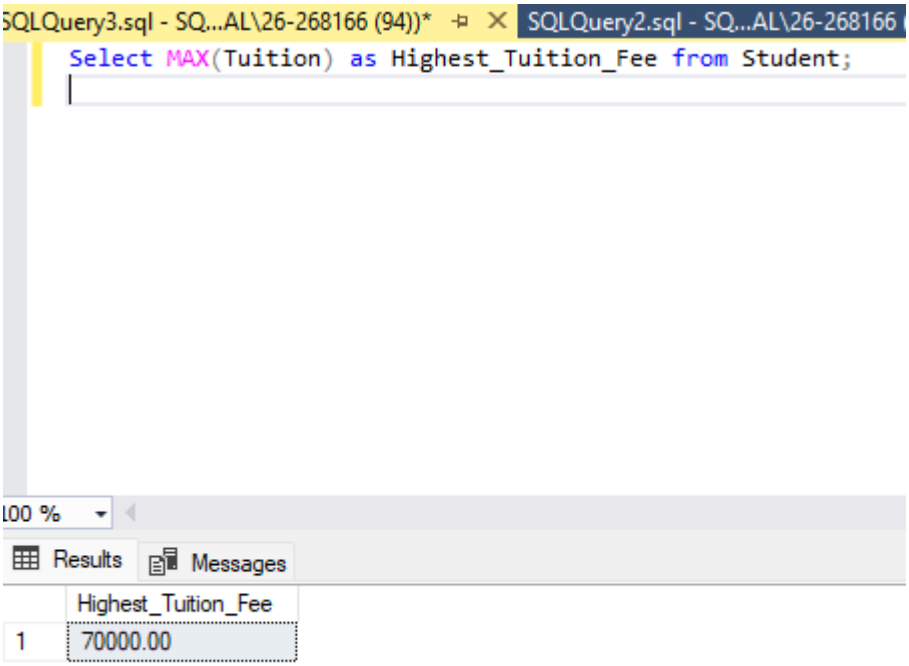


**I. Display the city and the Lowest Tuition fee per City and assign "Lowest Tuition Fee" as column alias name TAKE NOTE: Group by City**

**QUERY AND RESULT:**

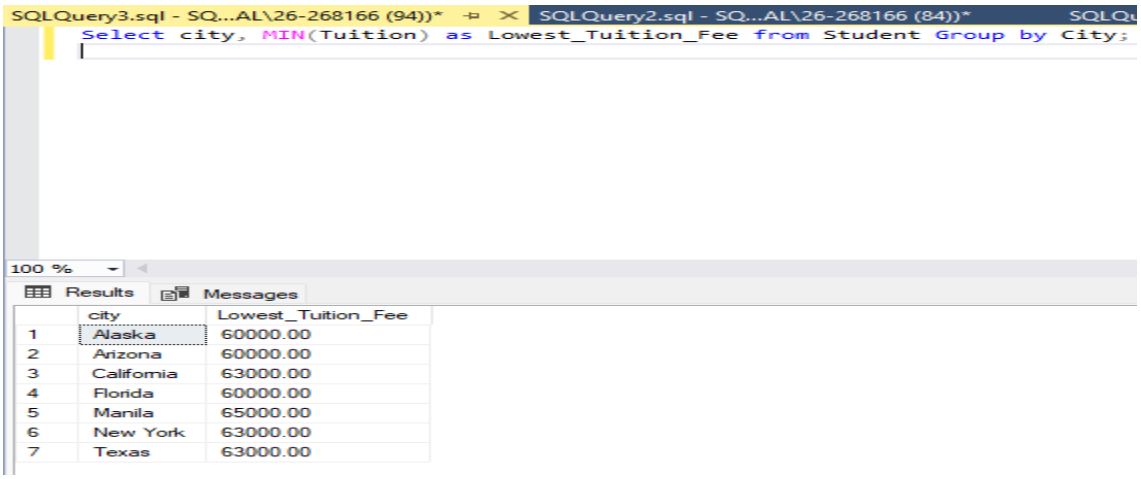

**j. Display the number of students per city arranged in descending order.**

**QUERY AND RESULT:**

SQLQuery3.sql - SQ...AL\26-268166 (94))* | SQLQuery2.sql - SQ...AL\26-268166 (84))* | SQLQuery1.sql - SQ...AL\26-268166 (77))*

```sql
SELECT city, COUNT(*) as Number_of_Students from Student Group by city Order by Number_of_Students DESC;
```

100 %

Results | Messages

| | city | Number_of_Students |
|---|---|---|
| 1 | Manila | 3 |
| 2 | New York | 2 |
| 3 | Alaska | 2 |
| 4 | California | 2 |
| 5 | Florida | 1 |
| 6 | Arizona | 1 |
| 7 | Texas | 1 |

**k. Display the average tuition fee of all students living in Manila with alias name**

**AVERAGE TUITION MANILA**
**QUERY AND RESULT:**

SQLQuery3.sql - SQ...AL\26-268166 (94))* | SQLQuery2.sql - SQ...AL\26-268166 (84))* | SQLQuery1.sql

```sql
Select AVG(Tuition) as Average_Tuition_Manila from Student where city = 'Manila';
```

100 %

Results | Messages

| | Average_Tuition_Manila |
|---|---|
| 1 | 65000.000000 |