

A L^AT_EX Package for Typesetting Crossword Puzzles and More*

Gerd Neugebauer
Im Lerchelsöhl 5
64521 Groß-Gerau (Germany)
Net: `gene@gerd-neugebauer.de`

Documentation date: 2014/01/12

Abstract

`cpwuzzle.dtx` provides a package to typeset crossword puzzles. The leading philosophy is that the puzzle and the solution are typeset from the same source.

The package can be used to produce several types of puzzles like the classical crossword puzzle, a number puzzle, and fill-in puzzles. In addition to the block separated puzzles the thick line delimited puzzles are supported as well.

Contents

1	About Crossword Puzzles	3
1.1	Classical Crossword Puzzles	3
1.2	Number Crossword Puzzles	3
1.3	Fill-In Crossword Puzzles	4
1.4	Line delimited Crossword Puzzles	4
1.5	Solutions	4
2	Input of Crossword Puzzles	5
3	Other Grid-based Puzzles	10
3.1	Sudoku	10
3.2	Kakuro	12
4	Parameters and Options	13
5	Further Plans	16
5.1	General	16
5.2	The Related Program	16

*This file documents `cpwuzzle.dtx` version 1.9 as of 2014/01/12.

6	The Implementation	17
6.1	Basic Definitions and Parameters	17
6.2	The Frame of the Crossword Puzzle	17
6.3	Predefined Cell Types	21
6.4	Clues	24
6.5	Numbers	25
6.6	Sudoku	27
6.7	Kakuro	28
6.8	Initialization	29

1 About Crossword Puzzles

Crossword puzzles can be an amusing but also a challenging hobby. Unfortunately at the time of this writing I am not aware of any good package to typeset crossword puzzles with L^AT_EX. Thus I decided to make one which at least fits my needs.

There are several types of crossword puzzles among. This package can only be used to typeset several of them. The basic assumption in this package is that puzzles are rectangular arrangements of boxes. Some of these boxes are black and others are prepared to take single letters. Each word in the grid is enclosed in black boxes or the outside.

Optionally there may be rectangular regions left blank inside the puzzle. They can be used to place ads or other informative texts inside the puzzle.

1.1 Classical Crossword Puzzles



Across 1 unit of measure
2 * 5 sectioning unit

Down 1 η 3 unit of measure
4 non-proportional font

The “classical” type of a crossword puzzle words are marked with numbers and each word is accompanied with a clue which should help (or confuse) the reader. Those clues are listed after the frame of the puzzle.

1.2 Number Crossword Puzzles




The following letters are used: AEPRSTX

1	2	3	4	5	6	7
---	---	---	---	---	---	---

The “number puzzle” variant contains only numbers instead of letters. Different numbers denote different letters. There are no clues. The reader is assumed to find a complete list of letters by filling appropriate words into the grid. Sometimes a word is already entered into the grid to ease the start.

1.3 Fill-In Crossword Puzzles




Words of length 2: EX SP TT
 Words of length 3: AST ETA
 Words of length 4: PART

The “fill-in puzzle” variant consists of a frame containing only black and white boxes. Additionally a list of words is given which have to be put into the frame until none is left and the frame is completed.

1.4 Line delimited Crossword Puzzles


The crossword puzzles we have seen before had the property that words are either delimited by the outer border or by a solid block. In addition line delimited puzzles are common. In this case a thicker line is drawn to indicate the end of a line.



Across 1 unit of measure 3 math function 6 list of tables 7 μ 8 key
 Down 1 class option 2 math function 3 η 4 all in angle brackets 5 \LaTeX place picture element

In the example above we can see another feature. This feature is that two letters are circled. This can be used to indicate letters for a solution word of the crossword puzzle.

1.5 Solutions



Often it is not only desirable to typeset the unsolved crossword puzzle but also the solution. This means that all the letters have to be filled in. This should be possible with the same source as the questions to avoid typos or redundancies leading to additional work.

Several variants of solutions come to mind. Primarily the solution should show the letters and suppress any clues. One major distinction is also whether or not the numbers of the words should be shown in the solution as well.

		¹ E	X	
² A	³ S	T		⁴ T
	⁵ P	A	R	T

Finally there are the lists of letters in numbered puzzles. In the solution they will show the letters in them as well.

		E	X	
A	S	T		T
	P	A	R	T

The following letters are used: AEPRSTX

X	S	R	P	A	E	T
---	---	---	---	---	---	---

2 Input of Crossword Puzzles

The basic idea behind this package is that a crossword puzzle is specified in a separate file. The actual appearance of the puzzle is controlled by several options. Thus it should be possible to produce the unsolved and the solved puzzle from the same source. Before we describe the various options we will have a look at the basic environments and macros used to specified a crossword puzzle.

Puzzle This package provides the environment **Puzzle** which typesets the frame of a crossword puzzle. This environment takes two arguments. These arguments are the number of columns and the number of the rows of the puzzle. This means that essentially only rectangular puzzles can be typeset.

The example from section 1.1 has been entered as follows:

```
\begin{Puzzle}{5}{3}%
|*|*|[1]E|X|*|.
|[2]A|[3]S|T|*|[4]T|.
|*|[5]P|A|R|T|.
\end{Puzzle}
```

In this example we can see that inside the **Puzzle** environment there is one special character. This is the bar |. This bar is an active character in T_EX. Thus you can think of it like a macro.


The | macro takes three arguments. The first two arguments are optional, i.e. enclosed in brackets if present. The first optional argument denotes the number for numbered boxes. The second optional argument specifies the formatting of the cell.

The third argument is either empty {} or it consists of a single character. This argument describes the action to be performed.

- If this argument is a letter then it is simply shown in the solution and suppressed in the unsolved crossword puzzle.

- If this argument is an asterisk `*` then a black box is produced.
- If this argument is a dot `.` then this marks the end of the current row. The next box is typeset at the beginning of the following row.
- If this argument is empty `{}` then a white box is typeset. This box does not contain a letter, nor does it have a frame. This macro can be used to leave room for larger boxed with ads. Alternatively this can be used to disable certain boxes to make a non-rectangular crossword puzzle.

```
\begin{Puzzle}{5}{5}
|{} |{} |[1]S|.
|{} |[2]M|I |[3]D|.
|[4]T|I |M |E |S |.
|{} |[5]N|E |G |.
|{} |{} |Q |.
\end{Puzzle}
```



















Across: 2 | 4 \times 5 \neg

Down: 1 \simeq 2 log-like
function 3 log-like func-
tion

Note that white-space is ignored after the arguments but not between the bar and the arguments.

The formatting of the cell is controlled by the second optional argument of the `|` macro. This optional argument may contain a list of several characters. Each of these characters is interpreted from left to right. The following list describes the meaning of the built-in characters.

	[8] [f] X	The letter f produces a simple frame around the cell. This is the default if nothing is specified.
	[8] [.] X	The character . produces no additional rendering it can be used to overwrite the default rendering which is to place a frame around the cell.
	[8] [*] X	The character * produces a black box. This is the same effect which can be achieved by providing the character * to be filled into the cell for the solution.
	[8] [O] X	The letter O produces an oval as drawn with the L ^A T _E X macro <code>\oval</code> .
	[8] [o] X	The letter o produces an oval inside a frame. T is is an abbreviation for the two letters fO.

	[8] [t] X	The letter t produces a frame with a thicker line at the top. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [T] X	The letter T produces a thicker line at the top of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [b] X	The letter b produces a frame with a thicker line at the bottom. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [B] X	The letter B produces a thicker line at the bottom of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [l] X	The letter l produces a frame with a thicker line at the left side of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [L] X	The letter L produces a thicker line at the left side of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [r] X	The letter r produces a frame with a thicker line at the right side of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [R] X	The letter R produces a thicker line at the right side of the cell. The thickness of this line is controlled by the macro <code>\PuzzleThickline</code> .
	[8] [/] X	The character / produces a line crossing the cell from lower left to upper right.
	[8] [,] X	The character , produces a line crossing the cell from upper left to lower right.
	[8] [S] X	The character S produces the solution, i.e. the content of the cell is typeset. No decorations are placed around. For this purpose it should be combined with some other formatting characters.

Whenever you try to use an undefined specification for the cell frame a warning is printed and the letter is ignored.

`\PuzzleDefineCell`

You can define additional cell renderings of your own. For this purpose the macro `\PuzzleDefineCell` is provided. It takes two arguments. The first argument contains the key under which the rendering should be addressed in the optional second argument of the macro `|`. The second argument contains the replacement text like in `\newcommand`. This replacement text can make use of two arguments. They are addressed with `#1` and `#2`. The first one contains the x coordinate of the cell to be rendered. The second one its y coordinate.

The following example shows for instance the definition of a new cell type addressed by the key `+` which draws a thick frame around the cell.

```
\PuzzleDefineCell{+}{
  \PuzzleThicklines
}
```

```

\put(#1,#2){\framebox(1,1){}}
}

```


Finally we show how to define a cell type consisting of a colored box. The box itself is drawn with the help of the macro `\colorbox`. Thus it is necessary to load the package `color` which defines this macro.

The two invocations show the combination with the `f` specifier. The specifier `f` is the default and used only if the user does not provide the optional argument. Thus we need to provide the `f` we want to have it additionally.

```

\definecolor{gray}{gray}{.9}
\PuzzleDefineCell{c}{%
  \put(#1,#2){\makebox(1,1){%
    \fboxsep=0pt
    \colorbox{gray}{\makebox(1,1){}}}}
}}
\begin{Puzzle}{2}{2}
| [1] [cf] X | {} |.
| {} | [2] [c] X |.
\end{Puzzle}

```




`\DefineColorCell`

The macro `\DefineColorCell` simplifies this task by encapsulating the definition above. It has two arguments. The first one is the key character and the second one is the name of the color to use for the background.

```

\definecolor{gray}{gray}{.9}
\PuzzleDefineColorCell{g}{gray}
\begin{Puzzle}{2}{2}
| {} | [1] [cf] X |.
| [2] [c] X | {} |.
\end{Puzzle}

```



`\Frame`

The macro `\Frame` can be used to typeset ads or other text into larger boxes inside the frame of the crossword puzzle. For this purpose five arguments are required. The first two arguments are used to specify the lower left corner of the frame. The lower left corner has the coordinates 0,0 and the numbers increase upwards and to the right.


The third argument is the width of the frame and the fourth argument is the height of the frame measured in number of boxes. Finally, the fifth argument contains the text to be typeset. Per default it is typeset in a mini-page of the appropriate width centered horizontally and vertically.

```

\begin{Puzzle}{8}{6}
\Frame{2}{2}{4}{2}{\sf Crossword\\Puzzle}
| [1] E | * | [2] N | U | L | [3] L | * | [4] V |.
| [5] T | [6] R | I | A | N | G | [7] L | E |.
| A | U | {} | {} | {} | {} | [8] C | C |.
| * | L | {} | {} | {} | {} | E | * |.
| [9] B | E | T | [10] A | * | [11] L | I | M |.
| F | * | [12] L | A | B | E | L | * |.

```


`\end{Puzzle}`

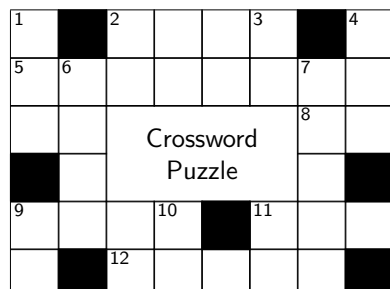

Across: 2 empty 5 \triangle 8 carbon copy (letter.sty) 9 β 11 limes 12 mark it
Down: 1 η 2 \ni 3 logarithm 4 \sim 6 black rectangle 7 \lceil 9 bold face 10 \AA 11 \leq

PuzzleClues The clues in the classical crossword puzzle are typeset with the use of the environment **PuzzleClues**. This environment takes one argument which is typeset before the clues. The environment takes roughly the half of the text width and make a mini-page with this width. Thus two invocations of this environment are typeset side by side.

Alternatively if the solution is typeset then the environment **PuzzleClues** has no effect.

```
\begin{PuzzleClues}{\textbf{Across}}%
\Clue{1}{EX}{unit of measure}%
\Clue{2}{AST}{\(\ast\)}%
\Clue{5}{PART}{sectioning unit}%
\end{PuzzleClues}%
\begin{PuzzleClues}{\textbf{Down}}%
\Clue{1}{ETA}{\(\eta\)}%
\Clue{3}{SP}{unit of measure}%
\Clue{4}{TT}{nonproportional font}%
\end{PuzzleClues}%
```

Clue The environment **PuzzleClues** defines one local macro. This macro is named `\Clue` and takes three arguments. The first argument is the number of the word. This should correspond to the number in the puzzle frame. The second argument is the word itself. Currently this not used at all. Finally the third argument is the clue for the word.

If the unsolved puzzle is typeset then the first and the third argument are used. Otherwise all arguments are silently absorbed.

\PuzzleLetters The macro **\PuzzleLetters** can be used to typeset the list of used letters in numbered crossword puzzles. It has one argument which are the used letters (preferably in alphabetical order).

\PuzzleNumbers The macro **\PuzzleNumbers** can be used to generate a numbered list of boxes for the numbered crossword puzzles. The user is supposed to collect the found letters here.

PuzzleWords The environment **PuzzleWords** can be sued to typeset the list of words for a fill-in puzzle. It takes one argument. This is the length of the words listed. For

each length there should be an invocation of this environment. The words in this environment are supposed to be ordered alphabetically.

`\Word` The macro `\Word` is defined inside the environment `PuzzleWords`. It takes one argument which is the word itself.

```
\begin{PuzzleWords}{2}
  \Word{EX}%
  \Word{SP}%
  \Word{TT}%
\end{PuzzleWords}%
\begin{PuzzleWords}{3}
  \Word{AST}%
  \Word{ETA}%
\end{PuzzleWords}%
\begin{PuzzleWords}{4}
  \Word{PART}%
\end{PuzzleWords}%
```

3 Other Grid-based Puzzles

In addition to the crossword puzzles other puzzles based on a grid can also be typeset with this package. The basic principle is the same. Just some minor simplifications have been provided.

3.1 Sudoku

A Sudoku is a puzzle on a 9×9 grid. It is filled with nine numbers. Each number occurs only once in each row, each column and each of the nine 3×3 boxes. Initially some of the numbers are shown. The goal is to fill in all missing digits.

	2						9	
3		1	9		6	5		2
			8		4			
	9						5	
5			2		3			6
	7						2	
			4		7			
8		2	5		1	7		3
	5						8	

Sudoku The input for a Sudoku is given in a specialized environment. Since the size is fixed there is no need to specify a size. We separate the cells with a pipe symbol and mark the end of a line with a dot. To mark those cells containing the hints we precede the number with an asterisk.

The Sudoku shown above is typeset from the following source:

```
\begin{Sudoku}
| 7|*2| 4| 1| 3| 5| 6|*9| 8|.
|*3| 8|*1|*9| 7|*6|*5| 4|*2|.
| 9| 6| 5|*8| 2|*4| 1| 3| 7|.
| 2|*9| 6| 7| 1| 8| 3|*5| 4|.
|*5| 1| 8|*2| 4|*3| 9| 7|*6|.
| 4|*7| 3| 6| 5| 9| 8|*2| 1|.
| 6| 3| 9|*4| 8|*7| 2| 1| 5|.
|*8| 4|*2|*5| 9|*1|*7| 6|*3|.
| 1|*5| 7| 3| 6| 2| 4|*8| 9|.
\end{Sudoku}
```

As for crossword puzzles the macro `\PuzzleSolution` can be used to switch to solution mode. Then all numbers are shown. The parameters to modify the appearance of a puzzle work here as well.

7	2	4	1	3	5	6	9	8
3	8	1	9	7	6	5	4	2
9	6	5	8	2	4	1	3	7
2	9	6	7	1	8	3	5	4
5	1	8	2	4	3	9	7	6
4	7	3	6	5	9	8	2	1
6	3	9	4	8	7	2	1	5
8	4	2	5	9	1	7	6	3
1	5	7	3	6	2	4	8	9

Since the characters in the solution are numbers only we can use the following definition to colorize the cells in the solution.

```
\def\PuzzleSolutionContent#1{\fboxsep=0pt
\def\myColor{}}%
\ifcase#1
\def\myColor{white}%0
\or\def\myColor{red}%1
\or\def\myColor{green}%2
\or\def\myColor{yellow}%3
\or\def\myColor{orange}%4
\or\def\myColor{lime}%5
\or\def\myColor{purple}%6
\or\def\myColor{violet}%7
```

```

\or\def\myColor{teal}%8
\or\def\myColor{brown}%9
\else\def\myColor{white}%*
\fi
\colorbox{\myColor}{\makebox(1,1){#1}}

```

With the help of the package xcolor for the predefined colors we get the following output:


7	2	4	1	3	5	6	9	8
3	8	1	9	7	6	5	4	2
9	6	5	8	2	4	1	3	7
2	9	6	7	1	8	3	5	4
5	1	8	2	4	3	9	7	6
4	7	3	6	5	9	8	2	1
6	3	9	4	8	7	2	1	5
8	4	2	5	9	1	7	6	3
1	5	7	3	6	2	4	8	9

Note that this definition has to be restricted to a local block if you have solutions for other puzzle types in the same document.

3.2 Kakuro

In a Kakuro the cells are filled with digits. Each “word” consists of different digits; i.e. a number can not be repeated in a consecutive horizontal or vertical sequence of numbers.

The hints for the “words” are the sums of the digits.

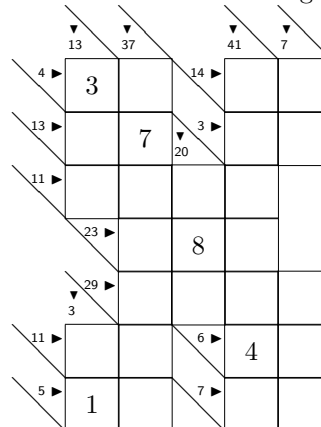

Kakuro

The input for a Kakuro is given in a specialized environment. It takes the width and the height as arguments. We separate the cells with a pipe symbol and mark the end of a line with a dot. To mark those cells containing the initial digits we precede the digit with an asterisk.

The hints are entered in angle brackets. They contain the horizontal and vertical sums separated by a colon. The sums can be empty if none should be typeset.

The Kakuro shown above is typeset from the following source:

```
\begin{Kakuro}{6}{9}
| - |<:13>|<:37>| - |<:41>|<:7>| - |.
|<4:>|* 3 | 1 |<14:>| 8 | 6 | - |.
|<13:>| 9 |* 7 |<3:20>| 2 | 1 | - |.
|<11:>| 1 | 2 | 3 | 5 | - | - |.
| - |<23:>| 6 |* 8 | 9 | - | - |.
| - |<29:3>| 8 | 9 | 7 | 5 | - |.
|<11:>| 2 | 9 |<6:>|* 4 | 2 | - |.
|<5:>| 1 | 4 |<7:>| 6 | 1 | - |.
| - | - | - | - | - | - |.
\end{Kakuro}
```

As for crossword puzzles the macro `\PuzzleSolution` can be used to switch to solution mode. Then all numbers are shown.

```
\PuzzleSolution
\PuzzleUnitlength=14pt
\footnotesize\sff
\begin{Kakuro}{6}{9}
| - |<:13>|<:37>| - |<:41>|<:7>| - |.
|<4:>|* 3 | 1 |<14:>| 8 | 6 | - |.
|<13:>| 9 |* 7 |<3:20>| 2 | 1 | - |.
|<11:>| 1 | 2 | 3 | 5 | - | - |.
| - |<23:>| 6 |* 8 | 9 | - | - |.
| - |<29:3>| 8 | 9 | 7 | 5 | - |.
|<11:>| 2 | 9 |<6:>|* 4 | 2 | - |.
|<5:>| 1 | 4 |<7:>| 6 | 1 | - |.
| - | - | - | - | - | - |.
\end{Kakuro}
```

4 Parameters and Options

The package `cwpuzzle` can be controlled by a rich set of macros. In addition some settings can be performed with style options. The following style options are recognized:

numbered The solution numbering is turned on.

nocenter The puzzle is not typeset in a centered paragraph of its own.

unboxed The clues are not enclosed in mini-pages and centered on the page.

normalsize The puzzle is set in normalsize. This is the default.

small The puzzle is set in small. The size of the cell and the font size of the solution are adjusted accordingly.

large The puzzle is set in large. The size of the cell and the font size of the solution are adjusted accordingly.

german

ngerman The build in texts are switched to german variants. The defaults are English. This options is also in effect when given to the document class. The style inherits it from there.

The style options can be passed to the style in the usual way:

```
\usepackage[nocenter,unboxed,small]{cwpuzzle}
```

The fine tuning can be achieved with the help of several macros. Those macros are described below.

\PuzzleUnitlength The length **\PuzzleUnitlength** determines the width and height of each single box in the frame of a crossword puzzle. The default value is 20pt.

\PuzzleBlackBox The macro **\PuzzleBlackBox** contains the commands to produce the black boxes. It has to produce at most of width and height of **\PuzzleUnitlength**. Per default it just produces a black rectangle of this size.

The following list shows some variants which can be achieved by redefining the macro **\PuzzleBlackBox**.



```
\renewcommand{\PuzzleBlackBox}{\rule{.75\PuzzleUnitlength}%  
                                {.75\PuzzleUnitlength}}
```



```
\renewcommand{\PuzzleBlackBox}{\framebox(.75,.75){%  
                                \framebox(.5,.5){}}}
```

Additional effects can be achieved by using shades of gray (with the **graphics** package).

\PuzzleFont The macro **\PuzzleFont** contains the font changing command issued before the frame of the crossword puzzle.

\PuzzleNumberFont The macro **\PuzzleNumberFont** contains the font changing command issued before a number in the frame of the crossword puzzle is typeset.

\PuzzleClueFont The macro **\PuzzleClueFont** contains the font changing command issued before the clues are typeset.

\PuzzleWordsText The macro **\PuzzleWordsText** contains the text which is typeset at the beginning of the environment **PuzzleWords**. It has one argument which contains the length of the words listed.

\PuzzleLettersText The macro **\PuzzleLettersText** contains the text which is typeset at the beginning of the macro **\PuzzleLetters**.

\PuzzleSolution The macro **\PuzzleSolution** arranges everything that the following puzzles

are typeset in the “solution” mode, i.e. the letters are shown and the clues are suppressed.


This macros has one optional argument which has to be **true** or **false**. This argument determines whether or not the numbers should also be shown in the solution. The default is **false** which means that the numbers are suppressed in the solution.

\PuzzleUnsolved The macro **\PuzzleUnsolved** arranges everything that the following puzzles are typeset in the “unsolved” mode, i.e. the letters are suppressed and the clues are shown.

\PuzzlePutNumber The macro **\PuzzlePutNumber** is a configuration macro which typesets the number in a cell. The first argument is the x coordinate. The second argument is the y coordinate. The third argument is the number to be typeset. The coordinates are integer numbers. The coordinate (0,0) is the lower left corner.

\PuzzleHook The macro **\PuzzleHook** is called at the end of the **Puzzle** environment. It can be used to place additional graphical elements in the puzzle frame.

The following example shows a crossword puzzle which we have seen before and the definition for the **\PuzzleHook**.



```
\newcommand\PuzzleHook{
  \put(0,2){\line(1,-1){2}}
  \put(0,3){\line(1,1){2}}
  \put(5,2){\line(-1,-1){2}}
  \put(5,3){\line(-1,1){2}}
}
```

\PuzzleLineThickness The macro **\PuzzleLineThickness** contains the width of the line used to frame the cells.

\PuzzlePre This macro contains the code to be inserted before a puzzle is typeset. It is initialized to begin a new paragraph and center the puzzle.

\PuzzlePost This macro contains the code to be inserted after a puzzle is typeset. It is initialized to end the paragraph and center the puzzle.

\PuzzleCluePre This macro contains the code to be inserted before the clues are typeset in normal mode. It is initialized to end the paragraph and center the puzzle.

\PuzzleCluePost This macro contains the code to be inserted after the clues are typeset in normal mode. It is initialized to end the paragraph and center the puzzle.

\PuzzleContent This macro contains the content of a cell during formatting this cell. This enables the cell forming macro to access it.

\PuzzleSolutionContent This macro processes the letter in solution mode. It takes one argument, the letter. This macro can be redefined to achieve special effects for the solution.

\SudokuLinethickness This macro contains the thickness of the thick lines in a sudoku.

\KakuroNumberFont This macro contains the definition of the font switching macros used when typesetting a Kakuro hint.

\KakuroHintTypeKakuroNumberFont This macro contains the cell type used when typesetting a Kakuro hint. It can be used to redefine the appearance.

5 Further Plans

5.1 General

Maybe I will add a mode for further variants of crossword puzzles sometimes.

Maybe I can add support for further languages if someone provides the appropriate texts. Contributions are welcome.

5.2 The Related Program

There is a related program written in Perl/Tk. This program can be used to manually construct crossword puzzles and save them in a format suitable for this package. Other features include the creation of a proper frame and filling with words.

Right now I have not prepared a distribution of this program yet since this program requires dictionaries which I can not distribute legally.

The crossword examples in this documentation have been computed with the help of the `cwp` program.

6 The Implementation

The crossword puzzle is basically implemented with the L^AT_EX picture environment. This gives us enough flexibility and provides an high enough abstraction such that we do not have to fiddle around with to many low level details.

The natural unit in a crossword puzzle is a box which is empty or black. Thus the `unitlength` is set to the width (and height) of such a box.

6.1 Basic Definitions and Parameters

First we identify this package.

```
1 \ProvidesPackage{cwpuzzle}[\filedate gene]
```

Next we load the package `amssymb` beended for the triangles used in Kakuros

```
2 \RequirePackage{amssymb}
```

The dimen register `\PuzzleUnitlength` stores the height and width of a box of the puzzle. The default is 20pt which is also shown in this documentation.

```
3 \newdimen\PuzzleUnitlength
```

```
4 \PuzzleUnitlength=20pt
```

`\PuzzleClueFont` The macro `\PuzzleClueFont` contains font changing commands issued before the clues are typeset.

```
5 \newcommand\PuzzleClueFont{\footnotesize}
```

`\PuzzleFont` The macro `\PuzzleFont` contains font changing commands issued before the puzzle is typeset.

```
6 \newcommand\PuzzleFont{\rm\normalsize}
```

`\PuzzleNumberFont` The macro `\PuzzleNumberFont` contains font changing commands issued before the numbers in a puzzle are typeset.

```
7 \newcommand\PuzzleNumberFont{\sf\scriptsize}
```

`\PuzzleHook` Puzzles are typeset with the L^AT_EX picture environment. At the end of this environment the macro `\PuzzleHook` is called. The package produces an empty default. Users may want to use this place to typeset additional elements on top of the puzzle.

The puzzle uses a `\unitlength` of `\PuzzleUnitlength`. Thus it is rather easy to address the boxes in the puzzle.

```
8 \let\PuzzleHook=\relax
```

6.2 The Frame of the Crossword Puzzle

To describe the coordinates where the next box should be typeset we need two counters for the coordinates. These counters are now allocated (even though we could use temporary counters from L^AT_EX).

```
9 \newcount\Puzzle@X
```

```
10 \newcount\Puzzle@Y
```

```

11 \begingroup
12 \catcode'\|=13
13 \gdef\Puzzle@@solution{
14   \let|=\Puzzle@Box@@solution
15   \let\Frame=\Puzzle@Frame@@solution
16 }
17 \gdef\Puzzle@@normal{
18   \let|=\Puzzle@Box@@normal
19   \let\Frame=\Puzzle@Frame@@normal
20 }
21 \endgroup

```

Puzzle The environment `Puzzle` typesets the frame of a crossword puzzle. It is implemented utilizing a `picture` environment. The `unitlength` is set to the `\PuzzleUnitlength`. Thus the navigation is fairly easy. The basic unit is width and height of a single box.

The macros which are local to the environment are activated. Thus we avoid collisions with other packages where the same macro names might be used.

Finally the counter which contain the x and the y coordinate have to be initialized.

The last action in the `picture` environment is the expansion of the macro `\PuzzleHook`. This can be used to include additional material in the `picture` environment. Primarily I have use this to include the ads. But now there is the macro `\Frame` for this purpose.

```

22 \newenvironment{Puzzle}[2]{\PuzzlePre
23   \catcode'\|=13
24   \@nameuse{Puzzle@@\Puzzle@TYPE}%
25   \unitlength=\PuzzleUnitlength
26   \linethickness{\PuzzleLineThickness}%
27   \Puzzle@Y=#2
28   \begin{picture}(\#1,\#2)
29     \Puzzle@Box@@normal.
30 }{%
31   \PuzzleHook
32   \end{picture}\PuzzlePost
33 }

```

\PuzzleLineThickness The macro `\PuzzleLineThickness` contains the width of the line used to frame the cells.

```

34 \newcommand\PuzzleLineThickness{.25pt}

```

\PuzzlePre This macro contains the code to be inserted before a puzzle is typeset. It is initialized to begin a new paragraph and center the puzzle.

```

35 \newcommand\PuzzlePre{%
36   \par\noindent\mbox{}}\hfill
37 }

```

`\PuzzlePost` This macro contains the code to be inserted after a puzzle is typeset. It is initialized to end the paragraph and center the puzzle.

```

38 \newcommand\PuzzlePost{%
39     \hfill\null\par\noindent
40 }

```

`\Puzzle@Frame@@normal` The macro `\Puzzle@Frame` is used to place additional rectangular regions into the puzzle frame. This frame can contain arbitrary text which is typeset in a centered environment.

This macro takes five arguments. The first two arguments are the coordinates of the upper left corner of the frame. The coordinates are logical coordinates starting from the lower left corner of the puzzle. The next two arguments are the width and the height of the frame given in the number of boxes covered. Finally the fifth argument contains the text which should appear in this frame.

```

41 \newcommand\Puzzle@Frame@@normal[5]{\put(#1,#2){\framebox(#3,#4){%
42     \begin{minipage}{#3\unitlength}\begin{center} #5
43     \end{center}\end{minipage}}}}

```

`\Puzzle@Frame@@solution` For the solution the framed ads are simply ignored.

```

44 \newcommand\Puzzle@Frame@@solution[5]{}

```

`\PuzzleBlackBox` The macro `\PuzzleBlackBox` is called to typeset the black boxes. It should produce a box of at most width and height of `\PuzzleUnitlength`.

```

45 \newcommand\PuzzleBlackBox{\rule{\PuzzleUnitlength}{\PuzzleUnitlength}}

```

`\Puzzle@Box@@normal` The macro `\Puzzle@Box@@normal` performs all tasks when a box should be typeset in “normal” mode. The arguments are evaluated and the appropriate type of box typeset or other actions performed.

```

46 \newcommand\Puzzle@Box@@normal[1][]{%
47     \def\Puzzle@tmp@{#1}%
48     \Puzzle@Box@@normal@
49 }

```

`\Puzzle@Box@@normal@` The macro `\Puzzle@Box@@normal@` performs all tasks when a box should be typeset in “normal” mode. The arguments are evaluated and the appropriate type of box typeset or other actions performed.

```

50 \newcommand\Puzzle@Box@@normal@[2][f]{%
51     \def\PuzzleContent{#2}%
52     \def\Puzzle@tmp@{#2}%
53     \if\Puzzle@tmp@.
54         \Puzzle@X=0
55         \advance\Puzzle@Y-1
56     \else
57         \ifx\Puzzle@tmp@\empty
58         \else
59             \if\Puzzle@tmp*
60                 \Puzzle@Cell@Loop *#1{}%
61             \else

```

```

62     \Puzzle@Cell@Loop #1{%
63     \fi
64 \fi
65 \ifx\@empty\Puzzle@tmp@\else
66     \PuzzlePutNumber{\Puzzle@X}{\Puzzle@Y}{\Puzzle@tmp}%
67 \fi
68 \advance\Puzzle@X 1
69 \fi
70 }

```

\PuzzlePutNumber The macro `\PuzzlePutNumber` is a configuration macro which typesets the number in a cell. The first argument is the x coordinate. The second argument is the y coordinate. The third argument is the number to be typeset.

```

71 \def\PuzzlePutNumber#1#2#3{%
72     \put(#1,#2){\makebox(1,.95)[t1]{\PuzzleNumberFont\,#3}}%
73 }

```

\Puzzle@Cell@Loop The macro `\Puzzle@Cell@Loop` processes its arguments until an empty argument is found. For each argument it is tried to invoke the corresponding cell drawing macro.

```

74 \def\Puzzle@Cell@Loop#1{%
75     \def\Puzzle@tmp{#1}%
76     \ifx\Puzzle@tmp\@empty
77         \let\Puzzle@tmp\relax
78     \else
79         \expandafter\ifx\csname Puzzle@Cell@@#1\endcsname\relax
80             \typeout{cwpuzzle: Cell type #1 is undefined. I am ignoring it}%
81         \else
82             \csname Puzzle@Cell@@#1\endcsname{\Puzzle@X}{\Puzzle@Y}%
83         \fi
84         \let\Puzzle@tmp\Puzzle@Cell@Loop
85     \fi
86     \Puzzle@tmp
87 }

```

\Puzzle@Box@@solution The macro `\Puzzle@Box@@solution` performs all tasks when a box should be typeset in “solution” mode. The arguments are evaluated and the appropriate type of box typeset or other actions performed.

```

88 \newcommand\Puzzle@Box@@solution[1][f]{%
89     \def\Puzzle@tmp{#1}%
90     \Puzzle@Box@@solution@
91 }

```

\Puzzle@Box@@solution@ The macro `\Puzzle@Box@@solution@` performs all tasks when a box should be typeset in “solution” mode. The arguments are evaluated and the appropriate type of box typeset or other actions performed.

```

92 \newcommand\Puzzle@Box@@solution@[2][f]{%
93     \def\Puzzle@tmp{#2}%
94     \if\Puzzle@tmp.

```

```

95     \Puzzle@X=0
96     \advance\Puzzle@Y-1
97   \else
98     \ifx\Puzzle@tmp\@empty
99     \else
100     \if\Puzzle@tmp*
101       \Puzzle@Cell@Loop *#1{}%
102     \else
103       \Puzzle@Cell@Loop #1{}%
104       \put(\Puzzle@X,\Puzzle@Y){\PuzzleSolutionContent{#2}}%
105     \fi
106   \fi
107   \def\Puzzle@tmp{#1}%
108   \ifx\Puzzle@tmp\@empty\else
109     \if\Puzzle@SolutionNumbered
110       \PuzzlePutNumber{\Puzzle@X}{\Puzzle@Y}{\Puzzle@tmp@}%
111     \fi
112   \fi
113   \advance\Puzzle@X 1
114 \fi
115 }

```

\PuzzleSolutionContent The macro `\PuzzleSolutionContent` processes the character in solution mode. Per default it converts the argument to upper case and sets it in a box of size 1×1 .

```

116 \def\PuzzleSolutionContent#1{\makebox(1,1){\uppercase{#1}}}

```

6.3 Predefined Cell Types

In this section a series of frame types are defined.

\PuzzleDefineCell The macro `\PuzzleDefineCell` is a user command to define a new cell type. The first argument contains the key under which the cell type should be addressed. This key should be expandable and should result into a single letter. Special effects can be achieved with keys constituted of non letters or several characters.

The second argument contains the code to be stored for the key given.

```

117 \newcommand\PuzzleDefineCell[2]{
118   \global\@namedef{Puzzle@Cell@@#1}##1##2{#2}%
119 }

```

\PuzzleDefineColorCell

```

120 \newcommand\PuzzleDefineColorCell[2]{
121   \global\@namedef{Puzzle@Cell@@#1}##1##2{%
122     \fboxsep=0pt
123     \put{##1,##2}{\makebox(1,1){\colorbox{#2}{\makebox(1,1){}}}}
124   }%
125 }

```

\PuzzleThickline The parameter `\PuzzleThickline` contains the expansion text to be inserted. whenever a thick line is required. This means that this macro arranges everything

that a thick line is drawn. Usually it contains an invocation to `\linethickness`. It can be redefined to achieve other effects like even thicker lines or colored lines. Note that the macro is used inside a group in the predefined cell types.

```
126 \def\PuzzleThickline{\linethickness{2pt}}
```

`\Puzzle@Cell@T` The letter T produces a thicker line at the top of the cell. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
127 \PuzzleDefineCell{T}{\%
128   \advance#2 1
129   \PuzzleThickline
130   \put(#1,#2){\line(1,0){1}}}
131 }}
```

`\Puzzle@Cell@t` The letter t produces a frame with a thicker line at the top. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
132 \PuzzleDefineCell{t}{\%
133   \put(#1,#2){\framebox(1,1){}}
134   \advance#2 1
135   \PuzzleThickline
136   \put(#1,#2){\line(1,0){1}}}
137 }}
```

`\Puzzle@Cell@B` The letter B produces a thicker line at the bottom of the cell. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
138 \PuzzleDefineCell{B}{\%
139   \PuzzleThickline
140   \put(#1,#2){\line(1,0){1}}}
141 }}
```

`\Puzzle@Cell@b` The letter b produces a frame with a thicker line at the bottom. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
142 \PuzzleDefineCell{b}{\%
143   \put(#1,#2){\framebox(1,1){}}
144   \PuzzleThickline
145   \put(#1,#2){\line(1,0){1}}}
146 }}
```

`\Puzzle@Cell@l` The letter l produces a frame with a thicker line at the left side of the cell. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
147 \PuzzleDefineCell{l}{\%
148   \put(#1,#2){\framebox(1,1){}}
149   \PuzzleThickline
150   \put(#1,#2){\line(0,1){1}}}
151 }}
```

`\Puzzle@Cell@L` The letter L produces a thicker line at the left side of the cell. The thickness of this line is controlled by the macro `\PuzzleThickline`.

```
152 \PuzzleDefineCell{L}{\%
```

```

153 \PuzzleThickline
154 \put(#1,#2){\line(0,1){1}}
155 }}

\Puzzle@Cell@@r The letter r produces a frame with a thicker line at the right side of the cell. The
thickness of this line is controlled by the macro \PuzzleThickline.
156 \PuzzleDefineCell{r}{%
157 \put(#1,#2){\framebox(1,1){}}
158 \advance #1 1
159 \PuzzleThickline
160 \put(#1,#2){\line(0,1){1}}
161 }}

\Puzzle@Cell@@R The letter R produces a thicker line at the right side of the cell. The thickness of
this line is controlled by the macro \PuzzleThickline.
162 \PuzzleDefineCell{R}{%
163 \advance #1 1
164 \PuzzleThickline
165 \put(#1,#2){\line(0,1){1}}
166 }}

\Puzzle@Cell@@f The letter f produces a simple frame around the cell. This is the default if nothing
is specified.
167 \PuzzleDefineCell{f}{%
168 \put(#1,#2){\framebox(1,1){}}
169 }}

\Puzzle@Cell@@S The letter S produces the solution without any other formatting around it.
170 \PuzzleDefineCell{S}{%
171 \put(#1,#2){\makebox(1,1){\expandafter\uppercase{\PuzzleContent}}}
172 }}

\Puzzle@Cell@@. The character . produces no additional rendering it can be used to overwrite the
default rendering which is to place a frame around the cell.
173 \PuzzleDefineCell{.}{%

\Puzzle@Cell@@O The letter O produces an oval as drawn with the LATEX macro \oval.
174 \PuzzleDefineCell{O}{%
175 \put(\the#1.5,\the#2.5){\oval(1,1){}}
176 }}

\Puzzle@Cell@@o The letter o produces an oval inside a frame. T is an abbreviation for the two
letters fO.
177 \PuzzleDefineCell{o}{%
178 \put(#1,#2){\framebox(1,1){}}
179 \put(\the#1.5,\the#2.5){\oval(1,1){}}
180 }}

```

`\Puzzle@Cell@@*` The letter `*` produces a solid black box.

```
181 \PuzzleDefineCell{*}{%
182   \put(#1,#2){\framebox(1,1){\PuzzleBlackBox}}
183 }
```

`\Puzzle@Cell@@/` The character `/` produces a line crossing the cell from lower left to upper right.

```
184 \PuzzleDefineCell{/}{%
185   \put(#1,#2){\line(1,1){1}}
186 }
```

`\Puzzle@Cell@@,` The character `,` produces a line crossing the cell from upper left to lower right.

```
187 \PuzzleDefineCell{,}{%
188   \advance#2 1
189   \put(#1,#2){\line(1,-1){1}}
190 }
```

6.4 Clues

`\Puzzle@Clue@@normal` The first and the third argument are shown as clue. This macro is used for unsolved puzzles.

```
191 \newcommand\Puzzle@Clue@@normal[3]{\textsf{#1} #3 }
```

`\Puzzle@Clue@@solution` In solutions clues are simply suppressed. Thus all three arguments are discarded.

```
192 \newcommand\Puzzle@Clue@@solution[3]{}
```

`Puzzle@Clues@@normal` The environment `Puzzle@Clues@@normal` is mapped to `PuzzleClues` in “normal” mode. It typesets its contents in a mini-page of approximately half text width.

```
193 \newenvironment{Puzzle@Clues@@normal}[1]{%
194   \let\Clue\Puzzle@Clue@@normal
195   \PuzzleCluePre
196   \PuzzleClueFont{#1}%
197 }{\PuzzleCluePost }
```

`\PuzzleCluePre` The macro `\PuzzleCluePre` contains the code which is inserted before the clues are typeset in normal mode.

```
198 \newcommand\PuzzleCluePre{%
199   \null\hfill
200   \begin{minipage}[t]{.45\textwidth}%
201 }
```

`\PuzzleCluePost` The macro `\PuzzleCluePost` contains the code which is inserted after the clues are typeset in normal mode.

```
202 \newcommand\PuzzleCluePost{
203   \end{minipage}\hfill\null
204 }
```


Puzzle@Clues@@solution The environment `Puzzle@Clues@@solution` is mapped to `PuzzleClues` in “solution” mode. It just suppresses any output.

```

205 \newenvironment{Puzzle@Clues@@solution}[1]{%
206   \let\Clue\Puzzle@Clue@@solution
207 }{}

```

\PuzzleWordsText The macro `\PuzzleWordsText` is the text typeset at the beginning of the environment `PuzzleWords`. It takes one argument which is the length of the words listed.

```

208 \newcommand\PuzzleWordsText[1]{Words of length #1: }

```

Puzzle@Words@@normal The environment `Puzzle@Words@@normal` will be mapped to the environment `PuzzleWords` in “normal” mode. It just arranges that words are typeset after the `\PuzzleWordsText` has shown the length of the words. Finally a new paragraph is started.

```

209 \newenvironment{Puzzle@Words@@normal}[1]{%
210   \PuzzleWordsText{#1}%
211   \let\Word\relax
212 }{\par}

```

Puzzle@Words@@solution The environment `Puzzle@Words@@solution` will be mapped to the environment `PuzzleWords` in “solution” mode. It arranges things that the contents is silently ignored.

```

213 \newenvironment{Puzzle@Words@@solution}[1]{%
214   \newcommand\Word[1]{}%
215 }{}

```

6.5 Numbers

\PuzzleNumbers The macro `\PuzzleNumbers` will produce a list of boxes with numbers for letters. It is intended for numbered crossword puzzles.

```

216 \newcommand\PuzzleNumbers[1]{\begingroup
217   \@nameuse{Puzzle@@\Puzzle@TYPE}%
218   \Puzzle@Y=0
219   \Puzzle@X=1
220   \unitlength=\PuzzleUnitlength
221   \Puzzle@Numbers#1.\endgroup}

```

\Puzzle@Numbers The macro `\Puzzle@Numbers` loops through the arguments until it finds a dot. For each argument it produces a box, either with the numbers or with the letters or both, depending on the current settings.

The loop is implemented via recursion. The box is typeset by the `|` macro which takes care of the current settings. For this purpose this character has to be made active temporarily.

```

222 \begingroup
223 \catcode'\|=13
224 \gdef\Puzzle@Numbers#1{%

```

```

225 \if#1.
226 \let\next\relax
227 \else
228 \begin{picture}(1,1)
229 \xdef\X{\the\Puzzle@X}%
230 \Puzzle@X=0
231 |[\X]{#1}%
232 \end{picture}%
233 \let\next\Puzzle@Numbers
234 \advance\Puzzle@X 1
235 \fi
236 \next
237 }
238 \endgroup

```

\PuzzleLettersText The macro `\PuzzleLettersText` contains the text typeset at the beginning of the `\PuzzleLetters` environment.

```
239 \newcommand\PuzzleLettersText{The following letters are used: }
```

\PuzzleLetters The macro `\PuzzleLetters` is intended to show the letters used in a numbered crossword puzzle. The argument is the (sorted) list of characters used.

```
240 \newcommand\PuzzleLetters[1]{\PuzzleLettersText #1\par}
```

\Puzzle@TYPE The macro `\Puzzle@TYPE` contains the type of the puzzle. It is used find the appropriate initialization macro.

```
241 \newcommand\Puzzle@TYPE{normal}
```

\PuzzleSolution The macro `\PuzzleSolution` arranges everything that the following puzzles are typeset in the “solution” mode, i.e. the letters are shown and the clues are suppressed.

This macros has one optional argument which has to be `true` or `false`. This argument determines whether or not the numbers should also be shown in the solution. The default is `false` which means that the numbers are suppressed in the solution.

```

242 \newcommand\PuzzleSolution[1][false]{%
243 \@nameuse{Puzzle@SolutionNumbered#1}%
244 \let\Kakuro@HINT\Kakuro@nohint
245 \let\PuzzleClues\Puzzle@Clues@@solution
246 \let\endPuzzleClues\endPuzzle@Clues@@solution
247 \let\PuzzleWords\Puzzle@Words@@solution
248 \let\endPuzzleWords\endPuzzle@Words@@solution
249 \def\Puzzle@TYPE{solution}%
250 }

```

\PuzzleUnsolved The macro `\PuzzleUnsolved` arranges everything that the following puzzles are typeset in the “unsolved” mode, i.e. the letters are suppressed and the clues are shown.

```
251 \newcommand\PuzzleUnsolved{%
```

```

252 \let\Kakuro@HINT\Kakuro@hint
253 \let\PuzzleClues\Puzzle@Clues@@normal
254 \let\endPuzzleClues\endPuzzle@Clues@@normal
255 \let\PuzzleWords\Puzzle@Words@@normal
256 \let\endPuzzleWords\endPuzzle@Words@@normal
257 \xdef\Puzzle@TYPE{normal}}

```

The boolean `Puzzle@SolutionNumbered` determines whether or not the solution should contain numbers. Initially it is set to “false”.

```

258 \newif\ifPuzzle@SolutionNumbered
259 \Puzzle@SolutionNumberedfalse

```

6.6 Sudoku

The challenge for the sudoku is to implement a convenient input syntax.

Sudoku The environemnt `Sudoku` is used to typeset the puzzle. The implementation defines the `begin` and `end` macro separately.

```

260 \begingroup
261 \catcode'\|=13
262 \gdef\Sudoku{\begin{Puzzle}{9}{9}%
263 \let\Puzzle@pipe=|}%
264 \def\PPa{\Puzzle@pipe[] [fS]}%
265 \def|##1{\ifx##1*\let\next\PPa\else\Puzzle@pipe{##1}\let\next\relax\fi\next}
266 }
267 \endgroup

```

The macro `\endSudoku` contains the code to be expanded at the end of the environment. It draws the field with the 3×3 boxes.

```

268 \gdef\endSudoku{%
269 \multiput(0,0)(1,0)9{\framebox(1,1){}}
270 \multiput(0,1)(1,0)9{\framebox(1,1){}}
271 \multiput(0,2)(1,0)9{\framebox(1,1){}}
272 \multiput(0,3)(1,0)9{\framebox(1,1){}}
273 \multiput(0,4)(1,0)9{\framebox(1,1){}}
274 \multiput(0,5)(1,0)9{\framebox(1,1){}}
275 \multiput(0,6)(1,0)9{\framebox(1,1){}}
276 \multiput(0,7)(1,0)9{\framebox(1,1){}}
277 \multiput(0,8)(1,0)9{\framebox(1,1){}}
278 \linethickness{\SudokuLinethickness}%
279 \put(0,0){\framebox(9,9){}}
280 \put(3,0){\framebox(3,9){}}
281 \put(0,3){\framebox(9,3){}}
282 \end{Puzzle}}

```

`\SudokuLinethickness` The macro `\SudokuLinethickness` contains the thickness of thick lines in a Sudoku.

```

283 \newcommand\SudokuLinethickness{2pt}

```

6.7 Kakuro

`\KakuroNumberFont` The macro `\KakuroNumberFont` is used to typeset the hints, i.e. the horizontal and vertical sums.

```
284 \newcommand\KakuroNumberFont{\sf\tiny}
```

`\Kakuro@cell` The macro `\Kakuro@cell` is used to typeset the cells. It analyzes the argument and acts accordingly.

```
285 \def\Kakuro@cell#1{%
286   \ifx#1.      \def\next{\Puzzle@pipe.}%
287   \else\ifx#1< \let\next\Kakuro@HINT
288   \else\ifx#1* \let\next\Kakuro@always
289   \else\ifx#1- \let\next\Kakuro@empty
290   \else\Puzzle@pipe#1 \let\next\relax
291   \fi\fi\fi\fi
292   \next
293 }%
```

`\Kakuro@always` The macro `\Kakuro@always` is used to draw a cell with an initial number.

```
294 \def\Kakuro@always{\Puzzle@pipe[] [fS]}%
```

`\Kakuro@empty` The macro `\Kakuro@empty` is used to draw an empty cell.

```
295 \def\Kakuro@empty{\Puzzle@pipe{}}%
```

`\Kakuro@hint` The macro `\Kakuro@hint` is used to draw hints.

```
296 \def\Kakuro@hint#1:#2>{%
297   \def\x{#2}%
298   \ifx\x\empty\else
299     \put(\Puzzle@X,\Puzzle@Y){\makebox(1,.8)[r]{\parbox{.95\unitlength}{\raggedright\KakuroNumber
300       $\blacktriangledown$\x{#2}}}}
301   \fi
302   \def\x{#1}%
303   \ifx\x\empty\else
304     \put(\Puzzle@X,\Puzzle@Y){\makebox(1,1.2){\parbox{.95\unitlength}{\raggedleft\KakuroNumberFon
305       #1 $\blacktriangleright$\x{#1}}}}
306   \fi
307   \Puzzle@pipe[] [\KakuroHintType]{ }%
```

`\Kakuro@nohint` The macro `\Kakuro@nohint` is used to suppress hints in solution mode.

```
308 \def\Kakuro@nohint#1:#2>{%
309   \Puzzle@pipe[] [,]{ }%
```

`\Kakuro@HINT` The macro `\Kakuro@HINT` contains the definition to be used to typeset hints. This indirection is needed to suppress hints in solution mode.

```
310 \let\Kakuro@HINT\Kakuro@hint
```

`Kakuro` The environment `Kakuro` is used to typeset the puzzle. The implementation defines the begin and end macro separately to cope with catcode changes.

```

311 \begingroup
312 \catcode'\|=13
313 \gdef\Kakuro#1#2{\begin{Puzzle}{#1}{#2}%
314   \catcode'\|=13
315   \let\Puzzle@pipe=|
316   \let|=\Kakuro@cell
317 }
318 \endgroup

```

The macro `\endKakuro` contains the code to be expanded at the end of the environment.

```

319 \def\endKakuro{\end{Puzzle}}

```

`\KakuroHintType` The macro `\KakuroHintType` contains the cell type for typesetting hint cells. It can be used to achieve a different look and feel.

```

320 \def\KakuroHintType{,}

```

6.8 Initialization

Finally we arrange that the default behavior is to typeset an unsolved crossword puzzle.

```

321 \PuzzleUnsolved

```

Now, that everything is in place we can arrange some package options.

```

322 \DeclareOption{numbered}{\Puzzle@SolutionNumberedtrue}
323 \DeclareOption{nocenter}{\let\PuzzlePre=\relax
324   \let\PuzzlePost=\relax}
325 \DeclareOption{unboxed}{\let\PuzzleCluePre=\relax
326   \let\PuzzleCluePost=\relax}
327 \DeclareOption{normalsize}{\PuzzleUnitlength=20pt
328   \def\PuzzleFont{\rm\normalsize}}
329 \DeclareOption{small}{\PuzzleUnitlength=16pt
330   \def\PuzzleFont{\rm\small}}
331 \DeclareOption{large}{\PuzzleUnitlength=24pt
332   \def\PuzzleFont{\rm\large}}
333 \DeclareOption{german}{%
334   \renewcommand\PuzzleWordsText[1]{Worte der L"ange #1: }%
335   \renewcommand\PuzzleLettersText{Benutzte Buchstaben: }%
336 }
337 \DeclareOption{ngerman}{%
338   \renewcommand\PuzzleWordsText[1]{Worte der L"ange #1: }%
339   \renewcommand\PuzzleLettersText{Benutzte Buchstaben: }%
340 }
341 \ProcessOptions\relax

```

That's all.

Change History

1.3	General: First public release.	1	\Puzzle@Cell@Loop: New	20
1.4	\Puzzle@Box@@normal: Minor bug fix. Using \ifx instead of \if.	19	\PuzzleDefineCell: New	21
	\Puzzle@Box@@solution: Minor bug fix. Using \ifx instead of \if.	20	\PuzzleDefineColorCell: New	21
1.5	\Puzzle@Box@@normal: Reimplemented to cope with two optional arguments.	19	\PuzzleLineThickness: New	18
	\Puzzle@Box@@normal@: Extracted from \Puzzle@Box@@normal.	19	\PuzzlePost: New	19
	\Puzzle@Box@@solution: Reimplemented to cope with two optional arguments.	20	\PuzzlePre: New	18
	\Puzzle@Box@@solution@: Reimplemented to cope with two optional arguments.	20	\PuzzlePutNumber: New	20
	\Puzzle@Cell@@*: New	24	1.6	General: Several style options defined
	\Puzzle@Cell@@,: New	24		29
	\Puzzle@Cell@@.: New	23	1.7	\Puzzle@Box@@normal@: \PuzzleContent added to transport the letter to the formatting macro.
	\Puzzle@Cell@@/: New	24		19
	\Puzzle@Cell@@B: New	22		\Puzzle@Cell@@S: New
	\Puzzle@Cell@@b: New	22	1.8	23
	\Puzzle@Cell@@f: New	23		Kakuro: New
	\Puzzle@Cell@@L: New	22		28, 29
	\Puzzle@Cell@@l: New	22		\Kakuro@always: New
	\Puzzle@Cell@@O: New	23		28
	\Puzzle@Cell@@o: New	23		\Kakuro@cell: New
	\Puzzle@Cell@@R: New	23		28
	\Puzzle@Cell@@r: New	23		\Kakuro@empty: New
	\Puzzle@Cell@@T: New	22		28
	\Puzzle@Cell@@t: New	22		\Kakuro@HINT: New
				28
				\Kakuro@hint: New
				28
				\Kakuro@nohint: New
				28
				\KakuroHintType: New
				29
				\KakuroNumberFont: New
				28
				\SudokuLinethickness: New
				27
				Sudoku: New
				27
			1.9	\Puzzle@Box@@solution@: Macro PuzzleSolutionContent introduced as extension point
				20
				\PuzzleSolutionContent: Macro PuzzleSolutionContent introduced as extension point
				21

Index

Numbers written in *italic* refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in roman refer to the code lines where the entry is used.

Symbols		K	
<code>\ </code>	12, 23, 223, 261, 312, 314	<code>\Kakuro</code>	313
B		<code>Kakuro</code> (environment)	<i>13</i> , <u>311</u>
<code>\blacktriangledown</code>	300	<code>\Kakuro@always</code>	288, <u>294</u>
<code>\blacktriangleright</code>	305	<code>\Kakuro@cell</code>	<u>285</u> , 316
C		<code>\Kakuro@empty</code>	289, <u>295</u>
<code>\Clue</code>	<i>9</i> , 194, 206	<code>\Kakuro@HINT</code>	244, 252, 287, <u>310</u>
<code>\colorbox</code>	123	<code>\Kakuro@hint</code>	252, 296, 310
D		<code>\Kakuro@nohint</code>	244, <u>308</u>
<code>\DeclareOption</code>	322,	<code>\KakuroHintType</code>	307, <u>320</u>
	323, 325, 327, 329, 331, 333, 337	<code>\KakuroHintTypeKakuroNumberFont</code> .	<i>15</i>
<code>\DefineColorCell</code>	8	<code>\KakuroNumberFont</code> ..	<i>15</i> , <u>284</u> , 299, 304
E		L	
<code>\empty</code>	298, 303	<code>\line</code>	130, 136, 140,
<code>\endKakuro</code>	319		145, 150, 154, 160, 165, 185, 189
<code>\endPuzzle@Clues@@normal</code>	254	<code>\linethickness</code>	26, 126, 278
<code>\endPuzzle@Clues@@solution</code>	246	M	
<code>\endPuzzle@Words@@normal</code>	256	<code>\multiput</code>	269–277
<code>\endPuzzle@Words@@solution</code>	248	N	
<code>\endPuzzleClues</code>	246, 254	<code>\next</code> ..	226, 233, 236, 265, 286–290, 292
<code>\endPuzzleWords</code>	248, 256	O	
<code>\endSudoku</code>	268	<code>\oval</code>	175, 179
environments:		P	
<code>Kakuro</code>	<i>13</i> , <u>311</u>	<code>\parbox</code>	299, 304
<code>Puzzle</code>	<i>5</i> , <u>22</u>	<code>\PPa</code>	264, 265
<code>Puzzle@Clues@@normal</code>	<u>193</u>	<code>\ProcessOptions</code>	341
<code>Puzzle@Clues@@solution</code>	<u>205</u>	<code>Puzzle</code> (environment)	<i>5</i> , <u>22</u>
<code>Puzzle@Words@@normal</code>	<u>209</u>	<code>\Puzzle@@normal</code>	17
<code>Puzzle@Words@@solution</code>	<u>213</u>	<code>\Puzzle@@solution</code>	13
<code>PuzzleClues</code>	<i>9</i>	<code>\Puzzle@Box@@normal</code>	18, 29, <u>46</u>
<code>PuzzleWords</code>	<i>9</i>	<code>\Puzzle@Box@@normal@</code>	48, <u>50</u>
<code>Sudoku</code>	<i>11</i> , <u>260</u>	<code>\Puzzle@Box@@solution</code>	14, <u>88</u>
<code>\expandafter</code>	79, 171	<code>\Puzzle@Box@@solution@</code>	90, <u>92</u>
F		<code>\Puzzle@Cell@@*</code>	<u>181</u>
<code>\fboxsep</code>	122	<code>\Puzzle@Cell@@,</code>	<u>187</u>
<code>\Frame</code>	8, 15, 19	<code>\Puzzle@Cell@@.</code>	<u>173</u>
I		<code>\Puzzle@Cell@@/</code>	<u>184</u>
<code>\ifPuzzle@SolutionNumbered</code> .	109, 258	<code>\Puzzle@Cell@@B</code>	<u>138</u>
		<code>\Puzzle@Cell@@b</code>	<u>142</u>

<code>\Puzzle@Cell@f</code>	<u>167</u>	<code>PuzzleClues</code> (environment)	<u>9</u>
<code>\Puzzle@Cell@L</code>	<u>152</u>	<code>\PuzzleContent</code>	<u>15</u> , <u>51</u> , <u>171</u>
<code>\Puzzle@Cell@l</code>	<u>147</u>	<code>\PuzzleDefineCell</code>	
<code>\Puzzle@Cell@O</code>	<u>174</u>	<u>7</u> , <u>117</u> , <u>127</u> , <u>132</u> , <u>138</u> ,
<code>\Puzzle@Cell@o</code>	<u>177</u>		<u>142</u> , <u>147</u> , <u>152</u> , <u>156</u> , <u>162</u> , <u>167</u> ,
<code>\Puzzle@Cell@R</code>	<u>162</u>		<u>170</u> , <u>173</u> , <u>174</u> , <u>177</u> , <u>181</u> , <u>184</u> , <u>187</u>
<code>\Puzzle@Cell@r</code>	<u>156</u>	<code>\PuzzleDefineColorCell</code>	<u>120</u>
<code>\Puzzle@Cell@S</code>	<u>170</u>	<code>\PuzzleFont</code>	<u>6</u> , <u>14</u> , <u>328</u> , <u>330</u> , <u>332</u>
<code>\Puzzle@Cell@T</code>	<u>127</u>	<code>\PuzzleHook</code>	<u>8</u> , <u>15</u> , <u>31</u>
<code>\Puzzle@Cell@t</code>	<u>132</u>	<code>\PuzzleLetters</code>	<u>9</u> , <u>240</u>
<code>\Puzzle@Cell@Loop</code>	<u>60</u> , <u>62</u> , <u>74</u> , <u>101</u> , <u>103</u>	<code>\PuzzleLettersText</code>	
<code>\Puzzle@Clue@normal</code>	<u>191</u> , <u>194</u>	<u>14</u> , <u>239</u> , <u>240</u> , <u>335</u> , <u>339</u>
<code>\Puzzle@Clue@solution</code>	<u>192</u> , <u>206</u>	<code>\PuzzleLineThickness</code>	<u>15</u> , <u>26</u> , <u>34</u>
<code>\Puzzle@Clues@normal</code>	<u>253</u>	<code>\PuzzleNumberFont</code>	<u>7</u> , <u>14</u> , <u>72</u>
<code>Puzzle@Clues@normal</code> (environment)	<u>193</u>	<code>\PuzzleNumbers</code>	<u>9</u> , <u>216</u>
<code>\Puzzle@Clues@solution</code>	<u>245</u>	<code>\PuzzlePost</code>	<u>15</u> , <u>32</u> , <u>38</u> , <u>324</u>
<code>Puzzle@Clues@solution</code> (environ- ment)	<u>205</u>	<code>\PuzzlePre</code>	<u>15</u> , <u>22</u> , <u>35</u> , <u>323</u>
<code>\Puzzle@Frame@normal</code>	<u>19</u> , <u>41</u>	<code>\PuzzlePutNumber</code>	<u>15</u> , <u>66</u> , <u>71</u> , <u>110</u>
<code>\Puzzle@Frame@solution</code>	<u>15</u> , <u>44</u>	<code>\PuzzleSolution</code>	<u>14</u> , <u>242</u>
<code>\Puzzle@Numbers</code>	<u>221</u> , <u>222</u>	<code>\PuzzleSolutionContent</code>	<u>15</u> , <u>104</u> , <u>116</u>
<code>\Puzzle@pipe</code>	<u>263–265</u> ,	<code>\PuzzleThickine</code>	<u>126</u>
	<u>286</u> , <u>290</u> , <u>294</u> , <u>295</u> , <u>307</u> , <u>309</u> , <u>315</u>	<code>\PuzzleThickline</code>	<u>126</u> , <u>129</u> ,
<code>\Puzzle@SolutionNumberedfalse</code> ..	<u>259</u>		<u>135</u> , <u>139</u> , <u>144</u> , <u>149</u> , <u>153</u> , <u>159</u> , <u>164</u>
<code>\Puzzle@SolutionNumberedtrue</code> ...	<u>322</u>	<code>\PuzzleUnitlength</code>	<u>3</u> ,
<code>\Puzzle@tmp</code>	<u>52</u> , <u>53</u> , <u>57</u> , <u>59</u> , <u>75–</u>		<u>4</u> , <u>14</u> , <u>25</u> , <u>45</u> , <u>220</u> , <u>327</u> , <u>329</u> , <u>331</u>
	<u>77</u> , <u>84</u> , <u>86</u> , <u>93</u> , <u>94</u> , <u>98</u> , <u>100</u> , <u>107</u> , <u>108</u>	<code>\PuzzleUnsolved</code>	<u>15</u> , <u>251</u> , <u>321</u>
<code>\Puzzle@tmp@</code>	<u>47</u> , <u>65</u> , <u>66</u> , <u>89</u> , <u>110</u>	<code>\PuzzleWords</code>	<u>247</u> , <u>255</u>
<code>\Puzzle@TYPE</code> ...	<u>24</u> , <u>217</u> , <u>241</u> , <u>249</u> , <u>257</u>	<code>PuzzleWords</code> (environment)	<u>9</u>
<code>\Puzzle@Words@normal</code>	<u>255</u>	<code>\PuzzleWordsText</code>	<u>14</u> , <u>208</u> , <u>210</u> , <u>334</u> , <u>338</u>
<code>Puzzle@Words@normal</code> (environment)	<u>209</u>		
<code>\Puzzle@Words@solution</code>	<u>247</u>		
<code>Puzzle@Words@solution</code> (environ- ment)	<u>213</u>		
<code>\Puzzle@X</code>	<u>9</u> ,		
	<u>54</u> , <u>66</u> , <u>68</u> , <u>82</u> , <u>95</u> , <u>104</u> , <u>110</u> ,		
	<u>113</u> , <u>219</u> , <u>229</u> , <u>230</u> , <u>234</u> , <u>299</u> , <u>304</u>		
<code>\Puzzle@Y</code>	<u>10</u> , <u>27</u> , <u>55</u> ,		
	<u>66</u> , <u>82</u> , <u>96</u> , <u>104</u> , <u>110</u> , <u>218</u> , <u>299</u> , <u>304</u>		
<code>\PuzzleBlackBox</code>	<u>14</u> , <u>45</u> , <u>182</u>		
<code>\PuzzleClueFont</code>	<u>5</u> , <u>14</u> , <u>196</u>		
<code>\PuzzleCluePost</code>	<u>15</u> , <u>197</u> , <u>202</u> , <u>326</u>		
<code>\PuzzleCluePre</code>	<u>15</u> , <u>195</u> , <u>198</u> , <u>325</u>		
<code>\PuzzleClues</code>	<u>245</u> , <u>253</u>		

S

<code>\Sudoku</code>	<u>262</u>
<code>Sudoku</code> (environment)	<u>11</u> , <u>260</u>
<code>\SudokuLinethickness</code> ...	<u>15</u> , <u>278</u> , <u>283</u>

T

<code>\typeout</code>	<u>80</u>
-----------------------------	-----------

W

<code>\Word</code>	<u>10</u> , <u>211</u> , <u>214</u>
--------------------------	-------------------------------------

X

<code>\X</code>	<u>229</u> , <u>231</u>
<code>\x</code>	<u>297</u> , <u>298</u> , <u>302</u> , <u>303</u>