Database Design Document: Store Price Tracking Application

Problem Description: (Nouns, Verbs)
In neighborhoods or cities without online platforms, users find it challenging to identify the store selling specific items at the most affordable prices. The solution is to develop a web-based application where users can contribute prices for common items when visiting various stores. The app enables users to view prices per unit for each store, aiding them in making informed decisions about where to shop. The application incorporates crowdsourced price tracking for offline stores.

Rules:
1. Each location can have more than one store.
2. There are multiple locations.
3. Customers can contribute to the list of items.
4. Each item is categorized into one category.
5. One category can encompass multiple items.
6. Each store has at least one location.
7. Multiple stores can have the same name but different locations.
8. Each item has a specific price in one store.
9. Many stores can have the same item with the same/different prices.
10. Each store is associated with an expense rating.
11. Users can filter items by expense rating, category, specialty, etc.
12. A store cannot carry multiple quantities of the same item with different prices.
13. The application should track the timestamp of when a price is contributed.
14. Users can update the price of an item at a location.
15. Stores may or may not have a cultural speciality.

Important Nouns:

User
Contributor
Reviewer
Item
Category
Price
Store
Location
Expense Rating
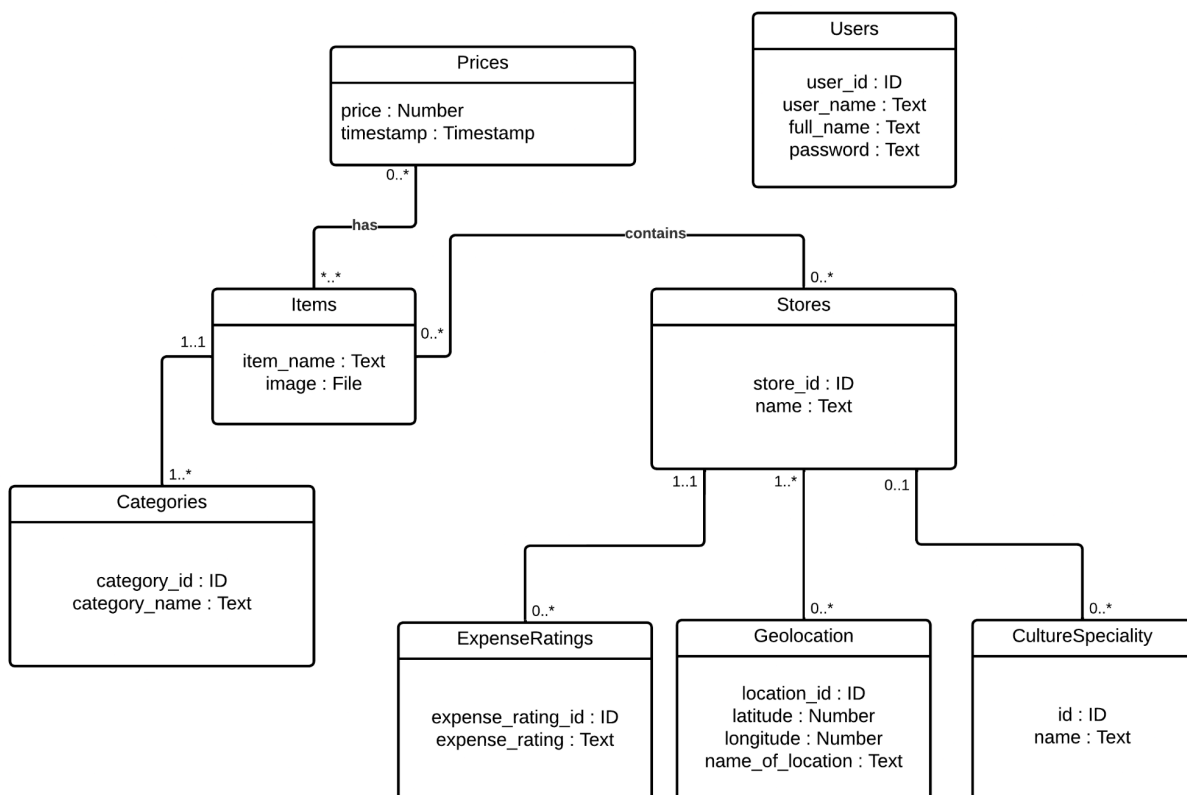Cultural Specialty
Crowdsourced
Price Tracking

Important Verbs:
Contribute

View
Discover
Filter
Categorize
Contribute
View
Track geolocation
Assign expense rating
Associate cultural specialty
Contribute prices
View prices
Record prices

LucidChart Diagram for UML & ERD -

UML Diagram:

Prices

price : Number
timestamp : Timestamp

0..*

has

..

Items

item_name : Text
image : File

0..*

1..1

1..*

Categories

category_id : ID
category_name : Text

Users

user_id : ID
user_name : Text
full_name : Text
password : Text

contains

0..*

Stores

store_id : ID
name : Text

1..1   1..*   0..1

0..*

ExpenseRatings

expense_rating_id : ID
expense_rating : Text

0..*

Geolocation

location_id : ID
latitude : Number
longitude : Number
name_of_location : Text

0..*

CultureSpeciality

id : ID
name : Text

One possible way to use Redis would be to store item data so that I don't have to query the database every time I want to show the items. Also, this way when I update the price, it is much quicker as I don't have to do many CRUD queries on Mongo. This will help reduce resource use in my server, and help speed up API response times.