EXP 8 : NMAP TO DISCOVER LIVE HOSTS USING NMAP SCANS ON THE TRYHACKME PLATFORM

AIM:


To discover live hosts using Nmap scans (ARP, ICMP, TCP/UDP) on the Try Hack Me Platform.

INTRODUCTION:

Nmap (Network Mapper) is a free and open source scanning tool used to discover live hosts and identify services running on the n/w. Host discovery is performed before port scanning to determine which systems are online. Nmap supports different host discovery techniques using ARP, ICMP, TCP and UDP.


NMAP Host Discovery using ARP:

ARP is used to discover hosts on the same local subnet. Nmap sends ARP requests and live hosts respond with ARP replies. The PR is used for ARP-based host discovery.

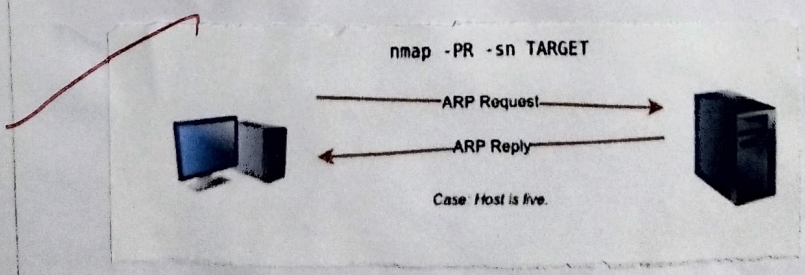


NMAP Host Discovery using ICMP:


ICMP provides different req | reply mechan for discovering live hosts. Nmap suggests ICMP Echo (-PE), Timestamp (-PP) and Address Mask (-PM) scans.

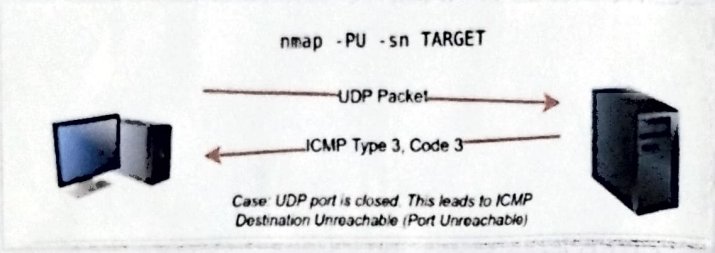



NMAP Host Discovery using TCP and UDP:


When ICMP is filtered, NMAP can use TCP and UDP packets to determine whether a host is online. TCP host discovery includes TCP SYN Ping (-PS) and TCP ACK Ping (-PA), while UDP host discovery uses -PU.

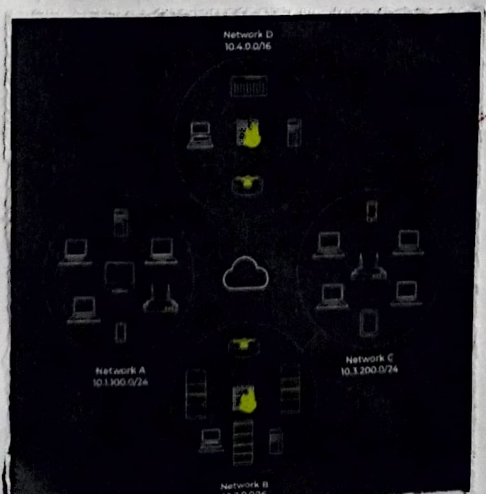

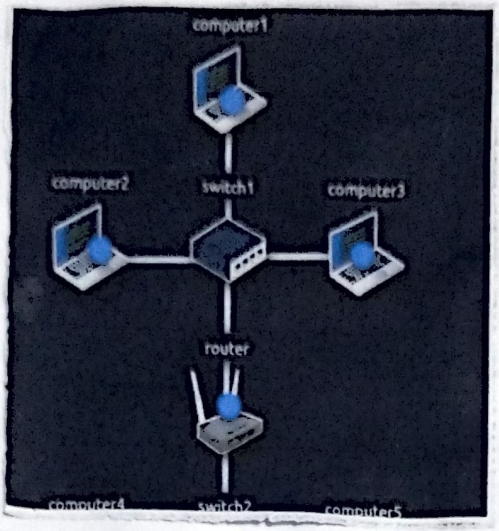

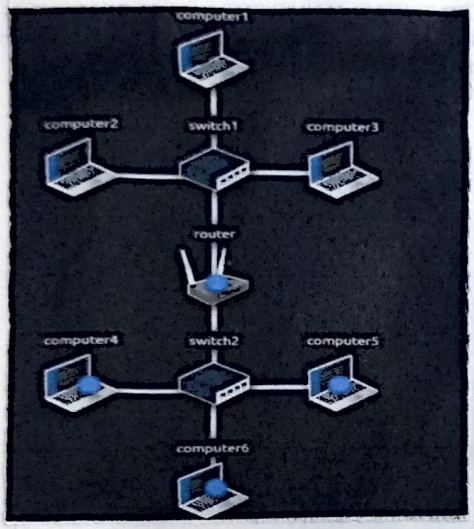

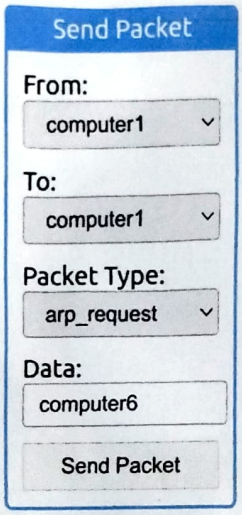

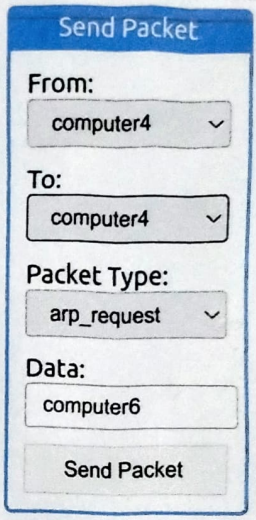

RESULT:

Thus, five hosts in the network were successfully discovered using NMAP host discovery techniques such as ARP, ICMP and TCP, UDP ping scans. The different scanning methods are used to identify active hosts and verify their availability in the network.