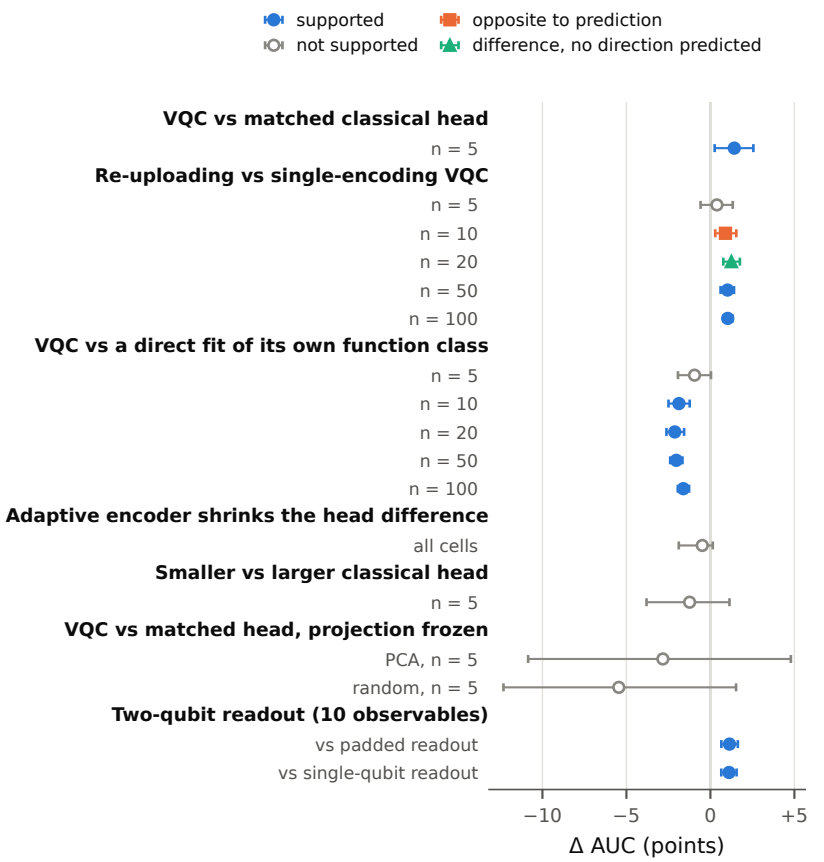
supported
not supported
opposite to prediction
difference, no direction predicted
VQC vs matched classical head
n = 5
Re-uploading vs single-encoding VQC
n = 5
n = 10
n = 20
n = 50
n = 100
VQC vs a direct fit of its own function class
n = 5
n = 10
n = 20
n = 50
n = 100
Adaptive encoder shrinks the head difference
all cells
Smaller vs larger classical head
n = 5
VQC vs matched head, projection frozen
PCA, n = 5
random, n = 5
Two-qubit readout (10 observables)
vs padded readout
vs single-qubit readout
−10
−5
0
+5
Δ AUC (points)

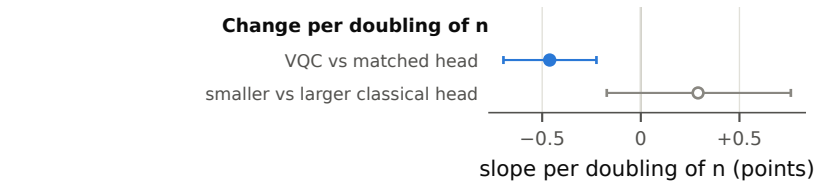
Change per doubling of n
VQC vs matched head
smaller vs larger classical head
−0.5
0
+0.5
slope per doubling of n (points)

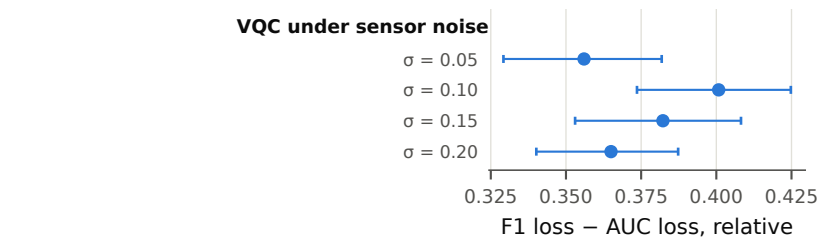
VQC under sensor noise
σ = 0.05
σ = 0.10
σ = 0.15
σ = 0.20
0.325
0.350
0.375
0.400
0.425
F1 loss − AUC loss, relative