9. Execute and display the results for the following Nmap Timing and performance commands in Kali Linux operating Systems:

(i) polite IDS evasion

(ii) normal IDS evasion

AIM:

To execute and display the results of Nmap timing and performance commands in Kali Linux Operating System.

DESCRIPTION:

1. Polite IDS Evasion

The -T2 option makes Nmap scan slowly to reduce network load. It is called the polite timing template.

Example:

nmap -T2 127.0.0.1

Output:




2. Normal IDS Evasion

The -T3 option is Nmap's default normal timing template. It balances scan speed and reliability. It does not itself guarantee IDS evasion.

Example:

nmap -T3 127.0.0.1

Output:

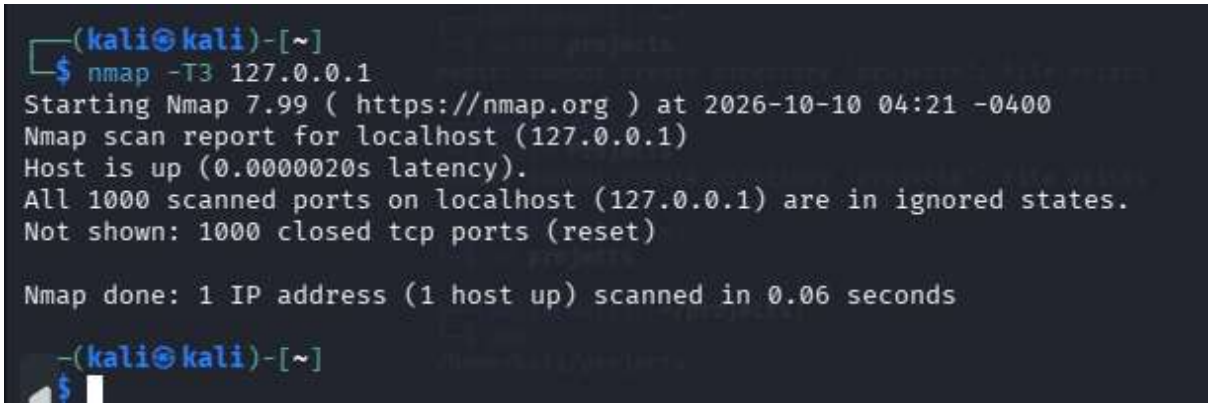

RESULTS:

The Nmap polite (-T2) and normal (-T3) timing commands were successfully executed in the Kali Linux operating system, and their respective outputs were observed.