Sent Mail - anjanakri181402@g ×   Merge Without Extra Space | Pr ×   +

geeksforgeeks.org/problems/merge-two-sorted-arrays-1587115620/1

Apps   Gmail   YouTube   Maps   Anjana Kumari | Ge...

Search...   Get 90% Refund Courses   Tutorials   Practice   Jobs

Problem   Editorial   Submissions   Comments

Output Window

Compilation Results   Custom Input

Input:

a[] =

1 3 5 7

b[] =

0 2 6 8 9

Your Output:

[0, 1, 2, 3]
[5, 6, 7, 8, 9]

Expected Output:

[0, 1, 2, 3]
[5, 6, 7, 8, 9]

Java (21)   Start Timer

```java
                }

                // Case 3: both pointers in b
                else {
                    if (b[i - n] > b[j - n]) {
                        int temp = b[i - n];
                        b[i - n] = b[j - n];
                        b[j - n] = temp;
                    }
                }

                i++;
                j++;
            }

            gap = nextGap(gap);
        }
    }

    // Function to calculate next gap
    private static int nextGap(int gap) {
        if (gap <= 1)
            return 0;
        return (gap / 2) + (gap % 2);
    }
}
```

Custom Input   Compile & Run   Submit

Search the web and Windows

12:21 AM
2/6/2026

Nj - anjanakri181402@gmail.co | Factorials of large numbers | Pr | New Tab

geeksforgeeks.org/problems/factorials-of-large-numbers2508/1

Apps | Gmail | YouTube | Maps | Anjana Kumari | Ge...

Search... | Get 90% Refund | Courses | Tutorials | Practice | Jobs | A

Problem | Editorial | Submissions | Comments

Java (21) | Start Timer

Output Window

Compilation Results | Custom Input

Compilation Completed

Case 1

Input:

n

5

Your Output:

1 2 0

Expected Output:

1 2 0

```java
        // Result stored in ArrayList
        ArrayList<Integer> result = new ArrayList<>();

        // Start with 1
        result.add(1);

        // Multiply from 2 to N
        for (int num = 2; num <= N; num++) {
            int carry = 0;

            for (int i = 0; i < result.size(); i++) {
                int prod = result.get(i) * num + carry;
                result.set(i, prod % 10);
                carry = prod / 10;
            }

            while (carry > 0) {
                result.add(carry % 10);
                carry /= 10;
            }
        }

        // reverse digits to proper order
        Collections.reverse(result);
        return result;
    }
}
```

Custom Input | Compile & Run | Submit

Search the web and Windows

12:32 AM
2/6/2026

Hu - anjanakri181402@gmail.cc | Kth Smallest | Practice | Geeksfc | anjanakri181402-ai/Anjana | Anjanakumari - LeetCode Profil

geeksforgeeks.org/problems/kth-smallest-element5635/1

Apps | Gmail | YouTube | Maps | Anjana Kumari | Ge...

Search... | Get 90% Refund Courses | Tutorials | Practice | Jobs

Problem | Editorial | Submissions | Comments

Java (21) | Start Timer

Output Window

Compilation Results | Custom Input | Y.O.G.I. (AI Bot)

Case 1

Input:

arr[] =

7 10 4 3 20 15

k =

3

Your Output:

7

Expected Output:

7

```java
import java.util.Arrays;

class Solution {

    public static int kthSmallest(int[] arr, int k){

        if(arr == null || k < 1 || k > arr.length){
            return -1;
        }

        Arrays.sort(arr);
        return arr[k-1];
    }
}

```

Custom Input | Compile & Run | Submit

Search the web and Windows

11:30 PM 2/5/2026

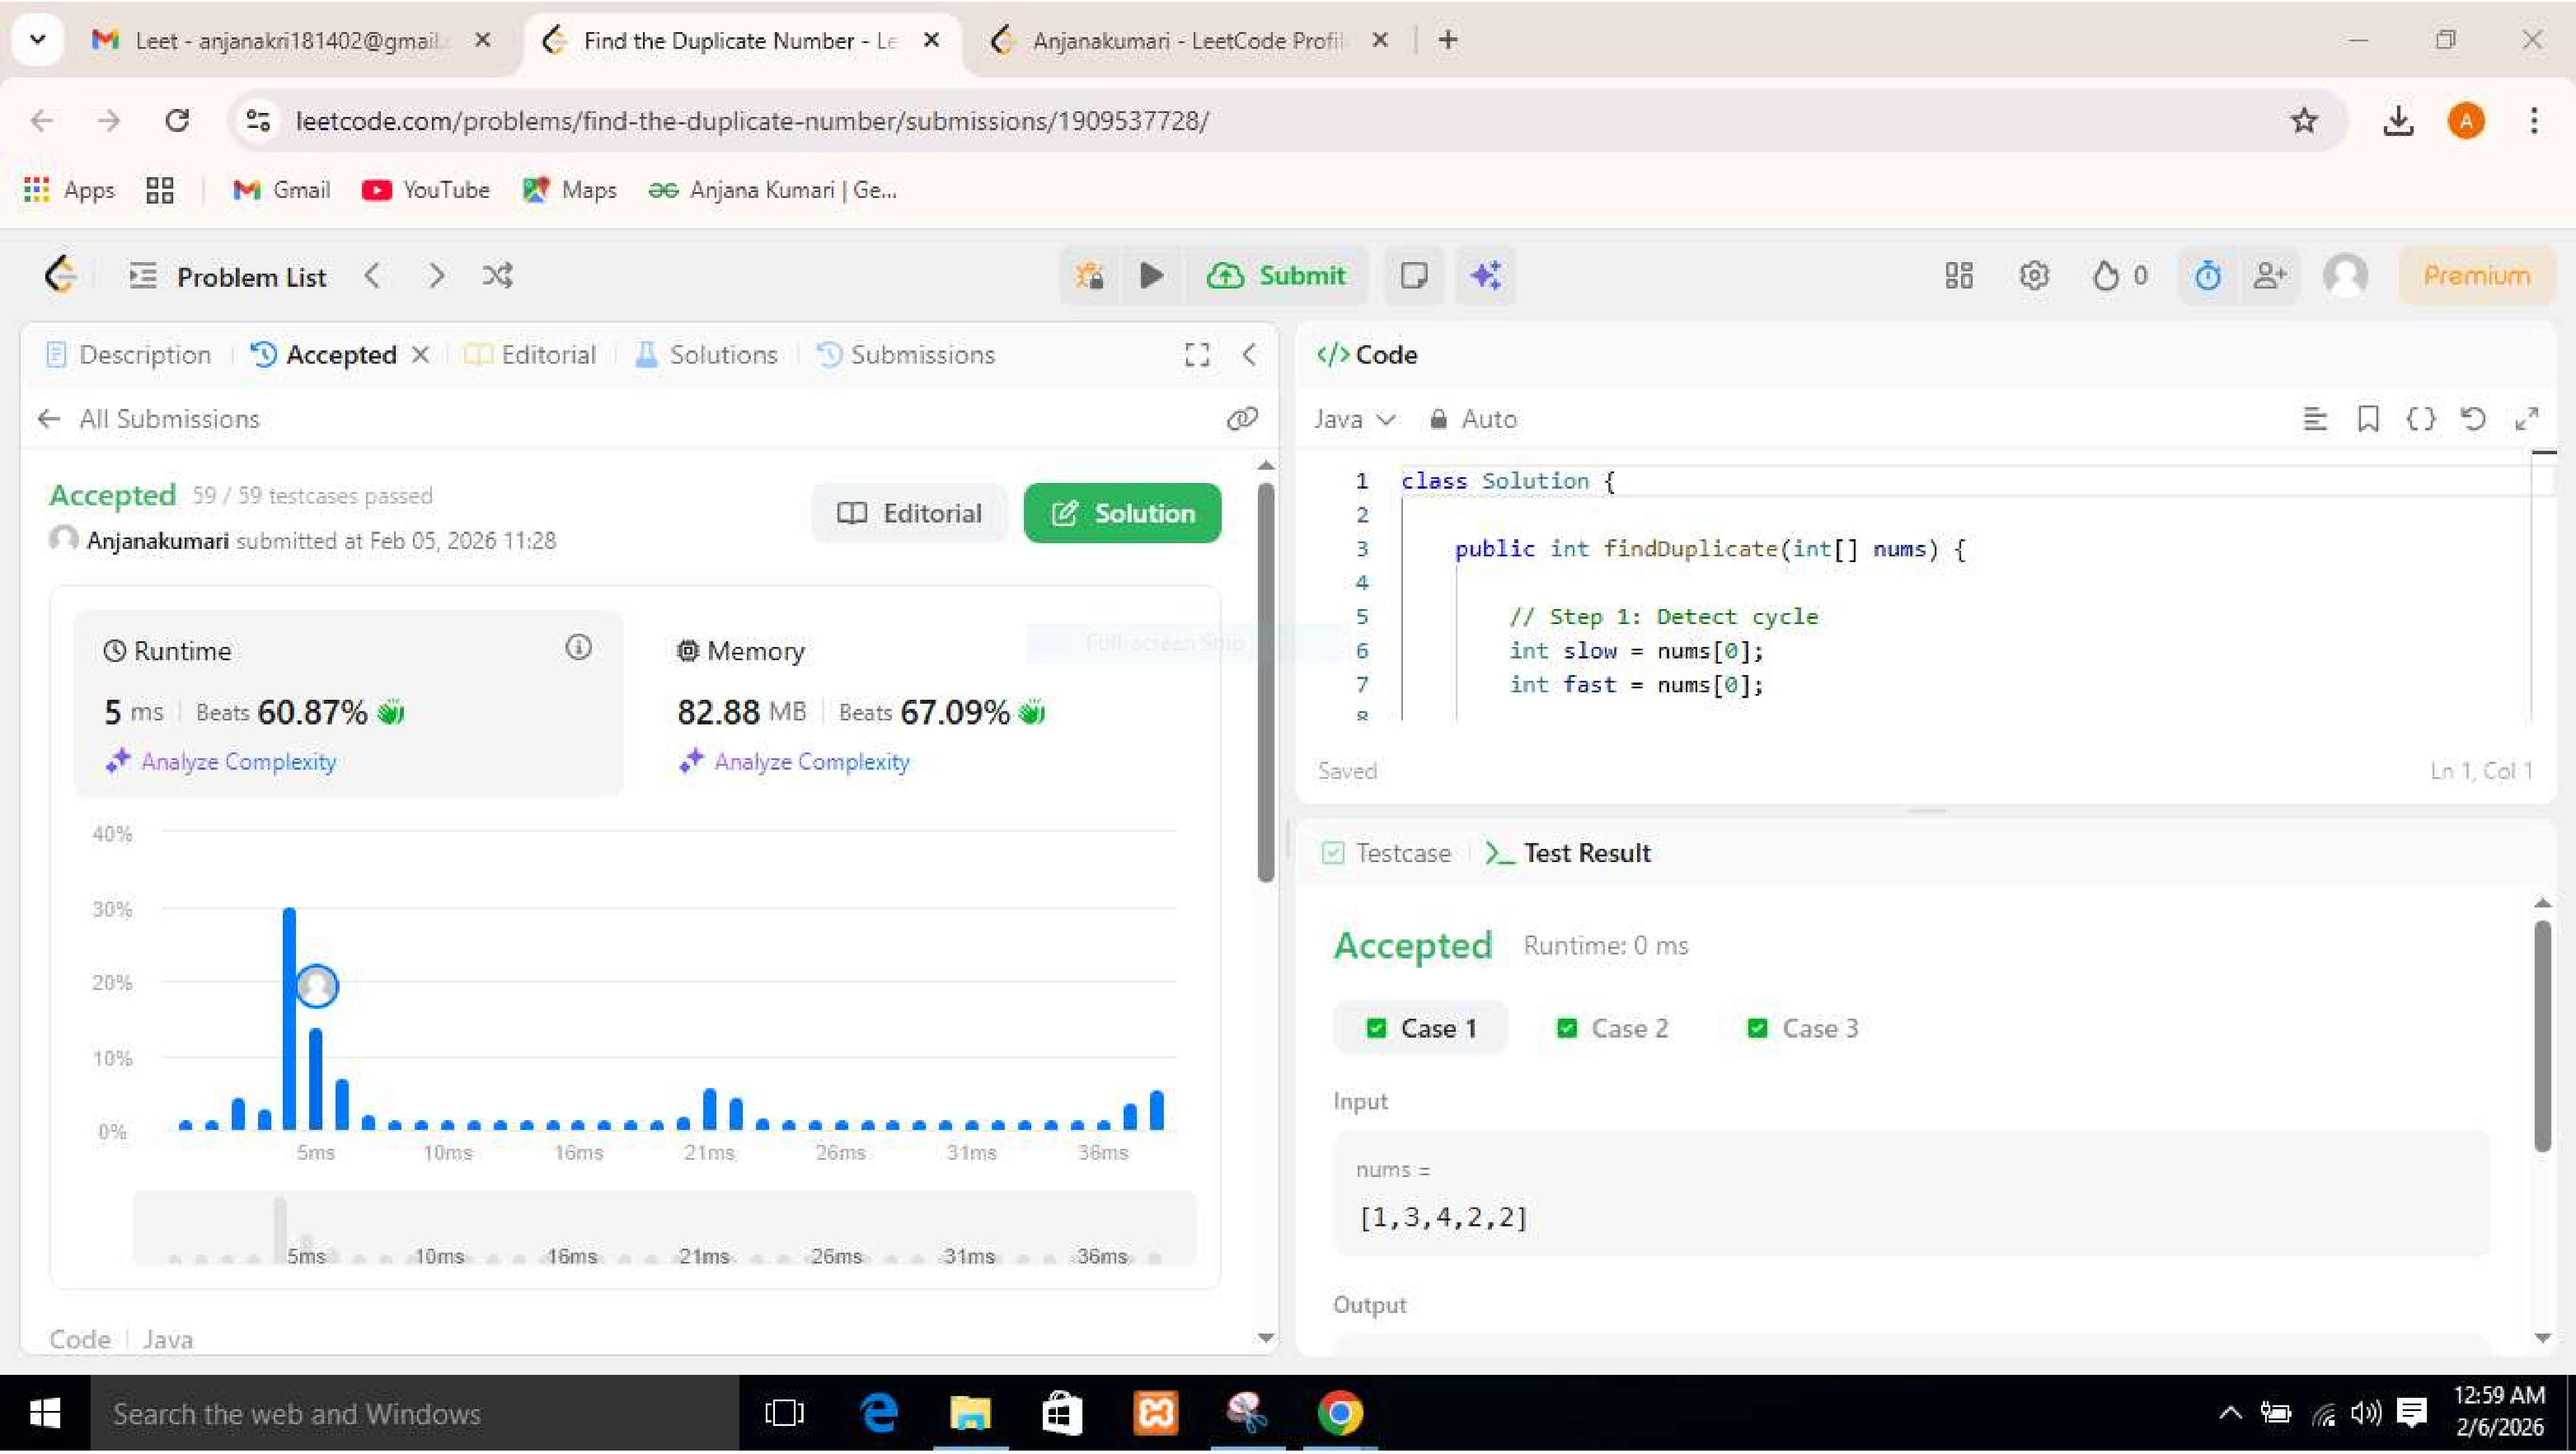
Leet - anjanakri181402@gmail.
Find the Duplicate Number - Le
Anjanakumari - LeetCode Profil
leetcode.com/problems/find-the-duplicate-number/submissions/1909537728/
Apps
Gmail
YouTube
Maps
Anjana Kumari | Ge...
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 59 / 59 testcases passed
Anjanakumari submitted at Feb 05, 2026 11:28
Editorial
Solution
Runtime
5 ms | Beats 60.87%
Analyze Complexity
Memory
82.88 MB | Beats 67.09%
Analyze Complexity
40%
30%
20%
10%
0%
5ms
10ms
16ms
21ms
26ms
31ms
36ms
Code | Java
Code
Java
Auto
class Solution {
public int findDuplicate(int[] nums) {
// Step 1: Detect cycle
int slow = nums[0];
int fast = nums[0];
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,3,4,2,2]
Output
Search the web and Windows
12:59 AM
2/6/2026

Yehge - anjanakri181402@gma | Merge Intervals - LeetCode | Find the Duplicate Number - Le | Anjanakumari - LeetCode Profil

leetcode.com/problems/merge-intervals/

Apps | Gmail | YouTube | Maps | Anjana Kumari | Ge...

Problem List | Submit | 0 | Premium

Description | Editorial | Solutions | Submissions | Run Ctrl '

56. Merge Intervals

Medium | Topics | Companies

Given an array of `intervals` where `intervals[i] = [start`$_i$`, end`$_i$`]`, merge all overlapping intervals, and return *an array of the non-overlapping intervals that cover all the intervals in the input.*

Example 1:

> **Input:** intervals = [[1,3],[2,6],[8,10],[15,18]]
> **Output:** [[1,6],[8,10],[15,18]]
> **Explanation:** Since intervals [1,3] and [2,6] overlap, merge them into [1,6].

Example 2:

> **Input:** intervals = [[1,4],[4,5]]
> **Output:** [[1,5]]
> **Explanation:** Intervals [1,4] and [4,5] are considered overlapping.

Example 3:

24.4K | 265 | 364 Online

Code

Java | Auto

```java
        }

        // Convert list to array
        return result.toArray(new int[result.size()][]);
    }
}

```

Saved | Ln 32, Col 1

Testcase | Test Result

Accepted

Runtime: 1 ms

Case 1 | Case 2 | Case 3

Input

intervals =

[[1,3],[2,6],[8,10],[15,18]]

Output

Search the web and Windows

1:01 AM
2/6/2026

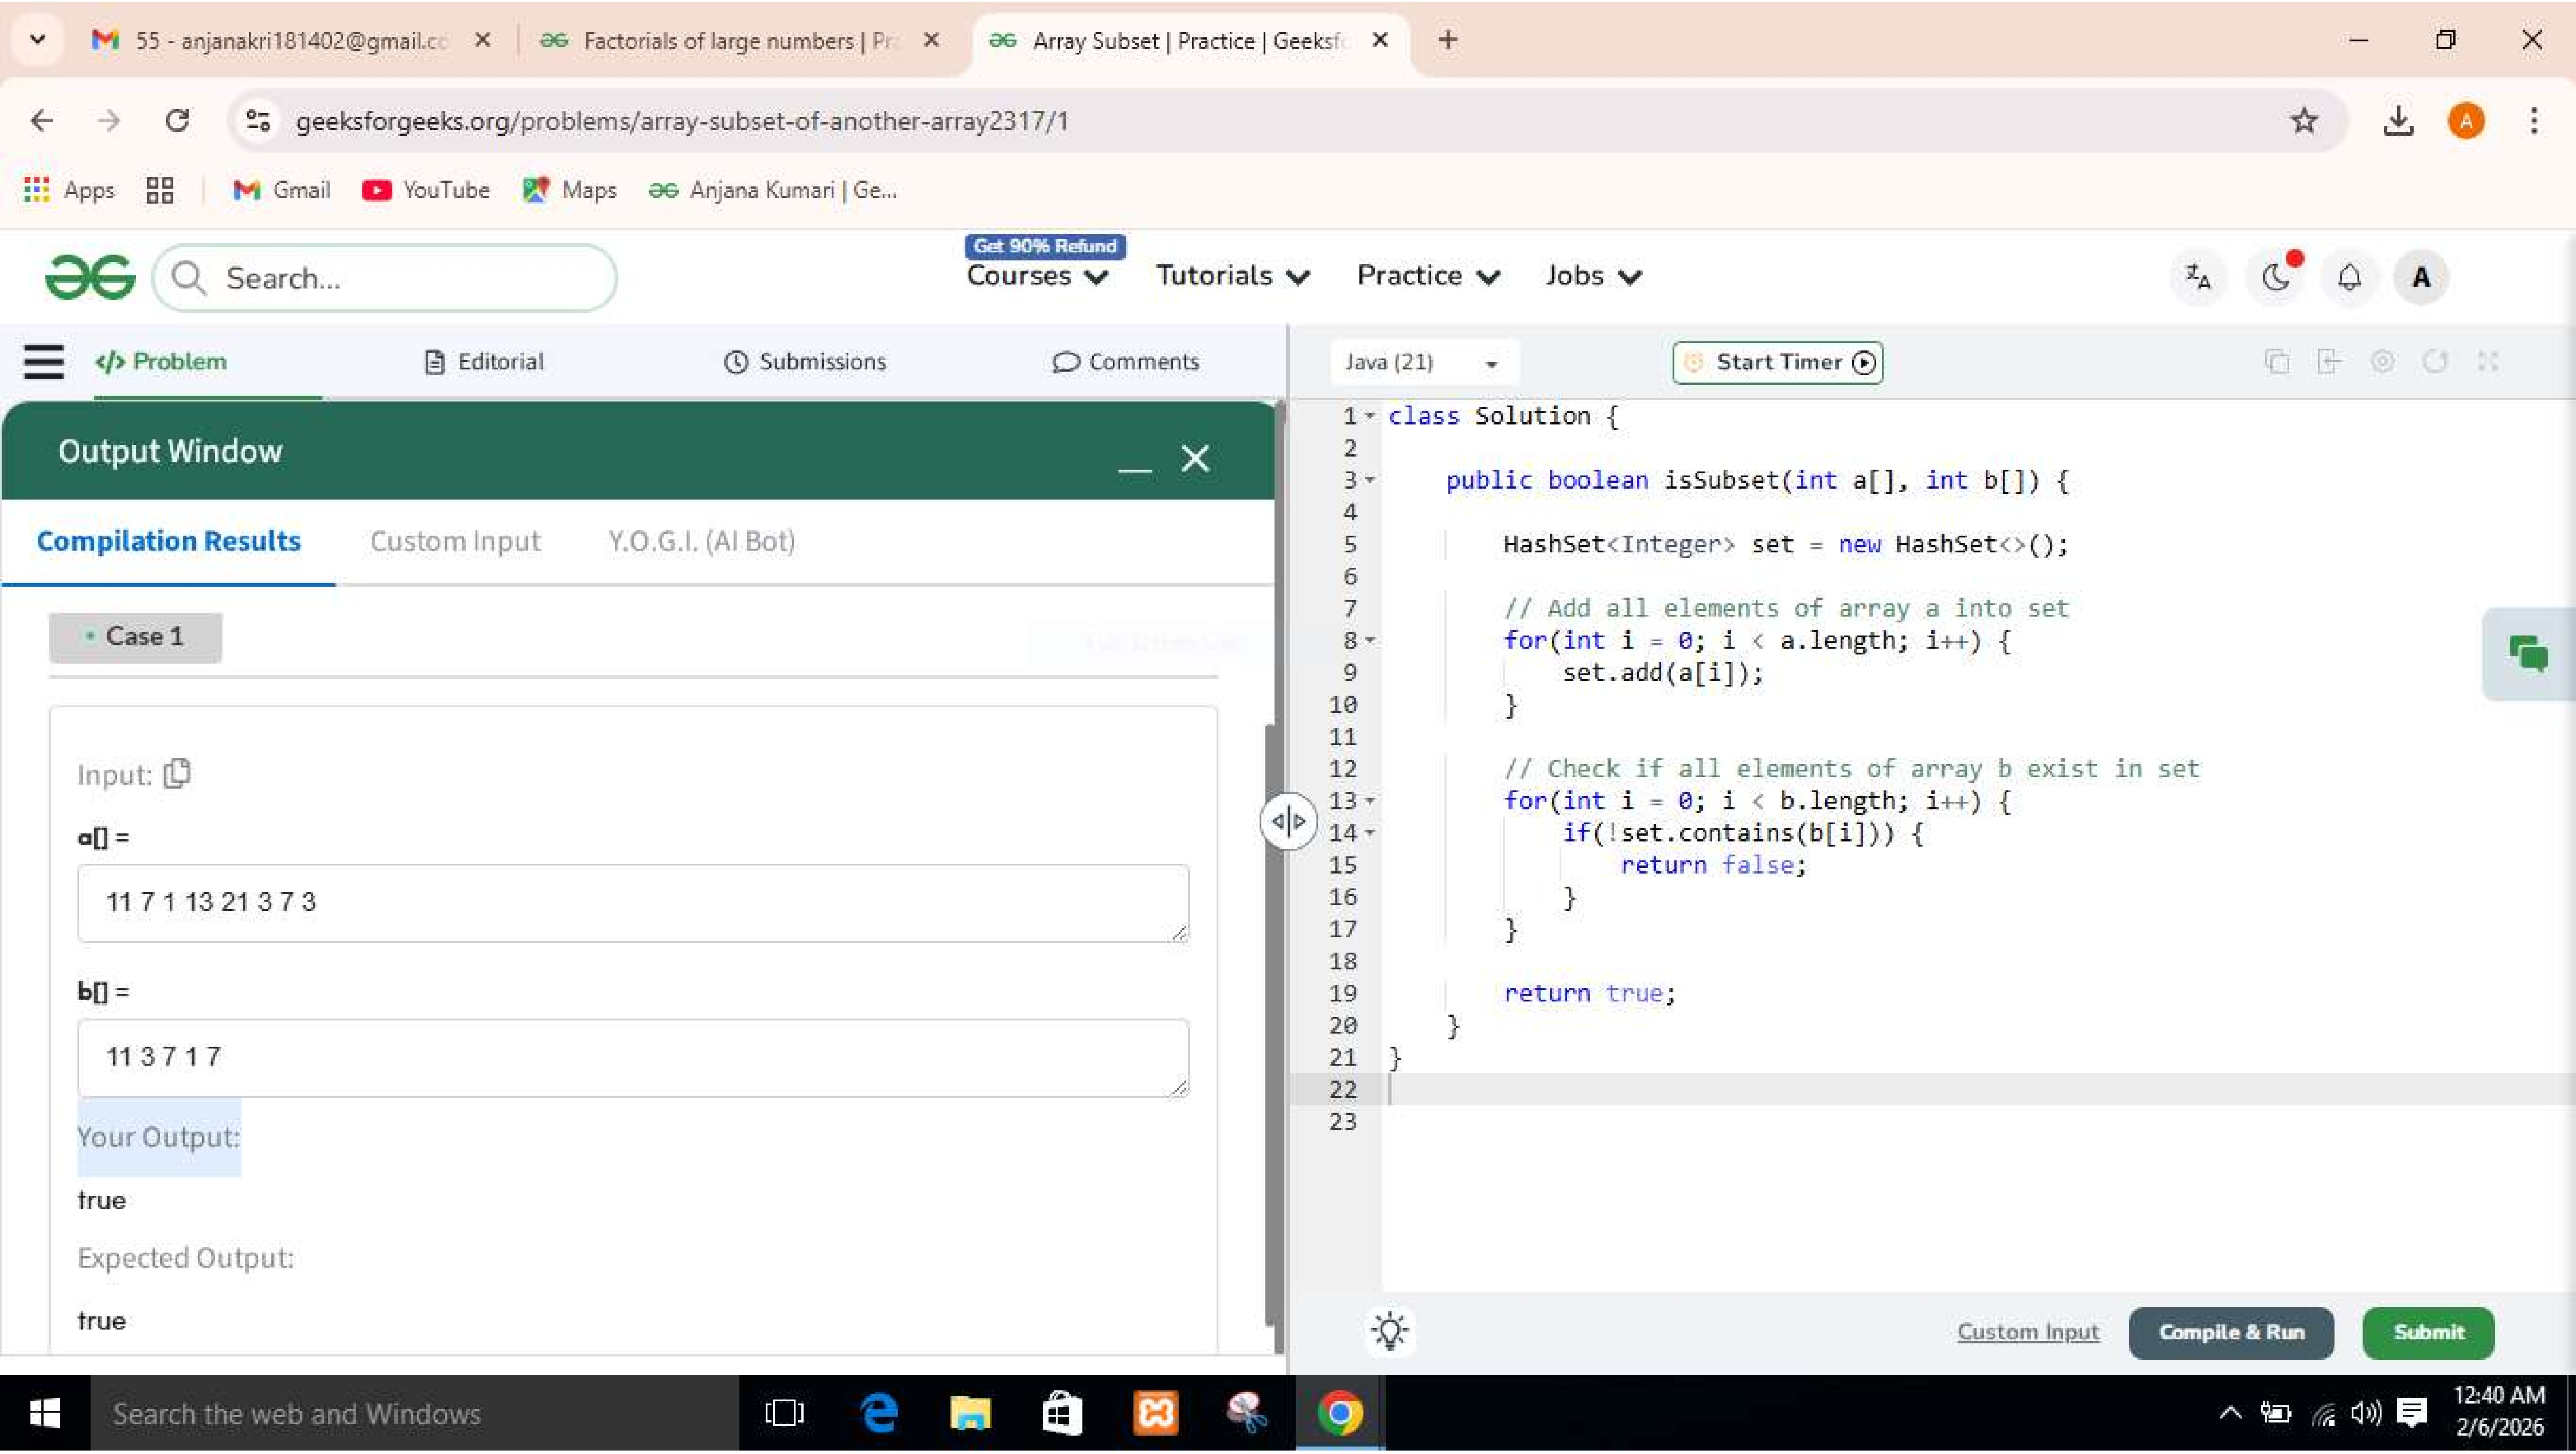
55 - anjanakri181402@gmail.co
Factorials of large numbers | Pr
Array Subset | Practice | Geeksf
geeksforgeeks.org/problems/array-subset-of-another-array2317/1
Apps
Gmail
YouTube
Maps
Anjana Kumari | Ge...
Search...
Get 90% Refund
Courses
Tutorials
Practice
Jobs
Problem
Editorial
Submissions
Comments
Java (21)
Start Timer
Output Window
Compilation Results
Custom Input
Y.O.G.I. (AI Bot)
Case 1
Input:
a[] =
11 7 1 13 21 3 7 3
b[] =
11 3 7 1 7
Your Output:
true
Expected Output:
true
class Solution {
public boolean isSubset(int a[], int b[]) {
HashSet<Integer> set = new HashSet<>();
// Add all elements of array a into set
for(int i = 0; i < a.length; i++) {
set.add(a[i]);
}
// Check if all elements of array b exist in set
for(int i = 0; i < b.length; i++) {
if(!set.contains(b[i])) {
return false;
}
}
return true;
}
}
Custom Input
Compile & Run
Submit
Search the web and Windows
12:40 AM
2/6/2026

Yye - anjanakri181402@gmail.c

Minimum Jumps | Practice | Ge

geeksforgeeks.org/problems/minimum-number-of-jumps-1587115620/1

Ask Google

Apps Gmail YouTube Maps Anjana Kumari | Ge...

Search...

Get 90% Refund

Courses Tutorials Practice Jobs

Problem Editorial Submissions Comments

Java (21) Start Timer

Output Window

Compilation Results Custom Input Y.O.G.I. (AI Bot)

Problem Solved Successfully

Suggest Feedback

Test Cases Passed **1120 / 1120**	Attempts : Correct / Total **1 / 1** Accuracy : 100%
Points Scored **4 / 4** Your Total Score: 8	Time Taken **0.61**

Solve Next

```java
        int jumps = 0;
        int currentEnd = 0;
        int farthest = 0;

        for (int i = 0; i < n - 1; i++) {

            // Update farthest reachable index
            farthest = Math.max(farthest, i + arr[i]);

            // When we reach current jump boundary
            if (i == currentEnd) {
                jumps++;
                currentEnd = farthest;

                // If we already can reach end
                if (currentEnd >= n - 1)
                    return jumps;
            }

            // If stuck and cannot move further
            if (i >= farthest)
                return -1;
        }

        return -1;
    }
}
```

Custom Input Compile & Run Submit

Search the web and Windows

12:12 AM
2/6/2026