



Output:

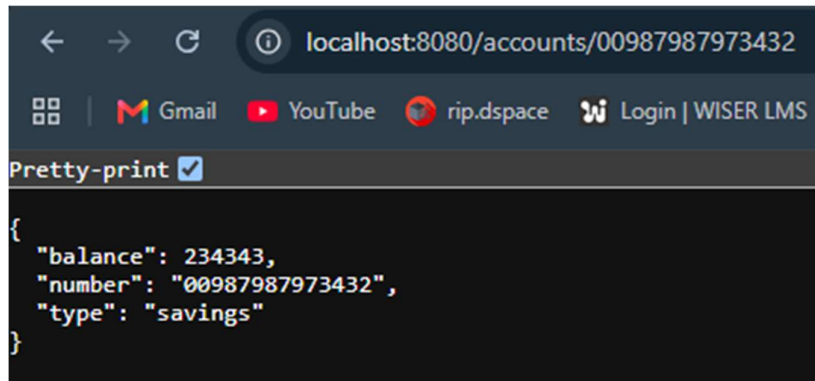

A screenshot of a web browser window. The address bar shows 'localhost:8080/accounts/00987987973432'. The browser has tabs for Gmail, YouTube, rip.dspace, and a 'Login | WISER LMS' button. Below the browser window, there is a 'Pretty-print' checkbox which is checked. The response is displayed in a dark-themed text area as a JSON object: { "balance": 234343, "number": "00987987973432", "type": "savings" }.

```
{
  "balance": 234343,
  "number": "00987987973432",
  "type": "savings"
}
```

LoanController.java:

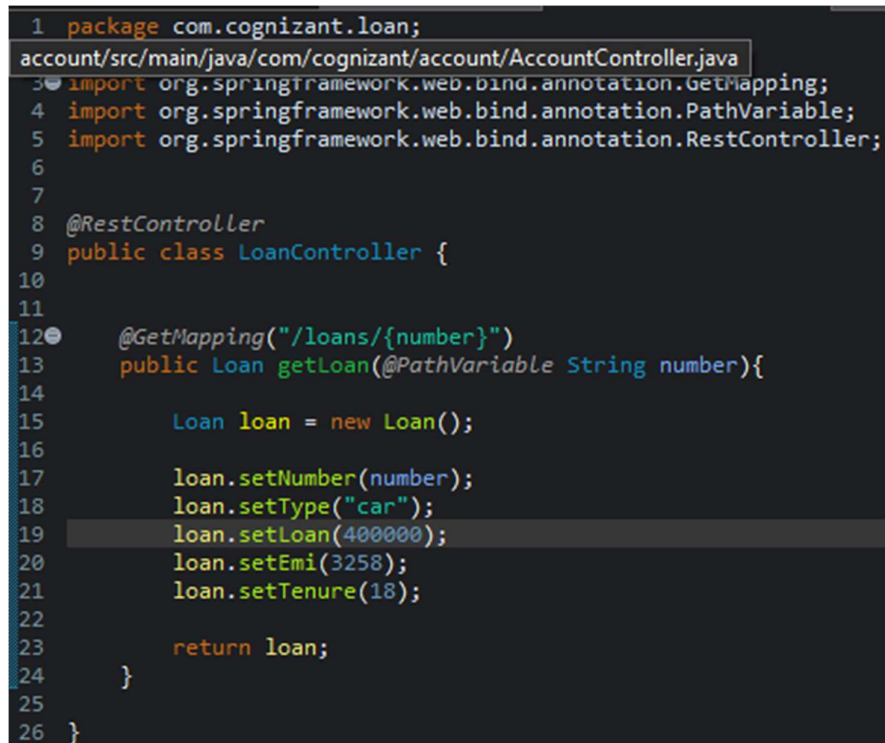


A screenshot of a code editor showing the contents of 'LoanController.java'. The file path is 'account/src/main/java/com/cognizant/account/AccountController.java'. The code includes imports for Spring annotations and defines a REST controller with a 'getLoan' method that returns a 'Loan' object with specific values.

```
1 package com.cognizant.loan;
account/src/main/java/com/cognizant/account/AccountController.java
3 import org.springframework.web.bind.annotation.GetMapping;
4 import org.springframework.web.bind.annotation.PathVariable;
5 import org.springframework.web.bind.annotation.RestController;
6
7
8 @RestController
9 public class LoanController {
10
11
12     @GetMapping("/loans/{number}")
13     public Loan getLoan(@PathVariable String number){
14
15         Loan loan = new Loan();
16
17         loan.setNumber(number);
18         loan.setType("car");
19         loan.setLoan(400000);
20         loan.setEmi(3258);
21         loan.setTenure(18);
22
23         return loan;
24     }
25
26 }
```

Loan.java:

```
1 package com.cognizant.loan;
2
3
4 public class Loan {
5
6     private String number;
7     private String type;
8     private int loan;
9     private int emi;
10    private int tenure;
11
12
13    public String getNumber() {
14        return number;
15    }
16
17
18    public void setNumber(String number) {
19        this.number = number;
20    }
21
22
23    public String getType() {
24        return type;
25    }
26
27
28    public void setType(String type) {
29        this.type = type;
30    }
31
32
33    public int getLoan() {
34        return loan;
35    }
36
37
38    public void setLoan(int loan) {
39        this.loan = loan;
40    }
41
42
43    public int getEmi() {
44        return emi;
45    }
46
47
48    public void setEmi(int emi) {
49        this.emi = emi;
50    }
51
52
53    public int getTenure() {
54        return tenure;
55    }
56
57
58    public void setTenure(int tenure) {
59        this.tenure = tenure;
60    }
61 }
```

Output:

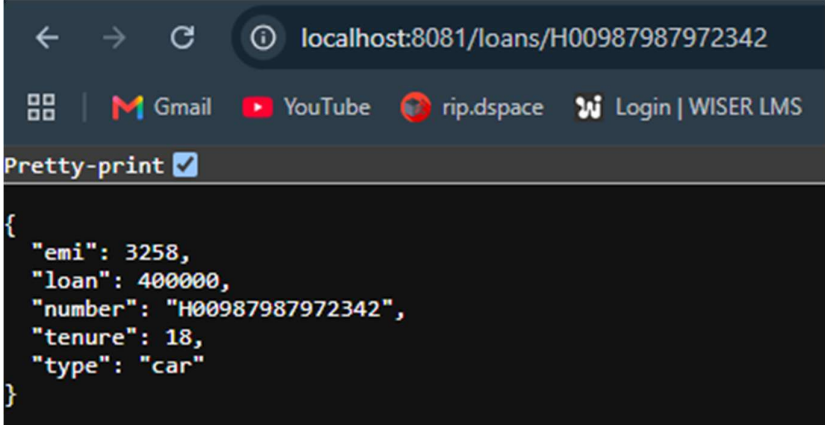

The screenshot shows a web browser window with the address bar displaying `localhost:8081/loans/H00987987972342`. Below the address bar, there are links for Gmail, YouTube, rip.dspace, and a login link for WISER LMS. A toggle switch labeled "Pretty-print" is checked. The main content area displays a JSON object with the following fields: `emi` (3258), `loan` (400000), `number` ("H00987987972342"), `tenure` (18), and `type` ("car").

```
{
  "emi": 3258,
  "loan": 400000,
  "number": "H00987987972342",
  "tenure": 18,
  "type": "car"
}
```