STEP 1: Create Resource Group

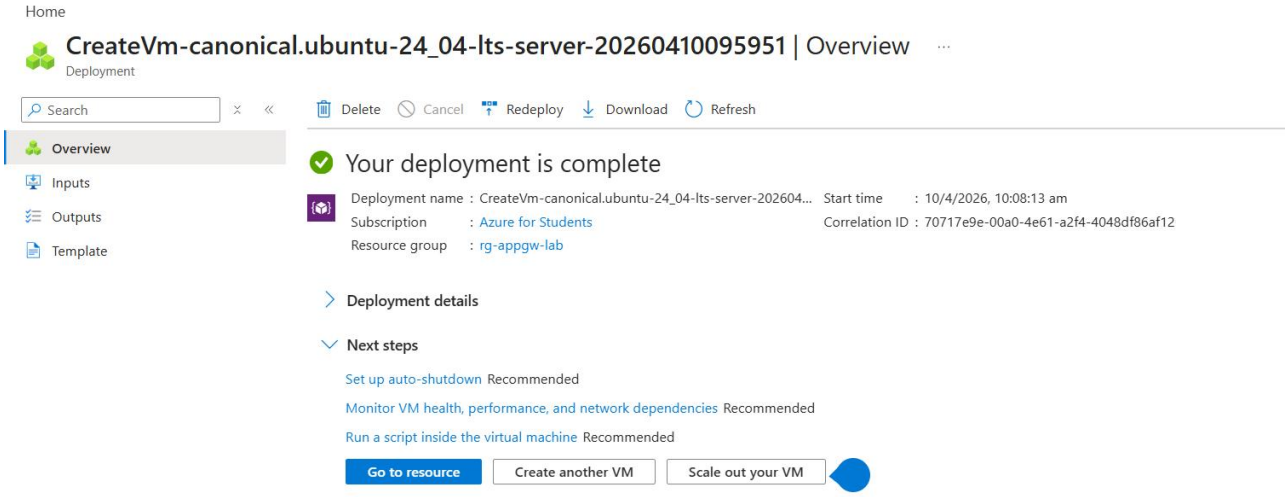

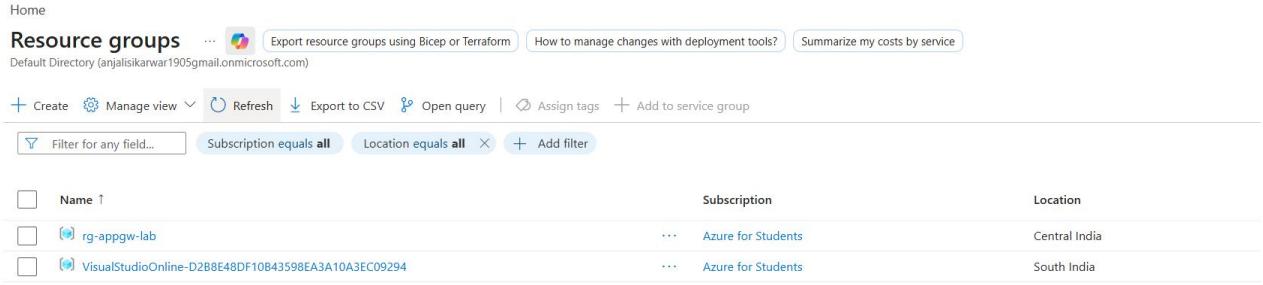

STEP 2: Create Virtual Network

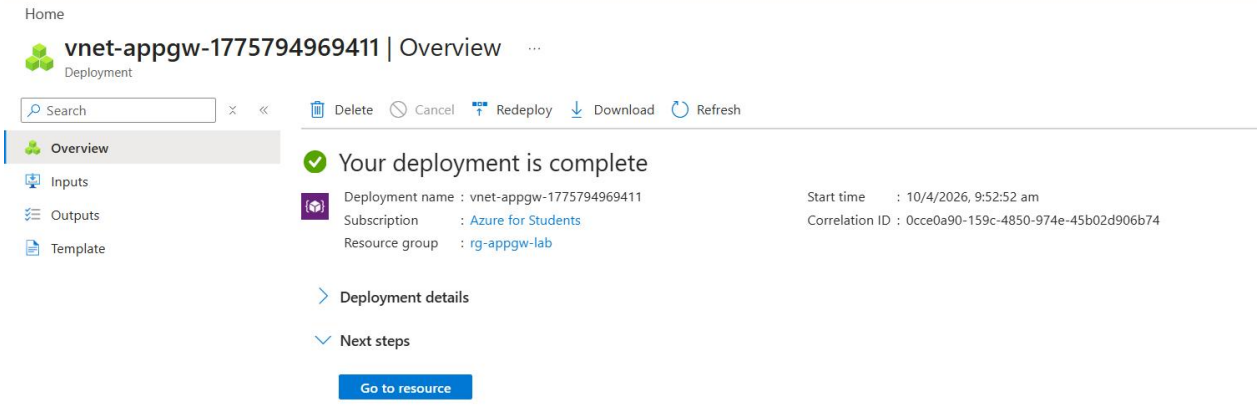

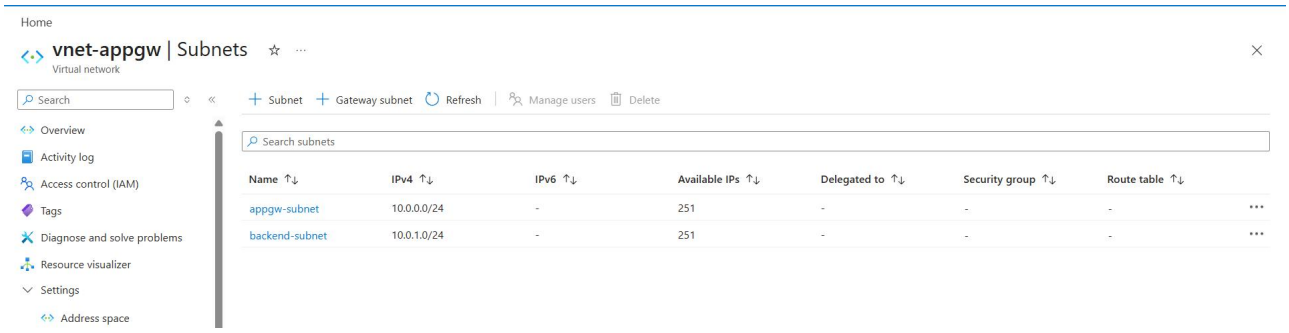

STEP 3: Create Backend VMs (2 VMs)

Home > CreateVm-canonical.ubuntu-24_04-lts-server-20260410095951 | Overview

vm1
Virtual machine

Help me copy this VM in any region | Manage this VM with Azure CLI

Search

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Monitor
Resource visualizer
Connect
Connect
Bastion
Networking

Help me copy this VM in any region

Connect | Start | Restart | Stop | Hibernate | Capture | Delete | Refresh | Scale | Open in mobile | Feedback | CLI / PS

Essentials | JSON View

Resource group (move)	: rg-appgw-lab	Operating system	: Linux (ubuntu 24.04)
Status	: Running	Size	: Standard FX2ms v2 (2 vcpus, 42 GiB memory)
Location	: Central India	Primary NIC public IP	: 20.198.126.253
Subscription (move)	: Azure for Students		1 associated public IP
Subscription ID	: a487671d-dd84-4cbd-abde-9e1fe88233c3	Virtual network/subnet	: vnet-appgw/backend-subnet
		DNS name	: Not configured
		Health state	: -
		Time created	: 10/4/2026, 4:38 am UTC
Tags (edit)	: Add tags		

Copy to clipboard

Home > CreateVm-canonical.ubuntu-24_04-lts-server-20260410101207 | Overview

vm2
Virtual machine

Help me copy this VM in any region | Manage this VM with Azure CLI

Search

Overview
Activity log
Access control (IAM)
Tags
Diagnose and solve problems
Monitor
Resource visualizer
Connect
Connect
Bastion
Networking

Help me copy this VM in any region

Connect | Start | Restart | Stop | Hibernate | Capture | Delete | Refresh | Scale | Open in mobile | Feedback | CLI / PS

Essentials | JSON View

Resource group (move)	: rg-appgw-lab	Operating system	: Linux (ubuntu 24.04)
Status	: Running	Size	: Standard DC1s v3 (1 vcpu, 8 GiB memory)
Location	: Central India	Primary NIC public IP	: 74.225.237.186
Subscription (move)	: Azure for Students		1 associated public IPs
Subscription ID	: a487671d-dd84-4cbd-abde-9e1fe88233c3	Virtual network/subnet	: vnet-appgw/backend-subnet
		DNS name	: Not configured
		Health state	: -
		Time created	: 10/4/2026, 4:44 am UTC
Tags (edit)	: Add tags		

```
azureuser@vm1:~$ echo "Hello From VM1" | sudo tee /var/www/html/index.html
Hello From VM1
azureuser@vm1:~$
```

```
No VM guests are running outdated hypervisor (qemu) binaries on this host.
azureuser@vm2:~$ echo "Hello From VM2" | sudo tee /var/www/html/index.html
Hello From VM2
azureuser@vm2:~$
```

STEP 4: Create Application Gateway

Create application gateway ...

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

Basics | Frontends | Backends | (4) Configuration | (5) Tags | (6) Review + create

An application gateway is a web traffic load balancer that enables you to manage traffic to your web application. Learn about creating application gateway

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription * : Azure for Students

Resource group * : rg-appgw-lab
Create new

Instance details

Application gateway name * : appgw-demo

Region * : Central India

Tier : Standard V2

Enable autoscaling : Yes / No

Previous | Next : Frontends >

Home › Load balancing and content delivery | Application gateways

Create application gateway ...

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics ✓ Frontends ✓ Backends (4) Configuration (5) Tags (6) Review + create

Traffic enters the application gateway via its frontend IP address(es). An application gateway can use a public IP address, private IP address, or one of each type.

Frontend IP address type: (•) Public ( ) Private ( ) Both

Public IPv4 address *: (New) appgw-pip

Add new

Home › Load balancing and content delivery | Application gateways

Create application gateway ...

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics ✓ Frontends ✓ Backends (4) Configuration (5) Tags (6) Review + create

A backend pool is a collection of resources to which your application gateway can send traffic. A backend pool can contain virtual machines, virtual machine scale sets, app services, IP addresses, or fully qualified domain names (FQDN).

Add a backend pool

Backend pool	Targets	
backend-pool	2 targets	...
	vm1132	...
	vm2492	...

Add a routing rule

Configure a routing rule to send traffic from a given frontend IP address to one or more backend targets. A routing rule must contain a listener and at least one backend target.

Rule name *: rule1

Priority *: 100

* Listener * Backend targets

Choose a backend pool to which this routing rule will send traffic. You will also need to specify a set of Backend settings that define the behavior of the routing rule.

Target type: (•) Backend pool ( ) Redirection

Backend target *: backend-pool

Add new

Backend settings *: http-setting

Add new

Path-based routing

You can route traffic from this rule's listener to different backend targets based on the URL path of the request. You can also apply a different set of Backend settings based on the URL path.

Path based rules

Path	Target name	Backend setting name	Backend pool
No additional targets to display			

Add Cancel

STEP 5: Test Application Gateway



Hello from VM1



Hello from VM2