

**A
Mini Project Report
On**

“HTML & CSS”

BACHELOR OF TECHNOLOGY

in

“Computer Science & Engineering”

Submitted by

Amit Singh

(Roll No.2201200100028)

Under Guidance of

Mr. Shailesh Patel

(Assistant Professor, CSED)



Submitted To

**DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING
INSTITUTE OF TECHNOLOGY & MANAGEMENT, GIDA,
GORAKHPUR**

SESSION: 2023-24



INSTITUTE OF TECHNOLOGY & MANAGEMENT

Integrated Technical Campus: Engineering, Pharmacy & Management
Approved by AICTE, Pharmacy Council of India, New Delhi & Affiliated to Dr. APJAKTU, Lucknow
AL-1, Sector - 7, GIDA, Gorakhpur - 273209 (UP)

Department of Computer Science & Engineering

Vision & Mission of the Department

Vision of the Department:

Excellence in education to produce competent computer professional to meet the need of industry and society.

Mission of the Department:

- 1- To impart quality education in computer science & engineering through competent faculties, good infrastructure and learning resources to produce competent graduates required by the industry.
- 2- To inculcate knowledge and skill sets and to strengthen industry-institute interaction to promote individual and team excellence to meet the requirement of industry.
- 3- To develop graduates to be computer professionals with high ethical standard and self-learning ability.

Program Educational Objective

PEO No.	Program Educational Objectives Statements
PEO1	To prepare competent computer science graduates to have successful career in application software development and in allied industries.
PEO2	To impart in depth knowledge in core computer science and engineering domain and expertise in providing solution to complex problems using modern IT tools to meet the requirement of industries.
PEO3	To inculcate professional skills and to work effectively as individual and member of a team in multidisciplinary projects.
PEO4	To develop self-learning ability, to protect environment and exercise ethical code of conduct in professional practice and activities.



INSTITUTE OF TECHNOLOGY & MANAGEMENT

Integrated Technical Campus: Engineering, Pharmacy & Management
Approved by AICTE, Pharmacy Council of India, New Delhi & Affiliated to Dr. APJAKTU, Lucknow
AL-1, Sector - 7, GIDA, Gorakhpur - 273209 (UP)

Department of Computer Science & Engineering

Rubrics are tagged with course outcomes for the laboratory performance.

Rubrics	CO	Statements	PO MAPPING
1	C211.1	Students will be able to work effectively in individual and team to manage the projects.	PO9, PO11
2	C211.2	Apply written and verbal communication through report and presentation.	PO10
3	C211.3	Apply the fundamental principles of engineering into development of technology and able to develop work ethics in industry.	PO1, PO8



INSTITUTE OF TECHNOLOGY & MANAGEMENT

Integrated Technical Campus: Engineering, Pharmacy & Management

Approved by AICTE, Pharmacy Council of India, New Delhi & Affiliated to Dr. APJAKTU, Lucknow

AL-1, Sector - 7, GIDA, Gorakhpur - 273209 (UP)

Department of Computer Science & Engineering

Evaluation

Program Name : B. Tech (CSE)
Course Name : Mini Project or Internship
Course Code : (C 211) BCC-351

Semester : III
Session : 2023-24
Section : A

Sr. No	Roll No.	Name	CO1	CO2	CO3	TOTAL
Rubrics			Rub 1	Rub 2	Rub 3	
Maximum Marks						
1.	2201200100028	Amit Singh				

DECLARATION

This is certified that the work which is being presented in the mini project entitled “**HTML**” is submitted in the department of **Computer Science and Engineering of Institute of Technology and Management, Gida, Gorakhpur** is an authentic record of my own work carried out during the semester under the supervision of “**SHAILESH PATEL**”

The matter presented in this mini project has not been submitted by me for the award of any other degree of this or any other institute/university.

Amit Singh

This is to certify that the above statement made by the candidate is correct to the best of my knowledge.

Date

Candidate Signature

Mr. Shailesh Patel
(Mini Project Coordinator)

Mr. Ashutosh Rao
Head of Department (CSE)

ABSTRACT

HTML and CSS are two of the most fundamental technologies used in web development. HTML, or Hyper Text Markup Language, is used to structure content on the web. It provides a way to define the different parts of a webpage, such as headings, paragraphs, and images. CSS, or Cascading Style Sheets, is used to style HTML content. It allows you to change the colour, font, size, and layout of different elements on a webpage.

Together, HTML and CSS form the backbone of most websites. HTML provides the structure and content of a webpage, while CSS provides the visual design and layout. By using these two technologies together, web developers can create beautiful and functional websites that are easy to use and navigate.

If you're interested in learning more about HTML and CSS, there are many resources available online.

For example,

- **JavaTpoint** has a great tutorial on how to use HTML with CSS.
- **CODE HELP BY Love Bubbar** YouTube open-source platforms for HTML, CSS, WEB DEVELOPMENT, and many more
- **MDN Web Docs** provides a comprehensive glossary of web-related terms that include definitions of both HTML and CSS.

ACKNOWLEDGEMENT

Whenever a module of work is completed, there is always a source of inspiration. I always find my parents as my torch bearers. While completing this task, I realized from my inner core that Rome was not built in day. I found a stack of mini project reports in the library of ITM Gorakhpur library. Those reports are the landmarks for me on the way of this task. The presented report is an effort of day and night works. Selection is always tough; undoubtedly, I am accepting this fact.

I am sincerely thankful to **Mr. Ashutosh Rao** (HOD) & **Mr. Shailesh Patel** (Mini Project Coordinator) for his support. I express my gratitude and thanks to all the faculties and staff members of Computer Science & Engineering department for their sincere cooperation in furnishing relevant information to complete this mini project report well in time successfully.

Finally, my greatest debt is to my parents, my family for their enduring love, support and forbearance during my project work.

Amit Singh

B. Tech, CSE ^{2nd} Sem

Roll No 2201200100028

TABLE OF CONTENTS

	Page No.
CERTIFICATE	v
DECLARATION	vi
ABSTRACT	vii
ACKNOWLEDGEMENT	viii
TABLE OF CONTENTS	ix-xi
LIST OF FIGURES	xii
LIST OF TABLES	Xiii
LIST OF SYMBOLS AND ABBREVIATIONS	xiv
CHAPTER 1: INTRODUCTION TO HTML	1-23
1.1 HTML	1
1.2 FATHER OF HTML	3
1.3 HISTORY OF INTERNET	4
1.4 VERSIONS OF HTML	5
1.5 WEB APPLICATIONS	6
1.6 HTML TAGS	7
1.7 CSS	12
CHAPTER 2: REGISTRATION PAGE USING HTML AND CSS	24-26
2.1 INTRODUCTION	24
2.2 USER EXPERIENCE ENHANCEMENT	25
CHAPYER 3: TECHNOLOGY USED IN REGISTRATION PAGE	27
3.1 DESCRIPTION OF TECHNOLOGY USED	27
CHAPTER 4: RESULT AND ANALYSIS OF THE PROJECT	28-33
4.1 PROJECT ANALYSIS	28
4.2 SOURCE CODE OF REGISTRATION PAGE	30
4.3 RESULT	33
CONCLUSION	34
REFERENCES	35

LIST OF FIGURES

Figure No.	Title	Page No.
1	Tim Berners-Lee	3
2	History of The Internet	4
3	Css syntax	13
4	Source code	30-32
5	Output screen	33

LIST OF TABLES

Table No.	Title	Page No.
1	HTML TAGS TABLE	9
2	HTML EXAMPLE USING TABLE TAGS	9-10
3	HTML FORMS TAGS	12
4	CSS BORDER RADIUS PROPERTY	16
5	CSS CURSOR VALUES	17-17
6	CSS FONT SIZE	20-21
7	CSS ANIMATION PROPERTY	22-23

LIST OF SYMBOLS AND ABBREVIATIONS

HTML	: HYPER TEXT MARKUP LANGUAGE
CSS	: CASCADING STYLE SHEETS
URL	: UNIFORM RESOURCE LOCATOR
ISP	: INTERNET SERVICE PROVIDER
W3C	: WORLD WIDE WEB CONSORTIUM
WHATWG	: WEB HYPERTEXT APPLICATION TECHNOLOGY WORKING GROUP
API	: APPLICATION PROGRAMMING INTERFACES
DOM	: DOCUMENT OBJECT MODEL
PHP	: HYPERTEXT PREPROCESSOR
ASP	: ACTIVE SERVER PAGES

CHAPTER-1

Introduction to HTML

1.1 HTML: HyperText Markup Language

HTML (Hypertext Markup Language) is the most basic building block of the Web. It defines the meaning and structure of web content. Other technologies besides HTML are generally used to describe a web page's appearance/presentation (CSS) or functionality/behavior (JAWA SCRIPT).

"Hypertext" refers to links that connect web pages to one another, either within a single website or between websites. Links are a fundamental aspect of the Web. By uploading content to the Internet and linking it to pages created by other people, you become an active participant in the World Wide Web.

HTML uses "markup" to annotate text, images, and other content for display in a Web browser. HTML markup includes special "elements" such as

`<head>`, `<title>`, `<body>`, `<header>`, `<footer>`, `<article>`, `<section>`, `<p>`, `<div>`, `<span>`, `<img>`, `<aside>`, `<audio>`, `<canvas>`, `<datalist>`, `<detail>`, `<embed>`, `<nav>`, `<search>`, `<output>`, `<progress>`, `<video>`, `<ul>`, `<ol>`, `<li>` and many others.

An HTML element is set off from other text in a document by "tags", which consist of the element name surrounded by "<" and ">". The name of an element inside a tag is case-insensitive. That is, it can be written in uppercase, lowercase, or a mixture. For example, the `<title>` tag can be written as `<Title>`, `<TITLE>`, or in any other way.

The major points of HTML are given below:

- HTML stands for HyperText Markup Language.
- HTML is used to create web pages and web applications.
- HTML is widely used language on the web.
- We can create a static website by HTML only.
- Technically, HTML is a Markup language rather than a programming language.

HTML Example with HTML Editor

In this tutorial, you will get a lot of HTML examples, at least one example for each topic with explanation. You can also edit and run these examples, with our online HTML editor. Learning HTML is fun, and it's very easy to learn .

1. <!DOCTYPE>
2. <html>
3. <head>
4. <title>Web page title</title>
5. </head>
6. <body>
7. <h1>Write Your First Heading</h1>
8. <p>Write Your First Paragraph.</p>
9. </body>
10. </html>

Hyper Text Markup Language which is used for creating web pages and web applications. Let's see what is meant by Hypertext Markup Language, and Web page.

Hyper Text: HyperText simply means "Text within Text." A text has a link within it, is a hypertext. Whenever you click on a link which brings you to a new webpage, you have clicked on a hypertext. HyperText is a way to link two or more web pages (HTML documents) with each other.

Markup language: A markup language is a computer language that is used to apply layout and formatting conventions to a text document. Markup language makes text more interactive and dynamic. It can turn text into images, tables, links, etc.

Web Page: A web page is a document which is commonly written in HTML and translated by a web browser. A web page can be identified by entering an URL. A Web page can be of the static or dynamic type. **With the help of HTML only, we can create static web pages.**

Hence, HTML is a markup language which is used for creating attractive web pages with the help of styling, and which looks in a nice format on a web browser. An HTML document is made of many HTML tags and each HTML tag contains different content.



Figure1: Tim Berners-Lee (Father of HTML)

1.2 Tim Berners-Lee

(FATHER OF HTML)

Born 8 June 1955

Known for **Invention of the World Wide Web**

A scientist and academic, was the primary author of HTML1. His journey began at CERN, an international scientific organization based in Geneva.

In 1989, Berners-Lee invented the World Wide Web1. He developed a program for himself, called Enquire, that could store information in files that contained connections (“links”) both within and among separate files—a technique that became known as hypertext.

Berners-Lee’s own protocol, HTTP (HyperText Transfer Protocol), was the foundation for the text format for HTML (HyperText Mark-up Language). HTML was used to define the structure and layout of a web page, how a page looks, and any special functions.

His hypertext implementation was demonstrated on a Next workstation, which provided many of the tools he needed to develop his first prototype. Berners-Lee’s browser editor was developed in 1991-92. This was a true browser editor for the first version of HTML and ran on a Next workstation.

The first version of HTML was formally published in June 1993. Thus, Tim Berners-Lee invented the World Wide Web and HTML, revolutionizing the way we interact with the internet today.

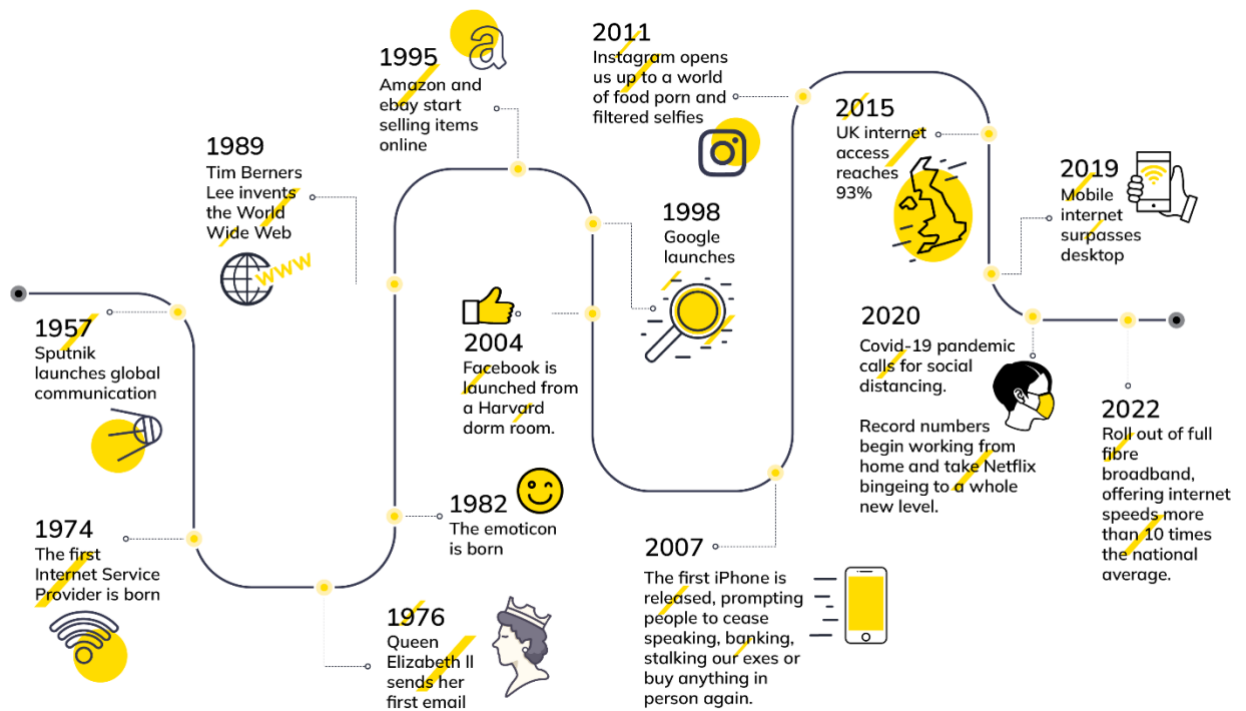


Figure 1.1: History of The Internet

1.3 The History of the Internet

The internet, a revolutionary technology that has reshaped our world, has a rich history marked by significant milestones:

1. **1957 - Sputnik Launches Global Communication:** The launch of the Sputnik satellite marked the beginning of global communication, setting the stage for the development of the internet.
2. **1974 - Birth of the First Internet Service Provider:** The first Internet Service Provider (ISP) was born, providing a platform for people to connect to the internet.
3. **1982 - The Emoticon is Born:** The creation of the emoticon added a new dimension to digital communication, allowing people to express emotions in text-based messages.
4. **1989 - Invention of the World Wide Web:** Tim Berners Lee invented the World Wide Web, providing a user-friendly interface to access information on the internet.
5. **1995 - Amazon and eBay Start Selling Items Online:** The emergence of online marketplaces like Amazon and eBay marked a significant shift in retail, with consumers able to purchase items from the comfort of their homes.
6. **1998 - Google Launches:** The launch of Google revolutionized information retrieval on the internet, making it easier for users to find relevant information.
7. **2004 - Facebook is Launched:** The launch of Facebook from a Harvard dorm room marked the beginning of the social media era.

8. **2011 - Instagram Opens Up:** Instagram opened up a world of visual communication, with users sharing images and short videos.
9. **2015 - UK Internet Access Reaches 93%:** By 2015, internet access in the UK had reached 93%, highlighting the widespread adoption of this technology.
10. **2019 - Mobile Internet Surpasses Desktop:** In 2019, more people accessed the internet via mobile devices than desktop computers, marking a significant shift in how people interact with the internet.
11. **2020 - Covid-19 Pandemic:** The Covid-19 pandemic led to record numbers of people working from home and increased use of streaming services like Netflix. This period also saw a significant increase in broadband speed.
12. **2022 - Roll out of full Fiber:** broadband offering Speed more than 10 times the national average.

1.4 Versions of HTML

Since the time HTML was invented, there are lots of HTML versions in market, the brief introduction about the HTML version is given below:

1. **HTML 1.0:** The first version of HTML was 1.0, which was the barebones version of HTML language, and it was released in 1991.
2. **HTML 2.0:** This was the next version which was released in 1995, and it was standard language version for website design. HTML 2.0 was able to support extra features such as form-based file upload, form elements such as text box, option button, etc.
3. **HTML 3.2:** HTML 3.2 version was published by W3C in early 1997. This version was capable of creating tables and providing support for extra options for form elements. It can also support a web page with complex mathematical equations. It became an official standard for any browser till January 1997. Today it is practically supported by most of the browsers.
4. **HTML 4.01:** HTML 4.01 version was released on December 1999, and it is a very stable version of HTML language. This version is the current official standard, and it provides added support for stylesheets (CSS) and scripting ability for various multimedia elements.
5. **HTML 5:** HTML5 is the newest version of HyperText Markup language. The first draft of this version was announced in January 2008. There are two major organizations one is W3C (World Wide Web Consortium), and another one is WHATWG (Web Hypertext Application Technology Working Group) which are involved in the development of HTML 5 version, and still, it is under development.

Latest Version of HTML:

HTML 5 is the fifth and current version of HTML. It has improved the markup available for documents and has introduced application programming interfaces (API) and Document Object Model (DOM). Features:

- It has introduced new multimedia features which supports both audio and video controls by using `<audio>` and `<video>` tags.
- There are new graphics elements including vector graphics and tags.
- Enrich semantic content by including `<header>` `<footer>`, `<article>`, `<section>` and `<figure>` are added.
- Drag and Drop- The user can grab an object and drag it further dropping it to a new location.
- Geo-location services- It helps to locate the geographical location of a client.
- Web storage facility which provides web application methods to store data on the web browser.
- Uses SQL database to store data offline.
- Allows drawing various shapes like triangle, rectangle, circle, etc.
- Capable of handling incorrect syntax.
- Easy DOCTYPE declaration i.e., `<!doctype html>`
- Easy character encoding i.e., `<meta charset="UTF-8">`

1.5 Web Applications

A web application, or web app, is a computer program that uses a web browser to perform a particular function. Web applications are delivered on the World Wide Web to users with an active network connection. They are client-server programs, so each program has a client side and a server side.

Web applications are typically stored on a remote server, and users can access them through software known as a web browser. They use a combination of server-side scripts (such as PHP, ASP) for handling data storage and retrieval, and client-side scripts (such as JavaScript, HTML) to present data to the users.

Web applications can be developed for various uses and can be used by individuals or organizations. They can include online shops (e-commerce), webmail, calculators, social media platforms, and more. They allow users to communicate with organizations or companies using online forms, forums, shopping carts, content management systems, and more.

Web applications do not require downloading because they reside on a remote server. Users can access them using standard web browsers such as Google Chrome, Safari, Microsoft Edge, etc. Some web applications are entirely static and do not require any processing on the server, while others are dynamic and require server-side processing.

1.6 HTML TAGS

HTML tags are like keywords which defines that how web browser will format and display the content. With the help of tags, a web browser can distinguish between an HTML content and a simple content. HTML tags contain three main parts: opening tag, content and closing tag. But some HTML tags are unclosed tags.

Note:

- All HTML tags must be enclosed within < > these brackets.
- Every tag in HTML performs different tasks.
- If you have used an open tag <tag>, then you must use a close tag </tag> (except some tags)

Example:

```
<p> Paragraph Tag </p>
<h2> Heading Tag </h2>
<b> Bold Tag </b>
<i> Italic Tag </i>
<u> Underline Tag</u>
```

Unclosed HTML Tags:

Some HTML tags are not closed, for example br and hr.

 Tag: br stands for break line, it breaks the line of the code.

<hr> Tag: hr stands for Horizontal Rule. This tag is used to put a line across the webpage.

HTML Meta Tags

DOCTYPE, title, link, meta and style

HTML Text Tags

<p>, <h1>, <h2>, <h3>, <h4>, <h5>, <h6>, , , <abbr>, <acronym>, <address>, <bdo>, <ins>, , <dfn>, <pre>, <samp>, <var> and

HTML Link Tags

`<a>`

HTML Image and Object Tags

`<img>`, `<area>`

HTML List Tags

`<ul>`, `<ol>`, `<li>`, `<dl>`, `<dt>` and `<dd>`

HTML Table Tags

`table`, `tr`, `td`, `th`, `tbody`, `thead`, `tfoot`, `col`, `colgroup`

HTML Form Tags

`form`, `input`, `textarea`, `select`, `option`, `optgroup`, `button`, `label`, `fieldset` and `legend`

HTML ATTRIBUTE:

- HTML attributes are special words which provide additional information about the elements or attributes are the modifier of the HTML element.
- Each element or tag can have attributes, which defines the behaviour of that element.
- Attributes should always be applied with start tag.
- The Attribute should always be applied with its name and value pair.
- The Attributes name and values are case sensitive, and it is recommended by W3C that it should be written in Lowercase only.
- You can add multiple attributes in one HTML element, but need to give space between two attributes.

Example: `<p style="height: 50px; color: blue">It will add style property in element</p>`

HTML ANCHOR TAG:

The HTML anchor tag defines a hyperlink that links one page to another page. It can create hyperlink to other web page as well as files, location, or any URL. The "href" attribute is the most important attribute of the HTML a tag. and which links to destination page or URL.

SYNTAX- `<a href = "....."> Link Text </a>`

Example: `<a href="second.html">Click for Second Page</a>`

HTML table tag:

It is used to display data in tabular form (row * column). There can be many columns in a row.

We can create a table to display data in tabular form, using <table> element, with the help of <tr>, <td>, and <th> elements.

In Each table, table row is defined by <tr> tag, table header is defined by <th>, and table data is defined by <td> tags.

HTML tables are used to manage the layout of the page e.g. header section, navigation bar, body content, footer section etc. But it is recommended to use div tag over table

Table:1- HTML tags table

TAG	DESCRIPTION
<TABLE>	It defines a table
<TR>	It defines a row in a table
<TH>	It defines a header in a table
<TD>	It defines a cell in a table
<CAPTION>	It defines the table caption
<COLGROUP>	It specifies a group of one or more columns in a table for formatting
<TBODY>	It is used to group the body content in a table
<THEAD>	It is used to group the header content in a table
<TFOOTER>	It is used to group the footer content in a table

Let's see the example of HTML table tag. Its output is shown above.

```

1. <table>
2. <tr><th>First_Name</th><th>Last_Name</th><th>Marks</th></tr>
3. <tr><td>Sonoo</td><td>Jaiswal</td><td>60</td></tr>
4. <tr><td>James</td><td>William</td><td>80</td></tr>
5. <tr><td>Swati</td><td>Sironi</td><td>82</td></tr>
6. <tr><td>Chetna</td><td>Singh</td><td>72</td></tr>
7. </table>

```

Output:

In the below html table, there are 5 rows and 3 columns = 5 * 3 = 15 values.

Table:2- HTML example using table tags

First Name	Last Name	Marks
Sonoo	Jaiswal	60
James	William	80
Swati	Sironi	82

Chetna	Singh	72
--------	-------	----

HTML Lists

HTML Lists are used to specify lists of information. All lists may contain one or more list elements. There are three different types of HTML lists:

1. Ordered List or Numbered List (ol)
2. Unordered List or Bulleted List (ul)
3. Description List or Definition List (dl)

Ordered List or Numbered List

In the ordered HTML lists, all the list items are marked with numbers by default. It is known as numbered list also. The ordered list starts with `<ol>` tag and the list items start with `<li>` tag.

1. `<ol>`
2. `<li>Aries</li>`
3. `<li>Bingo</li>`
4. `<li>Leo</li>`
5. `<li>Oracle</li>`
6. `</ol>`

Output:

1. Aries
2. Bingo
3. Leo
4. Oracle

Unordered List or Bulleted List

In HTML Unordered list, all the list items are marked with bullets. It is also known as bulleted list also. The Unordered list starts with `<ul>` tag and list items start with the

`<li>` tag.

1. `<ul>`
2. `<li>Aries</li>`
3. `<li>Bingo</li>`
4. `<li>Leo</li>`

5. `<li>Oracle</li>`
6. `</ul>`

Output:

- ☐ Aries
- ☐ Bingo
- ☐ Leo
- ☐ Oracle

Description List or Definition List

HTML Description list is also a list style which is supported by HTML and XHTML. It is also known as definition list where entries are listed like a dictionary or encyclopedia.

The definition list is very appropriate when you want to present glossary, list of terms or other name-value list.

The HTML definition list contains following three tags:

- A. `<dl>` tag defines the start of the list.
- B. `<dt>` tag defines a term.
- C. `<dd>` tag defines the term definition (description).

1. `<dl>`
2. `<dt>Aries</dt>`
3. `<dd>-One of the 12 horoscope sign.</dd>`
4. `<dt>Bingo</dt>`
5. `<dd>-One of my evening snacks</dd>`
6. `<dt>Leo</dt>`
7. `<dd>-It is also an one of the 12 horoscope sign.</dd>`
8. `<dt>Oracle</dt>`
9. `<dd>-It is a multinational technology corporation.</dd>`
10. `</dl>`

Output:

Aries

-One of the 12 horoscope sign. Bingo

-One of my evening snacks

Leo

-It is also an one of the 12 horoscope sign. Oracle

-It is a multinational technology corporation.

HTML Form

An HTML form is a section of a document which contains controls such as text fields, password fields, checkboxes, radio buttons, submit button, menus etc.

An HTML form facilitates the user to enter data that is to be sent to the server for processing such as name, email address, password, phone number, etc. .

Why use HTML Form

HTML forms are required if you want to collect some data from of the site visitor.

For example: If a user want to purchase some items on internet, he/she must fill the form such as shipping address and credit/debit card details so that item can be sent to the given address.

HTML Form Syntax

1. `<form action="server url" method="get|post">`
2. `//input controls e.g. textfield, textarea, radiobutton, button`
3. `</form>`

Form Tags

Let's see the list of HTML 5 form tags.

Table:3- HTML forms tags

Tag	Description
<code><form></code>	It defines an HTML form to enter inputs by the used side.
<code><input></code>	It defines an input control.
<code><textarea></code>	It defines a multi-line input control.
<code><label></code>	It defines a label for an input element.
<code><fieldset></code>	It groups the related element in a form.
<code><legend></code>	It defines a caption for a <code><fieldset></code> element.

1.7 CSS

CSS tutorial or CSS 3 tutorial provides basic and advanced concepts of CSS technology. Our CSS tutorial is developed for beginners and professionals. The major points of CSS are given below:

- CSS stands for Cascading Style Sheet.
- CSS is used to design HTML tags.
- CSS is a widely used language on the web.
- HTML, CSS and JavaScript are used for web designing. It helps the web designers to apply style on HTML tags.

CSS Example with CSS Editor

In this tutorial, you will get a lot of CSS examples, you can edit and run these examples with our online CSS editor tool.

```
1. <!DOCTYPE>
2. <html>
3. <head>
4. <style>
5. h1{
6.   color:white;
7.   background-color:red;
8.   padding:5px;
9. }
10.    p{
11.     color:blue;
12.    }
13.   </style>
14.   </head>
15.   <body>
16.    <h1>Write Your First CSS Example</h1>
17.    <p>This is Paragraph.</p>
18.   </body>
19.   </html>
```

CSS Syntax:

A CSS rule set contains a selector and a declaration block.

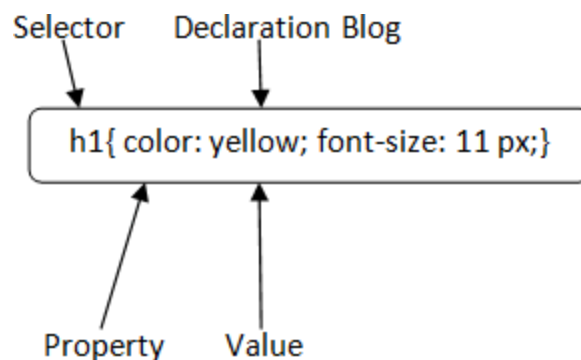


Figure:2.6- CSS Syntax

Selector: Selector indicates the HTML element you want to style. It could be any tag like <h1>, <title> etc.

Declaration Block: The declaration block can contain one or more declarations separated by a semicolon. For the above example, there are two declarations:

1. color: yellow;
2. font-size: 11 px;

Each declaration contains a property name and value, separated by a colon.

Property: A Property is a type of attribute of HTML element. It could be color, border etc.

Value: Values are assigned to CSS properties. In the above example, value "yellow" is assigned to color property.

○ Selector {Property1: value1; Property2: value2; ;}

CSS Selector:

CSS selectors are used to select the content you want to style. Selectors are the part of CSS rule set. CSS selectors select HTML elements according to its id, class, type, attribute etc.

There are several different types of selectors in CSS.

1. CSS Element Selector
2. CSS Id Selector
3. CSS Class Selector

CSS Element Selector:

The element selector selects the HTML element by name.

CSS Id Selector:

The id selector selects the id attribute of an HTML element to select a specific element. An id is always unique within the page so it is chosen to select a single, unique element.

It is written with the hash character (#), followed by the id of the element.

CSS Class Selector:

The class selector selects HTML elements with a specific class attribute. It is used with a period character. (full stop symbol) followed by the class name.

How to add CSS

CSS is added to HTML pages to format the document according to information in the style sheet.

There are three ways to insert CSS in HTML documents.

1. Inline CSS
2. Internal CSS
3. External CSS

Inline CSS

Inline CSS is used to apply CSS on a single line or element. For example

1. `<p style="color:blue">Hello CSS</p>`

Internal CSS

Internal CSS is used to apply CSS on a single document or page. It can affect all the elements of the page. It is written inside the style tag within head section of html.

For example:

1. `<style>`
2. `p{color:blue}`
3. `</style>`

External CSS

External CSS is used to apply CSS on multiple pages or all pages. Here, we write all the CSS code in a css file. Its extension must be .css for example style.css.

For example:

1. `p{color:blue}`

You need to link this style.css file to your html pages like this:

1. `<link rel="stylesheet" type="text/css" href="style.css">` The link tag must be used inside head section of html.

CSS border-radius property

This CSS property sets the rounded borders and provides the rounded corners around an element, tags, or div. It defines the radius of the corners of an element.

It is shorthand for border-top-left-radius, border-top-right-radius, border-bottom-right-radius and border-bottom-left-radius.

This CSS property includes the properties that are tabulated as follows:

Table4: CSS border radius property

Property	Description
border-top-left-radius	It is used to set the border-radius for the top-left corner
border-top-right-radius	It is used to set the border-radius for the top-right corner
border-bottom-right-radius	It is used to set the border-radius for the bottom-right corner
border-bottom-left-radius	It is used to set the border-radius for the bottom-left corner

If the bottom-left value is omitted, then it will be same as the top-right. If the value of bottom-right is eliminated, then it will be same as the top-left. Similarly, if top-right is eliminated, then it will be the same as top-left.

Syntax:

1. border-radius: 1-4 length | % / 1-4 length | % | inherit | initial;

Property values:

length: It defines the shape of the corners. It denotes the size of the radius using length values. Its default value is 0. It does not allow negative values.

Percentage: It denotes the size of the radius in percentage. It also does not allow negative values.

CSS Cursor:

It is used to define the type of mouse cursor when the mouse pointer is on the element. It allows us to specify the cursor type, which will be displayed to the user. When a user hovers on the link, then by default, the cursor transforms into the hand from a pointer.

Let's understand the property values of the cursor.

Table5 CSS cursor values

Values	Usage
alias	It is used to display the indication of the cursor of something that is to be created.
auto	It is the default property in which the browser sets the cursor.
all-scroll	It indicates the scrolling.
col-resize	Using it, the cursor will represent that the column can be horizontally resized.
cell	The cursor will represent that a cell or the collection of cells is selected.
context-menu	It indicates the availability of the context menu.
default	It indicates an arrow, which is the default cursor.
copy	It is used to indicate that something is copied.
crosshair	In it, the cursor changes to the crosshair or the plus sign.

e-resize	It represents the east direction and indicates that the edge of the box is to be shifted towards right.
ew-resize	It represents the east/west direction and indicates a bidirectional resize cursor.
n-resize	It represents the north direction that indicates that the edge of the box is to be shifted to up.
ne-resize	It represents the north/east direction and indicates that the edge of the box is to be shifted towards up and right.
move	It indicates that something is to be shifted.
help	It is in the form of a question mark or ballon, which represents that help is available.
None	It is used to indicate that no cursor is rendered for the element.
No-drop	It is used to represent that the dragged item cannot be dropped here.
s-resize	It indicates an edge box is to be moved down. It indicates the south direction.
Row-resize	It is used to indicate that the row can be vertically resized.
Se-resize	It represents the south/east direction, which indicates that an edge box is to be moved down and right.
Sw-resize	It represents south/west direction and indicates that an edge of the box is to be shifted towards down and left.
Wait	It represents an hourglass.
<url>	It indicates the source of the cursor image file.
w-resize	It indicates the west direction and represents that the edge of the box is to be shifted left.

Zoom-in	It is used to indicate that something can be zoomed in.
Zoom-out	It is used to indicate that something can be zoomed out.

CSS Buttons:

In HTML, we use the button tag to create a button, but by using CSS properties, we can style the buttons. Buttons help us to create user interaction and event processing.

They are one of the widely used elements of web pages. During the form submission, to view or to get some information, we generally use buttons.

Let's see the basic styling in buttons.

Basic styling in Buttons

There are multiple properties available that are used to style the button element. Let's discuss them one by one.

Background-color

As we have discussed earlier, this property is used for setting the background color of the button element.

Syntax

```
1. element {
2.   // background-color style
3. }
```

border

It is used to set the border of the button. It is the shorthand property for border-width, border-color, and border-style.

Syntax

```
1. element {
2.   // border style
3. }
```

CSS Font:

CSS Font property is used to control the look of texts. By the use of CSS font property, you can change the text size, color, style and more. You have already studied how to make text bold or underlined. Here, you will also know how to resize your font using percentage.

These are some important font attributes:

1. CSS Font color: This property is used to change the color of the text.(standalone attribute)

2. CSS Font family: This property is used to change the face of the font.
3. CSS Font size: This property is used to increase or decrease the size of the font.
4. CSS Font style: This property is used to make the font bold, italic or oblique.

CSS Font Family:

CSS font family can be divided in two types:

- Generic family: It includes Serif, Sans-serif, and Monospace.
- Font family: It specifies the font family name like Arial, New Times Roman etc.

```
1.  <!DOCTYPE html>
2.  <html>
3.  <head>
4.  <style>
5.  body {
6.  font-size: 100%; }
7.  h1 { font-family: sans-serif; }
8.  h2 { font-family: serif; }
9.  p { font-family: monospace; } }
10. </style>
11. </head>
12. <body>
13. <h1>This heading is shown in sans-serif.</h1>
14. <h2>This heading is shown in serif.</h2>
15. <p>This paragraph is written in monospace.</p>
16. </body>
17. </html>
```

Output:

This heading is shown in sans-serif.

This heading is shown in serif.

This paragraph is written in monospace.

CSS Font Size:

CSS font size property is used to change the size of the font. These are the possible values that can be used to set the font size:

Table 6: CSS font size

Font Size Value	Description
xx-small	used to display the extremely small text size.

x-small	used to display the extra small text size.
Small	used to display small text size.
Medium	used to display medium text size.
Large	used to display large text size.
x-large	used to display extra large text size.
xx-large	used to display extremely large text size.
Smaller	used to display comparatively smaller text size.
Larger	used to display comparatively larger text size.
size in pixels or %	used to set value in percentage or in pixels.

CSS hover :

- The: hover selector is for selecting the elements when we move the mouse on them.

Note- It is not only limited to the links. We can use it on almost every HTML element.

- To style the link to unvisited pages, we can use
- the: link selector.
- To style the link for visited pages, we can use the: visited selector and to style the active links we can use the: active selector.

It is introduced in CSS1. The hover can be used to highlight the web pages as per the preference of users in an effective web-designing program.

The hover feature includes the following effects:

- Change the color of the background and font.
- Modify the opacity of the image.
- Text embedding.
- Create image rollover effects.
- Swapping of images.

Basically, the hover effect modifies the element's property value to enable the animate changes on a stated image/text or the corresponding elements. Embedding of the hover elements in the web pages makes them interactive and functional.

Generally, the hover feature is compatible with all of the main browsers. But it will be a challenging task to implement it on touch devices. It is observed that an active hover function gets stuck on the non-supportive device.

CSS Padding:

CSS Padding property is used to define the space between the element content and the element border.

It is different from CSS margin in the way that CSS margin defines the space around elements. CSS padding is affected by the background colors. It clears an area around the content.

Top, bottom, left and right padding can be changed independently using separate properties. You can also change all properties at once by using shorthand padding property.

CSS justify-content

This CSS property is used to align the items of the flexible box container when the items do not use all available space on the main-axis (horizontally). It defines how the browser distributes the space around and between the content items. This CSS property can't be used to describe containers or items along the vertical axis. To align the items vertically, we have to use the align-items property.

Syntax:

`justify-content: center | flex-start | flex-end | space-around | space-evenly | space-between | initial | inherit;`

Note-The default value of this property is flex-start. Let's understand its property values in detail.

3.34: CSS Animation:

CSS Animation property is used to create animation on the webpage. It can be used as a replacement of animation created by Flash and JavaScript.

CSS3 @keyframes Rule

The animation is created in the @keyframe rule. It is used to control the intermediate steps in a CSS

Table 7 CSS animation properties

Property	Description
@keyframes	It is used to specify the animation.

Animation	This is a shorthand property, used for setting all the properties except the animation-play-state and the animation-fill-mode property.
animation-delay	It specifies when the animation will start.
animation-direction	It specifies if or not the animation should play in reverse on alternate cycle.
animation-duration	It specifies the time duration taken by the animation to complete one cycle.
animation-fill-mode	it specifies the static style of the element. (when the animation is not playing)
animation-iteration-count	It specifies the number of times the animation should be played.
animation-play-state	It specifies if the animation is running or paused.
animation-name	It specifies the name of @keyframes animation.
animation-timing-function	It specifies the speed curve of the animation.

CSS Table:

We can apply style on HTML tables for better look and feel. There are some CSS properties that are widely used in designing table using CSS:

- border
- padding
- width
- height
- text-align
- color
- background-color

Chapter 2

Registration Page Using HTML and CSS

2.1 Introduction

In an era where digitalization has revolutionized numerous aspects of our lives, online registration forms have become ubiquitous tools for streamlining processes and gathering essential information. Among the myriad applications, educational institutions, training centers, and organizations offering courses often rely on registration forms to facilitate enrollment and collect pertinent details from prospective participants.

The registration form under scrutiny is meticulously crafted to cater to the specific needs of individuals seeking enrollment in various courses. From basic certification programs to advanced diploma courses spanning different durations, the form accommodates a diverse range of educational pursuits. With a structured layout and an array of input fields, it aims to capture comprehensive information essential for the enrollment process.

In this report, we delve into the intricacies of the registration form, dissecting its design elements, functionality, and user experience enhancements. By analyzing its features, such as input validation techniques, user-friendly interface design, error handling mechanisms, and file upload capability, we aim to unravel the underlying principles driving its effectiveness in facilitating seamless registration.

Through this exploration, we not only gain insights into the form's utility in collecting applicant data but also glean valuable lessons in designing intuitive and efficient registration processes. As we navigate through the various sections of the form and unravel its intricacies, we uncover the strategies employed to ensure data accuracy, streamline user interactions, and enhance overall user satisfaction.

2.2 Data Validation and User Experience Enhancement

The registration form demonstrates a robust approach to data validation and user experience enhancement, ensuring accuracy and ease of use for applicants. Here's how the form achieves these objectives:

1. Input Validation:

- The form employs various input validation techniques to ensure the correctness of the entered data. For instance:
 - Mandatory fields are marked with the “required” attribute, preventing form submission until all necessary information is provided.
 - Field attributes such as “maxlength” limit the length of input data, preventing overflows and ensuring data integrity.
 - Input types such as “date” for date of birth, “tel” for mobile number, and “email” for email address enforce specific formats, reducing errors in data entry.

2. User-Friendly Interface:

- The form layout is well-structured and easy to navigate, enhancing user experience. Elements such as field labels, placeholders, and grouping of related options under select and checkbox menus contribute to clarity and intuitiveness.
- Interactive features like dropdown menus for selecting courses and countries, radio buttons for gender, religion, and category selection, and checkboxes for indicating education level and language proficiency, simplify data input for applicants.

3. Error Handling:

- In case of incorrect or incomplete data input, the form provides feedback to users through browser-native validation messages or custom error messages, guiding them to rectify errors before submission.
- Clear instructions and placeholders prompt users to enter the required information accurately, reducing the likelihood of errors and enhancing the overall registration experience.

4. File Upload Capability:

- The provision for uploading a profile picture adds a personalized touch to the registration process and facilitates easy identification of applicants. By allowing applicants to submit their

photos directly through the form, administrative tasks associated with enrollment are streamlined, improving efficiency.

Overall, the registration form exemplifies best practices in data validation and user experience design, contributing to a seamless and user-friendly registration process for prospective applicants. By incorporating these features, the form ensures the reliability and accuracy of collected data while enhancing the overall user experience.

Chapter-3

Technology used in Registration Page

3.1 Technology used

1. `<!DOCTYPE html>`: Defines the document type and version of HTML being used.
2. `<html lang="en">`: The root element of the HTML document, indicating the document's language (English).
3. `<head>`: Contains meta-information about the HTML document, such as character encoding, viewport settings, and title.
4. `<meta charset="UTF-8">`: Specifies the character encoding for the document as UTF-8, which supports a wide range of characters.
5. `<meta name="viewport" content="width=device-width, initial-scale=1.0">`: Sets the viewport properties to control the layout and scaling of the web page on different devices.
6. `<title>Registration Form</title>`: Sets the title of the HTML document displayed in the browser's title bar or tab.
7. `<style>`: Defines internal CSS styles for styling the HTML elements within the document.
8. `body`: Represents the content of the HTML document, including text, images, and other elements.
9. `.container`: A class selector used to style a container element that wraps the registration form.
10. `<h2>`: Defines a level 2 heading for the form title.
11. `<form>`: Creates a form for collecting user input.
12. `<input type="text">`: Defines a text input field for users to enter their full name.
13. `<input type="email">`: Defines an email input field for users to enter their email address.
14. `<input type="password">`: Defines a password input field for users to enter their password (characters are masked for security).
15. `<input type="submit">`: Defines a submit button for submitting the form data to the server.
16. `<div>`: Defines a division or section in the HTML document. In this case, it's used as a container for the form.
17. `name` attribute: Assigns a name to the input fields, which is used to identify the form data when submitted to the server.
18. `placeholder` attribute: Provides a hint or example text to users about the expected input in the input fields.
19. `required` attribute: Specifies that the input fields are required and must be filled out before submitting the form.

These HTML tags and elements work together to create a structured and interactive registration form for collecting user information.

Chapter-4

Result and Analysis Of the Project

4.1 Project Analysis

1. Purpose and Scope:

- The registration form project aims to collect comprehensive information from individuals interested in enrolling in various courses offered by the institution or organization. It serves as a crucial tool for streamlining the enrollment process and gathering essential data for administrative purposes.

2. Technologies Used:

- The project utilizes HTML for structuring the form elements and defining their attributes.
- It incorporates CSS (Cascading Style Sheets) for styling the form layout and enhancing its visual presentation.
- The form includes interactive elements such as dropdown menus, radio buttons, checkboxes, and file upload functionality, facilitated through HTML tags and attributes.

3. Form Structure and Components:

- The form is structured within HTML `<form>` tags and organized using fieldset and div elements for better visual grouping and organization.
- Key components of the form include:
 - Course Selection: A dropdown menu allows applicants to select from various course options categorized by duration.
 - Personal Information: Fields for entering applicant's name, father's name, mother's name, date of birth, gender, religion, category, education level, languages known, and address.
 - Contact Details: Input fields for mobile number, email address, and password for account creation.
 - Additional Details: Selection of country and file upload option for submitting a profile picture.

4. Input Validation and User Experience:

- The form includes input validation techniques such as the "required" attribute for mandatory fields and "maxlength" attribute for limiting input length.

- It provides a user-friendly interface with clear labels, placeholders, and descriptive instructions to guide applicants through the registration process.

- Error handling mechanisms ensure prompt feedback to users in case of incorrect or incomplete data input, enhancing the overall user experience.

5. Accessibility and Compatibility:

- The project aims for accessibility by ensuring compatibility with various web browsers and devices.

- It adheres to web standards and best practices to ensure optimal performance and usability across different platforms and screen sizes.

6. Data Security and Privacy:

- While the form collects sensitive information such as personal details and contact information, the project should implement appropriate security measures to safeguard data integrity and privacy.

- Measures such as encryption of sensitive data during transmission and secure storage protocols should be considered to protect applicant information from unauthorized access or misuse.

7. Future Enhancements:

- Potential enhancements to the project may include implementing server-side validation for additional security and validation checks.

- Integration with a database or backend system for storing and managing applicant data efficiently.

- Incorporation of features such as real-time validation, autocomplete suggestions, and multi-step form navigation to further enhance user experience and streamline the registration process.

4.2 Source Code of Registration Page

FILE NAME: index.html

```
# style.css  index.html
C: > Users > pande > Desktop > SEMESTER 3 NOTES > index.html > html > body > fieldset > div.container > form > b > select > optgroup > option
1 <html>
2
3 <head>
4 <title>Registration Form</title>
5 <link rel="stylesheet" href="style.css">
6 </head>
7
8 <body>
9 <fieldset>
10 <div class="container">
11 <h2>Application Detail</h2>
12 <form>
13 <b>Course:
14 <select>
15 <option>--Select course--</option>
16 <optgroup label="3 months course">
17 <option>Basic course</option>
18 <option>CCC</option>
19 <option>BCC</option>
20 <option>Tally</option>
21 <optgroup label="6 months course">
22 <option>DCAA</option>
23 <option>DCA</option>
24 <option>DFA</option>
25 <option>DCAD</option>
26 <optgroup label="1 year course">
27 <option>ADOAP</option>
28 <option>ADCA</option>
29 <option>PGDCA</option>
30 <option>ADGFA</option>
31 </select><br><br>
32 Applicant's name:
33 <input type="text" name="Applicant's name" size="40" maxlength="35" placeholder="Enter your name"
34 <input type="text" name="Applicant's name" size="40" maxlength="35" placeholder="Enter your name"
35 required><br><br>
36 Father's name:
37 <input type="text" name="Father's name" size="40" maxlength="35" placeholder="Enter your father's name"
38 <input type="text" name="Father's name" size="40" maxlength="35" placeholder="Enter your father's name"
39 required><br><br>
40 Mother's name:
```

```
# style.css  index.html
C: > Users > pande > Desktop > SEMESTER 3 NOTES > index.html > html > body > fieldset > div.container > form > b > select > optgroup > option
38 Mother's name:
39 <input type="text" name="Mother's name" size="40" maxlength="35" placeholder="Enter your mother's name"
40 <input type="text" name="Mother's name" size="40" maxlength="35" placeholder="Enter your mother's name"
41 required><br><br>
42 Dob:
43 <input type="date"><br><br>
44 Gender:
45 <input type="radio" name="Gender" value="Male">Male
46 <input type="radio" name="gender" value="female">Female
47 <input type="radio" name="gender" value="trans">Other<br><br>
48 Religion:
49 <input type="radio" name="religion" value="hindu">Hindu
50 <input type="radio" name="religion" value="sikkh">Sikkh
51 <input type="radio" name="religion" value="christian">Christian
52 <input type="radio" name="religion" value="muslim">Muslim<br><br>
53 Category:
54 <input type="radio" name="category" value="general">General
55 <input type="radio" name="category" value="OBC">OBC
56 <input type="radio" name="category" value="SC">SC
57 <input type="radio" name="category" value="ST">ST<br><br>
58 Education:
59 <input type="checkbox" name="education" value="10th">10th
60 <input type="checkbox" name="education" value="12th">12th
61 <input type="checkbox" name="education" value="Graduation">Graduation
62 <input type="checkbox" name="education" value="other">Other<br><br>
63 Language known:
64 <input type="checkbox" name="language known" value="hindi">Hindi
65 <input type="checkbox" name="language known" value="english">English
66 <input type="checkbox" name="language known" value="other">Other<br><br>
67 Address:
68 <input type="text" name="Address" value="Address"></input><br><br>
69 Mobile no.:
70 <input type="tel" name="Mobile no." placeholder="Enter your mobile no."
71 <input type="tel" name="Mobile no." placeholder="Enter your mobile no."
72 <br><br>
73 Email Id:
74 <input type="text" name="email id" placeholder="Enter your Email Id">
75 <input type="text" name="email id" placeholder="Enter your Email Id">
76 <br><br>
77 Password:
```

```
# style.css  index.html
C: > Users > pande > Desktop > SEMESTER 3 NOTES > index.html > html > body > fieldset > div.container > form > b > select > optgroup > option
75     <input type="Password" name="Password" placeholder="Enter new password">
76     <br><br>
77     Country:&nbsp;&nbsp;&nbsp;<select>
78         <option>-- Select country--</option>
79         <option>India</option>
80         <option>Nepal</option>
81         <option>sri lanka</option>
82         <option>bhutan</option>
83     </select><br><br>
84     Upload your pic:<input type="file" name="photofile" required><br><br>
85     <input type="submit" value="Submit ">
86 </b>
87 </form>
88 </div>
89 </fieldset>
90 </body>
91
92 </html>
```

FILE NAME: style.css

```
# style.css  index.html
C: > Users > pande > Desktop > SEMESTER 3 NOTES > # style.css > .container input[type="text"]
1  .container input[type="submit"]:hover {
2      background-color: #0056b3;
3  }
4  .container input[type="submit"] {
5      width: 100%;
6      background-color: #007bff;
7      color: #fff;
8      padding: 10px;
9      border: none;
10     border-radius: 5px;
11     cursor: pointer;
12 }
13 .container input[type="text"],
14 .container input[type="email"],
15 .container input[type="tel"],
16 .container input[type="password"] {
17     width: 100%;
18     padding: 10px;
19     margin-bottom: 15px;
20     border: 1px solid #ccc;
21     border-radius: 5px;
22     box-sizing: border-box;
23 }
24 .container {
```

```
# style.css • index.html •
C: > Users > pande > Desktop > SEMESTER 3 NOTES > # style.css > .container input[type="text"]

25     max-width: 400px;
26     margin: 50px auto;
27     background-color: #fff;
28     padding: 20px;
29     border-radius: 8px;
30     box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
31 }
32 body {
33     font-family: Arial, sans-serif;
34     background-color: #f4f4f4;
35     margin: 0;
36     padding: 0;
37 }
38 .container h2 {
39     text-align: center;
40     margin-bottom: 20px;
41 }
```

4.3 Result

The screenshot shows a web browser window with the address bar displaying "C:/Users/pande/Desktop/SEMESTER%20%203%20NOTES/index.html". The main content is a form titled "Application Detail". The form contains the following fields and options:

- Course:** A dropdown menu with the text "--Select course--".
- Applicant's name:** A text input field with the placeholder text "Enter your name".
- Father's name:** A text input field with the placeholder text "Enter your father's name".
- Mother's name:** A text input field with the placeholder text "Enter your mother's name".
- Dob:** A date input field with the placeholder text "dd - mm - yyyy" and a calendar icon.
- Gender:** Radio buttons for ☐ Male, ☐ Female, and ☐ Other.
- Religion:** Radio buttons for ☐ Hindu, ☐ Sikkh, ☐ Christian, and ☐ Muslim.
- Category:** Radio buttons for ☐ General, ☐ OBC, ☐ SC, and ☐ ST.
- Education:** Checkboxes for ☐ 10th, ☐ 12th, ☐ Graduation, and ☐ Other.

The screenshot shows the continuation of the application form. The form contains the following fields and options:

- Language known:** Checkboxes for ☐ Hindi, ☐ English, and ☐ Other.
- Address:** A text input field with the placeholder text "Address".
- Mobile no.:** A text input field with the placeholder text "Enter your mobile no.".
- Email Id:** A text input field with the placeholder text "Enter your Email Id".
- Password:** A text input field with the placeholder text "Enter new password".
- Country:** A dropdown menu with the text "-- Select country--".
- Upload your pic:** A file upload button labeled "Choose File" and a status indicator "No file chosen".
- Submit:** A blue button labeled "Submit".

CONCLUSION

Web development is the building and maintenance of websites; it's the work that happens behind the scenes to make a website look great, work fast and perform well with a seamless user experience.

Web developers, do this by using a variety of coding languages. The languages they use depends on the types of tasks they are performing and the platforms on which they are working.

Web development skills are in high demand worldwide and well paid too – making development a great career option. It is one of the easiest accessible higher paid fields as you do not need a traditional university degree to become qualified.

The field of web development is generally broken down into front- end (the user-facing side) and back-end (the server side).

REFERENCES

1. W3Schools. (n.d.). Retrieved Month Day, Year, from <https://www.w3schools.com/>
2. GeeksforGeeks. (n.d.). GeeksforGeeks: A Computer Science Portal for Geeks. Retrieved Month Day, Year, from <https://www.geeksforgeeks.org/>
3. JavatPoint. (n.d.). JavatPoint - Learn Java Programming. Retrieved Month Day, Year, from <https://www.javatpoint.com/>
4. Wikipedia contributors. (Year, Month Day). Title of the article. In Wikipedia, The Free Encyclopedia. Retrieved Month Day, Year, from <https://www.wikipedia.org/>