Route Parameters

Mosh Hamedani
programmingwithmosh.com

File   Edit   Selection   View   Go   Run   Terminal   Help

07. Route Parameters > JS index.js > ...

```javascript
const express = require('express');
const app = express();
app.get('/',(req, res)=>{
    res.send('Hello World !!! Its corona-time');
});
app.get('/api/courses',(req, res)=>{
    res.send([1, 2, 3]);
});
app.get('/api/courses/:id',(req, res)=>{
    res.send(req.params.id);
});
// app.get('/api/posts/:year/:month',(req, res)=>{
//     res.send(req.params);
// });
app.get('/api/posts/:year/:month',(req, res)=>{
    res.send(req.query);
});
//PORT
const port = process.env.PORT || 3000
app.listen(port,() => console.log(`Listening to port ${port} ....`));
// To add environment variable use :
// Ubuntu : EXPORT PORT=3333
// Windows : SET PORT=3333
```

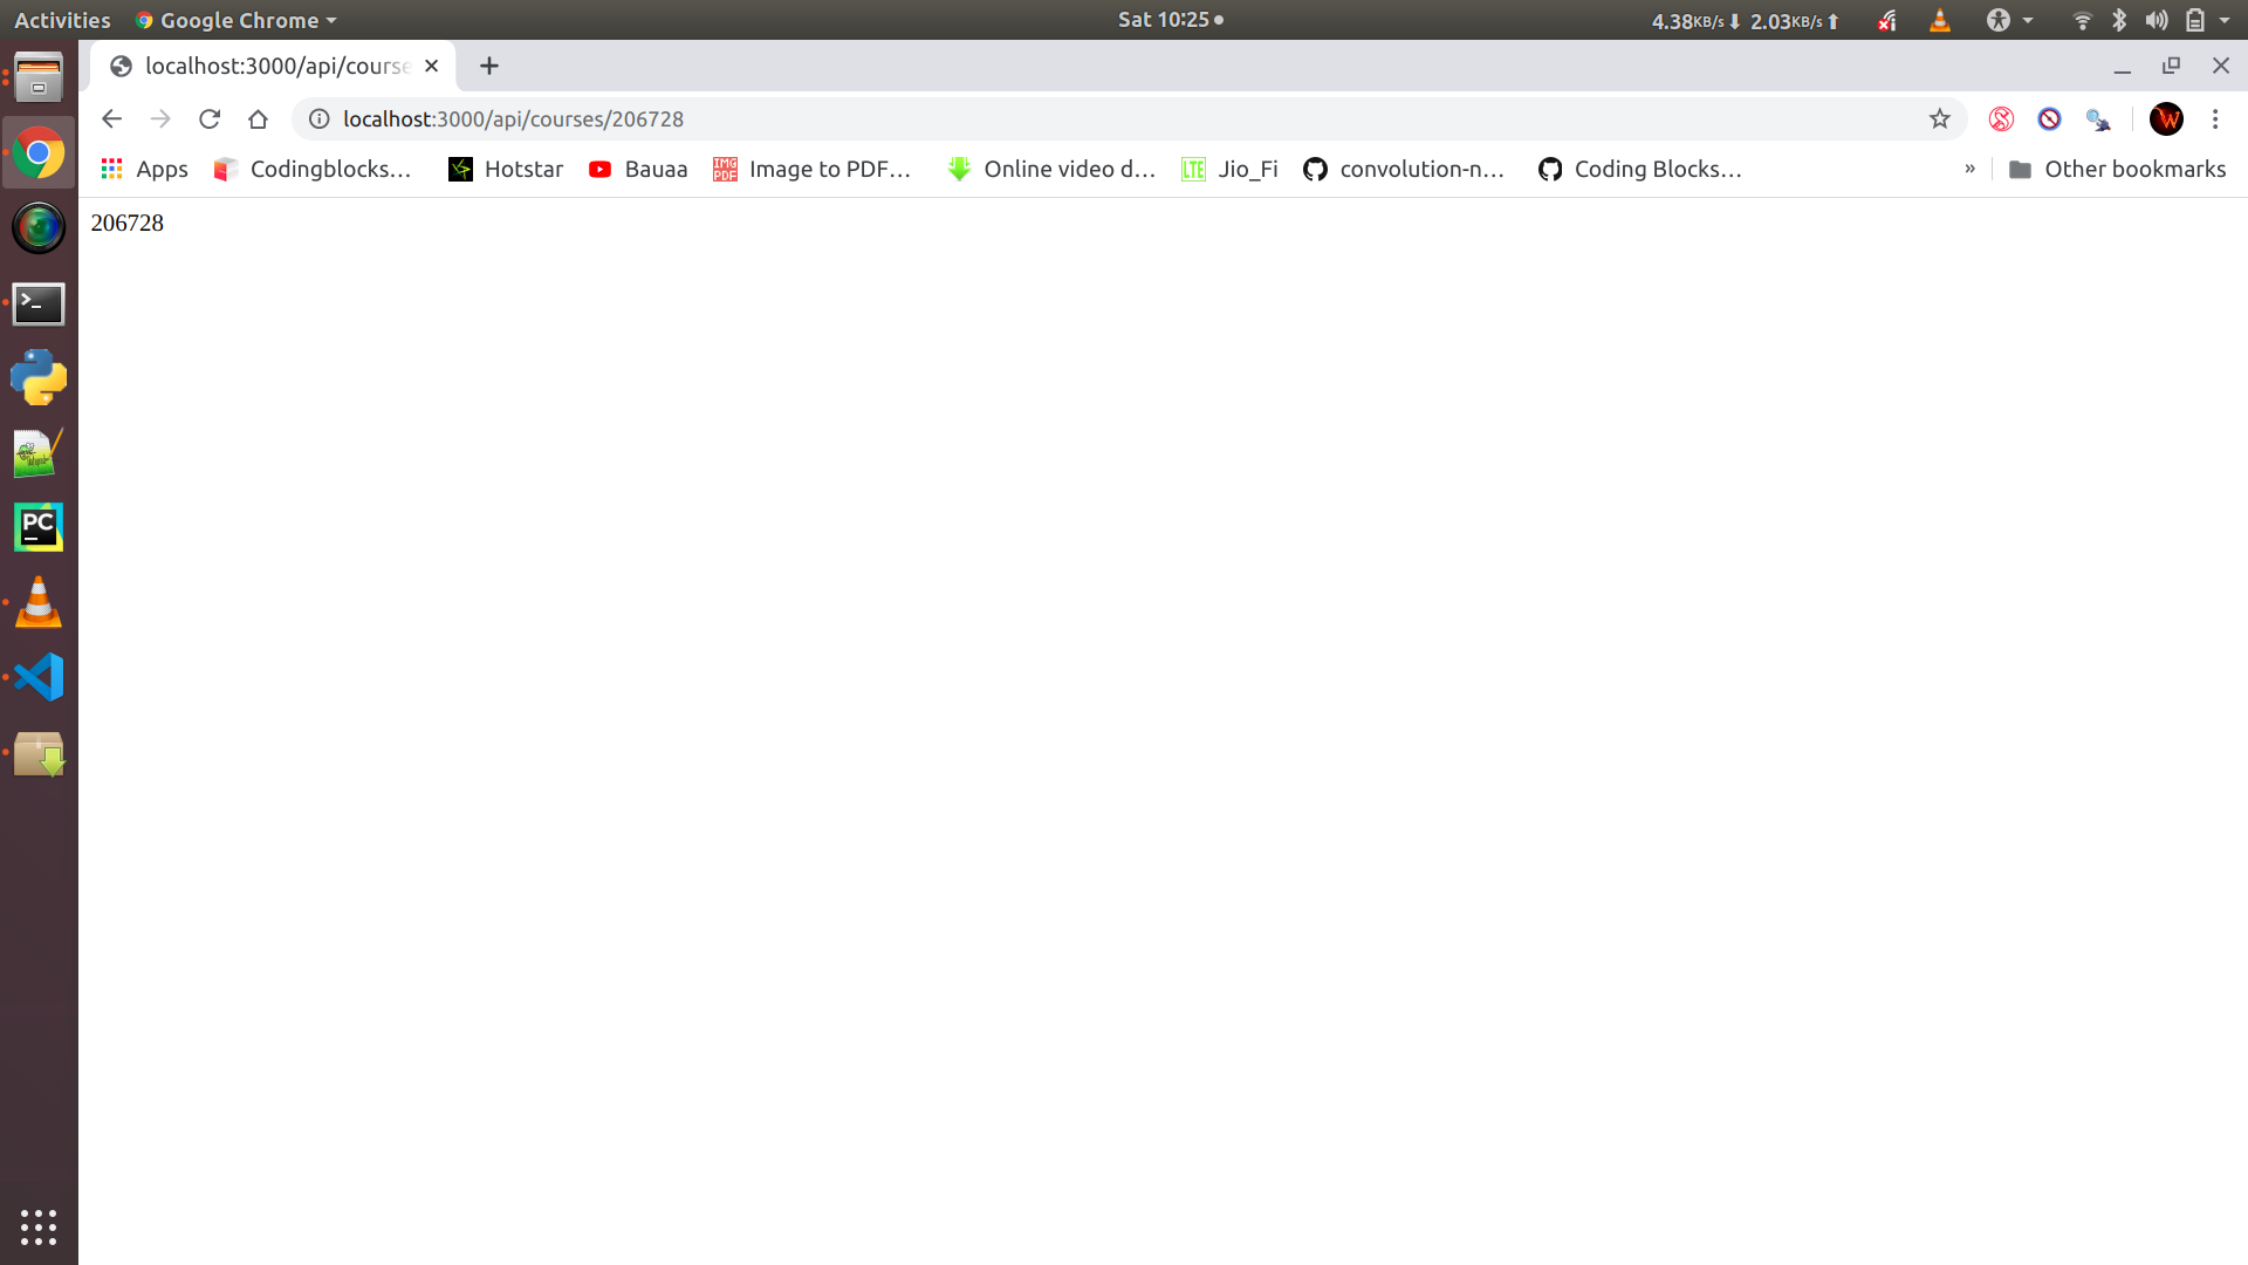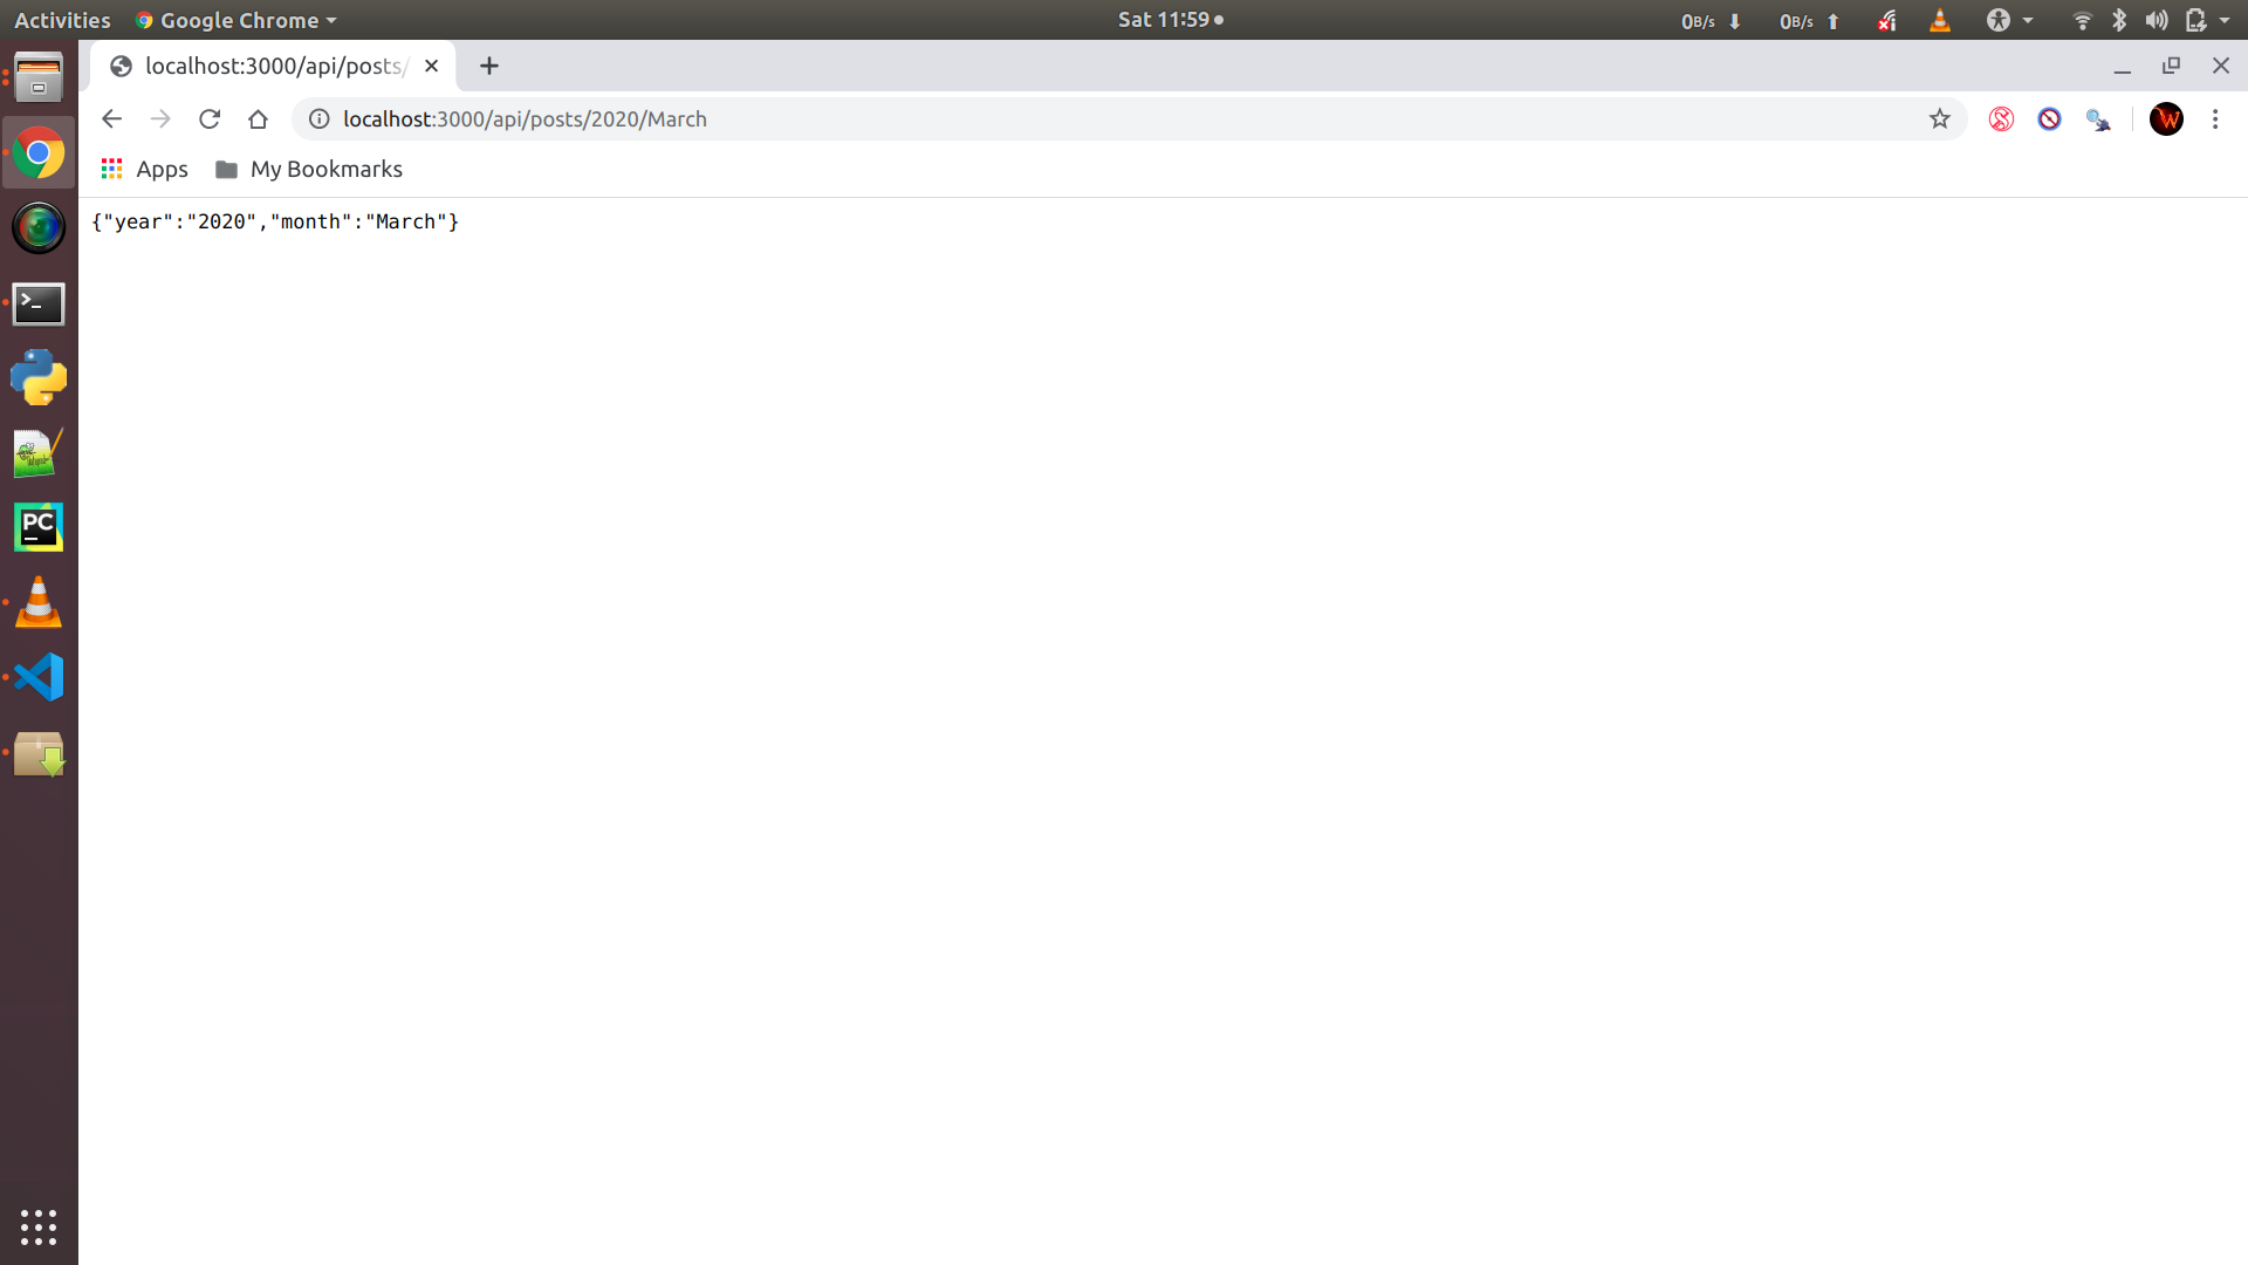DEBUG CONSOLE   PROBLEMS   OUTPUT   **TERMINAL**

2: node

```
dandy@My-Ubuntu:~/Keep/Node.js/04. Building RESTful API_s Using Express/Applications/07. Route Parameters$ nodemon in
dex.js
[nodemon] 2.0.2
[nodemon] to restart at any time, enter `rs`
[nodemon] watching dir(s): *.*
[nodemon] watching extensions: js,mjs,json
[nodemon] starting `node index.js`
Listening to port 3000 ....
[nodemon] restarting due to changes...
```

OUTLINE

Ln 17, Col 4   Spaces: 4   UTF-8   LF   Babel JavaScript   JavaScript Standard Style

206728

{"year":"2020","month":"March"}

{"sortBy":"name"}