

MySQL Exercise 6: Common Pitfalls of Grouped Queries

There are two main reasons grouped queries can cause problems, especially in MySQL:

- 1) MySQL gives the user the benefit of the doubt, and assumes we don't make (at least some kinds of) mistakes. Unfortunately, we do make those mistakes.
- 2) We commonly think about data as spreadsheets that allow you make calculations across rows and columns, and that allow you to keep both raw and aggregated data in the same spreadsheet. Relational databases don't work that way.

The way these issues cause problems are:

- 1) When we are working with a MySQL database, we incorrectly interpret non-sensical output from illogical queries, or
- 2) When we are working with a non-MySQL database platform, we struggle with trying to make queries that will never work because they ask for both aggregated and non-aggregated data.

In this lesson, we will learn what these issues look like.

1. Misinterpretations due to Aggregation Mismatches

Begin by loading the SQL library, connecting to the Dognition database, and setting the Dognition database as the default.

In [2]:

```
%load_ext sql
%sql mysql://studentuser:studentpw@localhost/dognitiondb
%sql USE dognitiondb
```

The sql extension is already loaded. To reload it, use:

```
%reload_ext sql
* mysql://studentuser:***@localhost/dognitiondb
0 rows affected.
```

Out[2]:

```
[]
```

Imagine that we would like to retrieve, for each breed_type in the Dognition database, the number of unique dog_guids associated with that breed_type and their weight. Let's try to write a query that reflects that request:

```
SELECT breed_type, COUNT(DISTINCT dog_guid) AS NumDogs, weight
FROM dogs
GROUP BY breed_type;
```

Now take a look at the output:

In [3]:

```
%%sql
SELECT breed_type, COUNT(DISTINCT dog_guid) AS NumDogs, weight
FROM dogs;

* mysql://studentuser:***@localhost/dognitiondb
1 rows affected.
```

Out[3]:

breed_type	NumDogs	weight
Pure Breed	35050	50

In [7]:

```
%%sql
SELECT DISTINCT breed_type, weight
FROM dogs
ORDER BY breed_type ASC;
```

```
* mysql://studentuser:***@localhost/dognitiondb
76 rows affected.
```

Out[7]:

	breed_type	weight
	Cross Breed	0
	Cross Breed	10
	Cross Breed	20
	Cross Breed	30
	Cross Breed	40
	Cross Breed	50
	Cross Breed	60
	Cross Breed	70
	Cross Breed	80
	Cross Breed	90
	Cross Breed	100
	Cross Breed	110
	Cross Breed	120
	Cross Breed	130
	Cross Breed	140
	Cross Breed	150
	Cross Breed	160
	Cross Breed	170
	Cross Breed	180
	Cross Breed	190
	Cross Breed	250
Mixed Breed/ Other/ I Don't Know		0
Mixed Breed/ Other/ I Don't Know		10
Mixed Breed/ Other/ I Don't Know		20
Mixed Breed/ Other/ I Don't Know		30
Mixed Breed/ Other/ I Don't Know		40
Mixed Breed/ Other/ I Don't Know		50
Mixed Breed/ Other/ I Don't Know		60
Mixed Breed/ Other/ I Don't Know		70
Mixed Breed/ Other/ I Don't Know		80
Mixed Breed/ Other/ I Don't Know		90
Mixed Breed/ Other/ I Don't Know		100
Mixed Breed/ Other/ I Don't Know		110
Mixed Breed/ Other/ I Don't Know		120
Mixed Breed/ Other/ I Don't Know		130
Mixed Breed/ Other/ I Don't Know		140
Mixed Breed/ Other/ I Don't Know		150
Mixed Breed/ Other/ I Don't Know		160
Mixed Breed/ Other/ I Don't Know		170
Mixed Breed/ Other/ I Don't Know		190
	Popular Hybrid	0
	Popular Hybrid	10
	Popular Hybrid	20
	Popular Hybrid	30
	Popular Hybrid	40
	Popular Hybrid	50
	Popular Hybrid	60
	Popular Hybrid	70
	Popular Hybrid	80
	Popular Hybrid	90
	Popular Hybrid	100
	Popular Hybrid	110
	Popular Hybrid	120
	Popular Hybrid	130

Popular Hybrid	140
Popular Hybrid	160
Pure Breed	0
Pure Breed	10
Pure Breed	20
Pure Breed	30
Pure Breed	40
Pure Breed	50
Pure Breed	60
Pure Breed	70
Pure Breed	80
Pure Breed	90
Pure Breed	100
Pure Breed	110
Pure Breed	120
Pure Breed	130
Pure Breed	140
Pure Breed	150
Pure Breed	160
Pure Breed	170
Pure Breed	180
Pure Breed	190

In [8]:

```
%%sql
SELECT COUNT(DISTINCT dog_guid) AS NumDogs
FROM dogs;
```

```
* mysql://studentuser:***@localhost/dognitiondb
1 rows affected.
```

Out[8]:

NumDogs
35050

In [6]:

```
%%sql
SELECT DISTINCT breed_type
FROM dogs;
```

```
* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.
```

Out[6]:

breed_type
Pure Breed
Mixed Breed/ Other/ I Don't Know
Cross Breed
Popular Hybrid

In [4]:

```
%%sql
SELECT breed_type, COUNT(DISTINCT dog_guid) AS NumDogs, weight
FROM dogs
GROUP BY breed_type;
```

```
* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.
```

Out[4]:

	breed_type	NumDogs	weight
	Cross Breed	5568	0
	Mixed Breed/ Other/ I Don't Know	9499	50
	Popular Hybrid	1160	70
	Pure Breed	18823	50

You immediately notice a few things: (1) the query accurately represents the fields I said I wanted; (2) the query executed without errors! Wonderful! (3) Cross Breed dogs weigh 0 pounds; and (4) the grammar of the sentence describing what I said I wanted seems a little confusing: "We would like to retrieve, for *each breed_type* in the Dognition database, *the number of* unique dog_guids associated with that breed_type and *their weight*."

All of these things you noticed are related. Let's address them in reverse order.

What's wrong with the sentence I wrote? One of the things I said I wanted was *the number of* unique dog_guids. This is a single number. I also said I wanted "their weight." "Their" implies many weight measurements, not one measurement. In order to make my grammar correct, I need my description of dog_guids and weight to either both be singular or both be plural. To make the logic behind the sentence make sense, I have to do a similar thing: either dog_guids and weight both need to be aggregated or dog_guids and weight both need to be non-aggregated.

It's useful to remember that SQL output is always a table. How could you construct a valid table that would have columns for aggregate counts and individual weight measurements at the same time? The answer is, you can't. One option is to disaggregate the count so that you have one column with dog_guids and another column with weight measurements for each dog_guid. The only other option is to aggregate the weight measurements so that you have one column with the total count of dog_guids and another column with the average (or some other kind of summary aggregation) weight measurement for the group the count represents.

That brings us to the next phenomenon we observed: Cross Breed dogs weigh 0 pounds. Well, unless the laws of gravity and physics have changed, that's not possible. Something strange must be happening in the weight field.

We've established that the question I posed and the query I executed don't make logical sense, yet the MySQL query did run! If there is no way to make a tabular output that fits what I asked for, what is MySQL outputting for us?

It turns out that MySQL resolves my poor query by choosing its own way to "summarize" the unaggregated field, which in our case is "weight." Rather than run an aggregation function that takes all the values in the weight column into account, though, it unpredictably populates the weight output column with one value from all the possible weight values within a given breed_type subset. Which value it chooses will be different depending on the original order of the raw data and the configuration of a database. This flexibility is very convenient when you know that all the values in a non-aggregated column are the same for the subsets of the data that correspond to the variable by which you are grouping. In fact, the visualization software Tableau (which is based in SQL language) recognized how frequently this type of situation arises and came up with a custom solution for its customers. Tableau incorporated an aggregation-like function called "ATTR" into its interface to let users say "I'm using an aggregation function here because SQL says I have to, but I know that this is a situation where all of the rows in each group will have the same value."

Tableau's approach is helpful because it forces users to acknowledge that a field in a query is supposed to be aggregated, and Tableau's formulas will crash if all the rows in a group do not have the same value. MySQL doesn't force users to do this. MySQL trusts users to know what they are doing, and will provide an output even if all the rows in a group do not have the same value. Unfortunately, this approach can cause havoc if you aren't aware of what you are asking MySQL to do and aren't familiar with your data.

Let's see a couple more first-hand examples of this tricky GROUP BY behavior. Let's assume you want to know the number of each kind of test completed in different months of the year.

You execute the following query:

```
SELECT test_name, MONTH(created_at) AS Month, COUNT(created_at) AS Num_Completed_Tests
FROM complete_tests
GROUP BY test_name
ORDER BY test_name ASC, Month ASC;
```

Question 1: What does the Month column represent in this output? Take a look and see what you think:

In [9]:

```
%%sql
SELECT test_name, MONTH(created_at) AS Month, COUNT(created_at) AS Num_Completed_Tests
FROM complete_tests
GROUP BY test_name
ORDER BY test_name ASC, Month ASC;
```

* mysql://studentuser:***@localhost/dognitiondb
40 rows affected.

Out[9]:

test_name	Month	Num_Completed_Tests
1 vs 1 Game	6	255
3 vs 1 Game	5	368
5 vs 1 Game	5	620
Arm Pointing	2	11452
Cover Your Eyes	2	7250
Delayed Cup Game	2	5271
Different Perspective	11	89
Expression Game	10	124
Eye Contact Game	2	14545
Eye Contact Warm-up	2	16238
Foot Pointing	2	9751
Impossible Task Game	4	532
Impossible Task Warm-up	4	539
Inferential Reasoning Game	2	4980
Inferential Reasoning Warm-up	2	5098
Memory versus Pointing	2	6525
Memory versus Smell	2	6163
Navigation Game	3	927
Navigation Learning	3	1054
Navigation Warm-up	3	1299
Numerosity Warm-Up	5	382
One Cup Warm-up	2	6785
Physical Reasoning Game	2	4255
Physical Reasoning Warm-up	2	4761
Self Control Game	9	132
Shaker Game	2	77
Shaker Warm-Up	2	81
Shared Perspective	11	83
Slide	8	147
Smell Game	7	168
Stair Game	12	112
Switch	8	137
Treat Warm-up	2	11737
Turn Your Back	2	7428
Two Cup Warm-up	2	6681
Warm-Up	6	873
Watching	2	8808
Watching - Part 2	2	7044
Yawn Game	2	19612
Yawn Warm-up	2	20863

Now try a similar query, but GROUP BY Month instead of test_name:

```
SELECT test_name, MONTH(created_at) AS Month, COUNT(created_at) AS Num_Completed_Tests
FROM complete_tests
GROUP BY Month
ORDER BY Month ASC, test_name ASC;
```

Question 2: What does test_name mean in this case? Try it out:

In [10]:

```
%%sql
SELECT test_name, MONTH(created_at) AS Month, COUNT(created_at) AS Num_Completed_Tests
FROM complete_tests
GROUP BY Month
ORDER BY test_name ASC, Month ASC;
```

* mysql://studentuser:***@localhost/dognitiondb
12 rows affected.

Out[10]:

test_name	Month	Num_Completed_Tests
Delayed Cup Game	1	11068
Delayed Cup Game	5	21013
Eye Contact Game	7	15977
Foot Pointing	6	23381
Inferential Reasoning Warm-up	11	12652
Inferential Reasoning Warm-up	12	10859
Memory versus Smell	8	13382
Physical Reasoning Game	4	7130
Yawn Warm-up	2	9122
Yawn Warm-up	3	9572
Yawn Warm-up	9	19853
Yawn Warm-up	10	39237

It looks like in both of these cases, MySQL is likely populating the unaggregated column with the first value it finds in that column within the first "group" of rows it is examining.

So how do we prevent this from happening?

The only way to be sure how the MySQL database will summarize a set of data in a SELECT clause is to tell it how to do so with an aggregate function.

I should have written my original request to read:

"I would like to know, for *each breed type* of dog, *the number of* unique Dog_Guids there are in the Dognition database and *the breed_type's average weight*."

The query that would have reflected this sentence would have executed an aggregate function for both Dog_Guids and weight. The output of these aggregate functions would be unambiguous, and would easily be represented in a single table.

2. Errors due to Aggregation Mismatches

It is important to note that the issues I described above are the consequence of mismatching aggregate and non-aggregate functions through the GROUP BY clause in MySQL, but other databases manifest the problem in a different way. Other databases won't allow you to run the queries described above at all. When you try to do so, you get an error message that sounds something like:

```
Column 'X' is invalid in the select list because it is not contained in either an aggregate function or the GROUP BY clause.
```

Especially when you are just starting to learn MySQL, these error messages can be confusing and infuriating. A good discussion of this problem can be found here:

<http://weblogs.sqlteam.com/jeffs/archive/2007/07/20/but-why-must-that-column-be-contained-in-an-aggregate.aspx>
(<http://weblogs.sqlteam.com/jeffs/archive/2007/07/20/but-why-must-that-column-be-contained-in-an-aggregate.aspx>)

As a way to prevent these logical mismatches or error messages, you will often hear a rule that "every non-aggregated field that is listed in the SELECT list *must* be listed in the GROUP BY list." You have just seen that this rule is not true in MySQL, which makes MySQL both more flexible and more tricky to work with. However, it is a useful rule of thumb for helping you avoid unknown mismatch errors.

3. By the way, even if you want to, there is no way to intentionally include aggregation mismatches in a single query

You might want to know the total number of unique User_Guids in the Dognition database, and in addition, the total number of unique User_Guids and average weight associated with each breed type. Given that you want to see the information efficiently to help you make decisions, you would like all of this information in one output. After all, that would be easy to do in Excel, given that all of this information could easily be summarized in a single worksheet.


To retrieve this information, you try one of the queries described above. Since you know the rule describing the relationship between fields in the SELECT and GROUP BY clauses, you write:

```
SELECT COUNT(DISTINCT dog_guid), breed_type, AVG(weight) AS avg_weight,  
FROM dogs  
GROUP BY breed_type;
```

The output to your query gives you four rows with the correct information, but it doesn't give you a count of the entire table without the groups being applied. Surely there must be a way to write a sophisticated query that can put these two pieces of information together for you, right?

Hopefully the discussion in the section above has already made it clear that the answer to this has to be "no." The output of every SQL query is a table. Can you think of a single table that could logically contain aggregated and non-aggregated data? You could put both types of information in an Excel worksheet, but not a single table.

There's yet another more practical reason the information you want can't be selected in a single query. The order of SQL queries is meant to reflect the way we write sentences, but in actuality they are actually executed in a different order than we write them. The cartoon below shows the order we write the queries being sent to the database at the top of the funnel, and the order the database usually executes the queries on the conveyor belt.

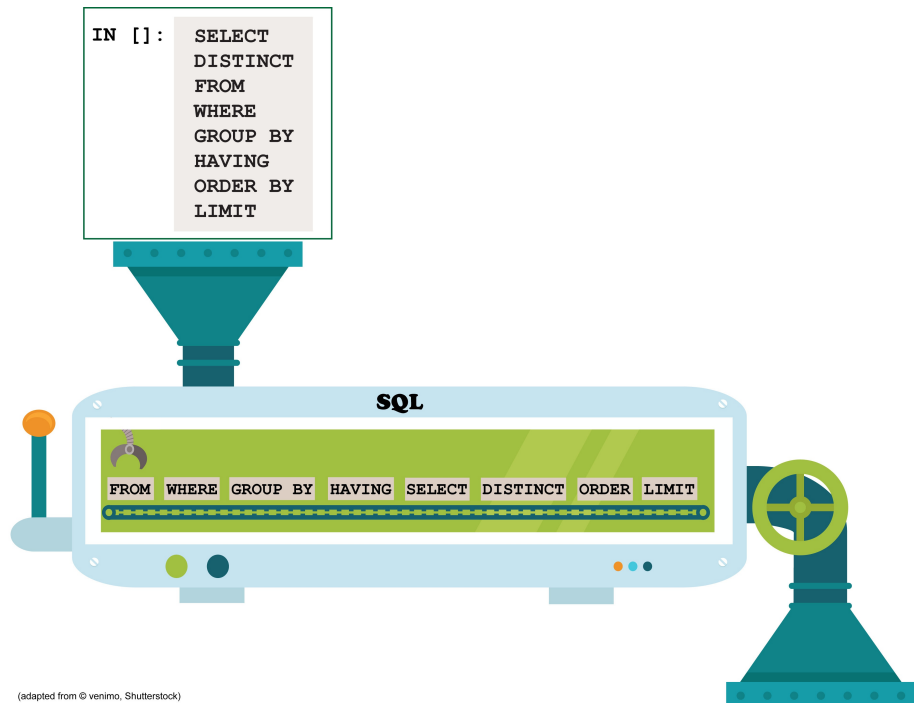

This diagram shows you that data are actually grouped before the SELECT expressions are applied. That means that when a GROUP BY expression is included in an SQL query, there is no way to use a SELECT statement to summarize data that cross multiple groups. The data will have already been separated by the time the SELECT statement is applied. The only way to get the information you want is to write two separate queries. This concept can be difficult to understand when you start using SQL for the first time after exclusively using Excel, but soon you will be come accustomed to it.

By the way, this diagram also shows you why some platforms and some queries in some platforms crash when you try to use aliases or derived fields in WHERE, GROUP BY, or HAVING clauses. If the SELECT statement hasn't been run yet, the alias or derived fields won't be available (as a reminder, some database systems--like MySQL--have found ways to overcome this issue). On the other hand, SELECT is executed before ORDER BY clauses. That means most database systems should be able to use aliases and derived fields in ORDER BY clauses.

Now that you are knowledgeable about the common pitfalls caused by GROUP BY, you are ready to perform one of the most powerful and fundamental utilities of a relational database: JOINS! Watch the next video to learn more about how joins work.

In [12]:

```
%%sql
SELECT COUNT(DISTINCT dog_guid) AS Num_Dog, breed_type, AVG(weight) AS Avg_Weight
From dogs
GROUP BY breed_type;
```

* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.

Out[12]:

Num_Dog	breed_type	Avg_Weight
5568	Cross Breed	37.3509
9499	Mixed Breed/ Other/ I Don't Know	38.3682
1160	Popular Hybrid	36.8103
18823	Pure Breed	42.0353

In [13]:

```
%%sql
SELECT COUNT(DISTINCT dog_guid) AS Num_Dog, breed_type, weight
From dogs
GROUP BY breed_type;
```

* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.

Out[13]:

Num_Dog	breed_type	weight
5568	Cross Breed	0
9499	Mixed Breed/ Other/ I Don't Know	50
1160	Popular Hybrid	70
18823	Pure Breed	50

In [14]:

```
%%sql
SELECT COUNT(DISTINCT dog_guid) AS Num_Dog, breed_type
From dogs
GROUP BY breed_type;
```

* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.

Out[14]:

Num_Dog	breed_type
5568	Cross Breed
9499	Mixed Breed/ Other/ I Don't Know
1160	Popular Hybrid
18823	Pure Breed

In [17]:

```
%%sql
SELECT DISTINCT dog_guid AS Num_Dog, breed_type, AVG(weight) AS Avg_Weight, weight
From dogs
GROUP BY breed_type;
```

* mysql://studentuser:***@localhost/dognitiondb
4 rows affected.

Out[17]:

Num_Dog	breed_type	Avg_Weight	weight
fd27c5be-7144-11e5-ba71-058fbc01cf0b	Cross Breed	37.3509	0
fd27bbbe-7144-11e5-ba71-058fbc01cf0b	Mixed Breed/ Other/ I Don't Know	38.3682	50
fd27d248-7144-11e5-ba71-058fbc01cf0b	Popular Hybrid	36.8103	70
fd27b272-7144-11e5-ba71-058fbc01cf0b	Pure Breed	42.0353	50

In [19]:

```
%%sql
SELECT COUNT(DISTINCT dog_guid) AS Num_Dog, breed_type, AVG(weight) AS Avg_Weight, weight
From dogs;
```

```
* mysql://studentuser:***@localhost/dognitiondb
1 rows affected.
```

Out[19]:

Num_Dog	breed_type	Avg_Weight	weight
35050	Pure Breed	40.1244	50

In []: