


Lecture slides by Kevin Wayne  
 Copyright © 2005 Pearson–Addison Wesley  
 Copyright © 2013 Kevin Wayne  
<http://www.cs.princeton.edu/~wayne/kleinberg-tardos>

Last updated on Nov 24, 2014, 8:24 AM

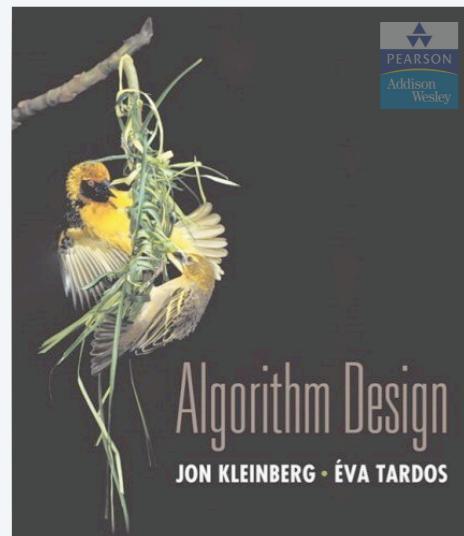

SECTION 10.2

## INTRACTABILITY III

- ▶ *special cases: trees*
- ▶ *special cases: planarity*
- ▶ *approximation algorithms*
- ▶ *exact exponential algorithms*

## Coping with NP-completeness

Q. Suppose I need to solve an **NP-hard** problem. What should I do?

- A. Sacrifice one of three desired features.
- Solve **arbitrary instances** of the problem.
  - Solve problem to **optimality**.
  - Solve problem in **polynomial time**.

### Coping strategies.

- Design algorithms **for special cases** of the problem.
- Design **approximation algorithms** or **heuristics**.
- Design algorithms that may take **exponential time**.




2

## Independent set on trees

**Independent set on trees.** Given a **tree**, find a maximum cardinality subset of nodes such that no two are adjacent.

**Fact.** A tree has at least one node that is a leaf (degree = 1).

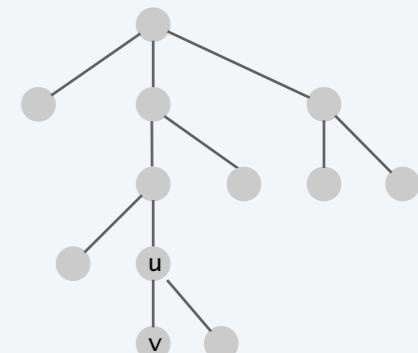

**Key observation.** If node  $v$  is a leaf, there exists a max cardinality independent set containing  $v$ .

**Pf.** [exchange argument]

- Consider a max cardinality independent set  $S$ .
- If  $v \in S$ , we're done.
- Let  $(u, v)$  be some edge.
  - if  $u \notin S$  and  $v \notin S$ , then  $S \cup \{v\}$  is independent  $\Rightarrow S$  not maximum
  - if  $u \in S$  and  $v \notin S$ , then  $S \cup \{v\} - \{u\}$  is independent ▀

4

## Independent set on trees: greedy algorithm

**Theorem.** The following greedy algorithm finds a max cardinality independent set in forests (and hence trees).

**Pf.** Correctness follows from the previous key observation. ▀

### INDEPENDENT-SET-IN-A-FOREST ( $F$ )

$S \leftarrow \emptyset$ .

**WHILE** ( $F$  has at least 1 edge)

$e \leftarrow (u, v)$  such that  $v$  is a leaf.

$S \leftarrow S \cup \{v\}$ .

$F \leftarrow F - \{u, v\}$ . ← delete  $u$  and  $v$  and all incident edges

**RETURN**  $S \cup \{nodes remaining in F\}$ .

**Remark.** Can implement in  $O(n)$  time by considering nodes in postorder.

## Weighted independent set on trees


**Weighted independent set on trees.** Given a tree and node weights  $w_v > 0$ , find an independent set  $S$  that maximizes  $\sum_{v \in S} w_v$ .

**Dynamic programming solution.** Root tree at some node, say  $r$ .

- $OPT_{in}(u) = \max$  weight independent set of subtree rooted at  $u$ , containing  $u$ .
- $OPT_{out}(u) = \max$  weight independent set of subtree rooted at  $u$ , not containing  $u$ .
- $OPT = \max \{ OPT_{in}(r), OPT_{out}(r) \}$ .

$$OPT_{in}(u) = w_u + \sum_{v \in \text{children}(u)} OPT_{out}(v)$$

$$OPT_{out}(u) = \sum_{v \in \text{children}(u)} \max \{ OPT_{in}(v), OPT_{out}(v) \}$$

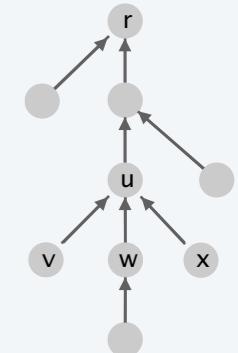

## Weighted independent set on trees: dynamic programming algorithm

**Theorem.** The dynamic programming algorithm finds a max weighted independent set in a tree in  $O(n)$  time.

can also find independent set itself  
(not just value)

### WEIGHTED-INDEPENDENT-SET-IN-A-TREE ( $T$ )

Root the tree  $T$  at a node  $r$ .

$S \leftarrow \emptyset$ .

**FOREACH** (node  $u$  of  $T$  in postorder)

**IF** ( $u$  is a leaf)

$M_{in}[u] = w_u$ .  
        ensures a node is visited  
        after all its children

$M_{out}[u] = 0$ .

**ELSE**


$M_{in}[u] = w_u + \sum_{v \in \text{children}(u)} M_{out}[v]$ .

$M_{out}[u] = \sum_{v \in \text{children}(u)} \max \{ M_{in}[v], M_{out}[v] \}$ .


**RETURN**  $\max \{ M_{in}[r], M_{out}[r] \}$ .

## NP-hard problems on trees: context

**Independent set on trees.** Tractable because we can find a node that breaks the communication among the subproblems in different subtrees.

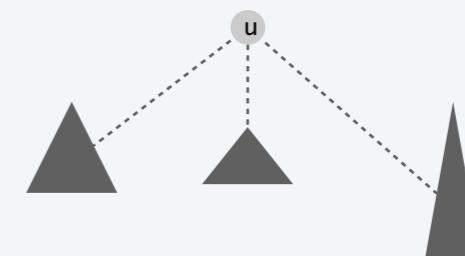

**Linear-time on trees.** VERTEX-COVER, DOMINATING-SET, GRAPH-ISOMORPHISM, ...

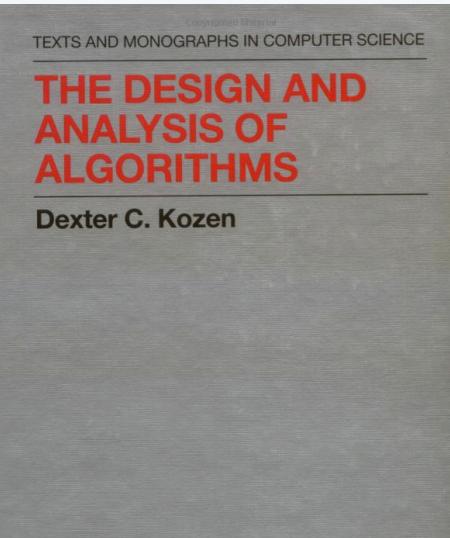




## SECTION 23.1

# INTRACTABILITY III

- ▶ *special cases: trees*
- ▶ *special cases: planarity*
- ▶ *approximation algorithms*
- ▶ *exact exponential algorithms*

## Planarity

**Def.** A graph is **planar** if it can be embedded in the plane in such a way that no two edges cross.

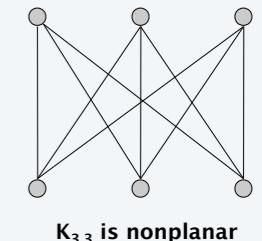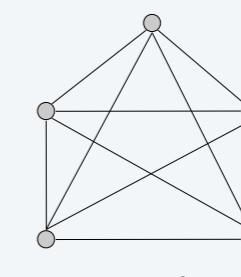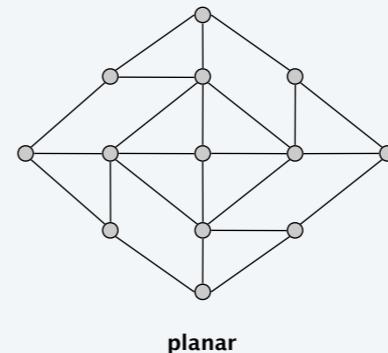

**Applications.** VLSI circuit design, computer graphics, ...

## Planarity testing

**Theorem.** [Hopcroft-Tarjan 1974] There exists an  $O(n)$  time algorithm to determine whether a graph is planar.

simple planar graph  
has at  $\leq 3n$  edges

### Efficient Planarity Testing

JOHN HOPCROFT AND ROBERT TARJAN

Cornell University, Ithaca, New York

**ABSTRACT.** This paper describes an efficient algorithm to determine whether an arbitrary graph  $G$  can be embedded in the plane. The algorithm may be viewed as an iterative version of a method originally proposed by Auslander and Parter and correctly formulated by Goldstein. The algorithm uses depth-first search and has  $O(V)$  time and space bounds, where  $V$  is the number of vertices in  $G$ . An ALGOL implementation of the algorithm successfully tested graphs with as many as 900 vertices in less than 12 seconds.

## Polynomial time detour

**Graph minor theorem.** [Robertson-Seymour 1980s]

**Pf of theorem.** Tour de force.

**Corollary.** There exist an  $O(n^3)$  algorithm to determine if a graph can be embedded in the torus in such a way that no two edges cross.

**Mind boggling fact 1.** The proof is highly nonconstructive!

**Mind boggling fact 2.** The constant of proportionality is enormous!

more than  $2^{1212121(n/2)}$

“Unfortunately, for any instance  $G = (V, E)$  that one could fit into the known universe, one would easily prefer  $n^{70}$  to even constant time, if that constant had to be one of Robertson and Seymour’s.” — David Johnson

**Theorem.** There exists an explicit  $O(n)$  algorithm.

**Practice.** LEDA implementation guarantees  $O(n^3)$ .

## Problems on planar graphs

**Fact 0.** Many graph problems can be solved faster in planar graphs.

**Ex.** Shortest paths, max flow, MST, matchings, ...

**Fact 1.** Some **NP**-complete problems become tractable in planar graphs.

**Ex.** MAX-CUT, ISING, CLIQUE, GRAPH-ISOMORPHISM, 4-COLOR, ...

**Fact 2.** Other **NP**-complete problems become easier in planar graphs.

**Ex.** INDEPENDENT-SET, VERTEX-COVER, TSP, STEINER-TREE, ...

An  $O(n \log n)$  Algorithm for Maximum  $st$ -Flow  
in a Directed Planar Graph

GLENORA BORRADAILE AND PHILIP KLEIN

Brown University, Providence, Rhode Island

Abstract. We give the first correct  $O(n \log n)$  algorithm for finding a maximum  $st$ -flow in a directed planar graph. After a preprocessing step that consists in finding single-source shortest-path distances in the dual, the algorithm consists of repeatedly saturating the leftmost residual  $s$ -to- $t$  path.

SIAM J. COMPUT.  
Vol. 9, No. 3, August 1980

© 1980 Society for Industrial and Applied Mathematics  
0097-5397/80/0903-0013 \$01.00/0

### APPLICATIONS OF A PLANAR SEPARATOR THEOREM\*


RICHARD J. LIPTON† AND ROBERT ENDRE TARJAN‡

**Abstract.** Any  $n$ -vertex planar graph has the property that it can be divided into components of roughly equal size by removing only  $O(\sqrt{n})$  vertices. This separator theorem, in combination with a divide-and-conquer strategy, leads to many new complexity results for planar graph problems. This paper describes some of these results.

\*This research was partially supported by grants from the National Science Foundation and the Defense Advanced Research Projects Agency. †AT&T Bell Laboratories, Murray Hill, New Jersey. ‡Department of Computer Science, Princeton University, Princeton, New Jersey. Received June 1979; revised January 1980.


## Planar graph 3-colorability

**PLANAR-3-COLOR.** Given a planar graph, can it be colored using 3 colors so that no two adjacent nodes have the same color?

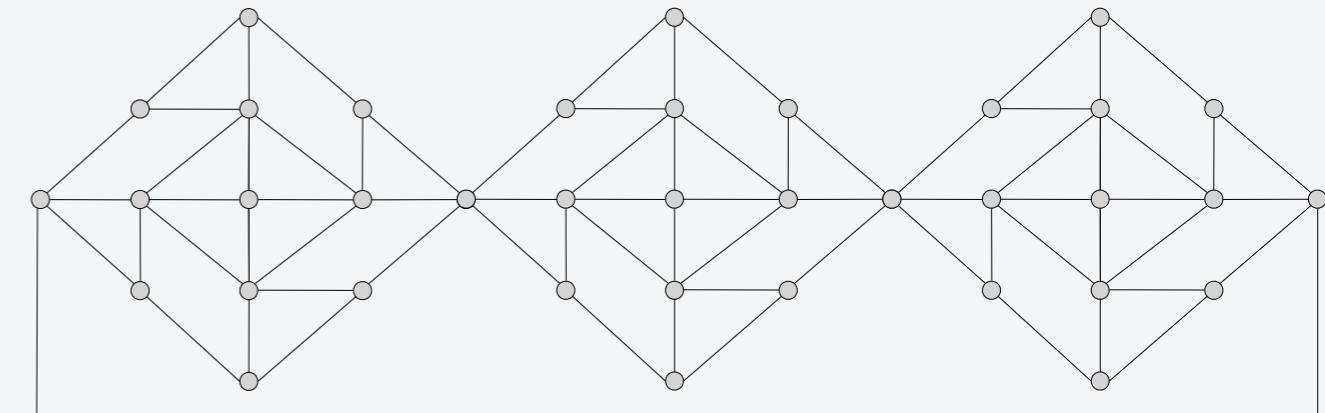

## Planar map 3-colorability


**PLANAR-MAP-3-COLOR.** Given a planar map, can it be colored using 3 colors so that no two adjacent regions have the same color?

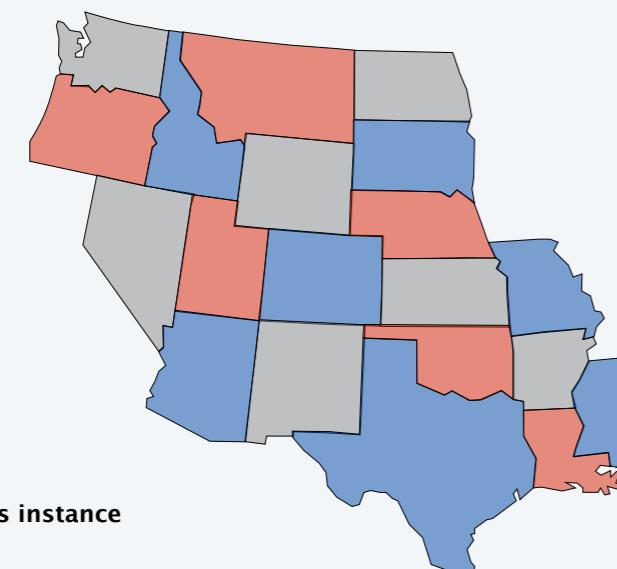

yes instance

## Planar map 3-colorability

**PLANAR-MAP-3-COLOR.** Given a planar map, can it be colored using 3 colors so that no two adjacent regions have the same color?

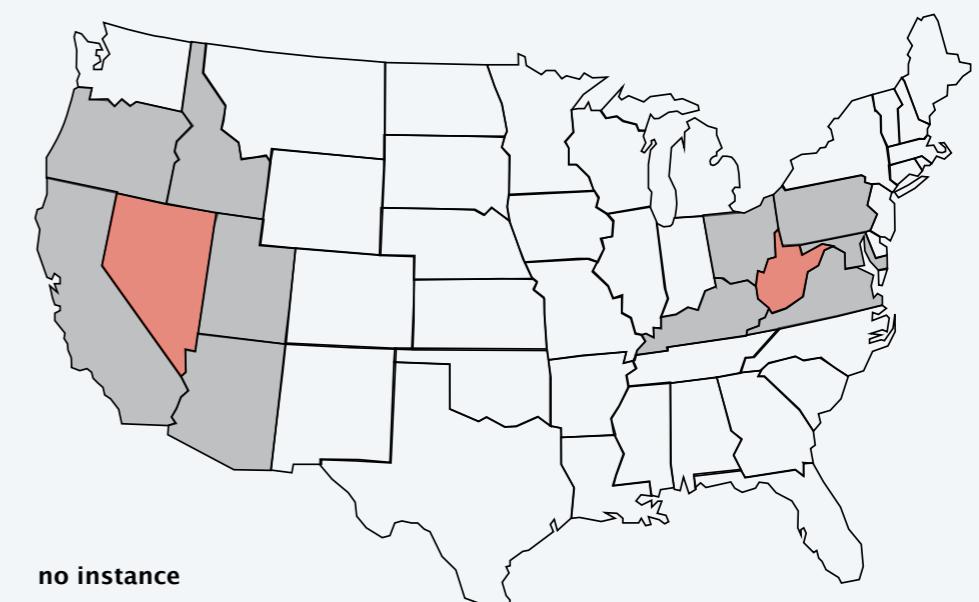


no instance

## Planar graph and map 3-colorability reduce to one another

**Theorem.** PLANAR-3-COLOR  $\equiv_P$  PLANAR-MAP-3-COLOR.

Pf sketch.

- Nodes correspond to regions.
- Two nodes are adjacent iff they share a nontrivial border.

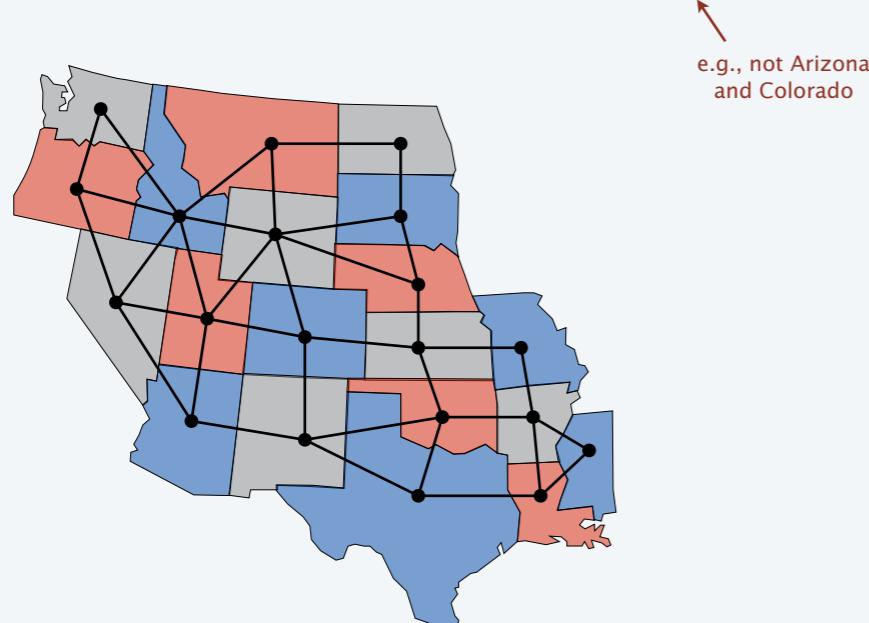

## Planar 3-colorability is NP-complete

**Theorem.** PLANAR-3-COLOR  $\in$  NP-complete.

Pf.

- Easy to see that PLANAR-3-COLOR  $\in$  NP.
- We show 3-COLOR  $\leq_P$  PLANAR-3-COLOR.
- Given 3-COLOR instance  $G$ , we construct an instance of PLANAR-3-COLOR that is 3-colorable iff  $G$  is 3-colorable.


17

18

## Planar 3-colorability is NP-complete

**Lemma.**  $W$  is a planar graph such that:

- In any 3-coloring of  $W$ , opposite corners have the same color.
- Any assignment of colors to the corners in which opposite corners have the same color extends to a 3-coloring of  $W$ .

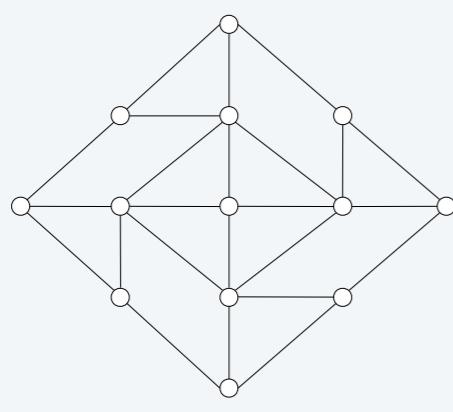


planar gadget  $W$

## Planar 3-colorability is NP-complete


**Lemma.**  $W$  is a planar graph such that:

- In any 3-coloring of  $W$ , opposite corners have the same color.
- Any assignment of colors to the corners in which opposite corners have the same color extends to a 3-coloring of  $W$ .

Pf. The only 3-colorings (modulo permutations) of  $W$  are shown below. ■

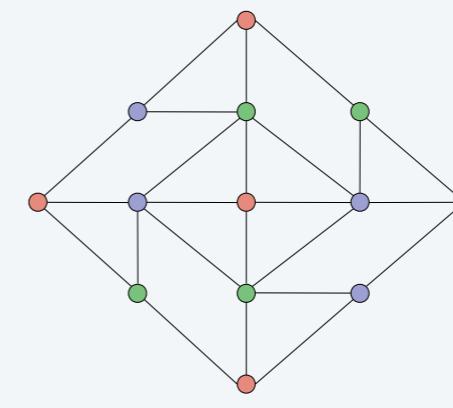

planar gadget  $W$

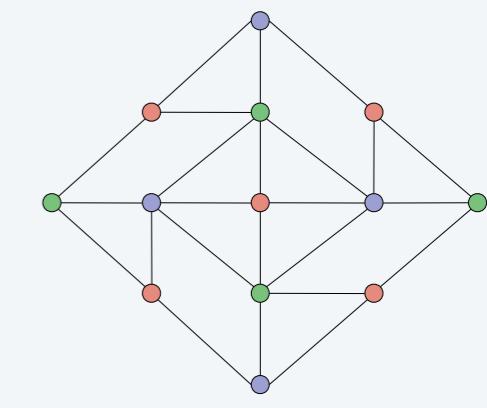

19


20

## Planar 3-colorability is NP-complete

**Construction.** Given instance  $G$  of 3-COLOR, draw  $G$  in plane, letting edges cross. Form planar  $G'$  by replacing each edge crossing with planar gadget  $W$ .

**Lemma.**  $G$  is 3-colorable iff  $G'$  is 3-colorable.

- In any 3-coloring of  $W$ ,  $a \neq a'$  and  $b \neq b'$ .
- If  $a \neq a'$  and  $b \neq b'$  then can extend to a 3-coloring of  $W$ .

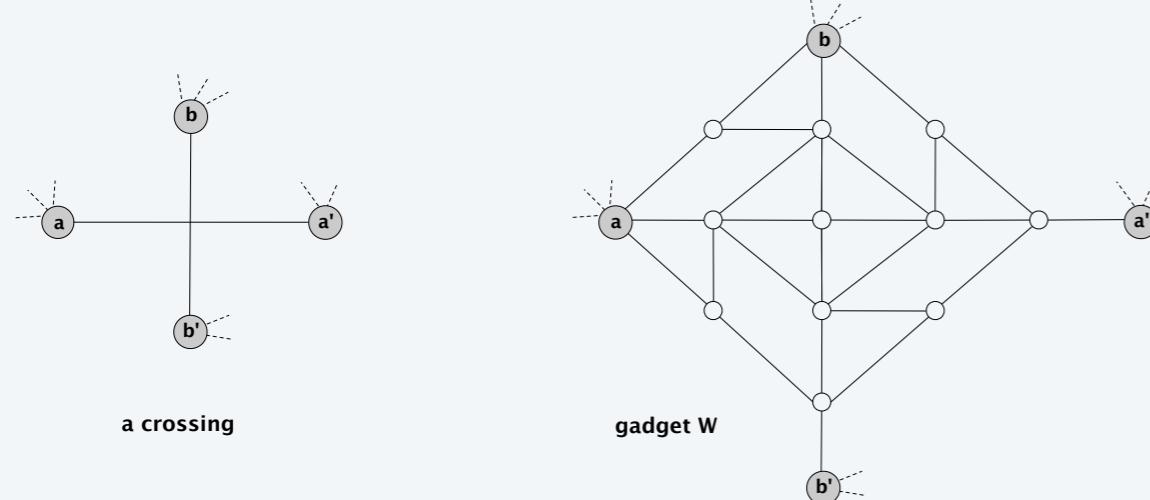


21

## Planar 3-colorability is NP-complete

**Construction.** Given instance  $G$  of 3-COLOR, draw  $G$  in plane, letting edges cross. Form planar  $G'$  by replacing each edge crossing with planar gadget  $W$ .

**Lemma.**  $G$  is 3-colorable iff  $G'$  is 3-colorable.

- In any 3-coloring of  $W$ ,  $a \neq a'$  and  $b \neq b'$ .
- If  $a \neq a'$  and  $b \neq b'$  then can extend to a 3-coloring of  $W$ .


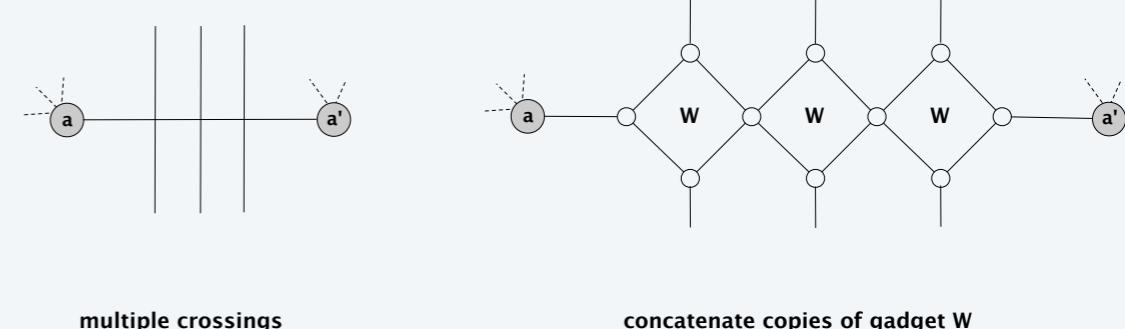


22

## Planar map k-colorability

**Theorem.** [Appel-Haken 1976] Every planar map is 4-colorable.

- Resolved century-old open problem.
- Used 50 days of computer time to deal with many special cases.
- First major theorem to be proved using computer.

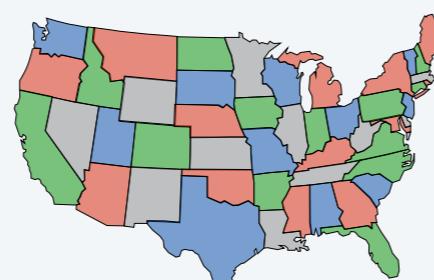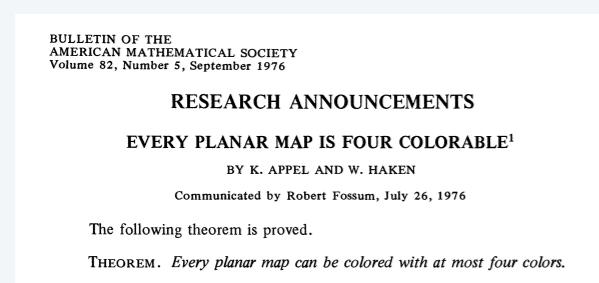

## Remarks.

- Appel-Haken yields  $O(n^4)$  algorithm to 4-color a planar map.
- Best known:  $O(n^2)$  to 4-color;  $O(n)$  to 5-color.
- Determining whether 3 colors suffice is NP-complete.

## Polynomial-time special cases NP-hard problems

**Trees.** VERTEX-COVER, INDEPENDENT-SET, DOMINATING-SET, GRAPH-ISOMORPHISM, ...


**Bipartite graphs.** VERTEX-COVER, 2-COLOR, ...

**Chordal graphs.** K-COLOR, CLIQUE, INDEPENDENT-SET, ...

**Planar graphs.** MAX-CUT, ISING, CLIQUE, GRAPH-ISOMORPHISM, 4-COLOR, ...

**Bounded treewidth.** 3-COLOR, HAM-CYCLE, INDEPENDENT-SET, GRAPH-ISOMORPHISM.

**Small integers.** KNAPSACK, PARTITION, SUBSET-SUM, ...

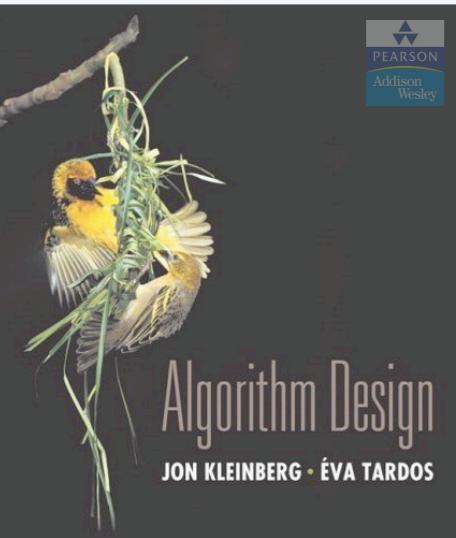

## SECTION 11.8

# INTRACTABILITY III

- ▶ *special cases: trees*
- ▶ *special cases: planarity*
- ▶ *approximation algorithms*
- ▶ *exact exponential algorithms*



## Approximation algorithms

### $\rho$ -approximation algorithm.

- Guaranteed to run in poly-time.
- Guaranteed to solve arbitrary instances of the problem.
- Guaranteed to find solution within ratio  $\rho$  of true optimum.

**Ex.** Given a graph  $G$ , the greedy algorithms finds a VERTEX-COVER that uses  $\leq 2 \text{OPT}(G)$  vertices in  $O(m + n)$  time.

**Challenge.** Need to prove a solution's value is close to optimum value, without even knowing what optimum value is!

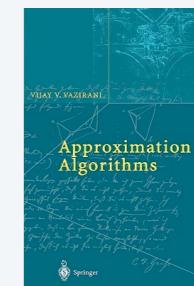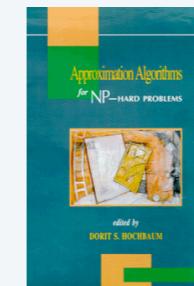

## Knapsack problem

### Knapsack problem.

- Given  $n$  objects and a knapsack.
- Item  $i$  has value  $v_i > 0$  and weighs  $w_i > 0$ . ← we assume  $w_i \leq W$  for each  $i$
- Knapsack has weight limit  $W$ .
- Goal: fill knapsack so as to maximize total value.

**Ex:**  $\{3, 4\}$  has value 40.

item	value	weight
1	1	1
2	6	2
3	18	5
4	22	6
5	28	7

original instance ( $W = 11$ )

## Knapsack is NP-complete

**KNAPSACK.** Given a set  $X$ , weights  $w_i \geq 0$ , values  $v_i \geq 0$ , a weight limit  $W$ , and a target value  $V$ , is there a subset  $S \subseteq X$  such that:

$$\begin{aligned} \sum_{i \in S} w_i &\leq W \\ \sum_{i \in S} v_i &\geq V \end{aligned}$$

**SUBSET-SUM.** Given a set  $X$ , values  $u_i \geq 0$ , and an integer  $U$ , is there a subset  $S \subseteq X$  whose elements sum to exactly  $U$ ?

**Theorem.**  $\text{SUBSET-SUM} \leq_P \text{KNAPSACK}$ .

**Pf.** Given instance  $(u_1, \dots, u_n, U)$  of SUBSET-SUM, create KNAPSACK instance:

$$\begin{aligned} v_i = w_i = u_i &\quad \sum_{i \in S} u_i \leq U \\ V = W = U &\quad \sum_{i \in S} u_i \geq U \end{aligned}$$

## Knapsack problem: dynamic programming I

Def.  $OPT(i, w)$  = max value subset of items  $1, \dots, i$  with weight limit  $w$ .

Case 1.  $OPT$  does not select item  $i$ .

- $OPT$  selects best of  $1, \dots, i-1$  using up to weight limit  $w$ .

Case 2.  $OPT$  selects item  $i$ .

- New weight limit  $= w - w_i$ .
- $OPT$  selects best of  $1, \dots, i-1$  using up to weight limit  $w - w_i$ .

$$OPT(i, w) = \begin{cases} 0 & \text{if } i = 0 \\ OPT(i-1, w) & \text{if } w_i > w \\ \max\{OPT(i-1, w), v_i + OPT(i-1, w - w_i)\} & \text{otherwise} \end{cases}$$

Theorem. Computes the optimal value in  $O(nW)$  time.

- Not polynomial in input size.
- Polynomial in input size if weights are small integers.

## Knapsack problem: dynamic programming II

Def.  $OPT(i, v)$  = min weight of a knapsack for which we can obtain a solution of value  $\geq v$  using a subset of items  $1, \dots, i$ .

Note. Optimal value is the largest value  $v$  such that  $OPT(i, v) \leq W$ .

Case 1.  $OPT$  does not select item  $i$ .

- $OPT$  selects best of  $1, \dots, i-1$  that achieves value  $v$ .

Case 2.  $OPT$  selects item  $i$ .

- Consumes weight  $w_i$ , need to achieve value  $v - v_i$ .
- $OPT$  selects best of  $1, \dots, i-1$  that achieves value  $v - v_i$ .

$$OPT(i, v) = \begin{cases} 0 & \text{if } v \leq 0 \\ \infty & \text{if } i = 0 \text{ and } v > 0 \\ \min\{OPT(i-1, v), w_i + OPT(i-1, v - v_i)\} & \text{otherwise} \end{cases}$$

## Knapsack problem: dynamic programming II

Theorem. Dynamic programming algorithm II computes the optimal value in  $O(n^2 v_{max})$  time, where  $v_{max}$  is the maximum of any value.

Pf.

- The optimal value  $V^* \leq n v_{max}$ .
- There is one subproblem for each item and for each value  $v \leq V^*$ .
- It takes  $O(1)$  time per subproblem. ■

Remark 1. Not polynomial in input size!

Remark 2. Polynomial time if values are small integers.

29

30

## Knapsack problem: polynomial-time approximation scheme

Intuition for approximation algorithm.

- Round all values up to lie in smaller range.
- Run dynamic programming algorithm II on rounded instance.
- Return optimal items in rounded instance.

item	value	weight	item	value	weight
1	934221	1	1	1	1
2	5956342	2	2	6	2
3	17810013	5	3	18	5
4	21217800	6	4	22	6
5	27343199	7	5	28	7

original instance ( $W = 11$ )

rounded instance ( $W = 11$ )

31

32

## Knapsack problem: polynomial-time approximation scheme

### Round up all values:

- $v_{max}$  = largest value in original instance.
- $\varepsilon$  = precision parameter.
- $\theta$  = scaling factor =  $\varepsilon v_{max} / n$ .

$$\bar{v}_i = \left\lceil \frac{v_i}{\theta} \right\rceil \theta, \quad \hat{v}_i = \left\lceil \frac{v_i}{\theta} \right\rceil$$

**Observation.** Optimal solutions to problem with  $\bar{v}$  are equivalent to optimal solutions to problem with  $\hat{v}$ .

**Intuition.**  $\bar{v}$  close to  $v$  so optimal solution using  $\bar{v}$  is nearly optimal;  $\hat{v}$  small and integral so dynamic programming algorithm II is fast.

## Knapsack problem: polynomial-time approximation scheme

Round up all values:  $\bar{v}_i = \left\lceil \frac{v_i}{\theta} \right\rceil \theta$

**Theorem.** If  $S$  is solution found by rounding algorithm and  $S^*$  is any other feasible solution, then

$$(1+\varepsilon) \sum_{i \in S} v_i \geq \sum_{i \in S^*} v_i$$

**Pf.** Let  $S^*$  be any feasible solution satisfying weight constraint.

$$\begin{aligned} \sum_{i \in S^*} v_i &\leq \sum_{i \in S^*} \bar{v}_i && \text{always round up} \\ &\leq \sum_{i \in S} \bar{v}_i && \text{solve rounded instance optimally} \\ &\leq \sum_{i \in S} (v_i + \theta) && \text{never round up by more than } \theta \\ &\leq \sum_{i \in S} v_i + n\theta && |S| \leq n \\ &\leq (1+\varepsilon) \sum_{i \in S} v_i && \text{DP alg can take } v_{max} \\ &&& \downarrow \\ &&& n\theta = \varepsilon v_{max}, \quad v_{max} \leq \sum_{i \in S} v_i \end{aligned}$$

33

34

## Knapsack problem: polynomial-time approximation scheme

**Theorem.** For any  $\varepsilon > 0$ , the rounding algorithm computes a feasible solution whose value is within a  $(1 + \varepsilon)$  factor of the optimum in  $O(n^3 / \varepsilon)$  time.

**Pf.**

- We have already proved the accuracy bound.
- Dynamic program II running time is  $O(n^2 \hat{v}_{max})$ , where

$$\hat{v}_{max} = \left\lceil \frac{v_{max}}{\theta} \right\rceil = \left\lceil \frac{n}{\varepsilon} \right\rceil$$

**PTAS.**  $(1 + \varepsilon)$ -approximation algorithm for any constant  $\varepsilon > 0$ .

- Produces arbitrarily high quality solution.
- Trades off accuracy for time.
- But such algorithms are unlikely to exist for certain problems...

## Inapproximability

**MAX-3-SAT.** Given a 3-SAT instance  $\Phi$ , find an assignment that satisfies the maximum number of clauses.

**Theorem.** [Karloff-Zwick 1997] There exists a  $\frac{7}{8}$ -approximation algorithm.

**Theorem.** [Håstad 2001] Unless  $\mathbf{P} = \mathbf{NP}$ , there does not exist a  $\rho$ -approximation for any  $\rho > \frac{7}{8}$ .

### A $\frac{7}{8}$ -Approximation Algorithm for MAX 3SAT?

Howard Karloff\* Uri Zwick†

We describe a randomized approximation algorithm which takes an instance of MAX 3SAT as input. If the instance—a collection of clauses each of length at most three—is satisfiable, then the expected weight of the assignment found is at least  $\frac{7}{8}$  of optimal. We provide strong evidence (but not a proof) that the algorithm performs equally well on arbitrary MAX 3SAT instances.

### Some Optimal Inapproximability Results

JOHAN HÅSTAD

Royal Institute of Technology, Stockholm, Sweden

Abstract. We prove optimal, up to an arbitrary  $\epsilon > 0$ , inapproximability results for Max-Ek-Sat for  $k \geq 3$ , maximizing the number of satisfied linear equations in an over-determined system of linear equations modulo a prime  $p$  and Set Splitting. As a consequence of these results we get improved lower bounds for the efficient approximability of many optimization problems studied previously. In particular, for Max-E2-Sat, Max-Cut, Max-di-Cut, and Vertex cover.

Categories and Subject Descriptors: F.2.2 [Analysis of Algorithms and Problem Complexity]; Non-numerical Algorithms and Problems


### INTRACTABILITY III

- ▶ *special cases: trees*
- ▶ *special cases: planarity*
- ▶ *approximation algorithms*
- ▶ *exact exponential algorithms*

Complexity theory deals with worst-case behavior.

- Instances you want to solve may be "easy."

*"For every polynomial-time algorithm you have, there is an exponential algorithm that I would rather run." — Alan Perlis*

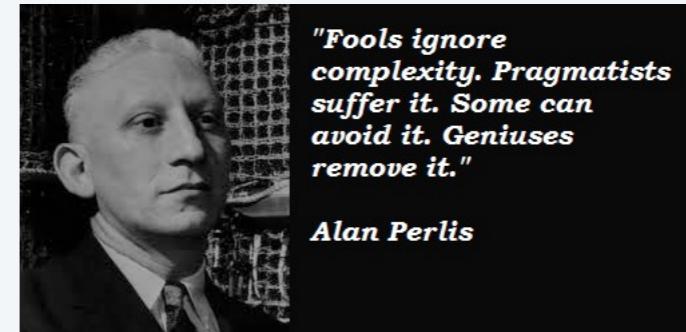

### Exact algorithms for 3-satisfiability

**Brute force.** Given a 3-SAT instance with  $n$  variables and  $m$  clauses, the brute-force algorithm takes  $O((m+n) 2^n)$  time.

Pf.

- There are  $2^n$  possible truth assignments to the  $n$  variables.
- We can evaluate a truth assignment in  $O(m+n)$  time. ▀

### Exact algorithms for 3-satisfiability

**A recursive framework.** A 3-SAT formula  $\Phi$  is either empty or the disjunction of a clause ( $\ell \vee \ell \vee \ell$ ) and a 3-SAT formula  $\Phi'$  with one fewer clause.

$$\begin{aligned}\Phi &= (\ell \vee \ell \vee \ell) \wedge \Phi' \\ &= (\ell \wedge \Phi') \vee (\ell \wedge \Phi') \vee (\ell \wedge \Phi') \\ &= (\Phi' \mid \ell = \text{true}) \vee (\Phi' \mid \ell = \text{true}) \vee (\Phi' \mid \ell = \text{true})\end{aligned}$$

**Notation.**  $\Phi \mid x = \text{true}$  is the simplification of  $\Phi$  by setting  $x$  to *true*.

Ex.

- $\Phi = (x \vee y \vee \neg z) \wedge (x \vee \neg y \vee z) \wedge (w \vee y \vee \neg z) \wedge (\neg x \vee y \vee z).$
- $\Phi' = (x \vee \neg y \vee z) \wedge (w \vee y \vee \neg z) \wedge (\neg x \vee y \vee z).$
- $(\Phi' \mid x = \text{true}) = (w \vee y \vee \neg z) \wedge (y \vee z).$

each clause has  $\leq 3$  literals

## Exact algorithms for 3-satisfiability

**A recursive framework.** A 3-SAT formula  $\Phi$  is either empty or the disjunction of a clause  $(\ell \vee \ell \vee \ell)$  and a 3-SAT formula  $\Phi'$  with one fewer clause.

### 3-SAT( $\Phi$ )

```

IF  $\Phi$  is empty RETURN true.
 $(\ell \vee \ell \vee \ell) \wedge \Phi' \leftarrow \Phi$ .
IF 3-SAT( $\Phi' | \ell = \text{true}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{false}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{true}$ ) RETURN true.
RETURN false.

```

**Theorem.** The brute-force 3-SAT algorithm takes  $O(\text{poly}(n) 3^n)$  time.

**Pf.**  $T(n) \leq 3T(n-1) + \text{poly}(n)$ . ■

## Exact algorithms for 3-satisfiability

**Key observation.** The cases are not mutually exclusive. Every satisfiable assignment containing clause  $(\ell \vee \ell \vee \ell)$  must fall into one of 3 classes:

- $\ell$  is true.
- $\ell$  is false;  $\ell$  is true.
- $\ell$  is false;  $\ell$  is false;  $\ell$  is true.

### 3-SAT( $\Phi$ )

```

IF  $\Phi$  is empty RETURN true.
 $(\ell \vee \ell \vee \ell) \wedge \Phi' \leftarrow \Phi$ .
IF 3-SAT( $\Phi' | \ell = \text{true}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{false}, \ell = \text{true}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{false}, \ell = \text{false}, \ell = \text{true}$ ) RETURN true.
RETURN false.

```

## Exact algorithms for 3-satisfiability

**Theorem.** The brute-force algorithm takes  $O(1.84^n)$  time.

**Pf.**  $T(n) \leq T(n-1) + T(n-2) + T(n-3) + O(m+n)$ . ■

↑  
largest root of  $r^3 = r^2 + r + 1$

## Exact algorithms for 3-satisfiability

**Theorem.** There exists a  $O(1.33334^n)$  deterministic algorithm for 3-SAT.

### 3-SAT( $\Phi$ )

```

IF  $\Phi$  is empty RETURN true.
 $(\ell \vee \ell \vee \ell) \wedge \Phi' \leftarrow \Phi$ .
IF 3-SAT( $\Phi' | \ell = \text{true}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{false}, \ell = \text{true}$ ) RETURN true.
IF 3-SAT( $\Phi' | \ell = \text{false}, \ell = \text{false}, \ell = \text{true}$ ) RETURN true.
RETURN false.

```

### A Full Derandomization of Schöning's $k$ -SAT Algorithm

Robin A. Moser and Dominik Scheder

Institute for Theoretical Computer Science  
 Department of Computer Science  
 ETH Zürich, 8092 Zürich, Switzerland  
 {robin.moser, dominik.scheder}@inf.ethz.ch

August 25, 2010



#### Abstract

Schöning [7] presents a simple randomized algorithm for  $k$ -SAT with running time  $O(a_k^n \text{poly}(n))$  for  $a_k = 2(k-1)/k$ . We give a deterministic version of this algorithm running in time  $O((a_k + \epsilon)^n \text{poly}(n))$ , where  $\epsilon > 0$  can be made arbitrarily small.

## Exact algorithms for satisfiability

**DPPL algorithm.** Highly-effective backtracking procedure.

- Splitting rule: assign truth value to literal; solve both possibilities.
- Unit propagation: clause contains only a single unassigned literal.
- Pure literal elimination: if literal appears only negated or unnegated.

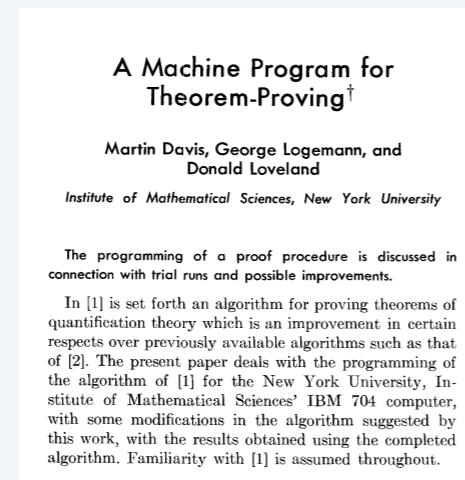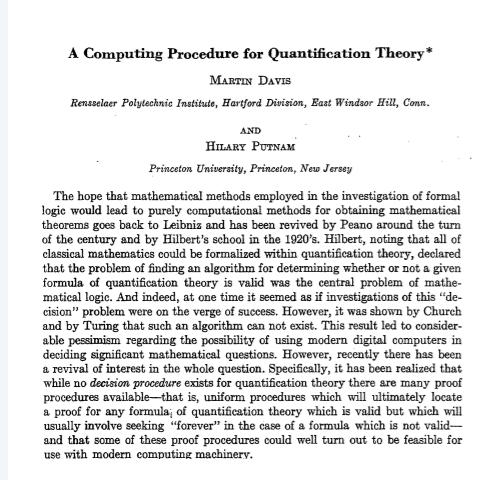

## Exact algorithms for satisfiability

**Chaff.** State-of-the-art SAT solver.

- Solves real-world SAT instances with ~ 10K variable.
- Developed at Princeton by undergrads.

### Chaff: Engineering an Efficient SAT Solver

Matthew W. Moskewicz  
Department of EECS  
UC Berkeley  
moskewcz@alumni.princeton.edu

Conor F. Madigan  
Department of EECS  
MIT  
cmadigan@mit.edu

Ying Zhao, Lintao Zhang, Sharad Malik  
Department of Electrical Engineering  
Princeton University  
{yingzhao, lintaoz, sharad}@ee.princeton.edu

#### ABSTRACT

Boolean Satisfiability is probably the most studied of combinatorial optimization/search problems. Significant effort has been devoted to trying to provide practical solutions to this problem for problem instances encountered in a range of applications in Electronic Design Automation (EDA), as well as in Artificial Intelligence (AI). This study has culminated in the

Many publicly available SAT solvers (e.g. GRASP [8], POSIT [5], SATO [13], rel\_sat [2], WalkSAT [9]) have been developed, most employing some combination of two main strategies: the Davis-Putnam (DP) backtrack search and heuristic local search. Heuristic local search techniques are not guaranteed to be complete (i.e. they are not guaranteed to find a satisfying assignment if one exists or prove unsatisfiability); as a

## Exact algorithms for TSP and Hamilton cycle

**Theorem.** The brute-force algorithm for TSP (or HAM-CYCLE) takes  $O(n!)$  time.

Pf.

- There are  $\frac{1}{2} (n - 1)!$  tours.
- Computing the length of a tour takes  $O(n)$  time. ■

**Note.** The function  $n!$  grows exponentially faster than  $2^n$ .


- $2^{40} = 1099511627776 \sim 10^{12}$ .
- $40! = 815915283247897734345611269596115894272000000000 \sim 10^{48}$ .

45

46

## Exact algorithms for TSP and Hamilton cycle

**Theorem.** [Bellman 1962, Held-Karp 1962] There exists a  $O(n^2 2^n)$  time algorithm for TSP (and HAMILTON-CYCLE).

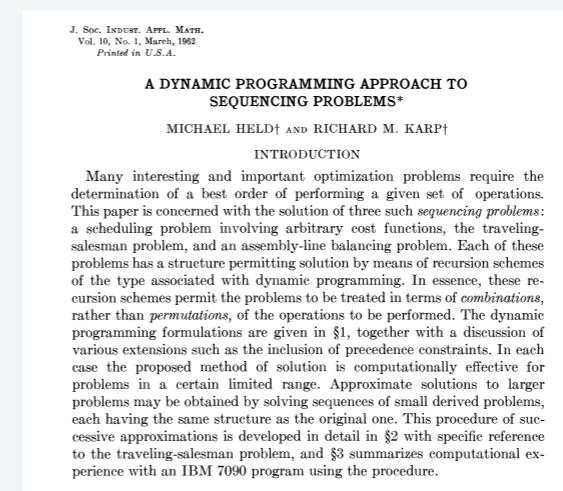

### Dynamic Programming Treatment of the Travelling Salesman Problem\*

RICHARD BELLMAN  
RAND Corporation, Santa Monica, California

Introduction

The well-known travelling salesman problem is the following: "A salesman is required to visit once and only once each of  $n$  different cities starting from a base city, and returning to this city. What path minimizes the total distance travelled by the salesman?"

The problem has been treated by a number of different people using a variety of techniques; cf. Dantzig, Fulkerson, Johnson [1], where a combination of ingenuity and linear programming is used, and Miller, Tucker and Zemlin [2], whose experiments using an all-integer program of Gomory did not produce results in cases with ten cities although some success was achieved in cases of simply four cities. The purpose of this note is to show that this problem can easily be formulated in dynamic programming terms [3], and resolved computationally for up to 17 cities. For larger numbers, the method presented below, combined with various simple manipulations, may be used to obtain quick approximate solutions. Results of this nature were independently obtained by M. Held and R. M. Karp, who are in the process of publishing some extensions and computational results.


## Exact algorithms for TSP and Hamilton cycle

**Theorem.** [Bellman 1962, Held-Karp 1962] There exists a  $O(n^2 2^n)$  time algorithm for TSP (and HAMILTON-CYCLE).

Pf. [dynamic programming]

- Define  $c(s, v, X) = \text{cost of cheapest path between } s \text{ and } v \text{ that visits every node in } X \text{ exactly once (and uses only nodes in } X\text{).}$
- Observe  $OPT = \min_{v \neq s} c(s, v, V) + c(v, s).$
- There are  $n 2^n$  subproblems and they satisfy the recurrence:

$$c(s, v, X) = \begin{cases} c(s, v) & \text{if } |X| = 2 \\ \min_{u \in X \setminus \{s, v\}} c(s, u, X \setminus \{v\}) + c(u, v) & \text{if } |X| > 2. \end{cases}$$

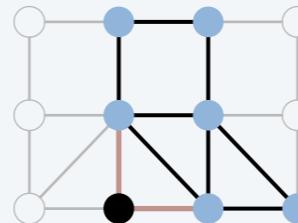

- The values  $c(s, v, X)$  can be computed increasing order of the cardinality of  $X$ . ■

## Exact algorithms for Hamilton cycle

**Theorem.** [Björklund 2010] There exists a  $O(1.657^n)$  time randomized algorithm for HAMILTON-CYCLE.

2010 IEEE 51st Annual Symposium on Foundations of Computer Science

### Determinant Sums for Undirected Hamiltonicity

Andreas Björklund  
Department of Computer Science  
Lund University  
Lund, Sweden  
Email: andreas.bjorklund@yahoo.se

**Abstract**—We present a Monte Carlo algorithm for Hamiltonicity detection in an  $n$ -vertex undirected graph running in time. To the best of our knowledge, this is the first superpolynomial improvement on the worst case runtime for the problem since the bound established for TSP almost fifty years ago (Bellman 1962, Held and Karp 1962). It answers in part the first open problem in Woeginger's 2003 survey on exact algorithms for NP-hard problems.

For bipartite graphs, we improve the bound to time. Both the bipartite and the general algorithm can be implemented to use space polynomial in .

We combine several recently resurrected ideas to get the results. Our main technical contribution is a new reduction inspired by the algebraic sieving method for -Paths (Koutis ICALP 2008, Williams IPL 2009). We introduce the Labeled Cycle Cover Sum in which we are set to count weighted arc labeled cycle covers over a finite field of characteristic two. We reduce Hamiltonicity to Labeled Cycle Cover Sum and apply the determinant summation technique for Exact Set Covers (Björklund STACS 2010) to evaluate it.

## Euclidean traveling salesperson problem


**Euclidean TSP.** Given  $n$  points in the plane and a real number  $L$ , is there a tour that visit every city exactly once that has distance  $\leq L$ ?

**Proposition.** EUCLIDEAN-TSP is **NP-hard**.

**Remark.** Not known to be in **NP**.

$$\sqrt{5} + \sqrt{6} + \sqrt{18} < \sqrt{4} + \sqrt{12} + \sqrt{12}$$

$$8.928198407 < 8.928203230$$

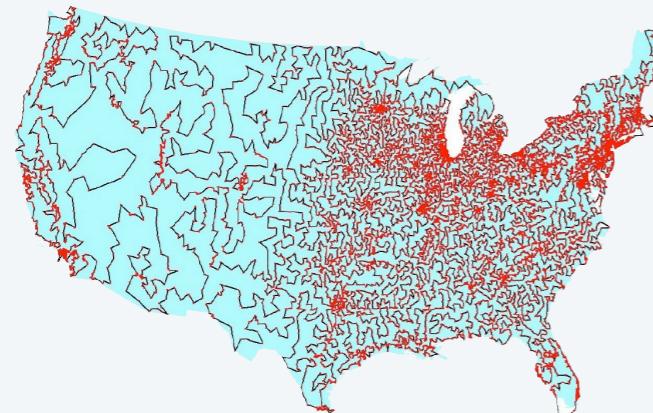

13509 cities in the USA and an optimal tour

49

## Euclidean traveling salesperson problem

**Theorem.** [Arora 1998, Mitchell 1999] Given  $n$  points in the plane, for any constant  $\epsilon > 0$ , there exists a poly-time algorithm to find a tour whose length is at most  $(1 + \epsilon)$  times that of the optimal tour.

**Pf idea.** Structure theorem + dynamic programming.

### Polynomial Time Approximation Schemes for Euclidean Traveling Salesman and other Geometric Problems

Sanjeev Arora  
Princeton University  
  
Association for Computing Machinery, Inc., 1515 Broadway, New York, NY 10036, USA  
Tel: (212) 555-1212; Fax: (212) 555-2000

We present a polynomial time approximation scheme for Euclidean TSP in fixed dimensions. For every fixed  $c > 1$  and given any  $n$  nodes in  $\mathbb{R}^d$ , a randomized version of the scheme finds a  $(1 + 1/c)$ -approximation to the optimum traveling salesman tour in  $O(n(\log n)^{O(c)})$  time. When the nodes are in  $\mathbb{R}^2$ , the running time increases to  $O(n(\log n)^{(O(\sqrt{d}))^{c-1}})$ . For every fixed  $c, d$  the running time is  $n \cdot \text{poly}(\log n)$ , i.e., nearly linear in  $n$ . The algorithm can be derandomized, but this increases the running time by a factor  $O(n^d)$ . The previous best approximation algorithm for the problem (due to Christofides) achieves a  $3/2$ -approximation in polynomial time.

### GUILLOTINE SUBDIVISIONS APPROXIMATE POLYGONAL SUBDIVISIONS: A SIMPLE POLYNOMIAL-TIME APPROXIMATION SCHEME FOR GEOMETRIC TSP, K-MST, AND RELATED PROBLEMS

JOSEPH S. B. MITCHELL\*

**Abstract.** We show that any polygonal subdivision in the plane can be converted into an ‘ $m$ -guillotine’ subdivision whose length is at most  $(1 + \frac{m}{n})$  times that of the original subdivision, for a small constant  $c$ . ‘ $m$ -Guillotine’ subdivisions have a simple recursive structure that allows one to search for shortest such subdivisions in polynomial time, using dynamic programming. In particular, a consequence of our main theorem is a simple polynomial-time approximation scheme for geometric instances of several network optimization problems, including the Steiner minimum spanning tree, the traveling salesperson problem (TSP), and the  $k$ -MST problem.

51



52

## Concorde TSP solver

Concorde TSP solver. [Applegate-Bixby-Chvátal-Cook]



- Linear programming + branch-and-bound + polyhedral combinatorics.
- Greedy heuristics, including Lin-Kernighan.
- MST, Delaunay triangulations, fractional b-matchings, ...

Remarkable fact. Concorde has solved all 110 TSPLIB instances.

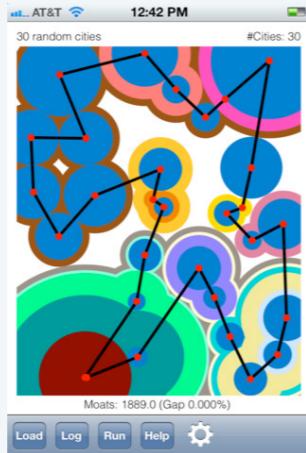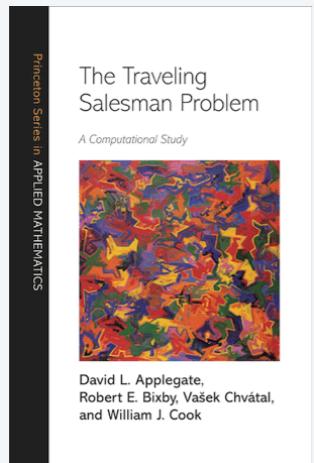

53

## TSP line art

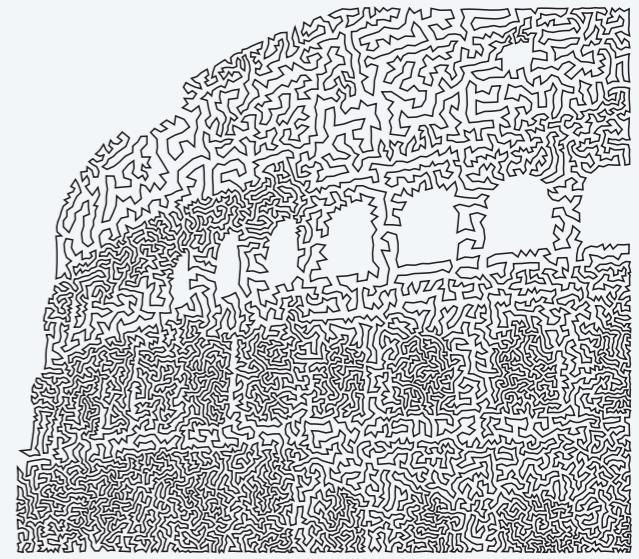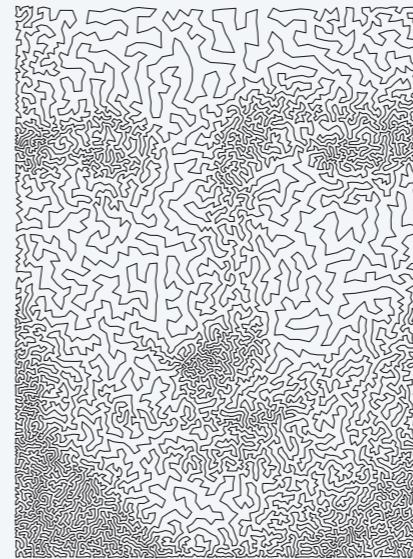

Continuous line drawings via the TSP by Robert Bosch and Craig Kaplan

That's all, folks: keep searching!



Woh-oh-oh-oh, find the longest path!  
Woh-oh-oh-oh, find the longest path!

If you said P is NP tonight,  
There would still be papers left to write.  
I have a weakness;  
I'm addicted to completeness,  
And I keep searching for the longest path.

The algorithm I would like to see  
Is of polynomial degree.  
But it's elusive:  
Nobody has found conclusive  
Evidence that we can find a longest path.

I have been hard working for so long.  
I swear it's right, and he marks it wrong.  
Some how I'll feel sorry when it's done: GPA 2.1  
Is more than I hope for.

Garey, Johnson, Karp and other men (and women)  
Tried to make it order  $N \log N$ .  
Am I a mad fool  
If I spend my life in grad school,  
Forever following the longest path?

Woh-oh-oh-oh, find the longest path!  
Woh-oh-oh-oh, find the longest path!  
Woh-oh-oh-oh, find the longest path.