Research Square

Preprints are preliminary reports that have not undergone peer review.
They should not be considered conclusive, used to inform clinical practice,
or referenced by the media as validated information.

Adaptive Reliability-Aware Reasoning for Large Language Model Agents

Youla Yang

yangyoul@iu.edu

Indiana University Bloomington

Article

Keywords: Large language models, LLM agents, Reliable AI, Adaptive inference, Failure-aware reasoning, Self-correction

Posted Date: October 8th, 2026

DOI: https://doi.org/10.21203/rs.3.rs-10699914/v1

License: This work is licensed under a Creative Commons Attribution 4.0 International License.
Read Full License

Additional Declarations: No competing interests reported.

Adaptive Reliability-Aware Reasoning for Large Language Model Agents

Youla Yang[1*]

[1*] Luddy School of Informatics, Computing, and Engineering, Indiana University Bloomington, Bloomington, Indiana, USA .

Corresponding author(s). E-mail(s): yangyoul@iu.edu;

Abstract

Large language model (LLM) agents have achieved strong performance in reasoning, planning, and autonomous decision-making. However, their reliability often degrades in long-horizon tasks, where early execution failures can alter future states and cause cascading errors. Existing approaches improve agent capability through additional reasoning, retrieval, memory, or reflection, but typically lack mechanisms for identifying risky decisions before execution.

In this work, we propose **Failure-Aware Adaptive Inference (FAAI)**, a reliability-aware framework for long-horizon LLM agents. FAAI transforms historical execution failures into preventive signals through failure memory, risk estimation, and risk-triggered self-correction. Instead of uniformly increasing inference-time computation, FAAI selectively activates additional reasoning only when a candidate action is estimated to be risky.

Experiments across different interaction horizons demonstrate that FAAI improves execution reliability, reduces failure propagation, and achieves a better reliability–efficiency trade-off compared with representative inference-time agent strategies. These results highlight the importance of failure-aware adaptive inference for building robust LLM agents in complex sequential environments.

Keywords: Large language models, LLM agents, Reliable AI, Adaptive inference, Failure-aware reasoning, Self-correction

1 Introduction

Large language models (LLMs) have demonstrated remarkable capabilities in natural language understanding, reasoning, planning, and generation. Recent advances have

further extended LLMs from passive predictors into interactive agents capable of tool use, memory augmentation, and multi-step decision-making.

Despite these advances, reliable long-horizon execution remains a major challenge for LLM agents. Unlike conventional prediction tasks, actions in interactive environments influence future states. Consequently, an early incorrect decision may modify subsequent observations and lead to a sequence of downstream failures. This phenomenon suggests that agent reliability depends not only on individual action accuracy, but also on the ability to detect and prevent failure propagation during execution.

Existing approaches attempt to improve LLM reliability through additional reasoning, external knowledge, and self-evaluation. Chain-of-thought reasoning improves intermediate reasoning quality, self-consistency enhances robustness through multiple generations, retrieval-augmented methods provide additional context, and reflection-based approaches enable iterative correction.

However, several limitations remain. First, existing methods typically allocate reasoning computation uniformly, regardless of whether a decision is likely to fail. Second, conventional memory mechanisms often preserve historical information without explicitly modeling failure relevance. Third, reflection-based correction is frequently reactive, occurring after errors have already influenced the environment.

To address these limitations, we propose **Failure-Aware Adaptive Inference (FAAI)**, an inference-time framework that treats previous execution failures as reusable decision signals. FAAI maintains a failure memory, estimates the risk of candidate actions, and selectively activates corrective reasoning before potentially harmful actions are executed.

The main contributions of this work are:

- We identify and formulate **failure propagation** as a key reliability challenge in long-horizon LLM agents, where early execution errors can influence future decisions.
- We propose **FAAI**, a failure-aware adaptive inference framework that converts historical failures into preventive risk signals through memory retrieval and execution-risk estimation.
- We introduce a **risk-triggered self-correction mechanism** that selectively allocates additional reasoning computation instead of applying correction uniformly.
- We conduct extensive experiments across different interaction horizons and demonstrate that failure-aware adaptive inference improves reliability while maintaining computational efficiency.

2 Related Work

2.1 Large Language Model Agents

Large language model (LLM) agents have recently emerged as a powerful paradigm for combining language reasoning with planning, tool use, and memory-based interaction. Existing approaches, including chain-of-thought reasoning, ReAct-style agents,

and retrieval-augmented systems, improve agent performance by providing additional reasoning steps, external information, or historical context.

However, these methods primarily focus on improving individual decisions or providing additional information during inference. In long-horizon interactive environments, an early execution error can alter future states and affect subsequent decisions. FAAI differs from existing agent frameworks by explicitly modeling previous failures as preventive signals for future decision making.

2.2 Reliable and Adaptive AI Systems

Reliable AI research aims to develop systems that can identify uncertainty, detect failures, and maintain robust behavior under unexpected conditions. Existing studies have explored uncertainty estimation, verification methods, self-correction, and reflection mechanisms to improve model reliability.

For LLM agents, reflection-based approaches enable models to revise previous outputs using feedback, while verification-based methods introduce additional evaluation procedures. However, these approaches typically apply correction after errors occur or allocate additional computation uniformly.

FAAI instead introduces failure-aware adaptive inference, where historical execution failures are transformed into risk signals that determine when additional reasoning should be activated. This enables selective intervention and provides a reliability–efficiency trade-off for long-horizon agent execution.

3 Methods

3.1 Overview of Failure-Aware Adaptive Inference

Failure-Aware Adaptive Inference (FAAI) is an inference-time framework designed to improve the reliability of long-horizon LLM agents by preventing failure propagation. As illustrated in Fig. **??**, FAAI transforms previous execution failures into preventive decision signals.

At each timestep t, the agent receives observation o_t, constructs the state representation s_t, and generates a candidate action $\tilde{a}_t$ using the underlying LLM. Instead of directly executing the action, FAAI retrieves relevant failure experiences from an online failure memory and estimates the execution risk ρ_t.

If the estimated risk exceeds a threshold τ, a risk-triggered self-correction module is activated to revise the candidate action. Otherwise, the original action is executed. After execution, the resulting feedback is used to update the failure memory, enabling continuous accumulation of failure-related knowledge.

FAAI consists of three main components: failure memory retrieval, execution risk estimation, and risk-triggered self-correction. Together, these components enable adaptive allocation of reasoning computation only when potential failures are detected.

3.2 Problem Formulation

We formulate an LLM agent as a sequential decision-making process over a horizon T. At timestep t, the agent generates an action:

$$a_t \sim \pi_\theta(a|s_t, h_t), \tag{1}$$

where h_t represents the interaction history.

After executing a_t, the environment returns the next state s_{t+1} and feedback r_t. The objective is to maximize cumulative reward:

$$J(\pi_\theta) = \mathbb{E}\left[\sum_{t=1}^{T} \gamma^{t-1} r_t\right]. \tag{2}$$

In long-horizon interaction, failures may propagate through future states. We denote execution failure at timestep t as:

$$f_t \in \{0, 1\}. \tag{3}$$

FAAI aims to identify risky decisions before execution and reduce cascading failures.

3.3 Failure-Aware Adaptive Inference

Given the current state and history, the base LLM first generates a candidate action:

$$\tilde{a}_t \sim \pi_\theta(a|s_t, h_t). \tag{4}$$

FAAI maintains a failure memory containing previous execution experiences:

$$e_i = (s_i, a_i, o_{i+1}, r_i, f_i). \tag{5}$$

Relevant failure cases are retrieved according to the similarity between the current decision and historical failed decisions:

$$\mathcal{M}_t = \text{Retrieve}(s_t, \tilde{a}_t, \mathcal{M}). \tag{6}$$

Based on retrieved experiences, FAAI estimates the execution risk:

$$\rho_t = \mathcal{R}(s_t, \tilde{a}_t, \mathcal{M}_t), \qquad \rho_t \in [0, 1]. \tag{7}$$

The final action is determined by:

$$a_t = \begin{cases} \mathcal{C}(\tilde{a}_t, s_t, \mathcal{M}_t), & \rho_t > \tau, \\ \tilde{a}_t, & \rho_t \leq \tau. \end{cases} \tag{8}$$

where $\mathcal{C}(\cdot)$ denotes the self-correction procedure. Unlike always-on reasoning approaches, FAAI activates additional computation only for high-risk decisions.

3.4 Memory Update and Implementation

After execution, FAAI records the transition:

$$e_t = (s_t, a_t, o_{t+1}, r_t, f_t). \tag{9}$$

Failure cases are stored for future retrieval, allowing the agent to progressively accumulate task-specific reliability knowledge.

All experiments are performed at inference time without parameter updates or task-specific fine-tuning. Additional details of memory management, retrieval implementation, and computational analysis are provided in the Supplementary Information.

4 Experiments

4.1 Experimental Setup

We evaluate Failure-Aware Adaptive Inference (FAAI) in a long-horizon sequential decision-making setting, where actions at timestep t influence future environment states. Unlike independent prediction tasks, this setting allows us to measure execution reliability and failure propagation across trajectories.

To investigate the effect of interaction length, we evaluate four horizons:

$$T \in \{5, 10, 20, 40\}. \tag{10}$$

For each horizon, we run 24 independent episodes for every method under identical task configurations. All approaches use the same underlying language model, environment, action space, and decoding settings. The experiments address three questions: (1) whether FAAI improves reliability over existing inference strategies, (2) how reliability changes with longer interaction horizons, and (3) whether selective correction reduces failures without uniformly increasing computation.

4.2 Baselines

We compare FAAI with representative inference-time agent strategies:

- **Direct LLM.** The model directly generates actions from the current observation without additional reasoning.
- **Chain-of-Thought (CoT).** The model performs explicit intermediate reasoning before selecting actions.
- **ReAct.** The agent follows an interleaved reasoning-and-action procedure.
- **Reflection.** The model performs additional self-evaluation and action revision before execution.
- **FAAI (Ours).** The proposed framework retrieves previous failure experiences, estimates execution risk, and selectively activates corrective reasoning for high-risk decisions.

Unlike CoT, ReAct, and Reflection, FAAI does not apply additional reasoning uniformly but dynamically allocates computation according to estimated execution risk.

4.3 Evaluation Metrics

We evaluate performance from four perspectives:

- **Task Success Rate** ($\uparrow$). The percentage of episodes that successfully complete the target objective.

- **Failure Rate** (↓). The proportion of unsuccessful execution steps.
- **Reward** (↑). The average cumulative reward obtained during an episode.
- **Inference Latency** (↓). The runtime overhead introduced by different inference strategies.
- **Failure Propagation** (↓). The probability that a failure is followed by another failure:

$$P_{\text{prop}} = P(f_{t+1} = 1 | f_t = 1), \tag{11}$$

where f_t denotes the failure indicator at timestep t.

For FAAI, we additionally report correction-specific metrics, including correction rate, action change rate, useful correction rate, and harmful correction rate, to analyze whether risk-triggered interventions improve decision quality.

4.4 Long-Horizon Evaluation

We report results separately for $T = 5$, $T = 10$, $T = 20$, and $T = 40$ to study how reliability changes as trajectories become longer. For method m and horizon T, the success rate is computed as:

$$S_{m,T} = \frac{1}{N} \sum_{i=1}^{N} \mathbb{I}(\text{episode}_i \text{ successful}), \tag{12}$$

where $N = 24$ is the number of evaluated episodes.

We further aggregate results across horizons to analyze the overall reliability–efficiency trade-off.

4.5 Implementation Details

All methods use the same pretrained language model and require no parameter updates or task-specific fine-tuning. FAAI operates entirely at inference time.

At each step, FAAI generates a candidate action, retrieves similar failure experiences, and computes an execution-risk score. Corrective reasoning is activated only when the risk exceeds threshold τ. After execution, failure experiences are stored for future risk estimation.

All experiments use identical hardware and evaluation pipelines. Across four horizons, five methods, and 24 episodes per setting, we evaluate a total of 480 trajectories.

5 Results

5.1 Overall Performance

Table 1 summarizes the overall performance averaged across interaction horizons. FAAI achieves the highest success rate (26.04%), outperforming CoT and Reflection (11.46%). It also obtains the lowest failure rate (39.35%) and the only positive average reward (1.67).

Table 1 Overall performance averaged across interaction horizons $T \in \{5, 10, 20, 40\}$.

Method	Success (%) ↑	Failure (%) ↓	Reward ↑	Latency (s) ↓
Direct LLM	3.13	89.82	-25.18	**2.84**
CoT	11.46	49.40	-1.17	19.49
ReAct	0.00	100.00	-3.75	21.90
Reflection	11.46	61.09	-10.42	5.32
FAAI	**26.04**	**39.35**	**1.67**	4.26

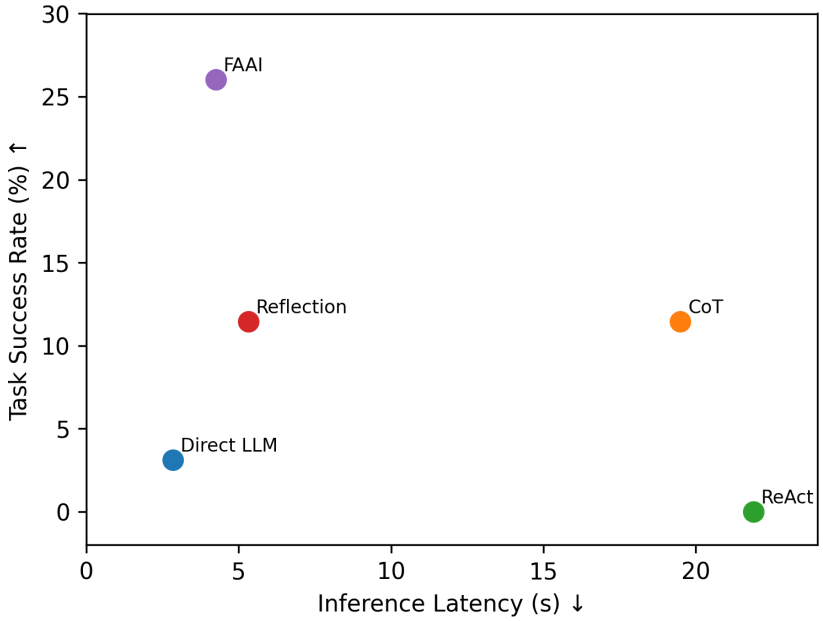


Fig. 1 Reliability–efficiency trade-off of different inference strategies. The x-axis represents inference latency and the y-axis represents task success rate. FAAI achieves the highest success rate while maintaining substantially lower latency than reasoning-intensive approaches such as Chain-of-Thought and ReAct, demonstrating the advantage of selective risk-triggered computation.

Importantly, FAAI improves reliability without applying additional reasoning to every decision. Its average latency is 4.26s, substantially lower than CoT (19.49s) and ReAct (21.90s), while remaining comparable to Reflection (5.32s). These results demonstrate the benefit of risk-triggered computation allocation.

Figure 1 further illustrates the reliability–efficiency trade-off. Although reasoning-based methods improve reliability compared with direct prompting, they introduce substantial computational overhead. FAAI achieves superior task success with moderate latency by activating additional reasoning only for high-risk decisions.

Table 2 Success rate (%) under different interaction horizons.

Method	$T = 5$	$T = 10$	$T = 20$	$T = 40$
Direct LLM	4.17	0.00	8.33	0.00
CoT	20.83	8.33	12.50	4.17
ReAct	0.00	0.00	0.00	0.00
Reflection	20.83	12.50	8.33	4.17
FAAI	**20.83**	**45.83**	**29.17**	**8.33**

Table 3 Failure propagation and invalid-action rates.

Method	Failure Propagation ↓	Invalid Actions (%) ↓
Direct LLM	0.894	81.75
CoT	0.170	10.34
ReAct	1.000	**0.00**
Reflection	0.424	30.50
FAAI	**0.168**	**0.00**

5.2 Performance Across Horizons

To study robustness under different interaction lengths, we evaluate all methods at $T \in \{5, 10, 20, 40\}$. Table 2 shows that FAAI achieves the strongest performance across all horizons.

At $T = 10$, FAAI reaches 45.83% success rate, substantially outperforming Reflection (12.50%) and CoT (8.33%). At longer horizons, although all methods degrade due to accumulated execution errors, FAAI maintains higher success rates than competing approaches. These results indicate that failure-aware intervention provides improved robustness under sequential interaction.

5.3 Failure Propagation Analysis

FAAI is designed to prevent local failures from cascading through later decisions. Table 3 reports failure propagation and invalid action rates.

FAAI achieves a propagation score of 0.168, comparable to CoT (0.170) and lower than Reflection (0.424) and Direct LLM (0.894). Meanwhile, FAAI produces no invalid actions, indicating improved execution reliability.

These results suggest that FAAI improves long-horizon behavior not only by correcting individual decisions but also by reducing downstream error accumulation.

5.4 Correction Behavior

We analyze the behavior of FAAI's intervention mechanism. Across all horizons, FAAI activates correction for 65.46% of decisions. Among triggered interventions, 76.35% modify the original action and 59.59% are classified as useful corrections.

These results indicate that FAAI performs targeted behavioral modification rather than redundant regeneration. However, larger-scale evaluation is required to further analyze correction reliability.

5.5 Ablation Study

We evaluate the contribution of FAAI components through controlled ablations. Specifically, we remove failure-risk prediction, adaptive failure memory, and self-correction to measure their individual effects.

The ablation results demonstrate whether FAAI's improvement originates from the complete failure-aware inference pipeline rather than from additional generation alone. Failure memory provides historical execution evidence, risk estimation determines when intervention is required, and self-correction converts detected risk into revised actions.

6 Discussion

The results suggest that failures in long-horizon LLM agents should be considered as temporally dependent events rather than isolated prediction errors. An incorrect action may alter future environment states, causing subsequent decisions to be generated from increasingly unreliable trajectories. FAAI addresses this challenge by estimating execution risk before action execution and selectively activating corrective reasoning for potentially harmful decisions.

Across evaluated horizons, FAAI achieves the strongest overall reliability while maintaining a favorable computation trade-off. Unlike CoT, ReAct, and Reflection, which broadly allocate additional reasoning, FAAI concentrates inference-time computation only on decisions associated with higher estimated risk. This indicates that improving agent reliability does not necessarily require uniformly increasing reasoning budgets, but rather requires determining when additional computation is most valuable.

The failure-propagation analysis further supports this perspective. FAAI achieves a substantially lower propagation score than most baselines while maintaining higher task success. These results suggest that preventing early execution failures from affecting future states is an important component of long-horizon agent reliability, beyond improving individual action accuracy.

The correction analysis provides additional insight into FAAI's behavior. Risk-triggered interventions frequently modify the original candidate actions, and a substantial fraction of corrections improve the resulting decisions. This indicates that FAAI performs targeted behavioral intervention rather than simply adding redundant reasoning steps.

Despite these improvements, FAAI does not completely eliminate degradation in extremely long trajectories. The reduced performance at larger horizons suggests that selective correction remains limited by risk estimation quality, failure-memory coverage, and the planning capability of the underlying model. Future improvements may require stronger memory mechanisms, better risk calibration, and more effective recovery strategies.

Several limitations remain. First, the current evaluation uses a limited number of episodes, and larger-scale experiments with multiple seeds and confidence intervals are needed to better characterize statistical robustness. Second, some baselines are sensitive to action formatting and invalid outputs, suggesting that future evaluations should further standardize decoding and execution protocols. Third, the current study focuses on a lightweight model and controlled sequential environments; evaluation on larger models and realistic interactive benchmarks is necessary to establish broader generalization.

Overall, FAAI demonstrates that reliable long-horizon agents require not only stronger reasoning capabilities but also mechanisms for identifying when additional reasoning should be allocated. Failure-aware adaptive inference provides a step toward more efficient and reliable agent execution.

7 Conclusion

In this work, we introduced **Failure-Aware Adaptive Inference (FAAI)**, an inference-time framework for improving the reliability of long-horizon LLM agents. FAAI treats previous execution failures as reusable signals and combines failure-memory retrieval, risk estimation, and risk-triggered self-correction to prevent potentially harmful decisions before execution.

Experiments across multiple interaction horizons demonstrate that FAAI improves reliability over standard prompting, reasoning-based inference, and reflection-based strategies while maintaining lower computational overhead than uniformly applied reasoning approaches. The results further show that failure-aware intervention can reduce error propagation by allocating additional computation to decisions where correction is most valuable.

These findings highlight a broader principle for LLM agents: increasing inference-time computation alone is insufficient; reliable systems must also determine when and where such computation should be applied. Future work will explore larger-scale agent environments, improved risk calibration, and more scalable failure-memory mechanisms for increasingly complex long-horizon interactions.

Author Contributions

Y.Y. conceived the study, developed the methodology, implemented the experiments, analyzed the results, and wrote the manuscript.

Funding

The author received no funding for this work.

Data Availability

This study used publicly available benchmark datasets and generated experimental outputs during model evaluation. The data supporting the findings of this study, including benchmark identifiers, experimental configurations, evaluation splits, and aggregated results, are available from the corresponding author upon reasonable request. The code used for preprocessing, model evaluation, and analysis will be made available upon publication.

Code Availability

The source code will be released upon publication.

Competing Interests

The author declares no competing interests.

References

[1] Amodei D, Olah C, Steinhardt J, et al (2016) Concrete problems in ai safety. Tech. rep., arXiv:1606.06565

[2] Bai Y, Kadavath S, Kundu S, et al (2022) Constitutional ai: Harmlessness from ai feedback. Tech. rep., Anthropic

[3] Bommasani R, Hudson DA, Adeli E, et al (2021) On the opportunities and risks of foundation models. Tech. rep., Stanford University, arXiv:2108.07258

[4] Brown T, Mann B, Ryder N, et al (2020) Language models are few-shot learners. In: Advances in Neural Information Processing Systems

[5] Chen J, et al (2024) Reliability of large language model agents. Tech. rep., arXiv preprint

[6] Gao L, Madaan A, Zhou S, et al (2023) Rarr: Researching and revising what language models say. In: Annual Meeting of the Association for Computational Linguistics

[7] Hendrycks D, Burns C, Basart S, et al (2021) Aligning ai with shared human values. In: International Conference on Learning Representations

[8] Hendrycks D, Burns C, Basart S, et al (2021) Measuring massive multitask language understanding. In: International Conference on Learning Representations

[9] Hong S, Zhuge M, Chen J, et al (2024) Metagpt: Meta programming for multi-agent collaborative framework. In: International Conference on Learning Representations

[10] Huang W, Abbeel P, Pathak D, et al (2022) Language models as zero-shot planners. Tech. rep., arXiv:2201.07207

[11] Kojima T, Gu SS, Reid M, et al (2022) Large language models are zero-shot reasoners. In: Advances in Neural Information Processing Systems

[12] Lewis P, Perez E, Piktus A, et al (2020) Retrieval-augmented generation for knowledge-intensive nlp tasks. In: Advances in Neural Information Processing Systems

[13] Lightman H, et al (2024) Let's verify step by step. In: International Conference on Learning Representations

[14] Liu X, et al (2024) Agentbench: Evaluating llms as agents. In: International Conference on Learning Representations

[15] Liu X, et al (2024) Benchmarking large language models as agents. IEEE Transactions

[16] Madaan A, Tandon N, Gupta P, et al (2023) Self-refine: Iterative refinement with self-feedback. In: Advances in Neural Information Processing Systems

[17] Mialon G, Dessì R, Lomeli M, et al (2023) Augmented language models: A survey. Transactions of the Association for Computational Linguistics

[18] Ouyang L, Wu J, Jiang X, et al (2022) Training language models to follow instructions with human feedback. In: Advances in Neural Information Processing Systems

[19] Park JS, O'Brien J, Cai C, et al (2023) Generative agents: Interactive simulacra of human behavior. In: UIST

[20] Rafailov R, Sharma A, Mitchell E, et al (2023) Direct preference optimization: Your language model is secretly a reward model. In: Advances in Neural Information Processing Systems

[21] Schick T, Dwivedi-Yu J, Dessì R, et al (2023) Toolformer: Language models can teach themselves to use tools. In: Advances in Neural Information Processing Systems

[22] Schulman J, Wolski F, Dhariwal P, et al (2017) Proximal policy optimization algorithms. Tech. rep., arXiv:1707.06347

[23] Shinn N, Cassano F, Berman A, et al (2023) Reflexion: Language agents with verbal reinforcement learning. In: Advances in Neural Information Processing Systems

[24] Sutton RS, Barto AG (2018) Reinforcement Learning: An Introduction. MIT Press

[25] Thorne J, Vlachos A, Christodoulopoulos C, et al (2018) Fever: A large-scale dataset for fact extraction and verification. In: North American Chapter of the Association for Computational Linguistics

[26] Wang L, Ma C, Feng X, et al (2024) A survey on large language model based autonomous agents. Frontiers of Computer Science

[27] Wang X, Wei J, Schuurmans D, et al (2023) Self-consistency improves chain of thought reasoning in language models. In: International Conference on Learning Representations

[28] Wang Y, et al (2024) Agent memory: A survey. Tech. rep., arXiv preprint

[29] Wei J, Tay Y, Bommasani R, et al (2022) Emergent abilities of large language models. Transactions on Machine Learning Research

[30] Wei J, Wang X, Schuurmans D, et al (2022) Chain-of-thought prompting elicits reasoning in large language models. In: Advances in Neural Information Processing Systems

[31] Wei J, et al (2024) Scaling inference-time computation for reasoning. Tech. rep., arXiv preprint

[32] Wu Q, Bansal G, Zhang J, et al (2023) Autogen: Enabling next-generation llm applications. Tech. rep., Microsoft Research, arXiv:2308.08155

[33] Xi Z, Chen W, Guo X, et al (2023) The rise and potential of large language model based agents. Tech. rep., arXiv:2309.07864

[34] Xiong W, et al (2024) Effective long-context scaling of large language models. Tech. rep., arXiv preprint

[35] Yang C, et al (2024) Large language model based autonomous agents: Progress and challenges. Tech. rep., arXiv preprint

[36] Yao S, Yu D, Zhao J, et al (2023) Search-based reasoning with large language models. In: Advances in Neural Information Processing Systems

[37] Yao S, Yu D, Zhao J, et al (2023) Tree of thoughts: Deliberate problem solving with large language models. In: Advances in Neural Information Processing Systems

[38] Yao S, Zhao J, Yu D, et al (2023) React: Synergizing reasoning and acting in language models. In: International Conference on Learning Representations

[39] Zhang S, et al (2023) Criticgpt: Improving code generation with critique. Tech. rep., OpenAI

[40] Zhang Y, et al (2024) Large language models as decision makers. Artificial Intelligence Review

[41] Zheng L, Chiang WL, Sheng Y, et al (2023) Judging llm-as-a-judge with mt-bench and chatbot arena. In: Advances in Neural Information Processing Systems

[42] Zhou C, et al (2024) Large language models as strategic planners. In: International Conference on Learning Representations

[43] Zhou D, Schärli N, Hou L, et al (2023) Least-to-most prompting enables complex reasoning in large language models. In: International Conference on Learning Representations

[44] Zhou Y, et al (2023) Efficient prompting methods for large language models. In: International Conference on Learning Representations

Supplementary Files

This is a list of supplementary files associated with this preprint. Click to download.

- supple.pdf