



华为云 CodeArts Check 代码扫描报告

报告生成日期： 2026/07/13 15:51:48 GMT+08:00

目录

- 1 任务摘要
- 2 扫描结果概述
 - 2.1 问题概览
 - 2.2 问题汇总
 - 2.3 十大问题
 - 2.4 问题级别
 - 2.5 问题历史趋势
- 3 扫描结果详情
 - 3.1 严重 (1)
 - 3.1.1 其他 (1)
 - 3.1.1.1 G.WST.01 禁止在 localStorage和sessionStorage中存储敏感数据 (1)
 - 3.2 一般 (68)
 - 3.2.1 其他 (68)
 - 3.2.1.1 G.OTH.03 不用的代码段直接删除，不要注释掉 (4)
 - 3.2.1.2 G.PSL.02 在datetime的使用过程中注意时区的影响，时区敏感的场景建议显式指定时区 (1)
 - 3.2.1.3 G.FMT.03 import包应该按照先安卓、华为公司、其他商业组织、其他开源第三方、net/org开源组织、最后java的分类顺序出现，并用一个空行分组 (38)
 - 3.2.1.4 G.EXP.02 判断相等时应使用 === 和 !== ，而不是 == 和 != (10)
 - 3.2.1.5 G.CMT.01 代码注释置于对应代码的上方或右边 (1)
 - 3.2.1.6 G.TYP.07 使用dict[key]获取 value 时需要注意保证 key 在有效的范围内 (1)
 - 3.2.1.7 G.LOG.02 使用日志记录工具实现日志功能 (2)
 - 3.2.1.8 G.FMT.02 行宽不超过120个字符 (1)
 - 3.2.1.9 G.TYP.13 在引用类型向下转换前用instanceof进行判断 (1)
 - 3.2.1.10 G.MET.06 使用Optional代替null作为返回值或者可能的缺失值；禁止对Optional对象赋值为null (6)
 - 3.2.1.11 G.COL.03 声明一个泛型类通过限定符限制可用的泛型类型 (2)
 - 3.2.1.12 G.OBJ.03 构造方法如果有多个，尽量重用 (1)
 - 3.3 提示 (672)
 - 3.3.1 其他 (672)
 - 3.3.1.1 G.FMT.12 每句代码后加分号 (15)
 - 3.3.1.2 G.CMT.02 注释符和注释内容之间留有一个空格 (18)
 - 3.3.1.3 G.MET.07 建议使用一致的 return 语句 (17)
 - 3.3.1.4 G.MET.05 函数的参数个数不建议超过 5 个 (5)
 - 3.3.1.5 G.FMT.11 使用拖尾逗号 (9)
 - 3.3.1.6 G.DCL.07 避免当前作用域中的变量覆盖更外层作用域的变量 (14)
 - 3.3.1.7 G.FMT.10 行宽不超过120个窄字符 (3)

- 3.3.1.8 G.EXP.06 建议在正则表达式中使用命名捕获组 (2)
- 3.3.1.9 G.FMT.01 使用空格进行缩进 (2)
- 3.3.1.10 G.CMT.04 文件头注释包含版权说明 (19)
- 3.3.1.11 G.FMT.02 一个源文件按顺序包含版权、package、import、顶层类,且用空行分隔 (15)
- 3.3.1.12 G.CMT.02 顶层public类的Javadoc应该包含功能说明和创建日期/版本信息 (66)
- 3.3.1.13 G.AOD.03 尽量避免使用console (2)
- 3.3.1.14 G.FMT.07 合理安排空行 (1)
- 3.3.1.15 G.FMT.09 建议 if、for、do、while 等语句的执行体加大括号 {} (3)
- 3.3.1.16 G.CMT.05 文件头注释应该包含版权许可信息 (66)
- 3.3.1.17 G.FMT.08 用空格突出关键字和重要信息 (3)
- 3.3.1.18 G.TYP.04 建议字符串使用单引号 (136)
- 3.3.1.19 G.CMT.01 public或protected修饰的元素应添加Javadoc注释 (235)
- 3.3.1.20 G.MET.01 方法要简短--方法的参数不应超过5个 (4)
- 3.3.1.21 G.FMT.12 减少不必要的空行,保持代码紧凑 (37)

1 任务摘要

任务名称	shixun-swmu
编程语言	JAVASCRIPT, PYTHON, JAVA
代码行数	5328
文件总数	97
仓库地址	git@codehub.devcloud.cn-north-4.huaweicloud.com: 9b1957ad04f844cfa48e66dd371a59bf/shixun-swmu.git
分支名称	main

2 扫描结果概述

2.1 问题概览



2.2 问题汇总

- 问题级别

致命	严重	一般	提示
0	1	68	672

- 已忽略问题级别

致命	严重	一般	提示
0	0	0	0

- 问题状态

待处理	已解决	已忽略	已修复
741	0	0	0

- 延迟问题

正式问题	延迟上线问题
741	0


- 待处理问题分类

问题级别	问题类型	问题数量
严重	其他	1
一般	其他	68
提示	其他	672


2.3 十大问题

规则	问题数量
G.CMT.01 public或protected修饰的元素应添加Javadoc注释	235
G.TYP.04 建议字符串使用单引号	136
G.CMT.02 顶层public类的Javadoc应该包含功能说明和创建日期/版本信息	66
G.CMT.05 文件头注释应该包含版权许可信息	66
G.FMT.03 import包应该按照先安卓、华为公司、其他商业组织、其他开源第三方、net/org开源组织、最后java的分类顺序出现，并用一个空行分组	38
G.FMT.12 减少不必要的空行，保持代码紧凑	37
G.CMT.04 文件头注释包含版权说明	19
G.CMT.02 注释符和注释内容之间留有一个空格	18
G.MET.07 建议使用一致的 return 语句	17
G.FMT.12 每句代码后加分号	15

2.4 问题级别

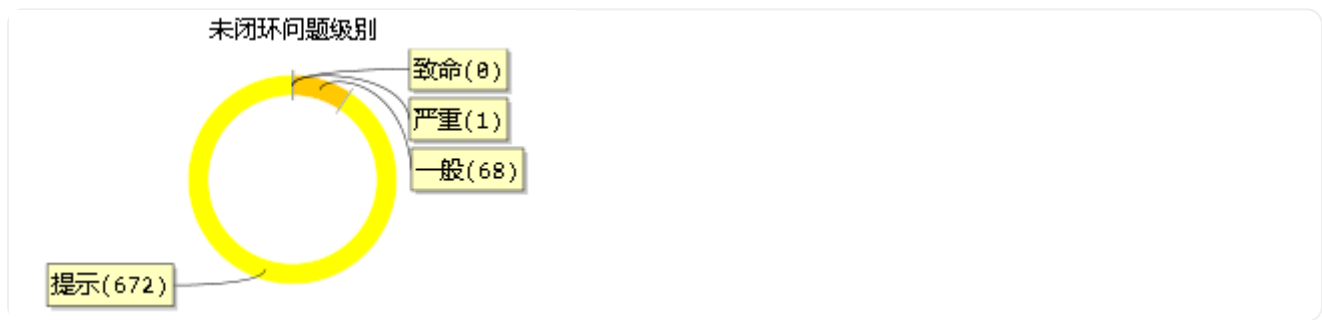

2.5 问题历史趋势

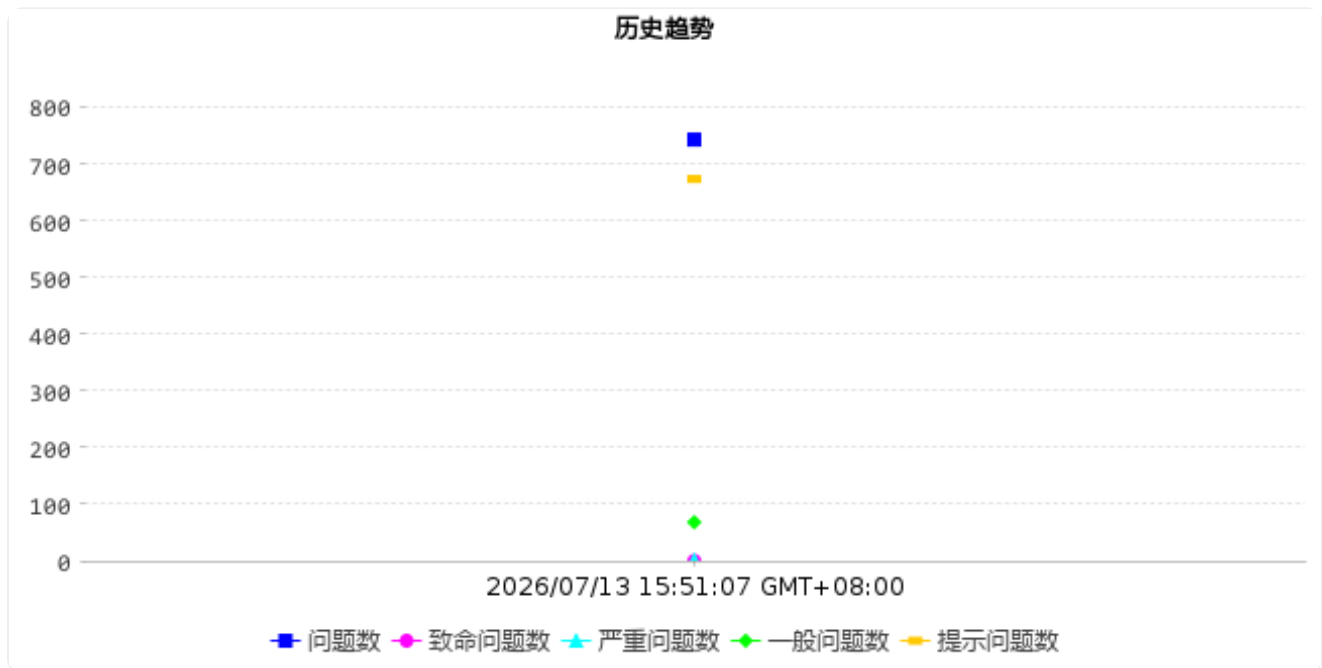

3 扫描结果详情

3.1 严重 (1)

3.1.1 其他 (1)

3.1.1.1 G.WST.01 禁止在 localStorage和sessionStorage中存储敏感数据 (1)

- 问题描述：

localStorage 本身无防XSS的机制，数据容易被窃取，即使对敏感数据加密，一旦密钥泄露，也将导致敏感数据泄露。

- 正确示例：

场景1：localStorage 中存储数据。

- 修复示例：在 localStorage 存储非敏感数据

```
localStorage.setItem('name', name);
```

- 错误示例：

场景1：localStorage 中存储数据。

- 错误示例：在 localStorage 存储敏感数据

```
localStorage.setItem('password', password);
```

- 建议的写法：

禁止在 localStorage 中存储敏感数据。

- 问题1：medical-managerment-system/src/store/modules/app.js:47

- 问题代码1：

```
42     if (!data.token || !data.userInfo) {
43         throw new Error("登录接口返回的数据不完整");
44     }
45
46     localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47     localStorage.setItem("token", data.token);
48     commit("SET_TOKEN", data.token);
49     Message({
50         type: "success",
51         message: "登录成功",
52     });
```

3.2 一般 (68)

3.2.1 其他 (68)

3.2.1.1 G.OTH.03 不用的代码段直接删除，不要注释掉（4）

- 问题描述：

使用注释符注释掉的代码段，无法被正常维护；当企图恢复使用这段代码时，极有可能引入易被忽略的缺陷。

- 正确示例：

场景1：废弃代码

- 修复示例：直接删除不用的代码段

```
mModel.reloadIcons();
```

- 错误示例：

场景1：废弃代码

- 错误示例：不用的代码段使用注释符来注释

```
mModel.reloadIcons();
// if (!mModel.isAllAppsLoaded()) {
//   function make(tag) {
//     return element;
//   }
// }
```

- 建议的写法：

将注释的代码段直接删除，若后续再需要，考虑移植或重写这段代码。

- 问题1： medical-managerment-system/src/api/admin/companyInfoManage.js:8

- 问题代码1：

```
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询公司信息api
11 export function getCompanyInfo(pn, size, keyword = "") {
12   return request({
13     url: '/companys/${pn}/${size}',
```

- 问题2： medical-managerment-system/src/api/admin/medicalPolicyInfoManage.js:8

- 问题代码1：

```

3     judgeAddResult,
4     judgeQueryResult,
5     judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询医保政策信息api
11 export function getMedicalPolicyInfo(params) {
12     return request({
13         url: '/medical_policys',

```

- 问题3: medical-managment-system/src/router/index.js:5

- 问题代码1 :

```

1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";
6
7 Vue.use(VueRouter);
8
9 // 解决导航栏或者底部导航tabBar中的vue-router在3.0版本以上频繁点击菜单报错的问题。
10 const originalPush = VueRouter.prototype.push;

```

- 问题4: medical-managment-system/src/views/SaleManage/index.vue:405

- 问题代码1 :

```

400     handleAddClose() {
401         this.addForm = emptySaleForm();
402         this.$nextTick(() => this.$refs.addForm && this.$refs.addForm.
clearValidate());
403     },
404     handleModifyClose() {
405         // this.$refs.modifyForm.clearValidate();
406         this.$refs.modifyForm.resetFields();
407     },
408     toCoordinate(value) {
409         if (value === "" || value === null || value === undefined) return null;
410         const coordinate = Number(value);

```

3.2.1.2 G.PSL.02 在datetime的使用过程中注意时区的影响，时区敏感的场景建议显式指定时区（1）

- 问题描述：

datetime标准库在未指定tz可选参数时，会按照操作系统设置的时区显示时间。未显式指定时区的软件在跨时区使用时，会因为不同的系统时区设置导致预期外的问题。在涉及时间比较和时间差计算等场景，在夏令时切换时，系统时区的时间会发生跳变，使用系统时区的时间可能会导致预期外的问题。

- 正确示例：

场景1：datetime的使用

- 修复示例：使用带时区的时间

```
from datetime import datetime, timezone

def main():
    print(datetime.now(tz=timezone.utc)) # 2021-04-02 15:04:31.759787+00:00, 推荐该用法, 包含明确的时区信息
    print(datetime.now(tz=timezone.utc).tzname()) # UTC
    print(datetime.utcnow()) # 2021-04-02 15:04:31.759787

if __name__ == '__main__':
    main()
```

- 错误示例：

场景1：datetime的使用

- 错误示例：直接使用本地时间

```
from datetime import datetime

def main():
    print(datetime.now()) # 2021-04-02 15:04:31.759787 比UTC时间快8小时
    print(datetime.now().tzname()) # None

if __name__ == '__main__':
    main()
```

- 建议的写法：

使用datetime标准库时，显式指定tz可选参数为希望使用的时区。使用UTC时间时建议直接使用datetime.now(tz=timezone.utc)方式。

- 问题1：api-tests/run_api_tests.py:672,693

- 问题代码1：

```
667         token=admin_token,
668         json_body={
669             "cityId": policy_city_id,
670             "title": medical_policy_title,
671             "message": "API 自动化测试医保政策",
672             "updateTime": datetime.now().strftime("%Y-%m-%d"),
673         },
674     )
675     policy_page = suite.expect_api(
676         "查询新增医保政策",
677         "GET",
```

- 问题代码2：

```
688         token=admin_token,
689         json_body={
690             "cityId": policy_city_id,
691             "title": f"{medical_policy_title}-updated",
692             "message": "已修改",
693             "updateTime": datetime.now().strftime("%Y-%m-%d"),
694         },
695     )
696     else:
697         suite.skip("医保政策 CRUD", "城市表为空, 无法取得 cityId")
```

3.2.1.3 G.FMT.03 import包应该按照先安卓、华为公司、其他商业组织、其他开源第三方、net/org开源组织、最后java的分类顺序出现，并用一个空行分组（38）

- 问题描述：

import包推荐按如下顺序排列：

- 静态导入置于所有其他导入之上。
- 从上往下，大致分类是：import static、安卓、华为公司com.huawei.、其他商业组织com.、其他开源第三方xxx.yyy.*、net/org开源组织、javacard、Java最基础的包、Java的其他包、Java的扩展包。
- 每一类内部按照字母顺序排序。几大分类也大致是按字母排序（android、com、net、org），只是java/javax在最后。

Java最基础的包，是指java.base模块中的包，参照[java.base中的包清单](#)。Java的其他包，是指java.base模块之外的[其他SE模块的包](#)。

三方开源，包含了商业公司的开源，例如com.alibaba.fastjson，com.intelliij.openapi等，与非盈利组织的开源，例如net/org组织的。这里，“其他”，就是指除了前缀为com、net、org之外的其他三方开源，例如下面示例中的lombok、maven。

这个风格兼容于[安卓的import顺序](#)，如果没有最上面的安卓包，也适用于非安卓。

- 正确示例：

场景1：

- 修复示例：

```
import static all.statics.imports; // 静态导入

import android.xx.Xyz; // 安卓
import androidx.xx.Xyz; // 安卓

import com.hisilicon.xx.Xyz; // 海思
import com.huawei.xx.Xyz; // 华为公司

import com.google.common.io.Files; // 其他商业组织

import harmonyos.xx.Xyz; // 开源第三方 鸿蒙
import lombok.extern.slf4j.Slf4j;
import maple.xx.Xyz;
import maven.xx.Xyz;
import ohos.xx.Xyz;

import net.sf.json.xx.Xyz; // net/org开源组织

import org.apache.server.SoapServer;

import javacard.xx.Xyz;

import java.io.IOException; // Java最基础的包
import java.net.URL;
import java.rmi.RmiServer;
import java.rmi.server.Server;

import javax.swing.JPanel; // Java的扩展包
import javax.swing.event.ActionEvent;
```

- 错误示例：

场景1：

- 错误示例：

```
import static all.statics.imports; // 静态导入
import android.xx.Xyz; // 安卓
import androidx.xx.Xyz; // 安卓
import lombok.extern.slf4j.Slf4j; // 开源第三方
import maple.xx.Xyz; // 开源第三方
import maven.xx.Xyz; // 开源第三方
import net.sf.json.xx.Xyz; // net/org开源组织
import org.apache.server.SoapServer; // net/org开源组织
import com.hisilicon.xx.Xyz; // 海思
import com.huawei.xx.Xyz; // 华为公司
import com.google.common.io.Files; // 其他商业组织
import harmonyos.xx.Xyz; // 开源第三方 鸿蒙
import ohos.xx.Xyz; // 开源第三方 鸿蒙
import javacard.xx.Xyz;
import java.io.IOException; // Java最基础的包
import java.net.URL;
import java.rmi.RmiServer; // Java的其他包
import java.rmi.server.Server;
import javax.swing.JPanel; // Java的扩展包
import javax.swing.event.ActionEvent;
```

- 建议的写法：

对代码进行格式化处理。

- 问题1: medical-backend/src/main/java/com/medicine/security/RestAuthenticationEntryPoint.java:11

- 问题代码1：

```
6 import org.springframework.http.MediaType;
7 import org.springframework.security.core.AuthenticationException;
8 import org.springframework.security.web.AuthenticationEntryPoint;
9 import org.springframework.stereotype.Component;
10
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
```

- 问题2: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:3

- 问题代码1：

```
1 package com.medicine.auth.mapper;
2
3 import com.medicine.auth.model.PermissionRecord;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 import java.util.List;
```

- 问题3: medical-backend/src/main/java/com/medicine/business/service/FileStorageService.java:9

- 问题代码1 :

```
4 import com.medicine.common.ErrorCode;
5 import org.springframework.beans.factory.annotation.Value;
6 import org.springframework.stereotype.Service;
7 import org.springframework.web.multipart.MultipartFile;
8
9 import java.io.IOException;
10 import java.awt.image.BufferedImage;
11 import javax.imageio.ImageIO;
12 import java.nio.file.Files;
13 import java.nio.file.Path;
14 import java.nio.file.StandardCopyOption;
```

- 问题4: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:5

- 问题代码1 :

```
1 package com.medicine.dashboard.mapper;
2
3 import com.medicine.dashboard.dto.DashboardCounts;
4 import com.medicine.dashboard.dto.DashboardNews;
5 import com.medicine.dashboard.dto.NameValue;
6 import org.apache.ibatis.annotations.Select;
7
8 import java.util.List;
9
10 public interface DashboardMapper {
```

- 问题5: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题6: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:6

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.DoctorService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
7 import org.springframework.security.core.annotation.AuthenticationPrincipal;
8 import org.springframework.web.bind.annotation.*;
9 import com.medicine.security.AuthSession;
10
11 import java.util.Map;
```

- 问题7: medical-backend/src/main/java/com/medicine/business/service/CityService.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CityMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
```

- 问题8: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MaterialService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题9: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:4

- 问题代码1 :

```
1 package com.medicine.dashboard.service;
2
3 import com.medicine.dashboard.dto.DashboardView;
4 import com.medicine.dashboard.mapper.DashboardMapper;
5 import org.springframework.stereotype.Service;
6
7 @Service
8 public class DashboardService {
```

- 问题10: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:3

- 问题代码1 :

```
1 package com.medicine.auth.mapper;
2
3 import com.medicine.auth.model.Account;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 public interface AccountMapper {
```

- 问题11: medical-backend/src/test/java/com/medicine/auth/service/AuthServiceTest.java:3

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.LoginResult;
4 import com.medicine.auth.mapper.AccountMapper;
5 import com.medicine.auth.model.Account;
6 import com.medicine.common.BusinessException;
7 import com.medicine.common.ErrorCode;
8 import com.medicine.security.AuthSession;
```

- 问题12: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:5

- 问题代码1 :

```
1 package com.medicine.config;
2
3 import com.medicine.security.RestAccessDeniedHandler;
4 import com.medicine.security.RestAuthenticationEntryPoint;
5 import com.medicine.security.TokenAuthenticationFilter;
6 import org.springframework.beans.factory.annotation.Value;
7 import org.springframework.context.annotation.Bean;
8 import org.springframework.context.annotation.Configuration;
9 import org.springframework.http.HttpHeaders;
10 import org.springframework.http.HttpMethod;
```

- 问题13: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:6

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.PermissionMeta;
4 import com.medicine.auth.dto.PermissionNode;
5 import com.medicine.auth.mapper.PermissionMapper;
6 import com.medicine.auth.model.PermissionRecord;
7 import org.springframework.stereotype.Service;
8
9 import java.util.ArrayList;
10 import java.util.LinkedHashMap;
11 import java.util.List;
```

- 问题14: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.MaterialMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
```

- 问题15: medical-backend/src/main/java/com/medicine/security/RestAccessDeniedHandler.java:11

- 问题代码1 :

```
6 import org.springframework.http.MediaType;
7 import org.springframework.security.access.AccessDeniedException;
8 import org.springframework.security.web.access.AccessDeniedHandler;
9 import org.springframework.stereotype.Component;
10
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
```

- 问题16: medical-backend/src/main/java/com/medicine/business/config/UploadWebConfig.java:3

- 问题代码1 :

```
1 package com.medicine.business.config;
2
3 import com.medicine.business.service.FileStorageService;
4 import org.springframework.context.annotation.Configuration;
5 import org.springframework.web.servlet.config.annotation.ResourceHandlerRegistry;
6 import org.springframework.web.servlet.config.annotation.WebMvcConfigurer;
7
8 @Configuration
```

- 问题17: medical-backend/src/main/java/com/medicine/security/TokenService.java:6

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import com.fasterxml.jackson.core.JsonProcessingException;
4 import com.fasterxml.jackson.databind.ObjectMapper;
5 import com.medicine.common.BusinessException;
6 import com.medicine.common.ErrorCode;
7 import org.springframework.beans.factory.annotation.Value;
8 import org.springframework.data.redis.core.StringRedisTemplate;
9 import org.springframework.stereotype.Service;
10
11 import java.time.Duration;
```

- 问题18: medical-backend/src/test/java/com/medicine/common/ApiResponseTest.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.common;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class ApiResponseTest {
```

- 问题19: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:10

- 问题代码1 :

```
5 import com.medicine.auth.mapper.AccountMapper;
6 import com.medicine.auth.model.Account;
7 import com.medicine.common.BusinessException;
8 import com.medicine.common.ErrorCode;
9 import com.medicine.security.AuthSession;
10 import com.medicine.security.TokenService;
11 import org.springframework.security.crypto.password.PasswordEncoder;
12 import org.springframework.stereotype.Service;
13
14 @Service
15 public class AuthService {
```

- 问题20: medical-backend/src/test/java/com/medicine/security/TokenServiceTest.java:3

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class TokenServiceTest {
```

- 问题21: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:22

- 问题代码1 :

```
17 import org.springframework.web.bind.annotation.RequestHeader;
18 import org.springframework.web.bind.annotation.RequestMapping;
19 import org.springframework.web.bind.annotation.RequestParam;
20 import org.springframework.web.bind.annotation.RestController;
21
22 import javax.validation.Valid;
23 import java.util.Collections;
24 import java.util.List;
25 import java.util.Map;
26
27 @Validated
```

- 问题22: medical-backend/src/test/java/com/medicine/auth/service/PermissionServiceTest.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.PermissionNode;
4 import com.medicine.auth.mapper.PermissionMapper;
5 import com.medicine.auth.model.PermissionRecord;
6 import org.junit.jupiter.api.Test;
7
8 import java.util.Arrays;
```

- 问题23: medical-backend/src/main/java/com/medicine/business/controller/UploadController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.FileStorageService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.PostMapping;
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RequestParam;
9 import org.springframework.web.bind.annotation.RestController;
```

- 问题24: medical-backend/src/test/java/com/medicine/business/service/DoctorServiceTest.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.DoctorMapper;
4 import org.junit.jupiter.api.Test;
5 import org.springframework.security.crypto.password.PasswordEncoder;
6
7 import static org.mockito.Mockito.mock;
8 import static org.mockito.Mockito.verify;
```

- 问题25: medical-backend/src/main/java/com/medicine/security/TokenAuthenticationFilter.java:9

- 问题代码1 :

```
4 import org.springframework.security.core.authority.SimpleGrantedAuthority;
5 import org.springframework.security.core.context.SecurityContextHolder;
6 import org.springframework.stereotype.Component;
7 import org.springframework.web.filter.OncePerRequestFilter;
8
9 import javax.servlet.FilterChain;
10 import javax.servlet.ServletException;
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.util.Collections;
```

- 问题26: medical-backend/src/test/java/com/medicine/dashboard/service/DashboardServiceTest.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.dashboard.service;
2
3 import com.medicine.dashboard.dto.DashboardCounts;
4 import com.medicine.dashboard.dto.DashboardNews;
5 import com.medicine.dashboard.dto.DashboardView;
6 import com.medicine.dashboard.dto.NameValue;
7 import com.medicine.dashboard.mapper.DashboardMapper;
8 import org.junit.jupiter.api.Test;
```

- 问题27: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.SaleService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题28: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:5

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CityService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
7 import org.springframework.web.bind.annotation.*;
8
9 import java.util.Map;
```

- 问题29: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MedicalPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题30: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:4

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题31: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.MedicalPolicyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.time.LocalDate;
8 import java.util.LinkedHashMap;
```

- 问题32: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:4

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.DrugService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
```

- 问题33: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:5

- 问题代码1 :

```
1 package com.medicine.dashboard.controller;
2
3 import com.medicine.common.ApiResponse;
4 import com.medicine.dashboard.dto.DashboardView;
5 import com.medicine.dashboard.service.DashboardService;
6 import org.springframework.web.bind.annotation.GetMapping;
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RestController;
9
10 @RestController
```

- 问题34: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CompanyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
```

- 问题35: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.SaleMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8 import java.util.LinkedHashMap;
```

- 问题36: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CompanyPolicyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.LinkedHashMap;
8 import java.util.List;
```

- 问题37: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:5

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.DoctorMapper;
4 import com.medicine.common.BusinessException;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.crypto.password.PasswordEncoder;
7 import org.springframework.stereotype.Service;
8 import org.springframework.transaction.annotation.Transactional;
9
10 import java.util.LinkedHashMap;
```

- 问题38: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:3

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.DrugMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.ArrayList;
8 import java.util.LinkedHashMap;
```

3.2.1.4 G.EXP.02 判断相等时应使用 === 和 !== ，而不是 == 和 != (10)

- 问题描述：

JavaScript 中使用双等 == 做相等判断时会自动做类型转换，如：[] == false、[] == ![]、3 == '03' 都是 true，当类型确定时使用全等 === 做比较可以提高效率。

- 正确示例：

场景1：相等判断

- 修复示例：判断相等时应使用 === 不等时用 !==

```
age === bee
age !== bee
```

- 错误示例：

场景1：相等判断

- 错误示例：判断相等时用 ==，判断不相等时用 !=

```
age == bee
age != bee
```

- 建议的写法：

判断相等时应使用 === 和 !==，而不是 == 和 !=。

- 问题1: medical-managerment-system/src/main.js:22

- 问题代码1：

```
17 Vue.mixin({
18   computed: {
19     // 进行按钮权限控制
20     hasRole() {
21       if(localStorage.getItem('userInfo')) {
22         if(JSON.parse(localStorage.getItem('userInfo')).utype == 1) {
23           return true
24         } else {
25           return false
26         }
27       } else {
```

- 问题2: medical-managerment-system/src/utlis/request.js:44

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
39 //response 拦截器
40 service.interceptors.response.use(
41   (response) => {
42     const res = response.data;
43     // code为10006代表token失效，需要重新登录
44     if (res.code == 10006) {
45       Message({
46         type: "error",
47         message: "登录已失效，请重新登录",
48       });
49       setTimeout(() => {
```

- 问题3: medical-managerment-system/src/utils/app.js:4

- 问题代码1 :

```
1 import { Message } from "element-ui";
2 // 判断删除结果
3 export function judgeDeleteResult(res) {
4   if (res.data.code == 20000) {
5     Message({
6       type: "success",
7       message: "删除成功!",
8     });
9   } else {
```

- 问题4: medical-managerment-system/src/utils/app.js:19,24

- 问题代码1 :

```
14   }
15   return res;
16 }
17 // 判断新增结果
18 export function judgeAddResult(res) {
19   if (res.data.code == 20000) {
20     Message({
21       type: "success",
22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
```

- 问题代码2 :

```
19   if (res.data.code == 20000) {
20     Message({
21       type: "success",
22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
25     Message({
26       type: "error",
27       message: "该手机号已被注册",
28     });
29   } else {
```

- 问题5: medical-managerment-system/src/utils/app.js:39

- 问题代码1 :


```

34  }
35  return res;
36  }
37  // 判断查询结果
38  export function judgeQueryResult(res) {
39    if (res.data.code == 20000) {
40      return res;
41    } else {
42      Message({
43        type: "error",
44        message: "加载数据失败!",

```

- 问题6: medical-managerment-system/src/utils/app.js:51,56

- 问题代码1 :

```

46    return false;
47  }
48  }
49  // 判断修改结果
50  export function judgeModifyResult(res) {
51    if (res.data.code == 20000) {
52      Message({
53        type: "success",
54        message: "修改成功!",
55      });
56    } else if (res.data.code == 10001) {

```

- 问题代码2 :

```

51    if (res.data.code == 20000) {
52      Message({
53        type: "success",
54        message: "修改成功!",
55      });
56    } else if (res.data.code == 10001) {
57      Message({
58        type: "error",
59        message: "该手机号已被注册",
60      });
61    } else {

```

- 问题7: medical-managerment-system/src/utils/app.js:71

- 问题代码1 :

```

66  }
67  return res;
68  }
69  // 判断重置密码结果
70  export function judgeResetResult(res) {
71    if (res.data.code == 20000) {
72      Message({
73        type: "success",
74        message: "重置密码成功!",
75      });
76    } else {

```

- 问题8: medical-managerment-system/src/store/modules/doctorInfoManage.js:43

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
38     { dispatch },
39     { age, levelId, name, phoneNumber, pwd, sex, typeId, size }
40   ) {
41     return addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId).then(
42       (res) => {
43         if (res.data.code == 10001) {
44           return false;
45         } else {
46           // 新增之后跳转到最后一页
47           dispatch("getDoctorInfo", { pn: res.data.data.pages, size });
48           return true;
49         }
50       }
51     );
52   }
53 }
```

- 问题9: medical-managerment-system/src/store/modules/doctorInfoManage.js:89

- 问题代码1 :

```
84     sex,
85     typeId,
86     id
87   ).then((res) => {
88     console.log(res);
89     if (res.data.code == 10001) {
90       return false;
91     } else {
92       dispatch("getDoctorInfo", { pn, size, keyword });
93       return true;
94     }
95   });
96 }
```

- 问题10: medical-managerment-system/src/store/modules/cityInfoManage.js:29

- 问题代码1 :

```
24   },
25   // 新增城市
26   addCity({ dispatch }, { cityNumber, size }) {
27     addCity(cityNumber).then((res) => {
28       // 新增之后跳转到最后一页
29       if (res.data.code == 20000) {
30         dispatch("getCityInfo", { pn: res.data.data.pages, size });
31       }
32     });
33   },
34   // 删除城市信息
35 }
```

3.2.1.5 G.CMT.01 代码注释置于对应代码的上方或右边 (1)

- 问题描述 :
针对代码的注释，应该置于对应代码的上方或右边。
- 正确示例 :

场景1：代码注释位置

- 修复示例：代码右边的注释与代码之间至少留有一个空格。

```
// getTableData函数的注释
function getTableData() {
  getData(); // getData函数是从后台请求表格数据
  ...
}
```

- 错误示例：

场景1：代码注释位置

- 错误示例：代码右边的注释与代码之间没有空格。

```
function getTableData() {
  getData();// getData函数是从后台请求表格数据
  ...
}
```

- 建议的写法：

代码右边的注释：与代码之间，至少留有一个空格。

- 问题1：medical-managerment-system/src/main.js:3,4,6,7,8,9

- 问题代码1：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css'//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
```

- 问题代码2：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css'//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
```

- 问题代码3：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css'//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

- 问题代码4：

```
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

● 问题代码5：

```
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
```

● 问题代码6：

```
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
14 Vue.use(Fragment.Plugin);
```

3.2.1.6 G.TYP.07 使用dict[key]获取 value 时需要注意保证 key 在有效的范围内 (1)

● 问题描述：

Python的字典dict可以使用key获取其对应的value。但是当key在dict的key值列表中不存在时，直接使用dict[key]获取value会报KeyError。从而会导致程序异常崩溃，因此需要注意从代码层面保证 key 在有效的范围内。

● 正确示例：

场景1：使用KeyError捕获字典key的取值异常

- 修复示例：对key不存在的情况做异常处理

```
example_dict = dict()
example_key = 'example_key'
try:
    example_value = example_dict[example_key]
except KeyError:
    ... # 符合，对key不存在的情况做异常处理
```

场景2：使用dict.get()的方法来代替直接取值

- 修复示例：使用dict.get()的方法，设置默认值为'Not exist'

```
example_dict = dict()
example_key = 'example_key'
example_value = example_dict.get(example_key, 'Not exist') # 符合，使用dict.get()的方法，设置默认值为'Not exist'

# 无论是否设置默认值，在使用的时候都应该进行判断，以保证安全性
if example_value == 'Not exist':
    pass
else:
    pass
```

场景3：使用defaultdict类来代替直接取值

- 修复示例：使用defaultdict类，默认值为空字符串''

```
from collections import defaultdict

example_dict = defaultdict(str) # 符合，使用defaultdict类，默认值为空字符串''
example_key = 'example_key'
print(example_dict[example_key])
```

- 错误示例：

场景1：使用KeyError捕获字典key的取值异常

- 错误示例：没有判断key是否在字典变量中存在

```
example_dict = dict()
example_key = 'example_key'
example_value = example_dict[example_key] # 不符合，字典取值时没有判断键值是否存在
```

场景2：使用dict.get()的方法来代替直接取值

- 错误示例：没有判断key是否在字典变量中存在

```
example_dict = dict()
example_key = 'example_key'
example_value = example_dict[example_key] # 不符合，字典取值时没有判断键值是否存在
```

场景3：使用defaultdict类来代替直接取值

- 错误示例：没有判断key是否在字典变量中存在

```
example_dict = dict()
example_key = 'example_key'
example_value = example_dict[example_key] # 不符合，字典取值时没有判断键值是否存在
```

- 建议的写法：

1. 尽量避免直接使用dict[key]的方式从字典中获取value，如果一定要使用，需要注意对key not in dict的情况做异常处理。
2. 使用dict.get(key)方法获取value，并且在使用dict.get方法时应设置默认值并对返回值进行检查，如果不设置默认值的话则默认为None。
3. 对于性能要求不高的场景，推荐使用collections模块中defaultdict类，当取一个字典中不存在的key值时，它不会报错或者取到的值为None，而是会返回一个设定的默认值。

- 问题1: api-tests/run_api_tests.py:863

- 问题代码1：

```

858     symbols = {"passed": "PASS", "failed": "FAIL", "skipped": "SKIP"}
859     for case in suite.cases:
860         detail = (case.detail or "-").replace("|", "\\|").replace("\n", " ")[:
240]
861         codes = f"{case.http_status or '-'} / {case.api_code if case.api_code is
not None else '-'}"
862         lines.append(
863             f"| {symbols[case.status]} | {case.name} | {case.method or '-'} |
{codes} | "
864             f"{case.elapsed_ms} ms | {detail} | "
865         )
866     markdown = "\n".join(lines) + "\n"
867     markdown_path.write_text(markdown, encoding="utf-8")
868     latest_path.write_text(markdown, encoding="utf-8")

```

3.2.1.7 G.LOG.02 使用日志记录工具实现日志功能（2）

- 问题描述：

使用日志记录工具实现日志功能。

使用标准输出（print）或标准输出（sys.stdout.write），会导致难以监控程序运行状况。

- 正确示例：

场景1：使用print打印到控制台

- 修复示例：采用正确的级别及形式记录日志

```
import logging
import threading
import time

logging.basicConfig(level=logging.NOTSET) # 指定日志文件路径等

class MyThread(threading.Thread):
    def __init__(self, thread_id, name, counter):
        threading.Thread.__init__(self)
        self.thread_id = thread_id
        self.name = name
        self.counter = counter

    def run(self):
        logging.info("Starting: %s", self.name) # 符合：采用正确的级别及形式记录日志
        process_something(self.name, self.counter)
        logging.info("Exiting:%s", self.name) # 符合：采用正确的级别及形式记录日志

def process_something(thread_name, counter):
    while counter:
        logging.debug("%s: %s", thread_name, time.ctime(time.time())) # 符合：采用正确的级别及形式记录日志
        counter -= 1
```

场景2：使用sys.stdout.write打印到控制台

- 修复示例：采用正确的级别及形式记录日志

```
import logging
import threading
import time

logging.basicConfig(level=logging.NOTSET) # 指定日志文件路径等

class MyThread(threading.Thread):
    def __init__(self, thread_id, name, counter):
        threading.Thread.__init__(self)
        self.thread_id = thread_id
        self.name = name
        self.counter = counter

    def run(self):
        logging.info("Starting: %s", self.name) # 符合：采用正确的级别及形式记录日志
        process_something(self.name, self.counter)
        logging.info("Exiting:%s", self.name) # 符合：采用正确的级别及形式记录日志

def process_something(thread_name, counter):
    while counter:
        logging.debug("%s: %s", thread_name, time.ctime(time.time())) # 符合：采用正确的级别及形式记录日志
        counter -= 1
```

- 错误示例：

场景1：使用print打印到控制台

- 错误示例：使用print打印到控制台

```
import threading

class MyThread(threading.Thread):
    def __init__(self, thread_id, name, counter):
        threading.Thread.__init__(self)
        self.thread_id = thread_id
        self.name = name
        self.counter = counter

    def run(self):
        print("Starting " + self.name) # 不符合：使用print打印到控制台
        process_something(self.name, self.counter, 5)
        print("Exiting " + self.name) # 不符合：使用print打印到控制台
```

场景2：使用sys.stdout.write打印到控制台

- 错误示例：使用sys.stdout.write打印到控制台

```
import sys
import threading

class MyThread(threading.Thread):
    def __init__(self, thread_id, name, counter):
        threading.Thread.__init__(self)
        self.thread_id = thread_id
        self.name = name
        self.counter = counter

    def run(self):
        sys.stdout.write("Starting " + self.name)
        process_something(self.name, self.counter, 5)
        sys.stdout.write("Exiting " + self.name) # 不符合：使用sys.stdout.write打印到控制台
```

- 建议的写法：

建议采用专门的日志记录工具或模块（如：logging）。

- 问题1：api-tests/generate_postman_collection.py:607

- 问题代码1：

```
602     ],
603     }
604     output = Path(__file__).parent / "postman" / "medicine-api.
postman_collection.json"
605     output.parent.mkdir(parents=True, exist_ok=True)
606     output.write_text(json.dumps(collection, ensure_ascii=False, indent=2) +
"\n", encoding="utf-8")
607     print(output)
608
609
610 if __name__ == "__main__":
611     main()
```

- 问题2：api-tests/run_api_tests.py:870,871,872,873

- 问题代码1：


```

865     )
866     markdown = "\n".join(lines) + "\n"
867     markdown_path.write_text(markdown, encoding="utf-8")
868     latest_path.write_text(markdown, encoding="utf-8")
869
870     print(json.dumps(report["summary"], ensure_ascii=False))
871     print(f"JSON: {json_path}")
872     print(f"JUnit: {junit_path}")
873     print(f"Markdown: {markdown_path}")
874     return 1 if failed else 0
875

```

• 问题代码2：

```

866     markdown = "\n".join(lines) + "\n"
867     markdown_path.write_text(markdown, encoding="utf-8")
868     latest_path.write_text(markdown, encoding="utf-8")
869
870     print(json.dumps(report["summary"], ensure_ascii=False))
871     print(f"JSON: {json_path}")
872     print(f"JUnit: {junit_path}")
873     print(f"Markdown: {markdown_path}")
874     return 1 if failed else 0
875
876

```

• 问题代码3：

```

867     markdown_path.write_text(markdown, encoding="utf-8")
868     latest_path.write_text(markdown, encoding="utf-8")
869
870     print(json.dumps(report["summary"], ensure_ascii=False))
871     print(f"JSON: {json_path}")
872     print(f"JUnit: {junit_path}")
873     print(f"Markdown: {markdown_path}")
874     return 1 if failed else 0
875
876
877 if __name__ == "__main__":

```

• 问题代码4：

```

868     latest_path.write_text(markdown, encoding="utf-8")
869
870     print(json.dumps(report["summary"], ensure_ascii=False))
871     print(f"JSON: {json_path}")
872     print(f"JUnit: {junit_path}")
873     print(f"Markdown: {markdown_path}")
874     return 1 if failed else 0
875
876
877 if __name__ == "__main__":
878     sys.exit(main())

```

3.2.1.8 G.FMT.02 行宽不超过120个字符 (1)

• 问题描述：

行宽包含代码以及注释等，行宽不宜过长，否则不利于阅读。
该规则有可配置参数，具体配置详见规则集中该规则的选项配置。

- 正确示例：

场景1：代码行长度过长

- 修复示例：函数调用长度超过120，使用\\换行连接符换行

```
var_sum = long_var_int_one + long_var_int_two + long_var_int_three + \\
    long_var_int_four + long_var_int_five + long_var_int_six
```

- 修复示例：函数调用代码长度超过120，使用规范化的格式

```
if __name__ == '__main__':
    # 符合，代码行过长，使用规范化格式换行写
    local_min = simulated_annealing(
        prob,
        find_max=True,
        max_x=100,
        min_x=5,
        max_y=5340,
        min_y=-5,
        visualization=True,
        max_z=120,
        allow_edit=False
    )
    p = Person()
```

- 错误示例：

场景1：代码行长度过长

- 错误示例：函数调用代码长度超过120

```
var_sum = long_var_int_one + long_var_int_two + long_var_int_three + long_var_int_four +
    long_var_int_five + long_var_int_six
```

- 建议的写法：

1. 代码行长度超过120，需在合适的地方换行。一般情况可使用\\。
2. 调用函数时，长度超过120，可以让调用的函数分成多行写，可以有效减少代码行长度。
3. 列表，字典元素过多，可以使用多行的方式分行写元素。

- 问题1: api-tests/generate_postman_collection.py:409

- 问题代码1：

```
404         "POST",
405         "/api/base/upload",
406         formdata=[
407             {"key": "file", "type": "file", "src": "{{testImagePath}}",
408             "contentType": "image/png"}
409         ],
410         extra_tests="pm.test(\"Image URL is returned\", () => pm.expect
411         (payload.data.url).to.be.a(\"string\").and.not.empty);",
412         request(
413             "拒绝非图片 MIME",
414             "POST",
415             "/api/base/upload",
```

3.2.1.9 G.TYP.13 在引用类型向下转换前用instanceof进行判断 (1)

- 问题描述：

没有判断类型直接进行类型转换，可能会因类型不匹配而导致运行时异常`java.lang.ClassCastException`。简单的修改方法是在强制转换之前使用`instanceof`进行判断，确认转换操作的可行性，除此之外其他的类型检查方式也是可行的（如直接判断`Class`类型），只要能保证类型可正确转换即可。

当集合或数组中保存多种类型的对象，当遍历这些数据使用时可以使用`instanceof`对每个元素的类型进行判断。但是运行时类型检查是一项耗时的操作，另外还可能带来修改点过多、工作量巨大的问题，同时维护的工作量也会倍增。最佳实现方式是改善设计，使集合/数组中只有同一种类型的对象。

- 正确示例：

场景1：类型强转前，未判断类型是否兼容，当类型不匹配时会抛出`java.lang.ClassCastException`

- 修复示例1：

```
public void doSomething(Object obj) {
    ...
    if(obj instanceof SomeResource) {
        SomeResource resource = (SomeResource)obj;
        ...
    }
}
```

- 错误示例：

场景1：类型强转前，未判断类型是否兼容，当类型不匹配时会抛出`java.lang.ClassCastException`

- 错误示例：

```
public void doSomething(Object obj) {
    ...
    SomeResource resource = (SomeResource)obj;
    ...
}
```

- 建议的写法：

引用类型向下转换前用`instanceof`进行判断；除此之外其他的类型检查方式也是可行的（如直接判断`Class`类型），只要能保证类型可正确转换即可。

- 问题1: `medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:56`

- 问题代码1：

```

51
52     @GetMapping("/permissions")
53     public ApiResponse<Map<String, List<PermissionNode>>> permissions(
54         @RequestParam(value = "roleName", required = false) String
55         ignoredRoleName,
56         Authentication authentication) {
57         AuthSession session = (AuthSession) authentication.getPrincipal();
58         List<PermissionNode> permissions = permissionService.findPermissionTree
59         (session.getRoleName());
60         return ApiResponse.success(Collections.singletonMap("permissions",
61         permissions));
62     }
63     @PostMapping("/logout")

```

3.2.1.10 G.MET.06 使用Optional代替null作为返回值或者可能的缺失值；禁止对Optional对象赋值为null（6）

- 问题描述：

使用Optional代替null作为返回值或者可能的缺失值；禁止对Optional对象赋值为null 工具检查场景：

- 检查是否将null赋值给Optional对象
- 检查是否将Optional对象和null进行比较（==或!=）
- 检查方法返回类型是否为Optional<Integer>、Optional<Long>或Optional<Double>
- 检查方法返回类型是否为Optional<集合或数组>

- 正确示例：

场景1：对于返回集合类型，应返回空集合

- 修复示例：返回空的集合

```

public Optional<List<String>> doSomething() {
    ...
    return Collections.emptyList();
}

```

场景2：对于包装类型应该使用OptionalInt、OptionalLong、OptionalDouble

- 修复示例：使用OptionalInt

```

public OptionalInt doSomething() {
    ...
    return OptionalInt.of(1);
}

```

场景3：禁止对Optional对象赋值/返回为null

- 修复示例：返回Optional.empty()

```

public OptionalInt doSomething() {
    ...
    return Optional.empty();
}

```

场景4：禁止Optional与null进行比较

- 修复示例：使用Optional.empty()来做判空逻辑

```
public void doSomething(Optional<String> opt) {
    ...
    if(opt.isEmpty()) {
        ...
    }
}
```

- 错误示例：

场景1：对于返回集合类型，应返回空集合

- 错误示例：使用了Optional<集合或数组>

```
public Optional<List<String>> doSomething() {
    ...
    return Optional.empty();
}
```

场景2：对于包装类型应该使用OptionalInt、OptionalLong、OptionalDouble

- 错误示例：使用了Optional

```
public Optional<Integer> doSomething() {
    ...
    return Optional.of(1);
}
```

场景3：禁止对Optional对象赋值/返回为null

- 错误示例：返回值为Optional<>的方法返回了null

```
public Optional<String> doSomething() {
    ...
    return null;
}
```

场景4：禁止Optional与null进行比较

- 错误示例：将Optional对象和null进行比较 (==或!=)

```
public void doSomething(Optional<String> opt) {
    ...
    if(opt==null) {
        ...
    }
}
```

- 建议的写法：

禁止对Optional对象赋值/返回为null，或与null比较，例如：Optional<Foo> foo = null;; 不应该返回Optional<Integer>、Optional<Long>、Optional<Double>，而应该使用OptionalInt、OptionalLong、OptionalDouble；一般不应该返回Optional<集合或数组>，而用空集合或空数组替代。

- 问题1: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:55

- 问题代码1：

```

50         return page(list, list.size(), 1, Math.max(list.size(), 1));
51     }
52
53     static Long longValue(Object value) {
54         if (value == null || value.toString().isBlank()) {
55             return null;
56         }
57         return value instanceof Number number ? number.longValue() : Long.valueOf(
58             value.toString());
59     }
60     static Integer intValue(Object value) {

```

- 问题2: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:62

- 问题代码1：

```

57         return value instanceof Number number ? number.longValue() : Long.valueOf(
58             value.toString());
59     }
60     static Integer intValue(Object value) {
61         if (value == null || value.toString().isBlank()) {
62             return null;
63         }
64         return value instanceof Number number ? number.intValue() : Integer.
65             valueOf(value.toString());
66     }
67     static String stringValue(Object value) {

```

- 问题3: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:68

- 问题代码1：

```

63     }
64     return value instanceof Number number ? number.intValue() : Integer.
65         valueOf(value.toString());
66     }
67     static String stringValue(Object value) {
68         return value == null ? null : value.toString().trim();
69     }
70
71     static BigDecimal decimalValue(Object value) {
72         if (value == null || value.toString().isBlank()) {
73             return null;

```

- 问题4: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:73

- 问题代码1：

```

68         return value == null ? null : value.toString().trim();
69     }
70
71     static BigDecimal decimalValue(Object value) {
72         if (value == null || value.toString().isBlank()) {
73             return null;
74         }
75         return value instanceof BigDecimal decimal ? decimal : new BigDecimal
(value.toString());
76     }
77 }

```

- 问题5: medical-backend/src/main/java/com/medicine/security/TokenService.java:67

- 问题代码1 :

```

62     }
63 }
64
65 public static String normalizeAuthorization(String authorization) {
66     if (authorization == null) {
67         return null;
68     }
69     String token = authorization.trim();
70     if (token.regionMatches(true, 0, "Bearer ", 0, 7)) {
71         token = token.substring(7).trim();
72     }

```

- 问题6: medical-backend/src/main/java/com/medicine/security/TokenService.java:73

- 问题代码1 :

```

68     }
69     String token = authorization.trim();
70     if (token.regionMatches(true, 0, "Bearer ", 0, 7)) {
71         token = token.substring(7).trim();
72     }
73     return token.isEmpty() ? null : token;
74 }
75 }

```

3.2.1.11 G.COL.03 声明一个泛型类通过限定符限制可用的泛型类型 (2)

- 问题描述 :

Java的泛型可按PECS(Producer Extends, Consumer Super)原则来设计上界和下界类型。声明一个带泛型的类或接口的时候,建议限制可以用的泛型类型,避免接口使用者乱用。

<? extends T>实现了泛型的协变,表现在泛型集合中,适合从集合中读取元素,不能添加元素。<? super T>实现了泛型的逆变,表现在泛型集合中,适合向集合中添加元素,不适合读取元素。Collections的一个典型的使用场景:public static <T> void copy(List<? super T> dest, List<? extends T> src)。

- 正确示例 :

场景1 :

- 修复示例：

```
public class GenericClassWithQualifier<T extends Number> {

}
```

- 错误示例：

场景1：

- 错误示例：

```
public class GenericClassWithQualifier<T> {

}
```

- 建议的写法：

声明一个带泛型的类或接口的时候，建议对可以使用的泛型类型进行限制，避免接口使用者乱用。

- 问题1: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:3

- 问题代码1：

```
1 package com.medicine.common;
2
3 public class ApiResponse<T> {
4
5     private int code;
6     private String message;
7     private T data;
```

- 问题2: medical-backend/src/main/java/com/medicine/common/PageView.java:6

- 问题代码1：

```
1 package com.medicine.common;
2
3 import java.util.Collections;
4 import java.util.List;
5
6 public class PageView<T> {
7
8     private long total;
9     private List<T> list;
10    private int pageNum;
11    private int pageSize;
```

3.2.1.12 G.OBJ.03 构造方法如果有多个，尽量重用（1）

- 问题描述：

由于可选参数导致的存在多个构造方法时，参数少的构造方法可以重用参数更多的构造方法，这样可以使代码更加简洁。

- 正确示例：

场景1：

- 修复示例：复用参数更多的构造方法

```
public class Student {
    private String name;
    private String sex;
    private int weight; // 可选参数
    private int height; // 可选参数
    private int age;    // 可选参数
    public Student(String name, String sex) {
        this(name, sex, 0);
    }
    public Student(String name, String sex, int weight) {
        this(name, sex, weight, 0);
    }
    public Student(String name, String sex, int weight, int height) {
        this(name, sex, weight, height, 0);
    }
    public Student(String name, String sex, int weight, int height, int age) {
        this.name = name;
        this.sex = sex;
        this.weight = weight;
        this.height = height;
        this.age = age;
    }
    ...
}
```

- 错误示例：

场景1：

- 错误示例：

```
public class Student {
    private String name;
    private String sex;
    private int weight; // 可选参数
    private int height; // 可选参数
    private int age;    // 可选参数
    public Student(String name, String sex) {
        this.name = name;
        this.sex = sex;
    }
    public Student(String name, String sex, int weight) {
        this.name = name;
        this.sex = sex;
        this.weight = weight;
    }
    public Student(String name, String sex, int weight, int height) {
        this.name = name;
        this.sex = sex;
        this.weight = weight;
        this.height = height;
    }
    public Student(String name, String sex, int weight, int height, int age) {
        this.name = name;
        this.sex = sex;
        this.weight = weight;
        this.height = height;
        this.age = age;
    }
    ...
}
```

- 建议的写法：

由于可选参数导致的存在多个构造方法时，参数少的构造方法重用参数更多的构造方法。

- 问题1: medical-backend/src/main/java/com/medicine/common/PageView.java:13

- 问题代码1：

```
8     private long total;
9     private List<T> list;
10    private int pageNum;
11    private int pageSize;
12
13    public PageView() {
14        this.list = Collections.emptyList();
15    }
16
17    public PageView(long total, List<T> list, int pageNum, int pageSize) {
18        this.total = total;
```

3.3 提示 (672)

3.3.1 其他 (672)

3.3.1.1 G.FMT.12 每句代码后加分号 (15)

- 问题描述：

每句代码后加分号。

JavaScript 在所有类 C 语言中是比较独特的，它不需要在每个语句的末尾有分号。在很多情况下，JavaScript 引擎可以确定一个分号应该在什么位置然后自动添加它。此特征被称为自动分号插入（ASI），被认为是 JavaScript 中较为有争议的特征。因为加上这个分号可以避免很多错误（例如不完整的输入），开发人员也可以放心地通过删除多余的空格来压缩ECMAScript代码（代码行结尾处没有分号会导致压缩错误）。另外，加上分号某些时候也会增进代码的性能，因为这样解析器就不用再花时间推测应该在哪里插入分号了。所以建议任何时候都不要省略它。

- 正确示例：

```
const foo = myfoo; // 赋值
(function(){
  const name = 'Skywalker';
  return name;
})(); // 自执行函数
return {
  name: 'ESLint',
};
```

- 错误示例：

```
const foo = myfoo // 没有分号，会连着下一行一起解析，变成调用myfoo(fn)();
(function(){
  const name = 'Skywalker'
  return name
})(); // 自执行函数
return
{
  name: 'ESLint',
}
// 这个看起来像是个return语句返回一个对象文本。然而，JavaScript 引擎将代码解释成：
return;
{
  name: 'ESLint';
}
```

- 建议的写法：

建议任何时候都不要省略分号。

- 问题1: medical-managerment-system/src/main.js:23,25,28

- 问题代码1：

```
18   computed: {
19     // 进行按钮权限控制
20     hasRole() {
21       if(localStorage.getItem('userInfo')) {
22         if(JSON.parse(localStorage.getItem('userInfo')).utype == 1) {
23           return true
24         } else {
25           return false
26         }
27       } else {
28         return false
```

- 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
20     hasRole() {
21         if(localStorage.getItem('userInfo')) {
22             if(JSON.parse(localStorage.getItem('userInfo')).utype == 1) {
23                 return true
24             } else {
25                 return false
26             }
27         } else {
28             return false
29         }
30     }
```

- 问题代码3：

```
23             return true
24         } else {
25             return false
26         }
27     } else {
28         return false
29     }
30 }
31 }
32 });
33 new Vue({
```

- 问题2: medical-managerment-system/src/utils/validator.js:52

- 问题代码1：

```
47     {
48         validator: validatorInt,
49         trigger: "change",
50     },
51 ],
52 }
53 // 验证密码 密码，以字母开头，长度在5~18之间，只能包含字母、数字和下划线
54 export function validatePass(str) {
55     const reg = /^[a-zA-Z]\w{4,18}$/;
56     return reg.test(str);
57 }
```

- 问题3: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:47

- 问题代码1：

```
42     ) {
43         modifyCompanyPolicyInfo(id, companyId, title, message).then(() => {
44             dispatch("getCompanyPolicyInfo", { pn, size });
45         });
46     },
47 }
48 export default {
49     namespaced: true,
50     state,
51     mutations,
52     actions,
```

- 问题4: medical-managerment-system/src/router/index.js:25

- 问题代码1：

```

20     },
21     {
22       path: "/",
23       redirect: "/home",
24     },
25   ],
26
27   const router = new VueRouter({
28     mode: "hash",
29     routes: constantRoutes
30   });

```

- 问题5: medical-managment-system/src/api/Login.js:1

- 问题代码1 :

```

1 import request from "../utils/request"
2 import Qs from "qs";
3
4 export function login(username, password) {
5   return request({
6     url: "/login",

```

- 问题6: medical-managment-system/src/api/Login.js:18

- 问题代码1 :

```

13     url: "/permissions",
14     method: "GET",
15     params: {
16       roleName
17     }
18   })
19 }

```

- 问题7: medical-managment-system/src/store/modules/materialInfoManage.js:44

- 问题代码1 :

```

39   modifyMaterial({ dispatch }, { id, message, title, pn, size, keyword }) {
40     modifyMaterial(id, message, title).then(() => {
41       dispatch("getMaterialInfo", { pn, size, keyword });
42     });
43   },
44 }
45 export default {
46   namespaced: true,
47   state,
48   mutations,
49   actions,

```

- 问题8: medical-managment-system/src/store/modules/app.js:3,4

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 import { login } from "../../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../../router/index'
4 import {getMenu} from '../../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
8   routesLoaded: false,
```

- 问题代码2 :

```
1 import { login } from "../../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../../router/index'
4 import {getMenu} from '../../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
8   routesLoaded: false,
9 };
```

- 问题9: medical-managerment-system/src/store/modules/doctorInfoManage.js:97

- 问题代码1 :

```
92         dispatch("getDoctorInfo", { pn, size, keyword });
93         return true;
94     }
95     });
96 },
97 }
98 export default {
99   namespaced: true,
100   state,
101   mutations,
102   actions,
```

- 问题10: medical-managerment-system/src/store/modules/companyInfoManage.js:54

- 问题代码1 :

```
49   getAllCompanyInfo({ commit }) {
50     getAllCompanyInfo().then((res) => {
51       commit("GET_COMPANY_INFO", res.data.data.pageInfo);
52     });
53   }
54 }
55 export default {
56   namespaced: true,
57   state,
58   mutations,
59   actions,
```

- 问题11: medical-managerment-system/src/store/modules/cityInfoManage.js:47

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
42     getAllCityInfo().then((res) => {
43         commit("GET_CITY_INFO", res.data.data.cityPageInfo);
44     });
45 },
46
47 }
48 export default {
49     namespaced: true,
50     state,
51     mutations,
52     actions,
```

- 问题12: medical-managerment-system/src/components/HelloWorld.vue:39

- 问题代码1 :

```
34 export default {
35     name: 'HelloWorld',
36     props: {
37         msg: String
38     }
39 }
40 </script>
41
42 <!-- Add "scoped" attribute to limit CSS to this component only -->
43 <style scoped>
44 h3 {
```

- 问题13: medical-managerment-system/src/views/MaterialManage/index.vue:321

- 问题代码1 :

```
316     set(val) {
317         this.keywordDefault = val;
318     },
319 },
320 },
321 }
322 </script>
323
324 <style lang="less" scoped>
325 @import "../../style/infoManage.less";
326 </style>
```

- 问题14: medical-managerment-system/babel.config.js:5

- 问题代码1 :

```
1 module.exports = {
2   presets: [
3     '@vue/cli-plugin-babel/preset'
4   ]
5 }
```

- 问题15: medical-managerment-system/src/main.js:1,2,3,4,6,37

- 问题代码1 :

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
```

● 问题代码2：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
```

● 问题代码3：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
```

● 问题代码4：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
```

● 问题代码5：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

● 问题代码6：

```
32 });
33 new Vue({
34   router,
35   store,
36   render: h => h(App)
37 }).$mount('#app')
```


3.3.1.2 G.CMT.02 注释符和注释内容之间留有一个空格 (18)

- 问题描述：

注释符(//和/* */)与注释内容之间留有一个空格，这会让注释看起来清晰美观。

- 正确示例：

场景1：使用//注释

- 修复示例：//后面空一格

```
// 通过 ... 复制数组
const itemsCopy = [...items];
```

场景2：使用 /* */注释

- 修复示例：使用 /* */注释时，*后面空一格

```
/* 变量name在使用时进行声明，并赋初始值 */
const name = getName();
```

- 错误示例：

场景1：使用//注释

- 错误示例：//后面没有空一格

```
//通过 ... 复制数组
const itemsCopy = [...items];
```

场景2：使用 /* */注释

- 错误示例：注释符*后面没有空一格

```
/*变量name在使用时进行声明，并赋初始值*/
const name = getName();
```

- 建议的写法：

- 1、**使用 /* */**注释时，注释符要和注释内容之间有一个空格

```
/* 单行注释 */
```

```
/*
 * 多行注释
 * 第二行
 */
```

- 2、**使用//**注释时，注释符要和注释内容之间有一个空格

```
// 单行注释
```

```
// 多行注释
// 第二行
```

- 问题1: medical-managerment-system/src/utlis/request.js:39

- 问题代码1：

```

34     },
35     (error) => {
36         return Promise.reject(error);
37     }
38 );
39 //response 拦截器
40 service.interceptors.response.use(
41     (response) => {
42         const res = response.data;
43         // code为10006代表token失效,需要重新登录
44         if (res.code == 10006) {

```

- 问题2: medical-managerment-system/src/store/index.js:5,7,15

- 问题代码1 :

```

1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9     const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10     const value = modulesFiles(modulePath);

```

- 问题代码2 :

```

2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9     const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10     const value = modulesFiles(modulePath);
11     modules[moduleName] = value.default;
12     return modules;

```

- 问题代码3 :

```

10     const value = modulesFiles(modulePath);
11     modules[moduleName] = value.default;
12     return modules;
13 }, {});
14
15 //vue.store统一配置modules
16 const store = new Vuex.Store({
17     modules,
18     getters,
19 });
20 export default store;

```

- 问题3: medical-managerment-system/src/store/modules/medicalPolicyInfoManage.js:9

- 问题代码1 :

```

4     modifyMedicalPolicyInfo,
5     deleteMedicalPolicy,
6 } from "../../api/admin/medicalPolicyInfoManage";
7
8 const state = {
9     medicalPolicyInfo: {}, //医保政策信息
10 };
11
12 const mutations = {
13     GET_MEDICAL_POLICY_INFO(state, payload) {
14         state.medicalPolicyInfo = payload;

```

- 问题4: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:9

- 问题代码1 :

```

4     deleteCompanyPolicy,
5     modifyCompanyPolicyInfo,
6 } from "../../api/admin/companyPolicyInfoManage";
7
8 const state = {
9     companyPolicyInfo: {}, //医药公司政策管理信息
10 };
11 const mutations = {
12     GET_COMPANY_POLICY_INFO(state, payload) {
13         state.companyPolicyInfo = payload;
14     },

```

- 问题5: medical-managerment-system/src/api/admin/drugInfoManage.js:28

- 问题代码1 :

```

23     data: {
24         drugName,
25         drugInfo,
26         drugEffect,
27         drugImg,
28         saleIds, //售卖该药品的药店id ( 数组 )
29         drugPublisher
30     },
31     }).then((res) => judgeAddResult(res));
32 }
33 // 删除药品api

```

- 问题6: medical-managerment-system/src/store/modules/materialInfoManage.js:9

- 问题代码1 :

```

4     deleteMaterial,
5     modifyMaterial,
6 } from "../../api/admin/materialInfoManage.js";
7
8 const state = {
9     materialInfo: {}, //必备材料信息
10 };
11 const mutations = {
12     GET_MATERIAL_INFO(state, payload) {
13         state.materialInfo = payload;
14     },

```

- 问题7: medical-managerment-system/src/store/modules/app.js:14

- 问题代码1 :

```
9  };
10 const mutations = {
11   SET_TOKEN(state, payload) {
12     state.token = payload;
13   },
14   //存储完整的路由
15   SET_ROUTER_MENU_LIST(state, payload) {
16     // 把固定路由和后端传来的路由合并为完整路由
17     const dynamicRoutes = Array.isArray(payload) ? payload : [];
18     const routes = constantRoutes.concat(dynamicRoutes);
19     state.menuList = routes;
```

- 问题8: medical-managerment-system/src/store/modules/companyInfoManage.js:10

- 问题代码1 :

```
5     modifyCompanyInfo,
6     getAllCompanyInfo,
7   } from "../../api/admin/companyInfoManage";
8
9   const state = {
10     companyInfo: {}, //公司信息
11   };
12   const mutations = {
13     GET_COMPANY_INFO(state, payload) {
14       state.companyInfo = payload;
15     },
```

- 问题9: medical-managerment-system/src/store/modules/saleInfoManage.js:10

- 问题代码1 :

```
5     modifySalePlaceInfo,
6     getAllSalePlaceInfo,
7   } from "../../api/admin/saleInfoManage";
8
9   const state = {
10     salePlaceInfo: {}, //销售地点信息
11   };
12   const mutations = {
13     GET_SALE_PLACE_INFO(state, payload) {
14       state.salePlaceInfo = payload;
15     },
```

- 问题10: medical-managerment-system/src/store/modules/drugInfoManage.js:9

- 问题代码1 :

```

4     deleteDrug,
5     modifyDrugInfo,
6 } from "../../api/admin/drugInfoManage";
7
8 const state = {
9     drugInfo: {}, //药品信息
10 };
11 const mutations = {
12     GET_DRUG_INFO(state, payload) {
13         state.drugInfo = payload;
14     },

```

- 问题11: medical-managerment-system/src/store/modules/cityInfoManage.js:9

- 问题代码1 :

```

4     deleteCity,
5     getAllCityInfo,
6 } from "../../api/admin/cityInfoManage.js";
7
8 const state = {
9     cityInfo: {}, //城市管理信息
10 };
11 const mutations = {
12     GET_CITY_INFO(state, payload) {
13         state.cityInfo = payload;
14     },

```

- 问题12: medical-managerment-system/src/views/CompanyPolicy/index.vue: 354,129,146,201,207,224,311,354,398,415,521,360,377,518,218,235,327,279,302,392,243,260

- 问题代码1 :

```

349 },
350 computed: {
351     ...mapGetters({
352         tableData: "companyPolicyInfo",
353         companyInfo: "companyInfo",
354     }), //后端返回的数据
355     keyword: {
356         get() {
357             return this.keywordDefault;
358         },
359         set(val) {

```

- 问题代码2 :

```

124     this.$store.dispatch("cityInfoManage/getCityInfo", {
125         pn: this.currentPage,
126         size: this.pageSize,
127     });
128 },
129 //当前页改变时触发,跳转其他页
130 handleCurrentChange(event) {
131     this.currentPage = event.page;
132     if (this.keyword.length) {
133         this.handelQuery(this.keyword);
134     } else {

```

- 问题代码3 :

华为云 CodeArts Check 代码扫描报告

```
141     pn: this.currentPage,
142     size: this.pageSize,
143     keyword,
144   });
145 },
146 //新增城市
147 handleAddcity(formName) {
148   this.$refs[formName].validate((valid) => {
149     if (valid) {
150       this.addFormVisible = false;
151       this.$store.dispatch("cityInfoManage/addCity", {
```

• 问题代码4：

```
196   this.getCityInfo(); // 首次渲染
197 },
198 computed: {
199   ...mapGetters({
200     tableData: "cityInfo",
201   }), //后端返回的数据
202   keyword: {
203     get() {
204       return this.keywordDefault;
205     },
206     set(val) {
```

• 问题代码5：

```
202     this.$store.dispatch("materialInfoManage/getMaterialInfo", {
203       pn: this.currentPage,
204       size: this.pageSize,
205     });
206   },
207   //当前页改变时触发,跳转其他页
208   handleCurrentChange(event) {
209     this.currentPage = event.page;
210     if (this.keyword.length) {
211       this.handelQuery(this.keyword);
212     } else {
```

• 问题代码6：

```
219     pn: this.currentPage,
220     size: this.pageSize,
221     keyword,
222   });
223 },
224 //新增
225 handleAddMaterial(formName) {
226   this.$refs[formName].validate((valid) => {
227     if (valid) {
228       this.addFormVisible = false;
229       this.$store.dispatch("materialInfoManage/addMaterial", {
```

• 问题代码7：

华为云 CodeArts Check 代码扫描报告

```
306     this.getMaterialInfo(); // 首次渲染
307 },
308 computed: {
309     ...mapGetters({
310         tableData: "materialInfo",
311     }), //后端返回的数据
312     keyword: {
313         get() {
314             return this.keywordDefault;
315         },
316         set(val) {
```

• 问题代码8：

```
349         this.percentage = 100;
350         this.status = "success";
351     }
352 }, 50);
353 },
354 //选择完图片后自动上传，并拿到服务器返回的图片url地址
355 handleUploadSuccess(res) {
356     this.$message.success("上传成功");
357     setTimeout(() => {
358         this.uploading = false;
359         this.percentage = 0;
```

• 问题代码9：

```
393     this.$store.dispatch("drugInfoManage/getDrugInfo", {
394         pn: this.currentPage,
395         size: this.pageSize,
396     });
397 },
398 //当前页改变时触发,跳转其他页
399 handleCurrentChange(event) {
400     this.currentPage = event.page;
401     if (this.keyword.length) {
402         this.handelQuery(this.keyword);
403     } else {
```

• 问题代码10：

```
410         pn: this.currentPage,
411         size: this.pageSize,
412         keyword,
413     });
414 },
415 //新增药品
416 handleAddDrug(formName) {
417     this.$refs[formName].validate((valid) => {
418         if (valid) {
419             this.addFormVisible = false;
420             this.$store.dispatch("drugInfoManage/addDrug", {
```

• 问题代码11：

```

516 },
517 computed: {
518   ...mapGetters({
519     tableData: "drugInfo",
520     salePlaceInfo: "salePlaceInfo",
521   }), //后端返回的数据
522   keyword: {
523     get() {
524       return this.keywordDefault;
525     },
526     set(val) {

```

• 问题代码12：

```

355   this.$store.dispatch("doctorInfoManage/getDoctorInfo", {
356     pn: this.currentPage,
357     size: this.pageSize,
358   });
359 },
360 //当前页改变时触发,跳转其他页
361 handleCurrentChange(event) {
362   this.currentPage = event.page;
363   if (this.keyword.length) {
364     this.handelQuery(this.keyword);
365   } else {

```

• 问题代码13：

```

372   pn: this.currentPage,
373   size: this.pageSize,
374   keyword,
375 });
376 },
377 //新增
378 handleAddDoctor(formName) {
379   this.$refs[formName].validate((valid) => {
380     if (valid) {
381       this.$store
382         .dispatch("doctorInfoManage/addDoctor", {

```

• 问题代码14：

```

513 },
514 computed: {
515   ...mapGetters({
516     tableData: "doctorInfo",
517     levelAndTypeData: "doctorLevelAndType",
518   }), //后端返回的数据
519   keyword: {
520     get() {
521       return this.keywordDefault;
522     },
523     set(val) {

```

• 问题代码15：

华为云 CodeArts Check 代码扫描报告

```
213     this.$store.dispatch("companyInfoManage/getCompanyInfo", {
214         pn: this.currentPage,
215         size: this.pageSize,
216     });
217 },
218 //当前页改变时触发,跳转其他页
219 handleCurrentChange(event) {
220     this.currentPage = event.page;
221     if (this.keyword.length) {
222         this.handelQuery(this.keyword);
223     } else {
```

• 问题代码16：

```
230         pn: this.currentPage,
231         size: this.pageSize,
232         keyword,
233     });
234 },
235 //新增公司
236 handleAddCompany(formName) {
237     this.$refs[formName].validate((valid) => {
238         if (valid) {
239             this.addFormVisible = false;
240             this.$store.dispatch("companyInfoManage/addCompany", {
```

• 问题代码17：

```
322     this.getCompanyInfo(); // 首次渲染
323 },
324 computed: {
325     ...mapGetters({
326         tableData: "companyInfo",
327     }), //后端返回的数据
328     keyword: {
329         get() {
330             return this.keywordDefault;
331         },
332         set(val) {
```

• 问题代码18：

```
274         modifyFormVisible: false,
275         searchRules,
276     };
277 },
278 methods: {
279     //当前页改变时触发,跳转其他页
280     handleCurrentChange(event) {
281         this.currentPage = event.page;
282         this.getMedicalPolicyInfo();
283     },
284     // 查询医药政策信息
```

• 问题代码19：

华为云 CodeArts Check 代码扫描报告

```
297         this.$message.warning("请检查输入的内容是否合规");
298         return false;
299     }
300 });
301 },
302 //新增医保政策
303 handleAddMedicalPolicy(formName) {
304     this.$refs[formName].validate((valid) => {
305         if (valid) {
306             this.addFormVisible = false;
307             this.$store.dispatch("medicalPolicyInfoManage/addMedicalPolicy", {
```

• 问题代码20：

```
387     },
388     computed: {
389         ...mapGetters({
390             tableData: "medicalPolicyInfo",
391             cityInfo: "cityInfo",
392         }), //后端返回的数据
393         params() {
394             //查询操作用到的参数
395             return {
396                 pn: this.currentPage,
397                 size: this.pageSize,
```

• 问题代码21：

```
238         this.$store.dispatch("companyPolicyInfoManage/getCompanyPolicyInfo", {
239             pn: this.currentPage,
240             size: this.pageSize,
241         });
242     },
243 //当前页改变时触发,跳转其他页
244 handleCurrentChange(event) {
245     this.currentPage = event.page;
246     if (this.keyword.length) {
247         this.handelQuery(this.keyword);
248     } else {
```

• 问题代码22：

```
255         pn: this.currentPage,
256         size: this.pageSize,
257         keyword,
258     });
259 },
260 //新增公司
261 handleAddCompanyPolicy(formName) {
262     this.$refs[formName].validate((valid) => {
263         if (valid) {
264             this.addFormVisible = false;
265             this.$store.dispatch("companyPolicyInfoManage/addCompanyPolicy", {
```

• 问题13: medical-managerment-system/src/views/MedicalPolicy/index.vue:394

• 问题代码1：

```

389     ...mapGetters({
390       tableData: "medicalPolicyInfo",
391       cityInfo: "cityInfo",
392     }), //后端返回的数据
393     params() {
394       //查询操作作用到的参数
395       return {
396         pn: this.currentPage,
397         size: this.pageSize,
398         cityId: this.searchLimit.city,
399         title: this.searchLimit.title,

```

- 问题14: medical-managerment-system/src/views/CityManage/index.vue: 117,119

- 问题代码1 :

```

112     keywordDefault: "",
113     addFormVisible: false, // 控制新增城市页面的显示
114     addForm: {
115       cityNumber: [],
116     },
117     formLabelWidth: "110px", //表单 label 的宽度
118     rules, // 封装好的表单验证
119     options: provinceAndCityData, //element-china-area-data组件
120   };
121 },
122   methods: {

```

- 问题代码2 :

```

114     addForm: {
115       cityNumber: [],
116     },
117     formLabelWidth: "110px", //表单 label 的宽度
118     rules, // 封装好的表单验证
119     options: provinceAndCityData, //element-china-area-data组件
120   };
121 },
122   methods: {
123     getCityInfo() {
124       this.$store.dispatch("cityInfoManage/getCityInfo", {

```

- 问题15: medical-managerment-system/src/views/SaleManage/index.vue: 301,318,429

- 问题代码1 :

```

296     this.$store.dispatch("saleInfoManage/getSalePlaceInfo", {
297       pn: this.currentPage,
298       size: this.pageSize,
299     });
300   },
301   //当前页改变时触发,跳转其他页
302   handleCurrentChange(event) {
303     this.currentPage = event.page;
304     if (this.keyword.length) {
305       this.handelQuery(this.keyword);
306     } else {

```

- 问题代码2 :

华为云 CodeArts Check 代码扫描报告

```
313     pn: this.currentPage,
314     size: this.pageSize,
315     keyword,
316   });
317 },
318 //新增销售地点
319 handleAddSalePlace(formName) {
320   this.$refs[formName].validate((valid) => {
321     if (valid) {
322       this.addFormVisible = false;
323       this.$store.dispatch("saleInfoManage/addSalePlace", {
```

• 问题代码3：

```
424   },
425   mounted() {
426     this.getSalePlaceInfo(); // 首次渲染
427   },
428   computed: {
429     //后端返回的数据
430     ...mapGetters({
431       tableData: "salePlaceInfo",
432     }),
433     // 用户输入的关键字
434     keyword: {
```

- 问题16: medical-management-system/src/views/DrugManage/index.vue: 332,333,323

• 问题代码1：

```
327     drugEffect: "",
328     drugImg: "",
329     saleIds: [],
330   },
331   rules, // 封装好的表单验证
332   token: localStorage.getItem("token"), //用于给上传操作添加token请求头
333   actionUrl: resolveApiUrl("/base/upload"), //图片上传接口
334   uploading: false, // 是否显示上传进度条
335   percentage: 0, // 进度条进度
336   status: null, // 进度条状态
337   };
```

• 问题代码2：

```
328     drugImg: "",
329     saleIds: [],
330   },
331   rules, // 封装好的表单验证
332   token: localStorage.getItem("token"), //用于给上传操作添加token请求头
333   actionUrl: resolveApiUrl("/base/upload"), //图片上传接口
334   uploading: false, // 是否显示上传进度条
335   percentage: 0, // 进度条进度
336   status: null, // 进度条状态
337   };
338 },
```

• 问题代码3：

```

318     return {
319       currentPage: 1,
320       pageSize: 5, // 每页的数据条数
321       keywordDefault: "",
322       addFormVisible: false, // 控制新增页面的显示
323       resetPwdDialogVisible: false, //控制重置密码对话框显示
324       addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",

```

- 问题17: medical-managerment-system/src/views/DrugManage/index.vue: 374,376

- 问题代码1 :

```

369     this.$message.error("上传失败，请重试");
370     this.uploading = false;
371     this.percentage = 0;
372     this.status = null;
373     console.log(err);
374     let myError = err.toString(); //转字符串
375     myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378   },
379   // 对上传的文件类型及大小进行限制

```

- 问题代码2 :

```

371     this.percentage = 0;
372     this.status = null;
373     console.log(err);
374     let myError = err.toString(); //转字符串
375     myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378   },
379   // 对上传的文件类型及大小进行限制
380   beforeImgUpload(file) {
381     const isJPG = file.type === "image/jpeg" || file.type === "image/png";

```

- 问题18: medical-managerment-system/src/main.js:3,4,6,7,8,9

- 问题代码1 :

```

1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router' //引入router
4 import store from './store' //引入vuex
5
6 import _ from 'lodash' //js库
7 import './style/reset.css'; //引入样式
8 import Fragment from "vue-fragment"; //处理Dom插件

```

- 问题代码2 :

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css';//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
```

● 问题代码3：

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css';//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

● 问题代码4：

```
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css';//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

● 问题代码5：

```
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css';//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
```

● 问题代码6：

```
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import './style/reset.css';//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
14 Vue.use(Fragment.Plugin);
```

3.3.1.3 G.MET.07 建议使用一致的 return 语句 (17)

- 问题描述：

在一个函数中，如果任何代码路径显式的返回一个值，但一些代码路径不显式返回一个值，那么这种情况可能是个书写错误，尤其是在一个较大的函数里。

- 正确示例：

场景1：返回值

- 修复示例1：两个分支使用一致的返回值。

```
function doSomething(condition) {
  if (condition) {
    ...
    return true;
  } else {
    ...
    return false; // 保证所有路径都以相同的方式返回值
  }
}
```

- 修复示例2：所有路径使用一致的返回值。

```
function doSomething(condition) {
  if (condition) {
    ...
    return true;
  }
  ...
  return false;
}
```

- 错误示例：

场景1：返回值

- 错误示例：两个分支的返回值不一致。

```
function doSomething(condition) {
  if (condition) {
    ...
    return true;
  } else {
    ...
    return;    // 不符合, 没有显式返回false
  }
}

function doSomething(condition) {
  if (condition) {
    ...
    return true;
  }
}
```

- 建议的写法:

函数中的每个代码路径使用一致的return语句, 都显示返回相同类型的值。

- 问题1: medical-managerment-system/src/utils/validator.js:22

- 问题代码1:

```
17     } else {
18         callback();
19     }
20 }
21 // 年龄验证器
22 function validatorAge(rule, value, callback) {
23     if (!value) {
24         return callback(new Error("年龄不能为空"));
25     }
26     if (!Number.isInteger(value)) {
27         callback(new Error("请输入数字值"));
28     }
29 }
```

- 问题2: medical-managerment-system/src/views/CompanyManage/index.vue: 237

- 问题代码1:

```
232     keyword,
233     });
234 },
235 //新增公司
236 handleAddCompany(formName) {
237     this.$refs[formName].validate((valid) => {
238         if (valid) {
239             this.addFormVisible = false;
240             this.$store.dispatch("companyInfoManage/addCompany", {
241                 companyName: this.addForm.companyName,
242                 companyPhone: this.addForm.companyPhone,
```

- 问题3: medical-managerment-system/src/views/CompanyManage/index.vue: 291

- 问题代码1:


```

286     };
287     this.modifyFormVisible = true;
288   },
289   // 修改公司信息
290   handleModifyCompany(formName) {
291     this.$refs[formName].validate((valid) => {
292       if (valid) {
293         this.modifyFormVisible = false;
294         this.$store.dispatch("companyInfoManage/modifyCompanyInfo", {
295           companyId: this.modifyForm.companyId,
296           companyName: this.modifyForm.companyName,

```

- 问题4: medical-managerment-system/src/views/MedicalPolicy/index.vue: 293

- 问题代码1 :

```

288     this.params
289   );
290   },
291   // 条件查询
292   handleLimitedSearch(formName) {
293     this.$refs[formName].validate((valid) => {
294       if (valid) {
295         this.getMedicalPolicyInfo();
296       } else {
297         this.$message.warning("请检查输入的内容是否合规");
298         return false;

```

- 问题5: medical-managerment-system/src/views/MedicalPolicy/index.vue: 304

- 问题代码1 :

```

299     }
300   });
301   },
302   //新增医保政策
303   handleAddMedicalPolicy(formName) {
304     this.$refs[formName].validate((valid) => {
305       if (valid) {
306         this.addFormVisible = false;
307         this.$store.dispatch("medicalPolicyInfoManage/addMedicalPolicy", {
308           cityId: this.addForm.city,
309           title: this.addForm.title,

```

- 问题6: medical-managerment-system/src/views/MedicalPolicy/index.vue: 353, 313

- 问题代码1 :

```

348     };
349     this.modifyFormVisible = true;
350   },
351   // 修改医保政策信息
352   handleModifyMedicalPolicy(formName) {
353     this.$refs[formName].validate((valid) => {
354       if (valid) {
355         this.modifyFormVisible = false;
356         this.$store.dispatch(
357           "medicalPolicyInfoManage/modifyMedicalPolicyInfo",
358         {

```

- 问题代码2：

```

308     };
309     this.modifyFormVisible = true;
310 },
311 // 修改
312 handleModifyMedicalPolicy(formName) {
313     this.$refs[formName].validate((valid) => {
314         if (valid) {
315             this.modifyFormVisible = false;
316             this.$store.dispatch(
317                 "companyPolicyInfoManage/modifyCompanyPolicyInfo",
318                 {

```

- 问题7: medical-managerment-system/src/views/CompanyPolicy/index.vue:262

- 问题代码1：

```

257         keyword,
258     });
259 },
260 //新增公司
261 handleAddCompanyPolicy(formName) {
262     this.$refs[formName].validate((valid) =>{
263         if (valid) {
264             this.addFormVisible = false;
265             this.$store.dispatch("companyPolicyInfoManage/addCompanyPolicy", {
266                 companyId: this.addForm.companyId,
267                 message: this.addForm.message,

```

- 问题8: medical-managerment-system/src/views/CityManage/index.vue:148

- 问题代码1：

```

143         keyword,
144     });
145 },
146 //新增城市
147 handleAddcity(formName) {
148     this.$refs[formName].validate((valid) => {
149         if (valid) {
150             this.addFormVisible = false;
151             this.$store.dispatch("cityInfoManage/addCity", {
152                 cityNumber: this.addForm.cityNumber[1],
153                 size: this.pageSize,

```

- 问题9: medical-managerment-system/src/views/Login.vue:98

- 问题代码1：

```

93         this.$notify.error({
94             title: " 错误",
95             message: " 请输入正确的用户名密码",
96         });
97
98         return false;
99     }
100 });
101 }
102 },
103 };

```

华为云 CodeArts Check 代码扫描报告

- 问题10: medical-managerment-system/src/views/MaterialManage/index.vue:226

- 问题代码1 :

```
221     keyword,
222   });
223 },
224   //新增
225   handleAddMaterial(formName) {
226     this.$refs[formName].validate((valid) => {
227       if (valid) {
228         this.addFormVisible = false;
229         this.$store.dispatch("materialInfoManage/addMaterial", {
230           title: this.addForm.title,
231           message: this.addForm.message,
```

- 问题11: medical-managerment-system/src/views/MaterialManage/index.vue:277

- 问题代码1 :

```
272   });
273   this.modifyFormVisible = true;
274 },
275   // 修改
276   handleModifyMeterial(formName) {
277     this.$refs[formName].validate((valid) => {
278       if (valid) {
279         this.modifyFormVisible = false;
280         this.$store.dispatch("materialInfoManage/modifyMaterial", {
281           id: this.modifyForm.id,
282           message: this.modifyForm.message,
```

- 问题12: medical-managerment-system/src/views/SaleManage/index.vue:320

- 问题代码1 :

```
315     keyword,
316   });
317 },
318   //新增销售地点
319   handleAddSalePlace(formName) {
320     this.$refs[formName].validate((valid) => {
321       if (valid) {
322         this.addFormVisible = false;
323         this.$store.dispatch("saleInfoManage/addSalePlace", {
324           saleName: this.addForm.saleName,
325           salePhone: this.addForm.salePhone,
```

- 问题13: medical-managerment-system/src/views/SaleManage/index.vue:376

- 问题代码1 :

```

371     };
372     this.modifyFormVisible = true;
373   },
374   // 修改销售地点信息
375   handleModifySalePlace(formName) {
376     this.$refs[formName].validate((valid) => {
377       if (valid) {
378         this.modifyFormVisible = false;
379         this.$store.dispatch("saleInfoManage/modifySalePlaceInfo", {
380           saleId: this.modifyForm.saleId,
381           saleName: this.modifyForm.saleName,

```

- 问题14: medical-managerment-system/src/views/DrugManage/index.vue:417

- 问题代码1 :

```

412     keyword,
413   });
414   },
415   //新增药品
416   handleAddDrug(formName) {
417     this.$refs[formName].validate((valid) => {
418       if (valid) {
419         this.addFormVisible = false;
420         this.$store.dispatch("drugInfoManage/addDrug", {
421           drugName: this.addForm.drugName,
422           drugInfo: this.addForm.drugInfo,

```

- 问题15: medical-managerment-system/src/views/DrugManage/index.vue:482

- 问题代码1 :

```

477     };
478     this.modifyFormVisible = true;
479   },
480   // 修改药品信息
481   handleModifyDrug(formName) {
482     this.$refs[formName].validate((valid) => {
483       if (valid) {
484         this.modifyFormVisible = false;
485         this.$store.dispatch("drugInfoManage/modifyDrugInfo", {
486           drugId: this.modifyForm.drugId,
487           drugName: this.modifyForm.drugName,

```

- 问题16: medical-managerment-system/src/views/DoctorManage/index.vue:379

- 问题代码1 :

```

374     keyword,
375   });
376   },
377   //新增
378   handleAddDoctor(formName) {
379     this.$refs[formName].validate((valid) => {
380       if (valid) {
381         this.$store
382           .dispatch("doctorInfoManage/addDoctor", {
383             age: this.addForm.age,
384             levelId: this.addForm.levelId,

```

- 问题17: medical-managerment-system/src/views/DoctorManage/index.vue: 453

- 问题代码1 :

```
448     };
449     this.modifyFormVisible = true;
450   },
451   // 修改
452   handleModifyDoctor(formName) {
453     this.$refs[formName].validate((valid) => {
454       if (valid) {
455         this.$store
456           .dispatch("doctorInfoManage/modifyDoctor", {
457             accountId: this.modifyForm.accountId,
458             age: this.modifyForm.age,
```

3.3.1.4 G.MET.05 函数的参数个数不建议超过 5 个 (5)

- 问题描述 :

如果参数超过5个，则维护的难度很大，建议减少参数个数。

- 正确示例 :

```
function insertHistory(spWorkfLog) {
  ...
}
```

- 错误示例 :

```
function insertHistory(workfSeq, workfType, recSeq, sortOrder, orderSeq, workfID, region,
subSys, orderID, procSystem, platType, neID, telnum, imsi, orderPri) {
  ...
}
```

- 建议的写法:

函数的参数个数不建议超过 5 个

- 问题1: medical-managerment-system/src/api/admin/doctorInfoManage.js: 30

- 问题代码1 :

```
25     url: "/doctors/info",
26     method: "GET",
27   });
28 }
29 // 新增
30 export function addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId) {
31   return request({
32     url: "/doctors",
33     method: "POST",
34     data: { age, levelId, name, phoneNumber, pwd, sex, typeId },
35   }).then((res) => judgeAddResult(res));
```

- 问题2: medical-managerment-system/src/api/admin/doctorInfoManage.js: 47

- 问题代码1 :

```

42     }).then((res) => {
43         judgeDeleteResult(res);
44     });
45 }
46 // // 修改
47 export function modifyDoctor(
48     accountId,
49     age,
50     levelId,
51     name,
52     phoneNumber,

```

- 问题3: medical-managerment-system/src/api/admin/drugInfoManage.js:19

- 问题代码1 :

```

14         name: keyword,
15     },
16     }).then((res) => judgeQueryResult(res));
17 }
18 // 新增药品api
19 export function addDrug(drugName, drugInfo, drugEffect, drugImg, saleIds,
drugPublisher) {
20     return request({
21         url: "/drugs",
22         method: "POST",
23         data: {
24             drugName,

```

- 问题4: medical-managerment-system/src/api/admin/drugInfoManage.js:43

- 问题代码1 :

```

38     }).then((res) => {
39         judgeDeleteResult(res);
40     });
41 }
42 // 修改药品api
43 export function modifyDrugInfo(
44     drugId,
45     drugName,
46     drugInfo,
47     drugEffect,
48     drugImg,

```

- 问题5: medical-managerment-system/src/views/DrugManage/index.vue:459,429

- 问题代码1 :

```

454         message: "已取消删除",
455     });
456     });
457 },
458 // 控制修改药品信息的表单弹出
459 handleModifyFormVisible(
460     drugId,
461     drugName,
462     drugInfo,
463     drugEffect,
464     drugImg,

```

- 问题代码2 :

```

424         message: "已取消删除",
425     });
426 });
427 },
428 // 控制修改表单的弹出
429 handleModifyFormVisible(
430     name,
431     age,
432     sex,
433     levelId,
434     phoneNumber,

```

3.3.1.5 G.FMT.11 使用拖尾逗号 (9)

- 问题描述：

最终元素和结束括号之间存在换行符时，应包含尾后逗号。在上一行已经使用了尾后逗号的情况下，如果要添加新的属性，可以仅仅添加新的一行，而不需要修改上一行。另一个支持拖尾逗号的原因是，当对象或数组添加或删除元素时，它提高了代码差异的清晰度。

- 正确示例：

场景1：定义对象时的拖尾逗号

- 修复示例：添加了拖尾逗号

```

const hero = {
  firstName: 'Dana',
  lastName: 'Scully', // 符合
};

```

场景2：定义数组时的拖尾逗号

- 修复示例：添加了拖尾逗号

```

const heroes = [
  'Batman',
  'Superman', // 符合
];

```

- 错误示例：

场景1：定义对象时的拖尾逗号

- 错误示例：定义对象时，最后一个元素后面没有拖尾逗号

```

const hero = {
  firstName: 'Dana',
  lastName: 'Scully' // 不符合，没有添加拖尾逗号
};

```

场景2：定义数组时的拖尾逗号

- 错误示例：定义数组时，最后一个元素后面没有拖尾逗号

```
const heroes = [
  'Batman',
  'Superman'    // 不符合，没有添加拖尾逗号
];
```

- 建议的写法：

定义数组或对象时，最后一个元素与结束括号之间存在换行符时，应在最后一个元素后面加上拖尾逗号。

- 问题1: medical-managerment-system/src/main.js:30

- 问题代码1：

```
25         return false
26     }
27     } else {
28         return false
29     }
30 }
31 }
32 });
33 new Vue({
34     router,
35     store,
```

- 问题2: medical-managerment-system/src/main.js:31

- 问题代码1：

```
26     }
27     } else {
28         return false
29     }
30 }
31 }
32 });
33 new Vue({
34     router,
35     store,
36     render: h => h(App)
```

- 问题3: medical-managerment-system/src/main.js:36

- 问题代码1：

```
31 }
32 });
33 new Vue({
34     router,
35     store,
36     render: h => h(App)
37 }).$mount('#app')
```

- 问题4: medical-managerment-system/src/api/admin/drugInfoManage.js:29

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
24         drugName,
25         drugInfo,
26         drugEffect,
27         drugImg,
28         saleIds, //售卖该药品的药店id (数组)
29         drugPublisher
30     },
31     }).then((res) => judgeAddResult(res));
32 }
33 // 删除药品api
34 export function deleteDrug(drugId) {
```

- 问题5: medical-managerment-system/src/router/index.js:29

- 问题代码1 :

```
24     },
25   ]
26
27   const router = new VueRouter({
28     mode: "hash",
29     routes: constantRoutes
30   });
31   // 判断登录状态
32   router.beforeEach((to, from, next) => {
33     document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
34     const token = localStorage.getItem("token");
```

- 问题6: medical-managerment-system/src/api/Login.js:16,17

- 问题代码1 :

```
11 export function getMenuList(roleName) {
12   return request({
13     url: "/permissions",
14     method: "GET",
15     params: {
16       roleName
17     }
18   })
19 }
```

- 问题代码2 :

```
12   return request({
13     url: "/permissions",
14     method: "GET",
15     params: {
16       roleName
17     }
18   })
19 }
```

- 问题7: medical-managerment-system/src/store/modules/app.js:28

- 问题代码1 :

```

23   },
24   RESET_AUTH(state) {
25     state.token = "";
26     state.menuList = constantRoutes.slice();
27     state.routesLoaded = false;
28   }
29 };
30 const actions = {
31   // 登录接口
32   async login({ commit }, loginInfo) {
33     // 清除同一浏览器会话中可能残留的上一账号菜单状态。

```

- 问题8: medical-managerment-system/src/store/modules/companyInfoManage.js:53

- 问题代码1 :

```

48   // 查询所有公司信息
49   getAllCompanyInfo({ commit }) {
50     getAllCompanyInfo().then((res) => {
51       commit("GET_COMPANY_INFO", res.data.data.pageInfo);
52     });
53   }
54 }
55 export default {
56   namespaced: true,
57   state,
58   mutations,

```

- 问题9: medical-managerment-system/babel.config.js:3,4

- 问题代码1 :

```

1 module.exports = {
2   presets: [
3     '@vue/cli-plugin-babel/preset'
4   ]
5 }

```

- 问题代码2 :

```

1 module.exports = {
2   presets: [
3     '@vue/cli-plugin-babel/preset'
4   ]
5 }

```

3.3.1.6 G.DCL.07 避免当前作用域中的变量覆盖更外层作用域的变量 (14)

- 问题描述 :

当前作用域中的变量覆盖了更外层作用域的变量时，这不仅会给阅读者带来困扰，还会导致无法获取和使用外层作用域的变量。

- 正确示例 :

场景1：变量覆盖

- 修复示例：修改变量名，避免与外层作用域的变量重名。

```
let bar = 3;
function foo() {
  let num = 10;  // 符合
}
```

- 错误示例：

场景1：变量覆盖

- 错误示例：函数foo()的内部定义的变量bar与外层的变量bar重名。

```
let bar = 3;
function foo() {
  // bar 覆盖了全局环境中的 bar。这会混淆读者并且在 foo 中不能获取全局变量
  let bar = 10;
}
```

- 建议的写法：

应当避免当前作用域中的变量覆盖更外层作用域的变量。

- 问题1：medical-managerment-system/src/store/index.js:8

- 问题代码1：

```
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9   const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10   const value = modulesFiles(modulePath);
11   modules[moduleName] = value.default;
12   return modules;
13 }, {});
```

- 问题2：medical-managerment-system/src/store/modules/medicalPolicyInfoManage.js:13

- 问题代码1：

```
8 const state = {
9   medicalPolicyInfo: {}, //医保政策信息
10 };
11
12 const mutations = {
13   GET_MEDICAL_POLICY_INFO(state, payload) {
14     state.medicalPolicyInfo = payload;
15   },
16 };
17 const actions = {
18   // 医保政策信息分页,关键字查询
```

- 问题3：medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:12

- 问题代码1：

```

7
8   const state = {
9     companyPolicyInfo: {}, //医药公司政策管理信息
10  };
11  const mutations = {
12    GET_COMPANY_POLICY_INFO(state, payload) {
13      state.companyPolicyInfo = payload;
14    },
15  };
16  const actions = {
17    // 医药公司政策管理信息分页, 关键字查询

```

- 问题4: medical-managerment-system/src/store/modules/materialInfoManage.js:12

- 问题代码1 :

```

7
8   const state = {
9     materialInfo: {}, //必备材料信息
10  };
11  const mutations = {
12    GET_MATERIAL_INFO(state, payload) {
13      state.materialInfo = payload;
14    },
15  };
16  const actions = {
17    // 信息分页, 关键字查询

```

- 问题5: medical-managerment-system/src/store/modules/app.js:11

- 问题代码1 :

```

6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
8   routesLoaded: false,
9 };
10 const mutations = {
11   SET_TOKEN(state, payload) {
12     state.token = payload;
13   },
14   //存储完整的路由
15   SET_ROUTER_MENULIST(state, payload) {
16     // 把固定路由和后端传来的路由合并为完整路由

```

- 问题6: medical-managerment-system/src/store/modules/app.js:15

- 问题代码1 :

```

10 const mutations = {
11   SET_TOKEN(state, payload) {
12     state.token = payload;
13   },
14   //存储完整的路由
15   SET_ROUTER_MENULIST(state, payload) {
16     // 把固定路由和后端传来的路由合并为完整路由
17     const dynamicRoutes = Array.isArray(payload) ? payload : [];
18     const routes = constantRoutes.concat(dynamicRoutes);
19     state.menuList = routes;
20     state.routesLoaded = true;

```

- 问题7: medical-managerment-system/src/store/modules/app.js:24

- 问题代码1：

```
19     state.menuList = routes;
20     state.routesLoaded = true;
21     router.options.routes = routes;
22     router.addRoutes(dynamicRoutes);
23   },
24   RESET_AUTH(state) {
25     state.token = "";
26     state.menuList = constantRoutes.slice();
27     state.routesLoaded = false;
28   }
29 };
```

- 问题8: medical-managerment-system/src/store/modules/app.js:56

- 问题代码1：

```
51     message: "登录成功",
52   });
53   return data;
54 },
55   // 获取后端传来的路由列表
56   async setMenuList({ commit, state }) {
57     if (state.routesLoaded) {
58       return state.menuList.slice(constantRoutes.length);
59     }
60     const routes = await getMenu();
61     commit("SET_ROUTER_MENULIST", routes);
```

- 问题9: medical-managerment-system/src/store/modules/doctorInfoManage.js:14

- 问题代码1：

```
9 const state = {
10   doctorInfo: {},
11   doctorLevelAndType: {},
12 };
13 const mutations = {
14   GET_DOCTOR_INFO(state, payload) {
15     state.doctorInfo = payload;
16   },
17   GET_DOCTOR_LEVEL_AND_TYPE(state, payload) {
18     state.doctorLevelAndType = payload;
19   },
```

- 问题10: medical-managerment-system/src/store/modules/doctorInfoManage.js:17

- 问题代码1：

```

12 };
13 const mutations = {
14     GET_DOCTOR_INFO(state, payload) {
15         state.doctorInfo = payload;
16     },
17     GET_DOCTOR_LEVEL_AND_TYPE(state, payload) {
18         state.doctorLevelAndType = payload;
19     },
20 };
21 const actions = {
22     // 医生信息分页, 关键字查询

```

- 问题11: medical-managerment-system/src/store/modules/companyInfoManage.js:13

- 问题代码1 :

```

8
9 const state = {
10     companyInfo: {}, //公司信息
11 };
12 const mutations = {
13     GET_COMPANY_INFO(state, payload) {
14         state.companyInfo = payload;
15     },
16 };
17 const actions = {
18     // 公司信息分页, 关键字查询

```

- 问题12: medical-managerment-system/src/store/modules/saleInfoManage.js:13

- 问题代码1 :

```

8
9 const state = {
10     salePlaceInfo: {}, //销售地点信息
11 };
12 const mutations = {
13     GET_SALE_PLACE_INFO(state, payload) {
14         state.salePlaceInfo = payload;
15     },
16 };
17 const actions = {
18     // 销售地点信息分页, 关键字查询

```

- 问题13: medical-managerment-system/src/store/modules/drugInfoManage.js:12

- 问题代码1 :

```

7
8 const state = {
9     drugInfo: {}, //药品信息
10 };
11 const mutations = {
12     GET_DRUG_INFO(state, payload) {
13         state.drugInfo = payload;
14     },
15 };
16 const actions = {
17     // 药品信息分页, 关键字查询

```

- 问题14: medical-managerment-system/src/store/modules/cityInfoManage.js:12
 - 问题代码1 :

```

7
8 const state = {
9   cityInfo: {}, //城市管理信息
10 };
11 const mutations = {
12   GET_CITY_INFO(state, payload) {
13     state.cityInfo = payload;
14   },
15 };
16 const actions = {
17   // 城市管理信息分页，关键字查询

```

3.3.1.7 G.FMT.10 行宽不超过120个窄字符 (3)

- 问题描述 :
建议代码每行不超过maxLineLength(默认值为120，支持动态配置)个窄字符，保证在屏幕中可以呈现完整代码行，不需要拖动横向滚动条来查看完整代码。
对于宽字符，实际在IDE中的呈现宽度可通过cnCharLength参数进行设置，该参数的默认值值为1.5（结合IntelliJ IDEA的实际呈现效果确定）。
- 正确示例 :

场景1 :

- 修复示例：在合适处断行

```

public void doSomething(HashMap<String, String> hashMap,
    HashSet<String> hashSet, List<String> stringList, String describe) {
    ...
}

```

- 错误示例 :

场景1 :

- 错误示例 :

```

public void doSomething(HashMap<String, String> hashMap, HashSet<String> hashSet,
    List<String> stringList, String describe) {
    // 代码行宽超过120个窄字符
    ...
}

```

- 建议的写法:
代码行宽超过maxLineLength个窄字符时，在合理的位置进行换行处理。
- 问题1: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:34
 - 问题代码1 :

```

29         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
30     }
31
32     @Transactional
33     public void update(Long id, Map<String, Object> request) {
34         mapper.update(id, PageSupport.stringValue(request.get("title")),
PageSupport.stringValue(request.get("message")));
35     }
36
37     @Transactional
38     public void delete(Long id) {
39         mapper.delete(id);

```

- 问题2: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:51

- 问题代码1 :

```

46     @Insert("INSERT INTO account(realname, uname, pwd, phonenumber, utype,
updatetime, createtime) "
47         + "VALUES(#{realname}, #{uname}, #{pwd}, #{phoneNumber}, 'ROLE_2',
NOW(), NOW())")
48     @Options(useGeneratedKeys = true, keyProperty = "id", keyColumn = "id")
49     int insertAccount(Map<String, Object> account);
50
51     @Insert("INSERT INTO doctor(name, age, sex, level_id, phone, type_id,
hospital, updatetime, createtime, account_id) "
52         + "VALUES(#{name}, #{age}, #{sex}, #{levelId}, #{phoneNumber}, #
{typeId}, "
53         + "'青岛第一人民医院', NOW(), NOW(), #{accountId})")
54     int insertDoctor(Map<String, Object> doctor);
55
56     @Update("UPDATE doctor SET name=#{name}, age=#{age}, sex=#{sex}, level_id=#
{levelId}, phone=#{phoneNumber}, "

```

- 问题3: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:43

- 问题代码1 :

```

38     int insert(@Param("cityId") Long cityId,
39         @Param("title") String title,
40         @Param("updateTime") String updateTime,
41         @Param("message") String message);
42
43     @Update("UPDATE medical_policy SET city_id=#{cityId}, title=#{title},
message=#{message}, update_time=#{updateTime} "
44         + "WHERE id=#{id}")
45     int update(@Param("id") Long id,
46         @Param("cityId") Long cityId,
47         @Param("title") String title,
48         @Param("updateTime") String updateTime,

```

3.3.1.8 G.EXP.06 建议在正则表达式中使用命名捕获组 (2)

- 问题描述 :

随着 ECMAScript 2018 的发布，命名捕获组可以用于正则表达式中，这可以提高正则表达式的可读性。

- 正确示例：

场景1：正则表达式

- 修复示例：使用命名捕获组。

```
const foo = /(?:<id>ba[rz])/;
const bar = new RegExp('(?:<id>ba[rz])');
const baz = RegExp('(?:<id>ba[rz])');

foo.exec('bar').groups.id;
```

- 错误示例：

场景1：正则表达式

- 错误示例：不使用命名捕获组。

```
const foo = /(ba[rz])/;
const bar = new RegExp('(ba[rz])');
const baz = RegExp('(ba[rz])');

foo.exec('bar')[1];
```

- 建议的写法：

建议在正则表达式中使用命名捕获组。

- 问题1: medical-managerment-system/src/utils/validator.js:5

- 问题代码1：

```
1 // 手机号验证器
2 function validatorPhone(rule, value, callback) {
3     if (value === "") {
4         callback(new Error(" 手机号不能为空 "));
5     } else if (!/^(13[0-9]|14[01456879]|15[0-35-9]|16[2567]|17[0-8]|18[0-9]|19[0-35-9])\d{8}$/.test(value)) {
6         callback(new Error(" 手机号格式错误 "));
7     } else {
8         callback();
9     }
10 }
```

- 问题2: medical-managerment-system/src/store/index.js:9

- 问题代码1：

```
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9     const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10     const value = modulesFiles(modulePath);
11     modules[moduleName] = value.default;
12     return modules;
13 }, {});
```

3.3.1.9 G.FMT.01 使用空格进行缩进 (2)

- 问题描述：

只允许使用空格(space)进行缩进。 JavaScript 中的回调函数、箭头函数多层嵌套，若使用4个空格容易导致缩进过多，因此建议优先使用2个空格。 不允许插入制表符 Tab。当前几乎所有的集成开发环境（IDE）和代码编辑器都支持配置将Tab键自动扩展为2个空格输入，应在代码编辑器中配置使用空格进行缩进。

- 正确示例：

场景1：缩进

- 修复示例：使用了2个空格缩进。

```
const obj = {
  id: 42, // 符合
  name: 'hi', // 符合
};
```

- 错误示例：

场景1：缩进

- 错误示例：使用了4个空格缩进。

```
const obj = {
    id: 42, // 不符合
    name: 'hi', // 不符合
};
```

- 建议的写法：

建议使用2个空格作为缩进。

- 问题1: medical-managerment-system/src/store/modules/doctorInfoManage.js:59

- 问题代码1：

```
54     deleteDoctor({ dispatch }, { id, pn, size, keyword }) {
55         deleteDoctor(id).then(() => {
56             dispatch("getDoctorInfo", { pn, size, keyword });
57         });
58     },
59     // 修改
60     modifyDoctor(
61         { dispatch },
62         {
63             accountId,
64             age,
```

- 问题2: medical-managerment-system/src/store/modules/doctorInfoManage.js:60

- 问题代码1：

```

55     deleteDoctor(id).then(() => {
56         dispatch("getDoctorInfo", { pn, size, keyword });
57     });
58 },
59 // 修改
60 modifyDoctor(
61     { dispatch },
62     {
63         accountId,
64         age,
65         levelId,

```

3.3.1.10 G.CMT.04 文件头注释包含版权说明 (19)

● 问题描述：

文件头注释应首先包含版权说明。如果文件头注释需要增加其他内容，可以在版权说明下面补充。

版权说明的内容及格式如下，其内容可根据实际情况做调整，参见下面的详细说明。

中文版：

```

/*
 * 版权所有 (c) 华为技术有限公司 2012-2020
 */

```

英文版：

```

/*
 * Copyright (c) Huawei Technologies Co., Ltd. 2012-2023. All rights reserved.
 */

```

详细说明

- 2012-2020 根据实际需要可以修改。
- 2012 是文件首次创建年份，而2020是文件最后修改年份。对文件有重大修改时，必须更新后面年份，如特性扩展，重大重构等。
- 可以只写一个创建年份，后续文件修改则不用更新版权声明，如：版权所有 (c) 华为技术有限公司 2012 或英文：Copyright (c) Huawei Technologies Co., Ltd. 2012. All rights reserved.
- 版权说明可以使用华为子公司。如：版权所有 (c) 海思半导体 2012-2020 或英文：Copyright (c) Hisilicon Technologies Co., Ltd. 2012-2020. All rights reserved.

● 正确示例：

场景1：文件头注释

- 修复示例：包含文件头注释。

```
/*
 * Copyright (c) Huawei Technologies Co., Ltd. 2012-2020. All rights reserved.
 */

class Queue {
  constructor(contents = []) {
    this._queue = [...contents];
  }

  pop() {
    let value = this._queue[0];
    this._queue.splice(0, 1);
    return value;
  }
}
```

- 错误示例：

场景1：文件头注释

- 错误示例：无文件头注释。

```
// 不符合，无文件头注释
class Queue {
  constructor(contents = []) {
    this._queue = [...contents];
  }

  pop() {
    let value = this._queue[0];
    this._queue.splice(0, 1);
    return value;
  }
}
```

- 建议的写法：

为.js文件添加文件头注释，文件头注释中添加版权许可信息，版权许可信息中的时间信息要与实际情况保持一致。

- 问题1: medical-managerment-system/src/utils/request.js:1

- 问题代码1：

```
1 import axios from "axios";
2 import { Message } from "element-ui";
3 import router from "../router/index";
4
5 // 默认使用同源 /api，生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
```

- 问题2: medical-managerment-system/src/utils/app.js:1,1

- 问题代码1：

```
1 import { Message } from "element-ui";
2 // 判断删除结果
3 export function judgeDeleteResult(res) {
4   if (res.data.code == 20000) {
5     Message({
6       type: "success",
```

- 问题代码2：

```
1 import { login } from "../../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../../router/index'
4 import { getMenu } from '../../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
```

- 问题3: medical-managerment-system/src/utils/routeParse.js:1

- 问题代码1：

```
1 import { getMenuList } from "../../api/Login";
2 import Layout from "../../layout/index.vue";
3
4 function tree(data, arr) {
5   if (!Array.isArray(data)) {
6     return arr;
```

- 问题4: medical-managerment-system/src/utils/validator.js:2

- 问题代码1：

```
1 // 手机号验证器
2 function validatorPhone(rule, value, callback) {
3   if (value === "") {
4     callback(new Error(" 手机号不能为空 "));
5   } else if (!/^(13[0-9]|14[01456879]|15[0-35-9]|16[2567]|17[0-8]|18[0-9]|19[0-35-9])\d{8}$/.test(value)) {
6     callback(new Error(" 手机号格式错误 "));
7   } else {
```

- 问题5: medical-managerment-system/src/store/index.js:1,1

- 问题代码1：

```
1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
```

- 问题代码2：

```
1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../../layout/index.vue";
```

- 问题6: medical-managerment-system/src/store/getters.js:1

- 问题代码1：

```
1 const getters = {
2   token: (state) => state.app.token,
3   menuList: (state) => state.app.menuList,
4   companyInfo: (state) => state.companyInfoManage.companyInfo,
5   salePlaceInfo: (state) => state.saleInfoManage.salePlaceInfo,
6   cityInfo: (state) => state.cityInfoManage.cityInfo,
```

- 问题7: medical-managerment-system/src/store/modules/medicalPolicyInfoManage.js:1,1

- 问题代码1 :

```
1 import {
2   getMedicalPolicyInfo,
3   addMedicalPolicy,
4   modifyMedicalPolicyInfo,
5   deleteMedicalPolicy,
6 } from "../../api/admin/medicalPolicyInfoManage";
```

- 问题代码2 :

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
```

- 问题8: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:1,1

- 问题代码1 :

```
1 import {
2   getCompanyPolicyInfo,
3   addCompanyPolicy,
4   deleteCompanyPolicy,
5   modifyCompanyPolicyInfo,
6 } from "../../api/admin/companyPolicyInfoManage";
```

- 问题代码2 :

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
```

- 问题9: medical-managerment-system/src/api/admin/materialInfoManage.js:1,1

- 问题代码1 :

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
```

- 问题代码2 :

```
1 import {
2   getMaterialInfo,
3   addMaterial,
4   deleteMaterial,
5   modifyMaterial,
6 } from "../../api/admin/materialInfoManage.js";
```

- 问题10: medical-managerment-system/src/api/admin/doctorInfoManage.js:1,1

- 问题代码1 :

```
1 import {  
2   judgeDeleteResult,  
3   judgeAddResult,  
4   judgeQueryResult,  
5   judgeModifyResult,  
6   judgeResetResult,
```

- 问题代码2 :

```
1 import {  
2   getDoctorInfo,  
3   getDoctorLevelAndType,  
4   addDoctor,  
5   deleteDoctor,  
6   modifyDoctor,
```

- 问题11: medical-managerment-system/src/api/admin/companyInfoManage.js:1,1

- 问题代码1 :

```
1 import {  
2   judgeDeleteResult,  
3   judgeAddResult,  
4   judgeQueryResult,  
5   judgeModifyResult,  
6 } from "../../utils/app";
```

- 问题代码2 :

```
1 import {  
2   getCompanyInfo,  
3   addCompany,  
4   deleteCompany,  
5   modifyCompanyInfo,  
6   getAllCompanyInfo,
```

- 问题12: medical-managerment-system/src/api/admin/saleInfoManage.js:1,1

- 问题代码1 :

```
1 import {  
2   judgeDeleteResult,  
3   judgeAddResult,  
4   judgeQueryResult,  
5   judgeModifyResult,  
6 } from "../../utils/app";
```

- 问题代码2 :

```
1 import {  
2   getSalePlaceInfo,  
3   addSalePlace,  
4   deleteSalePlace,  
5   modifySalePlaceInfo,  
6   getAllSalePlaceInfo,
```

- 问题13: medical-managerment-system/src/api/admin/drugInfoManage.js:1,1

- 问题代码1 :

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
```

- 问题代码2 :

```
1 import {
2   getDrugInfo,
3   addDrug,
4   deleteDrug,
5   modifyDrugInfo,
6 } from "../../api/admin/drugInfoManage";
```

- 问题14: medical-managerment-system/src/api/admin/cityInfoManage.js:1,1

- 问题代码1 :

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5 } from "../../utils/app";
6 import request from "../../utils/request";
```

- 问题代码2 :

```
1 import {
2   getCityInfo,
3   addCity,
4   deleteCity,
5   getAllCityInfo,
6 } from "../../api/admin/cityInfoManage.js";
```

- 问题15: medical-managerment-system/src/api/Login.js:1

- 问题代码1 :

```
1 import request from "../../utils/request"
2 import Qs from "qs";
3
4 export function login(username, password) {
5   return request({
6     url: "/login",
```

- 问题16: medical-managerment-system/src/api/dashboard.js:1

- 问题代码1 :

```
1 import request from "../../utils/request";
2
3 export function getDashboard() {
4   return request({
5     url: "/dashboard",
6     method: "GET",
```


- 问题17: medical-managerment-system/babel.config.js:1

- 问题代码1 :

```
1 module.exports = {
2   presets: [
3     '@vue/cli-plugin-babel/preset'
4   ]
5 }
```

- 问题18: medical-managerment-system/vue.config.js:1

- 问题代码1 :

```
1 module.exports = {
2   publicPath: '/',
3   lintOnSave: false, // 关闭ESLint检查
4   devServer: {
5     host: "0.0.0.0",
6     port: "9092", // 代理端口
7   }
8 }
```

- 问题19: medical-managerment-system/src/main.js:1

- 问题代码1 :

```
1 import Vue from 'vue'
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
```

3.3.1.11 G.FMT.02 一个源文件按顺序包含版权、package、import、顶层类，且用空行分隔 (15)

- 问题描述 :

一个源文件中应按顺序包含以下信息 :

1. 许可证或版权信息 ;
2. package语句 , 且语句内不换行 ;
3. import语句 , 且语句内不换行 , 不能用通配符* ;
4. 顶级类 (只有一个) , 所在.java源文件与它同名。

以上每个部分之间用一个空行隔开。

- 正确示例 :

场景1 : 版权、package、import、顶层类按推荐顺序排列

- 修复示例 : 版权、package、import、顶层类之间使用一个空行分隔

```
/**
 * Copyright (c) Huawei Technologies Co., Ltd. 2012-2019. All rights reserved.
 */

package com.puppycrawl.tools.checkstyle;

import java.util.List;

/**
 * JavaComponentOrder介绍
 *
 * @since 2023-08-29
 */
public class JavaComponentOrder {
}
```

- 错误示例：

场景1：版权、package、import、顶层类按推荐顺序排列

- 错误示例：版权、package的顺序错误，分隔使用多个空行

```
package com.puppycrawl.tools.checkstyle;

/**
 * Copyright (c) Huawei Technologies Co., Ltd. 2012-2019. All rights reserved.
 */

import java.util.List;

/**
 * JavaComponentOrder介绍
 *
 * @since 2023-08-29
 */
public class JavaComponentOrder {
}
```

- 建议的写法：

对代码进行格式化处理。

- 问题1：medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:6

- 问题代码1：

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.DrugService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/drugs")
```

- 问题2: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:3

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题3: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:6

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/companys")
```

- 问题4: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:3

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题5: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:8

- 问题代码1 :

```
3 import com.medicine.business.service.DoctorService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
7 import org.springframework.security.core.annotation.AuthenticationPrincipal;
8 import org.springframework.web.bind.annotation.*;
9 import com.medicine.security.AuthSession;
10
11 import java.util.Map;
12
13 @RestController
```

- 问题6: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:3

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题7: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:6

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MaterialService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/materials")
```

- 问题8: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:3

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题9: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:3

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题10: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

- 问题11: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:7

- 问题代码1 :

```
2
3 import com.medicine.business.service.CityService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
7 import org.springframework.web.bind.annotation.*;
8
9 import java.util.Map;
10
11 @RestController
12 @RequestMapping("/api/citys")
```

- 问题12: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:6

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MedicalPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/medical_policys")
```

- 问题13: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:6

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/company_policys")
```

- 问题14: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:6

- 问题代码1：

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.SaleService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/sales")
```

- 问题15: medical-backend/src/main/java/com/medicine/business/mapper/ MaterialMapper.java:3

- 问题代码1：

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
```

3.3.1.12 G.CMT.02 顶层public类的Javadoc应该包含功能说明和创建日期/版本信息 (66)

- 问题描述：

顶层public类的Javadoc中应该有功能说明、@since信息。日期格式为Java 8 time包中的ISO_DATE，例如“2011-12-03”或者“2011-12-03+01:00”。

编写文件头或顶层类头注释应注意：

- 禁止空有格式，无内容。
- 业界Java源码中一般没有History信息，History在配置库里面可以查询，不建议在Java源码的注释中包含History。
- 顶层public类头中创建日期的@since标签中的年份应该与版权中的起始年份相同。

- 正确示例：

场景1：

- 修复示例：

```
// 【GOOD】添加了顶层class的注释
/**
 * TopClassComment的功能说明
 *
 * @since 2020/5/26
 */
public enum TopClassComment {
    ...
}
```

- 错误示例：

场景1：

- 错误示例：注释中无功能说明、@since信息

```
// 【POTENTIAL FLAW】注释中无功能说明、'@since'信息
public enum TopClassComment {
    ...
}
```

- 建议的写法：

在Javadoc中添加功能说明、添加@since注解，并在后面添加时间，例如：@since 2023-08-29

- 问题1: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:8

- 问题代码1：

```
3 import com.medicine.auth.model.PermissionRecord;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 import java.util.List;
8
9 public interface PermissionMapper {
10
11     @Select("SELECT p.id, p.pid, p.name, p.path, p.component, p.level, p.title "
12           + "FROM permission p JOIN role_permission rp ON rp.per_id = p.id "
13           + "WHERE rp.roleName = #{roleName} ORDER BY p.id")
```

- 问题2: medical-backend/src/main/java/com/medicine/security/RestAuthenticationEntryPoint.java:15

- 问题代码1：

```
10
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAuthenticationEntryPoint implements AuthenticationEntryPoint {
18
19     private final ObjectMapper objectMapper;
```

- 问题3: medical-backend/src/main/java/com/medicine/auth/dto/PermissionMeta.java:2

- 问题代码1：

```
1 package com.medicine.auth.dto;
2
3 public class PermissionMeta {
4
5     private String title;
6
7     public PermissionMeta() {
```

- 问题4: medical-backend/src/main/java/com/medicine/business/service/FileStorageService.java:18

- 问题代码1 :

```
13 import java.nio.file.Path;
14 import java.nio.file.StandardCopyOption;
15 import java.util.Locale;
16 import java.util.Set;
17 import java.util.UUID;
18
19 @Service
20 public class FileStorageService {
21     private static final long MAX_IMAGE_SIZE = 2L * 1024 * 1024;
22     private static final Set<String> IMAGE_TYPES = Set.of("image/jpeg", "image/
png");
```

- 问题5: medical-backend/src/main/java/com/medicine/auth/dto/LoginRequest.java:5

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 import javax.validation.constraints.NotBlank;
4 import javax.validation.constraints.Size;
5
6 public class LoginRequest {
7
8     @NotBlank(message = "用户名不能为空")
9     @Size(max = 255, message = "用户名过长")
10     private String username;
```

- 问题6: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:7

- 问题代码1 :

```
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface CompanyMapper {
10     @Select("<script>SELECT COUNT(*) FROM drugcompany <where>"
11         + "<if test='name != null and name != \"\"'>company_name LIKE CONCAT
12         ('%', #{name}, '%')</if>"
13         + "</where></script>")
```

- 问题7: medical-backend/src/test/java/com/medicine/auth/service/AuthServiceTest.java:19

- 问题代码1 :


```

14 import static org.assertj.core.api.Assertions.assertThatThrownBy;
15 import static org.mockito.ArgumentMatchers.any;
16 import static org.mockito.Mockito.mock;
17 import static org.mockito.Mockito.verify;
18 import static org.mockito.Mockito.when;
19
20 class AuthServiceTest {
21
22     @Test
23     void loginReturnsRawTokenAndNumericUserType() {
24         AccountMapper accountMapper = mock(AccountMapper.class);

```

- 问题8: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:6

- 问题代码1 :

```

1 package com.medicine.auth.mapper;
2
3 import com.medicine.auth.model.Account;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 public interface AccountMapper {
8
9     @Select("SELECT id, realname, uname, pwd, phonenumber, utype FROM account WHERE uname = #{username} LIMIT 1")
10     Account findByUsername(@Param("username") String username);
11 }

```

- 问题9: medical-backend/src/main/java/com/medicine/dashboard/dto/NameValue.java:2

- 问题代码1 :

```

1 package com.medicine.dashboard.dto;
2
3 public class NameValue {
4
5     private String name;
6     private long value;

```

- 问题10: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:7

- 问题代码1 :

```

2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface SaleMapper {
10     @Select("<script>SELECT COUNT(*) FROM sale <where>"
11         + "<if test='name != null and name != \"\"'>sale_name LIKE CONCAT ('%', #{name}, '%')</if>"
12         + "</where></script>")

```

- 问题11: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:9

- 问题代码1 :

```
4 import com.medicine.dashboard.dto.DashboardNews;
5 import com.medicine.dashboard.dto.NameValue;
6 import org.apache.ibatis.annotations.Select;
7
8 import java.util.List;
9
10 public interface DashboardMapper {
11
12     @Select("SELECT "
13             + "(SELECT COUNT(*) FROM doctor) AS doctorCount, "
14             + "(SELECT COUNT(*) FROM drugcompany) AS companyCount, "
```

- 问题12: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:7

- 问题代码1 :

```
2
3 import java.util.LinkedHashMap;
4 import java.util.List;
5 import java.util.Map;
6 import java.math.BigDecimal;
7
8 final class PageSupport {
9     static final int MAX_PAGE_SIZE = 200;
10
11     private PageSupport() {
12     }
```

- 问题13: medical-backend/src/main/java/com/medicine/auth/dto/UserInfo.java:2

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class UserInfo {
4
5     private Long id;
6     private String realname;
7     private String uname;
```

- 问题14: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:12

- 问题代码1 :

```
7 import org.springframework.security.core.annotation.AuthenticationPrincipal;
8 import org.springframework.web.bind.annotation.*;
9 import com.medicine.security.AuthSession;
10
11 import java.util.Map;
12
13 @RestController
14 @RequestMapping("/api/doctors")
15 public class DoctorController {
16     private final DoctorService service;
```

- 问题15: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:7

- 问题代码1 :

```
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface DrugMapper {
10     @Select("<script>SELECT COUNT(*) FROM drug <where>"
11           + "<if test='name != null and name != '\">drug_name LIKE CONCAT"
12           + "</where></script>")
```

- 问题16: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:25

- 问题代码1 :

```
20 import org.springframework.web.cors.UrlBasedCorsConfigurationSource;
21
22 import java.util.Arrays;
23 import java.util.Collections;
24 import java.util.stream.Collectors;
25
26 @Configuration
27 @EnableGlobalMethodSecurity(prePostEnabled = true)
28 public class SecurityConfig {
29
30     private final TokenAuthenticationFilter tokenAuthenticationFilter;
```

- 问题17: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:9

- 问题代码1 :

```
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/companys")
12 public class CompanyController {
13     private final CompanyService service;
```

- 问题18: medical-backend/src/main/java/com/medicine/auth/model/Account.java:2

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class Account {
4
5     private Long id;
6     private String realname;
7     private String uname;
```

- 问题19: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:6

- 问题代码1 :

```
1 package com.medicine.dashboard.service;
2
3 import com.medicine.dashboard.dto.DashboardView;
4 import com.medicine.dashboard.mapper.DashboardMapper;
5 import org.springframework.stereotype.Service;
6
7 @Service
8 public class DashboardService {
9
10     private final DashboardMapper dashboardMapper;
```

- 问题20: medical-backend/src/main/java/com/medicine/business/service/CityService.java:8

- 问题代码1 :

```
3 import com.medicine.business.mapper.CityMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8
9 @Service
10 public class CityService {
11     private final CityMapper mapper;
12
13     public CityService(CityMapper mapper) {
```

- 问题21: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:9

- 问题代码1 :

```
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/materials")
12 public class MaterialController {
13     private final MaterialService service;
```

- 问题22: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:13

- 问题代码1 :

```

8
9 import java.util.ArrayList;
10 import java.util.LinkedHashMap;
11 import java.util.List;
12 import java.util.Map;
13
14 @Service
15 public class PermissionService {
16
17     private final PermissionMapper permissionMapper;

```

- 问题23: medical-backend/src/main/java/com/medicine/business/controller/BusinessResponses.java:7

- 问题代码1 :

```

2
3 import com.medicine.common.ApiResponse;
4
5 import java.util.LinkedHashMap;
6 import java.util.Map;
7
8 final class BusinessResponses {
9     private BusinessResponses() {
10     }
11
12     static ApiResponse<Map<String, Object>> wrapped(String key, Object value) {

```

- 问题24: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:8

- 问题代码1 :

```

3 import com.medicine.business.mapper.MaterialMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8
9 @Service
10 public class MaterialService {
11     private final MaterialMapper mapper;
12
13     public MaterialService(MaterialMapper mapper) {

```

- 问题25: medical-backend/src/main/java/com/medicine/security/RestAccessDeniedHandler.java:15

- 问题代码1 :

```

10
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAccessDeniedHandler implements AccessDeniedHandler {
18
19     private final ObjectMapper objectMapper;

```

- 问题26: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardNews.java:2

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardNews {
4
5     private String id;
6     private String title;
7     private String summary;
```

- 问题27: medical-backend/src/test/java/com/medicine/business/service/DoctorServiceTest.java:10

- 问题代码1 :

```
5 import org.springframework.security.crypto.password.PasswordEncoder;
6
7 import static org.mockito.Mockito.mock;
8 import static org.mockito.Mockito.verify;
9 import static org.mockito.Mockito.when;
10
11 class DoctorServiceTest {
12
13     @Test
14     void deleteRemovesDoctorAndAccountInOneTransaction() {
15         DoctorMapper mapper = mock(DoctorMapper.class);
```

- 问题28: medical-backend/src/main/java/com/medicine/security/AuthSession.java:2

- 问题代码1 :

```
1 package com.medicine.security;
2
3 public class AuthSession {
4
5     private Long userId;
6     private String username;
7     private String realname;
```

- 问题29: medical-backend/src/main/java/com/medicine/business/config/UploadWebConfig.java:7

- 问题代码1 :

```
2
3 import com.medicine.business.service.FileStorageService;
4 import org.springframework.context.annotation.Configuration;
5 import org.springframework.web.servlet.config.annotation.ResourceHandlerRegistry;
6 import org.springframework.web.servlet.config.annotation.WebMvcConfigurer;
7
8 @Configuration
9 public class UploadWebConfig implements WebMvcConfigurer {
10     private final FileStorageService storageService;
11
12     public UploadWebConfig(FileStorageService storageService) {
```

- 问题30: medical-backend/src/main/java/com/medicine/security/TokenService.java:14

- 问题代码1 :

```
9 import org.springframework.stereotype.Service;
10
11 import java.time.Duration;
12 import java.util.Optional;
13 import java.util.UUID;
14
15 @Service
16 public class TokenService {
17
18     private final StringRedisTemplate redisTemplate;
19     private final ObjectMapper objectMapper;
```

- 问题31: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:7

- 问题代码1 :

```
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface DoctorMapper {
10     String FROM_SQL = " FROM doctor d LEFT JOIN doctor_level dl ON dl.id=d.level_id "
11         + "LEFT JOIN treat_type tt ON tt.id=d.type_id ";
```

- 问题32: medical-backend/src/test/java/com/medicine/common/ApiResponseTest.java:6

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class ApiResponseTest {
8
9     @Test
10     void successUsesFrontendCompatibleCode() {
11         ApiResponse<String> response = ApiResponse.success("ok");
```

- 问题33: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:13

- 问题代码1 :

```

8 import com.medicine.common.ErrorCode;
9 import com.medicine.security.AuthSession;
10 import com.medicine.security.TokenService;
11 import org.springframework.security.crypto.password.PasswordEncoder;
12 import org.springframework.stereotype.Service;
13
14 @Service
15 public class AuthService {
16
17     private final AccountMapper accountMapper;
18     private final PasswordEncoder passwordEncoder;

```

- 问题34: medical-backend/src/test/java/com/medicine/security/TokenServiceTest.java:6

- 问题代码1 :

```

1 package com.medicine.security;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class TokenServiceTest {
8
9     @Test
10     void acceptsLegacyRawAuthorizationToken() {
11         assertThat(TokenService.normalizeAuthorization(" abc123 ").isEqualTo("abc123"));

```

- 问题35: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:26

- 问题代码1 :

```

21
22 import javax.validation.Valid;
23 import java.util.Collections;
24 import java.util.List;
25 import java.util.Map;
26
27 @Validated
28 @RestController
29 @RequestMapping("/api")
30 public class AuthController {

```

- 问题36: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:9

- 问题代码1 :

```

4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/sales")
12 public class SaleController {
13     private final SaleService service;

```


- 问题37: medical-backend/src/test/java/com/medicine/auth/service/PermissionServiceTest.java:14

- 问题代码1 :

```
9 import java.util.List;
10
11 import static org.assertj.core.api.Assertions.assertThat;
12 import static org.mockito.Mockito.mock;
13 import static org.mockito.Mockito.when;
14
15 class PermissionServiceTest {
16
17     @Test
18     void buildsFrontendRouteTree() {
19         PermissionMapper mapper = mock(PermissionMapper.class);
```

- 问题38: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:7

- 问题代码1 :

```
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface MedicalPolicyMapper {
10     String FROM_SQL = " FROM medical_policy mp LEFT JOIN city c ON c.city_id=mp.city_id "
11         + "LEFT JOIN sysregion r ON r.id=c.city_number LEFT JOIN sysregion p ON p.id=r.parent_id ";
12     String FILTER_SQL = "<where>"
```

- 问题39: medical-backend/src/main/java/com/medicine/MedicalBackendApplication.java:6

- 问题代码1 :

```
1 package com.medicine;
2
3 import org.mybatis.spring.annotation.MapperScan;
4 import org.springframework.boot.SpringApplication;
5 import org.springframework.boot.autoconfigure.SpringBootApplication;
6
7 @MapperScan({"com.medicine.auth.mapper", "com.medicine.business.mapper", "com.medicine.dashboard.mapper"})
8 @SpringBootApplication
9 public class MedicalBackendApplication {
10
11     public static void main(String[] args) {
```

- 问题40: medical-backend/src/test/java/com/medicine/dashboard/service/DashboardServiceTest.java:15

- 问题代码1 :

```

10 import java.util.Collections;
11
12 import static org.assertj.core.api.Assertions.assertThat;
13 import static org.mockito.Mockito.mock;
14 import static org.mockito.Mockito.when;
15
16 class DashboardServiceTest {
17
18     @Test
19     void assemblesAllDashboardSections() {
20         DashboardMapper mapper = mock(DashboardMapper.class);

```

- 问题41: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardView.java:4

- 问题代码1 :

```

1 package com.medicine.dashboard.dto;
2
3 import java.util.List;
4
5 public class DashboardView {
6
7     private DashboardCounts counts;
8     private List<NameValue> doctorLevels;
9     private List<NameValue> treatTypes;

```

- 问题42: medical-backend/src/main/java/com/medicine/auth/dto/PermissionNode.java:5

- 问题代码1 :

```

1 package com.medicine.auth.dto;
2
3 import java.util.ArrayList;
4 import java.util.List;
5
6 public class PermissionNode {
7
8     private String path;
9     private String name;
10    private String component;

```

- 问题43: medical-backend/src/main/java/com/medicine/business/controller/UploadController.java:15

- 问题代码1 :

```

10 import org.springframework.web.multipart.MultipartFile;
11 import org.springframework.web.servlet.support.ServletUriComponentsBuilder;
12
13 import java.util.LinkedHashMap;
14 import java.util.Map;
15
16 @RestController
17 @RequestMapping("/api/base")
18 public class UploadController {
19     private final FileStorageService storageService;

```

- 问题44: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:7

- 问题代码1 :

```

2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface CompanyPolicyMapper {
10     String FROM_SQL = " FROM company_policy cp LEFT JOIN drugcompany dc ON dc.
company_id=cp.company_id ";
11
12     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"

```

- 问题45: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:2

- 问题代码1 :

```

1 package com.medicine.common;
2
3 public class ApiResponse<T> {
4
5     private int code;
6     private String message;
7     private T data;

```

- 问题46: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:13

- 问题代码1 :

```

8 import org.springframework.web.bind.MethodArgumentNotValidException;
9 import org.springframework.web.bind.annotation.ExceptionHandler;
10 import org.springframework.web.bind.annotation.RestControllerAdvice;
11
12 import javax.validation.ConstraintViolationException;
13
14 @RestControllerAdvice
15 public class GlobalExceptionHandler {
16
17     private static final Logger log = LoggerFactory.getLogger
(GlobalExceptionHandler.class);

```

- 问题47: medical-backend/src/main/java/com/medicine/security/TokenAuthenticationFilter.java:15

- 问题代码1 :

```

10 import javax.servlet.ServletException;
11 import javax.servlet.http.HttpServletRequest;
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.util.Collections;
15
16 @Component
17 public class TokenAuthenticationFilter extends OncePerRequestFilter {
18
19     private final TokenService tokenService;

```

- 问题48: medical-backend/src/main/java/com/medicine/common/PageView.java:5

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import java.util.Collections;
4 import java.util.List;
5
6 public class PageView<T> {
7
8     private long total;
9     private List<T> list;
10    private int pageNum;
```

- 问题49: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:10

- 问题代码1 :

```
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
7 import org.springframework.web.bind.annotation.*;
8
9 import java.util.Map;
10
11 @RestController
12 @RequestMapping("/api/citys")
13 public class CityController {
14     private final CityService service;
```

- 问题50: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardCounts.java:2

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardCounts {
4
5     private long doctorCount;
6     private long companyCount;
7     private long drugCount;
```

- 问题51: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:11

- 问题代码1 :

```
6
7 import java.time.LocalDate;
8 import java.util.LinkedHashMap;
9 import java.util.List;
10 import java.util.Map;
11
12 @Service
13 public class MedicalPolicyService {
14     private final MedicalPolicyMapper mapper;
15
16     public MedicalPolicyService(MedicalPolicyMapper mapper) {
```

华为云 CodeArts Check 代码扫描报告

- 问题52: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:9

- 问题代码1 :

```
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/medical_policys")
12 public class MedicalPolicyController {
13     private final MedicalPolicyService service;
```

- 问题53: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:8

- 问题代码1 :

```
3 import com.medicine.business.mapper.CompanyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8
9 @Service
10 public class CompanyService {
11     private final CompanyMapper mapper;
12
13     public CompanyService(CompanyMapper mapper) {
```

- 问题54: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:9

- 问题代码1 :

```
4 import com.medicine.dashboard.dto.DashboardView;
5 import com.medicine.dashboard.service.DashboardService;
6 import org.springframework.web.bind.annotation.GetMapping;
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RestController;
9
10 @RestController
11 @RequestMapping("/api/dashboard")
12 public class DashboardController {
13
14     private final DashboardService dashboardService;
```

- 问题55: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:9

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/company_policys")
12 public class CompanyPolicyController {
13     private final CompanyPolicyService service;
```

- 问题56: medical-backend/src/main/java/com/medicine/auth/dto/LoginResult.java:2

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class LoginResult {
4
5     private String token;
6     private UserInfo userInfo;
```

- 问题57: medical-backend/src/main/java/com/medicine/auth/model/PermissionRecord.java:2

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class PermissionRecord {
4
5     private Integer id;
6     private Integer pid;
7     private String name;
```

- 问题58: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:9

- 问题代码1 :

```
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/drugs")
12 public class DrugController {
13     private final DrugService service;
```

- 问题59: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:11

- 问题代码1 :

```

6 import org.apache.ibatis.annotations.Param;
7 import org.apache.ibatis.annotations.Select;
8
9 import java.util.List;
10 import java.util.Map;
11
12 @Mapper
13 public interface CityMapper {
14     String FROM_SQL = " FROM city c "
15         + "LEFT JOIN sysregion r ON r.id = c.city_number "
16         + "LEFT JOIN sysregion p ON p.id = r.parent_id ";

```

- 问题60: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:9

- 问题代码1 :

```

4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8 import java.util.LinkedHashMap;
9
10 @Service
11 public class SaleService {
12     private final SaleMapper mapper;
13
14     public SaleService(SaleMapper mapper) {

```

- 问题61: medical-backend/src/main/java/com/medicine/common/BusinessException.java:2

- 问题代码1 :

```

1 package com.medicine.common;
2
3 public class BusinessException extends RuntimeException {
4
5     private final int code;
6
7     public BusinessException(int code, String message) {

```

- 问题62: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:2

- 问题代码1 :

```

1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;

```

- 问题63: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:7

- 问题代码1 :

```

2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface MaterialMapper {
10     @Select("<script>SELECT COUNT(*) FROM material <where>"
11             + "<if test='keyword != null and keyword != \"\">"
12             + "title LIKE CONCAT('%', #{keyword}, '%') OR message LIKE CONCAT
13             ('%', #{keyword}, '%')")

```

- 问题64: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:10

- 问题代码1 :

```

5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.LinkedHashMap;
8 import java.util.List;
9 import java.util.Map;
10
11 @Service
12 public class CompanyPolicyService {
13     private final CompanyPolicyMapper mapper;
14
15     public CompanyPolicyService(CompanyPolicyMapper mapper) {

```

- 问题65: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:12

- 问题代码1 :

```

7 import org.springframework.stereotype.Service;
8 import org.springframework.transaction.annotation.Transactional;
9
10 import java.util.LinkedHashMap;
11 import java.util.Map;
12
13 @Service
14 public class DoctorService {
15     public static final String RESET_PASSWORD = "123456";
16
17     private final DoctorMapper mapper;

```

- 问题66: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:12

- 问题代码1 :


```
7 import java.util.ArrayList;
8 import java.util.LinkedHashMap;
9 import java.util.List;
10 import java.util.Map;
11 import java.util.stream.Collectors;
12
13 @Service
14 public class DrugService {
15     private final DrugMapper mapper;
16
17     public DrugService(DrugMapper mapper) {
```

3.3.1.13 G.AOD.03 尽量避免使用console (2)

- 问题描述：

在 JavaScript，虽然console 被设计为在浏览器中执行的，但避免使用 console 的方法被认为是一种最佳实践。这样的消息被认为是用于调试的，因此不适合输出到客户端。通常，在发布正式交付的产品之前尽量删除不必要 的 console 调用。

- 正确示例：

场景1：console打印

- 修复示例：使用自定义函数打印信息

```
Console.log("Hello world!");
```

- 错误示例：

场景1：console打印

- 错误示例：使用console打印信息

```
console.log("Log a debug level message.");
```

- 建议的写法：

尽量避免使用console。

- 问题1: medical-managerment-system/src/store/modules/doctorInfoManage.js:88

- 问题代码1：

```
83         pwd,
84         sex,
85         typeId,
86         id
87     ).then((res) => {
88         console.log(res);
89         if (res.data.code == 10001) {
90             return false;
91         } else {
92             dispatch("getDoctorInfo", { pn, size, keyword });
93             return true;
```

- 问题2: medical-managerment-system/src/views/DrugManage/index.vue:373,377

● 问题代码1：

```
368     handleUploadError(err) {
369         this.$message.error("上传失败，请重试");
370         this.uploading = false;
371         this.percentage = 0;
372         this.status = null;
373         console.log(err);
374         let myError = err.toString(); //转字符串
375         myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376         myError = JSON.parse(myError); //转对象
377         console.log(myError);
378     },
```

● 问题代码2：

```
372         this.status = null;
373         console.log(err);
374         let myError = err.toString(); //转字符串
375         myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376         myError = JSON.parse(myError); //转对象
377         console.log(myError);
378     },
379     // 对上传的文件类型及大小进行限制
380     beforeImgUpload(file) {
381         const isJPG = file.type === "image/jpeg" || file.type === "image/png";
382         const isLt2M = file.size / 1024 / 1024 < 2;
```

3.3.1.14 G.FMT.07 合理安排空行 (1)

● 问题描述：

合理安排空行。

使用空行可以凸显出代码块的相关程度，能提升代码的可读性。但是过多的空行并不能带来更多的益处，反而可能降低代码的可读性。可参考如下建议：

1. 根据上下文内容的相关程度，合理安排空行，比如逻辑相对独立的代码块之间增加空行，类中的方法定义之间增加空行，多行变量声明后面增加空行，return语句前增加空行等；
2. 仅在需要特别凸显代码块逻辑分组时使用连续空行，并且最多连续2个空行，比如顶级的类定义或函数定义之间空2个空行，另外，函数内部、类型定义内部等不使用连续空行；
3. 大括号内的代码块行首之前和行尾之后不要加空行，包括函数定义，类的方法定义和语句代码块；
4. 在非空文件中，建议保留拖尾换行。在非空文件中，存在拖尾换行是一个常见的UNIX 风格，它的好处是可以方便串联和追加文件，不会打断cat在Shell 中的输出。另外，某些版本控制工具对拖尾换行有明确要求。

● 正确示例：

场景1：连续空行

- 修复示例：顶级函数定义之间空2个空行

```
function foo() {
    ...
}

function bar() {
    ...
}
```

场景2：类方法定义

- 修复示例：类的方法定义之间，增加空行

```
class MyClass {
    foo() {
        //...
    }

    bar() {
        //...
    }
}
```

场景3：代码块行首之前和行尾之后

- 修复示例：大括号内的代码块行首之前和行尾之后不加空行

```
function fight() {
    //...
}

if (isOk) {
    foo();
}

class MyClass {
    foo() {
        //...
    }
}
```

场景4：函数内部

- 修复示例：函数内部无连续空行

```
function bar() {
    foo();
}
```

场景5：注释和代码之间

- 修复示例：注释和代码之间没有空行

```
// getTableData函数的注释
function getTableData() {
    getData();
    ...
}
```

- 错误示例：

场景1：连续空行

- 错误示例：连续空行大于2个

```
function foo() {
    ...
}

function bar() {
    ...
}
```

场景2：类方法定义

- 错误示例：类的方法定义之间，没有增加空行

```
class MyClass {
    foo() {
        //...
    }
    bar() {
        //...
    }
}
```

场景3：代码块行首之前和行尾之后

- 错误示例：大括号内的代码块行首之前和行尾之后加空行

```
function fight() {

    //...

}

if (isOk) {

    foo();

}

class MyClass {

    foo() {
        //...
    }

}
```

场景4：函数内部

- 错误示例：函数内部使用连续空行

```
function bar() {

    foo();

}
```

场景5：注释和代码之间

- 错误示例：注释和代码之间有空行

```
// getTableData函数的注释

function getTableData() {
    getData();
    ...
}
```

- 建议的写法：

1. 大括号内的代码块行首之前和行尾之后不要加空行，包括函数定义，类的方法定义和语句代码块。
2. 代码上方的注释：与代码行间无空行，保持与代码一样的缩进。
3. 类中的方法定义之间增加空行。
4. 仅在需要特别凸显代码块逻辑分组时使用连续空行，并且最多连续2个空行，比如顶级的类定义或函数定义之间空2个空行，函数内部不使用连续空行。

- 问题1: medical-managerment-system/src/router/index.js:5

- 问题代码1：

```
1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";
6
7 Vue.use(VueRouter);
8
9 // 解决导航栏或者底部导航tabBar中的vue-router在3.0版本以上频繁点击菜单报错的问题。
10 const originalPush = VueRouter.prototype.push;
```

3.3.1.15 G.FMT.09 建议 if、for、do、while 等语句的执行体加大括号 {} (3)

- 问题描述：

在if、for、do、while 等语句的执行体加大括号 {}是一种最佳实践，因为省略大括号容易导致错误，并且降低代码的清晰度。

- 正确示例：

场景1：大括号

- 修复示例：if、for、do、while 等语句的执行体任何时候都添加大括号 {}。

```
if (foo) {
    foo++;
}

while (bar) {
    baz();
}

if (foo) {
    baz();
} else {
    qux();
}
```

- 错误示例：

场景1：大括号

- 错误示例：if、for、do、while 等语句的执行体 省略了大括号 {}。

```
if (foo) foo++;

while (bar)
    baz();

if (foo) {
    baz();
} else qux();
```

- 建议的写法：

建议 if、for、do、while 等语句的执行体加大括号 {}。

- 问题1: medical-managerment-system/src/layout/components/PageSider/index.vue:66

- 问题代码1：

```
61     };
62   },
63   methods: {
64     handleMenuListData(data, arr) {
65       (Array.isArray(data) ? data : []).forEach((route) => {
66         if (!route || !route.path || route.path === "/user/login") return;
67         arr.push({
68           path: route.path,
69           title: (route.meta && route.meta.title) || route.name || "未命名菜单",
70           icon: "el-icon-menu",
71           children: this.handleMenuListData(route.children, []),
```

- 问题2: medical-managerment-system/src/views/Login.vue:65

- 问题代码1：

```

60  methods: {
61    // 登录事件
62    handleLogin(formName) {
63      this.$refs[formName].validate((valid) => {
64        if (valid) {
65          if (this.loggingIn) return;
66          this.loggingIn = true;
67          this.$store
68            .dispatch("app/login", this.loginForm)
69            .then(() => this.$store.dispatch("app/setMenuList"))
70            .then(() => {

```

- 问题3: medical-managerment-system/src/views/SaleManage/index.vue:409

- 问题代码1 :

```

404  handleModifyClose() {
405    // this.$refs.modifyForm.clearValidate();
406    this.$refs.modifyForm.resetFields();
407  },
408  toCoordinate(value) {
409    if (value === "" || value === null || value === undefined) return null;
410    const coordinate = Number(value);
411    return Number.isFinite(coordinate) ? coordinate : null;
412  },
413  hasCoordinate(saleInfo) {
414    return (

```

3.3.1.16 G.CMT.05 文件头注释应该包含版权许可信息 (66)

- 问题描述 :

文件头注释应该放在package和import之前, 应该包含版权许可信息, 如果需要在文件头注释中增加其他内容, 可以在后面以相同格式补充。版权许可不应该使用Javadoc样式或单行样式的注释, 应该从文件顶头开始。如果包含“关键资产说明”类注释, 则应紧随其后。

版权许可内容及格式必须如下:

中文版:

```
/* * 版权所有 (c) 华为技术有限公司 2012-2020 */
```

英文版:

```
/* * Copyright (c) Huawei Technologies Co., Ltd. 2012-2020. All rights reserved. */
```

关于版本说明, 应注意:

- 2012-2020 根据实际需要可以修改。2012 是文件首次创建年份, 而 2020 是最后文件修改年份。二者可以一样, 如 "2020-2020"。对文件有重大修改时, 必须更新后面年份, 如特性扩展, 重大重构等。
- 版权说明可以使用华为子公司。如: 版权所有 (c) 海思半导体 2012-2020 或英文: Copyright (c) Hisilicon Technologies Co., Ltd. 2012-2020. All rights reserved.

- 正确示例:

场景1: 无文件头注释

- 修复示例:

```
/*
 * Copyright (c) Huawei Technologies Co., Ltd. 2022-2022. All rights reserved.
 */

package com.xxx;

public class FileHeaderComment {
    public void method() {
    }
}
```

- 错误示例：

场景1：无文件头注释

- 错误示例：

```
// 【不符合】无文件头注释
package com.xxx;

public class FileHeaderComment {
    public void method() {
    }
}
```

- 建议的写法：

为.java文件添加文件头注释，文件头注释中添加版权许可信息，版权许可信息中的时间信息要与实际情况保持一致。

- 问题1: medical-backend/src/main/java/com/medicine/dashboard/dto/NameValue.java:1

- 问题代码1：

```
1 package com.medicine.dashboard.dto;
2
3 public class NameValue {
4
5     private String name;
6     private long value;
```

- 问题2: medical-backend/src/main/java/com/medicine/business/service/PageSupport.java:1

- 问题代码1：

```
1 package com.medicine.business.service;
2
3 import java.util.LinkedHashMap;
4 import java.util.List;
5 import java.util.Map;
6 import java.math.BigDecimal;
```

- 问题3: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:1

- 问题代码1：


```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.DoctorService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
```

- 问题4: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题5: medical-backend/src/main/java/com/medicine/auth/dto/UserInfo.java:1

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class UserInfo {
4
5     private Long id;
6     private String realname;
```

- 问题6: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:1

- 问题代码1 :

```
1 package com.medicine.auth.mapper;
2
3 import com.medicine.auth.model.PermissionRecord;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
```

- 问题7: medical-backend/src/main/java/com/medicine/auth/dto/PermissionMeta.java:1

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class PermissionMeta {
4
5     private String title;
```

- 问题8: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:1

- 问题代码1 :

```
1 package com.medicine.config;
2
3 import com.medicine.security.RestAccessDeniedHandler;
4 import com.medicine.security.RestAuthenticationEntryPoint;
5 import com.medicine.security.TokenAuthenticationFilter;
6 import org.springframework.beans.factory.annotation.Value;
```

- 问题9: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MaterialService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题10: medical-backend/src/main/java/com/medicine/auth/model/Account.java:1

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class Account {
4
5     private Long id;
6     private String realname;
```

- 问题11: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:1

- 问题代码1 :

```
1 package com.medicine.auth.controller;
2
3 import com.medicine.auth.dto.LoginRequest;
4 import com.medicine.auth.dto.LoginResult;
5 import com.medicine.auth.dto.PermissionNode;
6 import com.medicine.auth.service.AuthService;
```

- 问题12: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.MaterialMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题13: medical-backend/src/main/java/com/medicine/security/RestAccessDeniedHandler.java:1

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import com.fasterxml.jackson.databind.ObjectMapper;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.http.MediaType;
```

- 问题14: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardNews.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardNews {
4
5     private String id;
6     private String title;
```

- 问题15: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:1

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.LoginResult;
4 import com.medicine.auth.dto.UserInfo;
5 import com.medicine.auth.mapper.AccountMapper;
6 import com.medicine.auth.model.Account;
```

- 问题16: medical-backend/src/main/java/com/medicine/security/TokenService.java:1

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import com.fasterxml.jackson.core.JsonProcessingException;
4 import com.fasterxml.jackson.databind.ObjectMapper;
5 import com.medicine.common.BusinessException;
6 import com.medicine.common.ErrorCode;
```

- 问题17: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题18: medical-backend/src/main/java/com/medicine/business/controller/BusinessResponses.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.common.ApiResponse;
4
5 import java.util.LinkedHashMap;
6 import java.util.Map;
```

- 问题19: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.SaleService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题20: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题21: medical-backend/src/test/java/com/medicine/auth/service/PermissionServiceTest.java:1

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.PermissionNode;
4 import com.medicine.auth.mapper.PermissionMapper;
5 import com.medicine.auth.model.PermissionRecord;
6 import org.junit.jupiter.api.Test;
```

- 问题22: medical-backend/src/main/java/com/medicine/MedicalBackendApplication.java:1

- 问题代码1 :

```
1 package com.medicine;
2
3 import org.mybatis.spring.annotation.MapperScan;
4 import org.springframework.boot.SpringApplication;
5 import org.springframework.boot.autoconfigure.SpringBootApplication;
```

- 问题23: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;  
2  
3 import org.apache.ibatis.annotations.*;  
4  
5 import java.util.List;  
6 import java.util.Map;
```

- 问题24: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardView.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;  
2  
3 import java.util.List;  
4  
5 public class DashboardView {
```

- 问题25: medical-backend/src/main/java/com/medicine/security/AuthSession.java:1

- 问题代码1 :

```
1 package com.medicine.security;  
2  
3 public class AuthSession {  
4  
5     private Long userId;  
6     private String username;
```

- 问题26: medical-backend/src/test/java/com/medicine/business/service/DoctorServiceTest.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;  
2  
3 import com.medicine.business.mapper.DoctorMapper;  
4 import org.junit.jupiter.api.Test;  
5 import org.springframework.security.crypto.password.PasswordEncoder;
```

- 问题27: medical-backend/src/main/java/com/medicine/business/config/UploadWebConfig.java:1

- 问题代码1 :

```
1 package com.medicine.business.config;  
2  
3 import com.medicine.business.service.FileStorageService;  
4 import org.springframework.context.annotation.Configuration;  
5 import org.springframework.web.servlet.config.annotation.ResourceHandlerRegistry;  
6 import org.springframework.web.servlet.config.annotation.WebMvcConfigurer;
```

- 问题28: medical-backend/src/main/java/com/medicine/business/controller/UploadController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.FileStorageService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.PostMapping;
```

- 问题29: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CityService;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.access.prepost.PreAuthorize;
```

- 问题30: medical-backend/src/test/java/com/medicine/common/ApiResponseTest.java:1

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
```

- 问题31: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.MedicalPolicyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题32: medical-backend/src/main/java/com/medicine/auth/dto/PermissionNode.java:1

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 import java.util.ArrayList;
4 import java.util.List;
5
6 public class PermissionNode {
```

- 问题33: medical-backend/src/test/java/com/medicine/security/TokenServiceTest.java:1

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
```

- 问题34: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CompanyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题35: medical-backend/src/main/java/com/medicine/security/TokenAuthenticationFilter.java:1

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import org.springframework.security.authentication.
UsernamePasswordAuthenticationToken;
4 import org.springframework.security.core.authority.SimpleGrantedAuthority;
5 import org.springframework.security.core.context.SecurityContextHolder;
6 import org.springframework.stereotype.Component;
```

- 问题36: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardCounts.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardCounts {
4
5     private long doctorCount;
6     private long companyCount;
```

- 问题37: medical-backend/src/test/java/com/medicine/dashboard/service/DashboardServiceTest.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.service;
2
3 import com.medicine.dashboard.dto.DashboardCounts;
4 import com.medicine.dashboard.dto.DashboardNews;
5 import com.medicine.dashboard.dto.DashboardView;
6 import com.medicine.dashboard.dto.NameValue;
```

- 问题38: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:1

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.http.converter.HttpMessageNotReadableException;
6 import org.springframework.security.access.AccessDeniedException;
```

- 问题39: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:1

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class ApiResponse<T> {
4
5     private int code;
6     private String message;
```

- 问题40: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.MedicalPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题41: medical-backend/src/main/java/com/medicine/auth/dto/LoginResult.java:1

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class LoginResult {
4
5     private String token;
6     private UserInfo userInfo;
```

- 问题42: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.DrugService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题43: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:1

- 问题代码1 :


```
1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
```

- 问题44: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyPolicyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题45: medical-backend/src/main/java/com/medicine/common/PageView.java:1

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import java.util.Collections;
4 import java.util.List;
5
6 public class PageView<T> {
```

- 问题46: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.SaleMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题47: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.controller;
2
3 import com.medicine.common.ApiResponse;
4 import com.medicine.dashboard.dto.DashboardView;
5 import com.medicine.dashboard.service.DashboardService;
6 import org.springframework.web.bind.annotation.GetMapping;
```

- 问题48: medical-backend/src/main/java/com/medicine/auth/model/PermissionRecord.java:1

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class PermissionRecord {
4
5     private Integer id;
6     private Integer pid;
```

- 问题49: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CompanyPolicyMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题50: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.DoctorMapper;
4 import com.medicine.common.BusinessException;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.security.crypto.password.PasswordEncoder;
```

- 问题51: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.Delete;
4 import org.apache.ibatis.annotations.Insert;
5 import org.apache.ibatis.annotations.Mapper;
6 import org.apache.ibatis.annotations.Param;
```

- 问题52: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题53: medical-backend/src/main/java/com/medicine/common/BusinessException.java:1

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class BusinessException extends RuntimeException {
4
5     private final int code;
```

- 问题54: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题55: medical-backend/src/main/java/com/medicine/auth/dto/LoginRequest.java:1

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 import javax.validation.constraints.NotBlank;
4 import javax.validation.constraints.Size;
5
6 public class LoginRequest {
```

- 问题56: medical-backend/src/test/java/com/medicine/auth/service/AuthServiceTest.java:1

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.LoginResult;
4 import com.medicine.auth.mapper.AccountMapper;
5 import com.medicine.auth.model.Account;
6 import com.medicine.common.BusinessException;
```

- 问题57: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.DrugMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题58: medical-backend/src/main/java/com/medicine/security/RestAuthenticationEntryPoint.java:1

- 问题代码1 :

```
1 package com.medicine.security;
2
3 import com.fasterxml.jackson.databind.ObjectMapper;
4 import com.medicine.common.ApiResponse;
5 import com.medicine.common.ErrorCode;
6 import org.springframework.http.MediaType;
```

- 问题59: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:1

- 问题代码1 :

```
1 package com.medicine.auth.service;
2
3 import com.medicine.auth.dto.PermissionMeta;
4 import com.medicine.auth.dto.PermissionNode;
5 import com.medicine.auth.mapper.PermissionMapper;
6 import com.medicine.auth.model.PermissionRecord;
```

- 问题60: medical-backend/src/main/java/com/medicine/business/service/FileStorageService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.common.BusinessException;
4 import com.medicine.common.ErrorCode;
5 import org.springframework.beans.factory.annotation.Value;
6 import org.springframework.stereotype.Service;
```

- 问题61: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.mapper;
2
3 import com.medicine.dashboard.dto.DashboardCounts;
4 import com.medicine.dashboard.dto.DashboardNews;
5 import com.medicine.dashboard.dto.NameValue;
6 import org.apache.ibatis.annotations.Select;
```

- 问题62: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:1

- 问题代码1 :

```
1 package com.medicine.business.controller;
2
3 import com.medicine.business.service.CompanyService;
4 import com.medicine.common.ApiResponse;
5 import org.springframework.security.access.prepost.PreAuthorize;
6 import org.springframework.web.bind.annotation.*;
```

- 问题63: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:1

- 问题代码1 :

```
1 package com.medicine.auth.mapper;
2
3 import com.medicine.auth.model.Account;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
```

- 问题64: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:1

- 问题代码1 :

```
1 package com.medicine.business.mapper;
2
3 import org.apache.ibatis.annotations.*;
4
5 import java.util.List;
6 import java.util.Map;
```

- 问题65: medical-backend/src/main/java/com/medicine/business/service/CityService.java:1

- 问题代码1 :

```
1 package com.medicine.business.service;
2
3 import com.medicine.business.mapper.CityMapper;
4 import org.springframework.stereotype.Service;
5 import org.springframework.transaction.annotation.Transactional;
```

- 问题66: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:1

- 问题代码1 :

```
1 package com.medicine.dashboard.service;
2
3 import com.medicine.dashboard.dto.DashboardView;
4 import com.medicine.dashboard.mapper.DashboardMapper;
5 import org.springframework.stereotype.Service;
```

3.3.1.17 G.FMT.08 用空格突出关键字和重要信息 (3)

- 问题描述 :

空格应该突出关键字和重要信息。

总体建议如下 :

1. if, for, while, switch等关键字与左括号(之间加空格
2. 在函数定义和调用时, 函数名称与参数列表的左括号(之间不加空格
3. 关键字else或catch与其之前的大括号 } 之间加空格
4. 任何打开大括号{ 之前加空格, 有两个例外 :
 - a. 在作为函数的第一个参数或数组中的第一个元素时, 对象之前不用加空格, 例如: foo({ name : [{ bar : baz }] })
 - b. 在模板中, 不用加空格, 例如: abc\${name}
5. 二元操作符+ - * = < > <= >= === !== && ||前后加空格; 三元操作符?: 符号两侧均加空格
6. 数组初始化中的逗号和函数中多个参数之间的逗号后加空格
7. 在逗号, 或分号;之前不加空格

8. 数组的中括号[]内侧不要加空格
 9. 不要出现多个连续空格。在某行中，出现多个空格而且不是用来作缩进的，通常是个错误。这里有一个例外：
 - a. 当处理复杂的数据结构时，为了提高可读性，可以通过连续空格的方式来使数据对齐
- 正确示例：

场景1：数组

- 修复示例：数组中括号[]内侧无空格

```
var arr = ['foo', 'bar', 'baz'];
```

场景2：逗号前的空格

- 修复示例：在逗号前不加空格，逗号后加空格

```
var obj = {"foo": "bar", "baz": "qur"};
```

场景3：函数定义时名称与参数列表的左括号(之间

- 修复示例：命名的函数表达式在参数的（前面无空格

```
function foo() {
    // ...
}
let bar = function() {
    // ...
};
```

场景4：模板花括号内

- 修复示例：花括号内无空格

```
'hello, ${people.name}!';
```

场景5：关键字与左括号(之间

- 修复示例：关键字与左括号(之间有一个空格

```
if (isJedi) {
    fight();
}
```

场景6：关键字与之前的大括号 }

- 修复示例：关键字与之前的大括号 }有一个空格

```
if (flag) {
    //...
} else { // else 与其前面的大括号 } 之间增加空格
    //...
}
```

场景7：空格个数

- 修复示例：只有一个空格

```
let foo = 5;
```

场景8：操作符 = 前后

- 修复示例：操作符 = 前后有空格

```
const foo = 1;
```

场景9：语句块{ 之前

- 修复示例：语句块{ 之前加空格

```
if (flag) {
    foo();
}
```

场景10：函数调用名称与参数列表的左括号(之间

- 修复示例：在函数名和左括号(之间没有空格

```
fn();
```

场景11：分号之前

- 修复示例：分号之前无空格

```
let foo = 1;
```

- 错误示例：

场景1：数组

- 错误示例：数组中括号[]内侧出现空格

```
var arr = [ 'foo', 'bar' ];
```

场景2：逗号前的空格

- 错误示例：在逗号前加空格，逗号后不加空格

```
var obj = {"foo": "bar" , "baz": "qur"};
```

场景3：函数定义时名称与参数列表的左括号(之间

- 错误示例：命名的函数表达式在参数的 (前面有空格

```
function foo () {
    // ...
}
let bar = function () {
    // ...
};
```

场景4：模板花括号内

- 错误示例：花括号内有空格。

```
'hello, ${ people.name}!';
```

场景5：关键字与左括号(之间

- 错误示例：关键字与左括号(之间没有一个空格

```
if(isJedi) {
    fight ();
}
```

场景6：关键字与之前的大括号 } 之间

- 错误示例：关键字与之前的大括号 } 之间没有一个空格

```
if (flag) {
    //...
}else { // else 与其前面的大括号 } 之间没有加空格
    //...
}
```

场景7：空格个数

- 错误示例：出现多个空格

```
let foo =   5;
```

场景8：操作符 = 前后

- 错误示例：操作符 = 前后无空格

```
const foo=1;
```

场景9：语句块{ 之前

- 错误示例：语句块{ 之前没空格

```
if (flag){
    foo();
}
```

场景10：函数调用名称与参数列表的左括号(之间

- 错误示例：在函数名和左括号(之间有空格

```
fn ();
```

场景11：分号之前

- 修复示例：分号之前有空格

```
let foo = 1 ;
```

- 建议的写法：

空格应该突出关键字和重要信息。

- 问题1: medical-managerment-system/src/utils/app.js:24

- 问题代码1 :

```
19   if (res.data.code == 20000) {
20     Message({
21       type: "success",
22       message: "新增成功!",
23     });
24   }else if (res.data.code == 10001) {
25     Message({
26       type: "error",
27       message: "该手机号已被注册",
28     });
29   } else {
```

- 问题2: medical-managerment-system/src/utils/validator.js:99

- 问题代码1 :

```
94     validator: validatorPhone,
95     trigger: "change",
96   },
97 ],
98 nameRules: [
99   { required: true,validator: validatorName, trigger: "change" },
100 ],
101 requiredRules: [
102   { required: true, message: "此内容不可为空", trigger: "change" },
103 ],
104 ageRules: [
```

- 问题3: medical-managerment-system/src/main.js:21,22

- 问题代码1 :

```
16 Vue.prototype._ = _;
17 Vue.mixin({
18   computed: {
19     // 进行按钮权限控制
20     hasRole() {
21       if(localStorage.getItem('userInfo')) {
22         if(JSON.parse(localStorage.getItem('userInfo')).utype == 1) {
23           return true
24         } else {
25           return false
26         }
27       }
28     }
29   }
30 });
```

- 问题代码2 :

```
17 Vue.mixin({
18   computed: {
19     // 进行按钮权限控制
20     hasRole() {
21       if(localStorage.getItem('userInfo')) {
22         if(JSON.parse(localStorage.getItem('userInfo')).utype == 1) {
23           return true
24         } else {
25           return false
26         }
27       }
28     }
29   }
30 });
```

3.3.1.18 G.TYP.04 建议字符串使用单引号 (136)

- 问题描述：

单引号优于双引号，比如，当创建一个包含 HTML 代码的字符串时可以避免转义字符串中的双引号。

- 正确示例：

场景1：字符串格式

- 修复示例：字符串使用单引号

```
let msg = '<span id="test" name="test">';
```

- 错误示例：

场景1：字符串格式

- 错误示例：字符串使用双引号

```
let msg = "<span id=\"test\" name=\"test\">";
```

- 建议的写法：

建议字符串使用单引号。

- 问题1: medical-managerment-system/src/utils/request.js:

1,2,3,9,10,12,28,46,47,50,51,52,53

- 问题代码1：

```
1 import axios from "axios";
2 import { Message } from "element-ui";
3 import router from "../router/index";
4
5 // 默认使用同源 /api，生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
```

- 问题代码2：

```
1 import axios from "axios";
2 import { Message } from "element-ui";
3 import router from "../router/index";
4
5 // 默认使用同源 /api，生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
7   process.env.VUE_APP_API_BASE_URL ||
```

- 问题代码3：

```
1 import axios from "axios";
2 import { Message } from "element-ui";
3 import router from "../router/index";
4
5 // 默认使用同源 /api，生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
7   process.env.VUE_APP_API_BASE_URL ||
8   process.env.VUE_APP_URL ||
```

- 问题代码4：

```

4
5 // 默认使用同源 /api , 生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
7   process.env.VUE_APP_API_BASE_URL ||
8   process.env.VUE_APP_URL ||
9   "/api"
10 ).replace(/\$/ , "");
11
12 const withCredentials = process.env.VUE_APP_WITH_CREDENTIALS !== "false";
13 axios.defaults.withCredentials = withCredentials;

```

• 问题代码5：

```

5 // 默认使用同源 /api , 生产部署时可通过环境变量切换到独立网关。
6 export const API_BASE_URL = (
7   process.env.VUE_APP_API_BASE_URL ||
8   process.env.VUE_APP_URL ||
9   "/api"
10 ).replace(/\$/ , "");
11
12 const withCredentials = process.env.VUE_APP_WITH_CREDENTIALS !== "false";
13 axios.defaults.withCredentials = withCredentials;
14
15 export function resolveApiUrl(path = "") {

```

• 问题代码6：

```

7   process.env.VUE_APP_API_BASE_URL ||
8   process.env.VUE_APP_URL ||
9   "/api"
10 ).replace(/\$/ , "");
11
12 const withCredentials = process.env.VUE_APP_WITH_CREDENTIALS !== "false";
13 axios.defaults.withCredentials = withCredentials;
14
15 export function resolveApiUrl(path = "") {
16   return `${API_BASE_URL}/${String(path).replace(/^\/ , "")}`;
17 }

```

• 问题代码7：

```

23   withCredentials,
24 });
25 // request 拦截器
26 service.interceptors.request.use(
27   (config) => {
28     const token = localStorage.getItem("token");
29     if (token) {
30       config.headers = config.headers || {};
31       config.headers.Authorization = token;
32     }
33     return config;

```

• 问题代码8：

华为云 CodeArts Check 代码扫描报告

```
41     (response) => {
42         const res = response.data;
43         // code为10006代表token失效，需要重新登录
44         if (res.code == 10006) {
45             Message({
46                 type: "error",
47                 message: "登录已失效，请重新登录",
48             });
49             setTimeout(() => {
50                 localStorage.removeItem("token");
51                 localStorage.removeItem("userInfo");
```

● 问题代码9：

```
42         const res = response.data;
43         // code为10006代表token失效，需要重新登录
44         if (res.code == 10006) {
45             Message({
46                 type: "error",
47                 message: "登录已失效，请重新登录",
48             });
49             setTimeout(() => {
50                 localStorage.removeItem("token");
51                 localStorage.removeItem("userInfo");
52                 if (router.currentRoute.path !== "/user/login") {
```

● 问题代码10：

```
45             Message({
46                 type: "error",
47                 message: "登录已失效，请重新登录",
48             });
49             setTimeout(() => {
50                 localStorage.removeItem("token");
51                 localStorage.removeItem("userInfo");
52                 if (router.currentRoute.path !== "/user/login") {
53                     router.replace("/user/login");
54                 }
55             }, 500);
```

● 问题代码11：

```
46                 type: "error",
47                 message: "登录已失效，请重新登录",
48             });
49             setTimeout(() => {
50                 localStorage.removeItem("token");
51                 localStorage.removeItem("userInfo");
52                 if (router.currentRoute.path !== "/user/login") {
53                     router.replace("/user/login");
54                 }
55             }, 500);
56         }
```

● 问题代码12：

华为云 CodeArts Check 代码扫描报告

```
47         message: "登录已失效, 请重新登录",
48     });
49     setTimeout(() => {
50         localStorage.removeItem("token");
51         localStorage.removeItem("userInfo");
52         if (router.currentRoute.path !== "/user/login") {
53             router.replace("/user/login");
54         }
55     }, 500);
56 }
57 return response;
```

- 问题代码13 :

```
48     });
49     setTimeout(() => {
50         localStorage.removeItem("token");
51         localStorage.removeItem("userInfo");
52         if (router.currentRoute.path !== "/user/login") {
53             router.replace("/user/login");
54         }
55     }, 500);
56 }
57 return response;
58 },
```

- 问题2: medical-managerment-system/src/utils/request.js:15,16

- 问题代码1 :

```
10 ).replace(/\$/ , "");
11
12 const withCredentials = process.env.VUE_APP_WITH_CREDENTIALS !== "false";
13 axios.defaults.withCredentials = withCredentials;
14
15 export function resolveApiUrl(path = "") {
16     return `${API_BASE_URL}/${String(path).replace(/^\/\//, "")}`;
17 }
18
19 // 创建 axios 实例
20 const service = axios.create({
```

- 问题代码2 :

```
11
12 const withCredentials = process.env.VUE_APP_WITH_CREDENTIALS !== "false";
13 axios.defaults.withCredentials = withCredentials;
14
15 export function resolveApiUrl(path = "") {
16     return `${API_BASE_URL}/${String(path).replace(/^\/\//, "")}`;
17 }
18
19 // 创建 axios 实例
20 const service = axios.create({
21     baseURL: API_BASE_URL,
```

- 问题3: medical-managerment-system/src/utils/app.js:1,1,2,6,6

- 问题代码1 :

```
1 import { Message } from "element-ui";
2 // 判断删除结果
3 export function judgeDeleteResult(res) {
4   if (res.data.code == 20000) {
5     Message({
6       type: "success",
```

• 问题代码2：

```
1 import { login } from "../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../router/index'
4 import {getMenu} from '../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
```

• 问题代码3：

```
1 import { login } from "../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../router/index'
4 import {getMenu} from '../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
```

• 问题代码4：

```
1 import { login } from "../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../router/index'
4 import {getMenu} from '../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
8   routesLoaded: false,
9 };
10 const mutations = {
11   SET_TOKEN(state, payload) {
```

• 问题代码5：

```
1 import { login } from "../api/Login";
2 import { Message } from "element-ui";
3 import router, { constantRoutes } from '../router/index'
4 import {getMenu} from '../utils/routeParse'
5 const state = {
6   token: localStorage.getItem("token") || "",
7   menuList: constantRoutes.slice(),
8   routesLoaded: false,
9 };
10 const mutations = {
11   SET_TOKEN(state, payload) {
```

• 问题4: medical-managerment-system/src/utils/app.js:6,7,11,12

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
1 import { Message } from "element-ui";
2 // 判断删除结果
3 export function judgeDeleteResult(res) {
4   if (res.data.code == 20000) {
5     Message({
6       type: "success",
7       message: "删除成功!",
8     });
9   } else {
10     Message({
11       type: "error",
```

- 问题代码2：

```
2 // 判断删除结果
3 export function judgeDeleteResult(res) {
4   if (res.data.code == 20000) {
5     Message({
6       type: "success",
7       message: "删除成功!",
8     });
9   } else {
10     Message({
11       type: "error",
12       message: "删除失败!",
```

- 问题代码3：

```
6       type: "success",
7       message: "删除成功!",
8     });
9   } else {
10     Message({
11       type: "error",
12       message: "删除失败!",
13     });
14   }
15   return res;
16 }
```

- 问题代码4：

```
7       message: "删除成功!",
8     });
9   } else {
10     Message({
11       type: "error",
12       message: "删除失败!",
13     });
14   }
15   return res;
16 }
17 // 判断新增结果
```

- 问题5: medical-managment-system/src/utlis/app.js:21,22,26,27,31,32

- 问题代码1：

```

16 }
17 // 判断新增结果
18 export function judgeAddResult(res) {
19   if (res.data.code == 20000) {
20     Message({
21       type: "success",
22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
25     Message({
26       type: "error",

```

● 问题代码2：

```

17 // 判断新增结果
18 export function judgeAddResult(res) {
19   if (res.data.code == 20000) {
20     Message({
21       type: "success",
22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
25     Message({
26       type: "error",
27       message: "该手机号已被注册",

```

● 问题代码3：

```

21       type: "success",
22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
25     Message({
26       type: "error",
27       message: "该手机号已被注册",
28     });
29   } else {
30     Message({
31       type: "error",

```

● 问题代码4：

```

22       message: "新增成功!",
23     });
24   } else if (res.data.code == 10001) {
25     Message({
26       type: "error",
27       message: "该手机号已被注册",
28     });
29   } else {
30     Message({
31       type: "error",
32       message: "新增失败",

```

● 问题代码5：

华为云 CodeArts Check 代码扫描报告

```
26     type: "error",
27     message: "该手机号已被注册",
28   });
29   } else {
30     Message({
31       type: "error",
32       message: "新增失败",
33     });
34   }
35   return res;
36 }
```

- 问题代码6：

```
27     message: "该手机号已被注册",
28   });
29   } else {
30     Message({
31       type: "error",
32       message: "新增失败",
33     });
34   }
35   return res;
36 }
37 // 判断查询结果
```

- 问题6: medical-managerment-system/src/utils/app.js:43,44

- 问题代码1：

```
38 export function judgeQueryResult(res) {
39   if (res.data.code == 20000) {
40     return res;
41   } else {
42     Message({
43       type: "error",
44       message: "加载数据失败!",
45     });
46     return false;
47   }
48 }
```

- 问题代码2：

```
39   if (res.data.code == 20000) {
40     return res;
41   } else {
42     Message({
43       type: "error",
44       message: "加载数据失败!",
45     });
46     return false;
47   }
48 }
49 // 判断修改结果
```

- 问题7: medical-managerment-system/src/utils/app.js:53,54,58,59,63,64

- 问题代码1：

```

48 }
49 // 判断修改结果
50 export function judgeModifyResult(res) {
51   if (res.data.code == 20000) {
52     Message({
53       type: "success",
54       message: "修改成功!",
55     });
56   } else if (res.data.code == 10001) {
57     Message({
58       type: "error",

```

● 问题代码2：

```

49 // 判断修改结果
50 export function judgeModifyResult(res) {
51   if (res.data.code == 20000) {
52     Message({
53       type: "success",
54       message: "修改成功!",
55     });
56   } else if (res.data.code == 10001) {
57     Message({
58       type: "error",
59       message: "该手机号已被注册",

```

● 问题代码3：

```

53       type: "success",
54       message: "修改成功!",
55     });
56   } else if (res.data.code == 10001) {
57     Message({
58       type: "error",
59       message: "该手机号已被注册",
60     });
61   } else {
62     Message({
63       type: "error",

```

● 问题代码4：

```

54       message: "修改成功!",
55     });
56   } else if (res.data.code == 10001) {
57     Message({
58       type: "error",
59       message: "该手机号已被注册",
60     });
61   } else {
62     Message({
63       type: "error",
64       message: "修改失败!",

```

● 问题代码5：

```

58     type: "error",
59     message: "该手机号已被注册",
60 });
61 } else {
62     Message({
63         type: "error",
64         message: "修改失败!",
65     });
66 }
67 return res;
68 }

```

• 问题代码6：

```

59     message: "该手机号已被注册",
60 });
61 } else {
62     Message({
63         type: "error",
64         message: "修改失败!",
65     });
66 }
67 return res;
68 }
69 // 判断重置密码结果

```

• 问题8: medical-managment-system/src/utils/app.js:73,74,78,79

• 问题代码1：

```

68 }
69 // 判断重置密码结果
70 export function judgeResetResult(res) {
71     if (res.data.code == 20000) {
72         Message({
73             type: "success",
74             message: "重置密码成功!",
75         });
76     } else {
77         Message({
78             type: "error",

```

• 问题代码2：

```

69 // 判断重置密码结果
70 export function judgeResetResult(res) {
71     if (res.data.code == 20000) {
72         Message({
73             type: "success",
74             message: "重置密码成功!",
75         });
76     } else {
77         Message({
78             type: "error",
79             message: "重置密码失败!",

```

• 问题代码3：

```

73     type: "success",
74     message: "重置密码成功!",
75   });
76 } else {
77   Message({
78     type: "error",
79     message: "重置密码失败!",
80   });
81 }
82 return res;
83 }

```

• 问题代码4：

```

74     message: "重置密码成功!",
75   });
76 } else {
77   Message({
78     type: "error",
79     message: "重置密码失败!",
80   });
81 }
82 return res;
83 }

```

• 问题9: medical-managerment-system/src/utils/routeParse.js:1,2

• 问题代码1：

```

1 import { getMenuList } from "../api/Login";
2 import Layout from "../layout/index.vue";
3
4 function tree(data, arr) {
5   if (!Array.isArray(data)) {
6     return arr;

```

• 问题代码2：

```

1 import { getMenuList } from "../api/Login";
2 import Layout from "../layout/index.vue";
3
4 function tree(data, arr) {
5   if (!Array.isArray(data)) {
6     return arr;
7   }

```

• 问题10: medical-managerment-system/src/utils/routeParse.js:18,22

• 问题代码1：

```

13
14   const route = {
15     path: item.path,
16     name: item.name || item.path,
17     component:
18       item.component === "Layout"
19         ? Layout
20         : () => import('../views/${item.component}/index.vue'),
21     meta: {
22       title: (item.meta && item.meta.title) || item.title || item.name || "慧医
数字医疗",
23     },

```

- 问题代码2：

```

17     component:
18       item.component === "Layout"
19       ? Layout
20       : () => import('../views/${item.component}/index.vue'),
21     meta: {
22       title: (item.meta && item.meta.title) || item.title || item.name || "慧医
数字医疗",
23     },
24     children: [],
25   };
26
27   if (Array.isArray(item.children) && item.children.length) {

```

- 问题11: medical-managerment-system/src/utils/routeParse.js:37,37

- 问题代码1：

```

32   return arr;
33 }
34
35 function getStoredRole() {
36   try {
37     const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
38     return userInfo && userInfo.utype;
39   } catch (error) {
40     return null;
41   }
42 }

```

- 问题代码2：

```

32   return arr;
33 }
34
35 function getStoredRole() {
36   try {
37     const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
38     return userInfo && userInfo.utype;
39   } catch (error) {
40     return null;
41   }
42 }

```

- 问题12: medical-managerment-system/src/utils/routeParse.js:47,52,58

- 问题代码1：

```

42 }
43
44 export async function getMenu() {
45   const roleName = getStoredRole();
46   if (roleName === null || roleName === undefined) {
47     throw new Error("登录信息无效，请重新登录");
48   }
49
50   const res = await getMenuList(roleName);
51   if (!res.data || Number(res.data.code) !== 20000) {
52     throw new Error((res.data && res.data.message) || "获取菜单列表失败");

```

- 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
47     throw new Error("登录信息无效，请重新登录");
48   }
49
50   const res = await getMenuList(roleName);
51   if (!res.data || Number(res.data.code) !== 20000) {
52     throw new Error((res.data && res.data.message) || "获取菜单列表失败");
53   }
54
55   const permissions = res.data.data && res.data.data.permissions;
56   const routes = tree(permissions, []);
57   if (!routes.length) {
```

- 问题代码3：

```
53   }
54
55   const permissions = res.data.data && res.data.data.permissions;
56   const routes = tree(permissions, []);
57   if (!routes.length) {
58     throw new Error("当前账号没有可访问的菜单");
59   }
60   return routes;
61 }
```

- 问题13: medical-management-system/src/utils/validator.js:3,4,6

- 问题代码1：

```
1 // 手机号验证器
2 function validatorPhone(rule, value, callback) {
3   if (value === "") {
4     callback(new Error(" 手机号不能为空 "));
5   } else if (!/^(13[0-9]|14[01456879]|15[0-35-9]|16[2567]|17[0-8]|18[0-9]|19[0-35-9])\d{8}$/.test(value)) {
6     callback(new Error(" 手机号格式错误 "));
7   } else {
8     callback();
9   }
10 }
```

- 问题代码2：

```
1 // 手机号验证器
2 function validatorPhone(rule, value, callback) {
3   if (value === "") {
4     callback(new Error(" 手机号不能为空 "));
5   } else if (!/^(13[0-9]|14[01456879]|15[0-35-9]|16[2567]|17[0-8]|18[0-9]|19[0-35-9])\d{8}$/.test(value)) {
6     callback(new Error(" 手机号格式错误 "));
7   } else {
8     callback();
9   }
10 }
```

- 问题代码3：

```

1 // 手机号验证器
2 function validatorPhone(rule, value, callback) {
3     if (value === "") {
4         callback(new Error(" 手机号不能为空 "));
5     } else if (!/^(13[0-9]|14[01456879]|15[0-35-9]|16[2567]|17[0-8]|18[0-9]|19[0-35-9])\d{8}$/.test(value)) {
6         callback(new Error(" 手机号格式错误 "));
7     } else {
8         callback();
9     }
10 }
11 // 姓名验证器

```

- 问题14: medical-managerment-system/src/utils/validator.js:13,14,16

- 问题代码1 :

```

8     callback();
9 }
10 }
11 // 姓名验证器
12 function validatorName(rule, value, callback) {
13     if (value === "") {
14         callback(new Error(" 姓名不能为空 "));
15     } else if (!/^[u4E00-u9FA5]{2,4}$/.test(value)) {
16         callback(new Error(" 姓名应为汉字并且长度在2到4位 "));
17     } else {
18         callback();

```

- 问题代码2 :

```

9 }
10 }
11 // 姓名验证器
12 function validatorName(rule, value, callback) {
13     if (value === "") {
14         callback(new Error(" 姓名不能为空 "));
15     } else if (!/^[u4E00-u9FA5]{2,4}$/.test(value)) {
16         callback(new Error(" 姓名应为汉字并且长度在2到4位 "));
17     } else {
18         callback();
19 }

```

- 问题代码3 :

```

11 // 姓名验证器
12 function validatorName(rule, value, callback) {
13     if (value === "") {
14         callback(new Error(" 姓名不能为空 "));
15     } else if (!/^[u4E00-u9FA5]{2,4}$/.test(value)) {
16         callback(new Error(" 姓名应为汉字并且长度在2到4位 "));
17     } else {
18         callback();
19 }
20 }
21 // 年龄验证器

```

- 问题15: medical-managerment-system/src/utils/validator.js:24,27,30

- 问题代码1 :

```

19     }
20   }
21   // 年龄验证器
22   function validatorAge(rule, value, callback) {
23     if (!value) {
24       return callback(new Error("年龄不能为空"));
25     }
26     if (!Number.isInteger(value)) {
27       callback(new Error("请输入数字值"));
28     } else {
29       if (value > 100 || value < 18) {

```

• 问题代码2：

```

22   function validatorAge(rule, value, callback) {
23     if (!value) {
24       return callback(new Error("年龄不能为空"));
25     }
26     if (!Number.isInteger(value)) {
27       callback(new Error("请输入数字值"));
28     } else {
29       if (value > 100 || value < 18) {
30         callback(new Error("请检查年龄大小是否合理"));
31       } else {
32         callback();

```

• 问题代码3：

```

25     }
26     if (!Number.isInteger(value)) {
27       callback(new Error("请输入数字值"));
28     } else {
29       if (value > 100 || value < 18) {
30         callback(new Error("请检查年龄大小是否合理"));
31       } else {
32         callback();
33       }
34     }
35   }

```

• 问题16: medical-managerment-system/src/utlis/validator.js:39

• 问题代码1：

```

34     }
35   }
36   // 搜索栏数字验证
37   function validatorInt(rule, value, callback) {
38     if (/D/g.test(value)) {
39       callback(new Error(" 编号应为数字类型 "));
40     } else {
41       callback();
42     }
43   }
44   // 搜索条件验证

```

• 问题17: medical-managerment-system/src/utlis/validator.js:49,64,68,68,72,73,77,77,81,82,86,86,95,99,102,102,108,117,118,123,124,128,128,132,133

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
44 // 搜索条件验证
45 export const searchRules = {
46   intRules: [
47     {
48       validator: validatorInt,
49       trigger: "change",
50     },
51   ],
52 }
53 // 验证密码 密码，以字母开头，长度在5~18之间，只能包含字母、数字和下划线
54 export function validatePass(str) {
```

• 问题代码2：

```
59 export default {
60   phoneRules: [
61     {
62       required: true,
63       validator: validatorPhone,
64       trigger: "change",
65     },
66   ],
67   nameRules: [
68     { required: true, message: "名称不能为空", trigger: "change" },
69     {
```

• 问题代码3：

```
63       validator: validatorPhone,
64       trigger: "change",
65     },
66   ],
67   nameRules: [
68     { required: true, message: "名称不能为空", trigger: "change" },
69     {
70       min: 4,
71       max: 24,
72       message: "名称长度应为 4 到 24 个字符",
73       trigger: "change",
```

• 问题代码4：

```
63       validator: validatorPhone,
64       trigger: "change",
65     },
66   ],
67   nameRules: [
68     { required: true, message: "名称不能为空", trigger: "change" },
69     {
70       min: 4,
71       max: 24,
72       message: "名称长度应为 4 到 24 个字符",
73       trigger: "change",
```

• 问题代码5：

华为云 CodeArts Check 代码扫描报告

```
67     nameRules: [  
68         { required: true, message: "名称不能为空", trigger: "change" },  
69         {  
70             min: 4,  
71             max: 24,  
72             message: "名称长度应为 4 到 24 个字符",  
73             trigger: "change",  
74         },  
75     ],  
76     infoRules: [  
77         { required: true, message: "该项不能为空", trigger: "change" },
```

• 问题代码6：

```
68         { required: true, message: "名称不能为空", trigger: "change" },  
69         {  
70             min: 4,  
71             max: 24,  
72             message: "名称长度应为 4 到 24 个字符",  
73             trigger: "change",  
74         },  
75     ],  
76     infoRules: [  
77         { required: true, message: "该项不能为空", trigger: "change" },  
78         {
```

• 问题代码7：

```
72         message: "名称长度应为 4 到 24 个字符",  
73         trigger: "change",  
74     },  
75 ],  
76 infoRules: [  
77     { required: true, message: "该项不能为空", trigger: "change" },  
78     {  
79         min: 4,  
80         max: 480,  
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",
```

• 问题代码8：

```
72         message: "名称长度应为 4 到 24 个字符",  
73         trigger: "change",  
74     },  
75 ],  
76 infoRules: [  
77     { required: true, message: "该项不能为空", trigger: "change" },  
78     {  
79         min: 4,  
80         max: 480,  
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",
```

• 问题代码9：

华为云 CodeArts Check 代码扫描报告

```
76     infoRules: [  
77       { required: true, message: "该项不能为空", trigger: "change" },  
78       {  
79         min: 4,  
80         max: 480,  
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",  
83       },  
84     ],  
85     requiredRules: [  
86       { required: true, message: "此内容不可为空", trigger: "change" },
```

● 问题代码10：

```
77       { required: true, message: "该项不能为空", trigger: "change" },  
78       {  
79         min: 4,  
80         max: 480,  
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",  
83       },  
84     ],  
85     requiredRules: [  
86       { required: true, message: "此内容不可为空", trigger: "change" },  
87     ],
```

● 问题代码11：

```
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",  
83       },  
84     ],  
85     requiredRules: [  
86       { required: true, message: "此内容不可为空", trigger: "change" },  
87     ],  
88   };  
89   // 医生信息验证规则  
90   export const doctorRules = {  
91     phoneRules: [  
92       { required: true, message: "手机号长度应为 11 到 15 位", trigger: "change" },  
93       { required: true, message: "手机号必须以 1 开头", trigger: "change" },  
94       { required: true, message: "手机号必须以 3, 4, 5, 6, 7, 8, 9 结尾", trigger: "change" },  
95     ],  
96     nameRules: [  
97       { required: true, message: "姓名长度应为 2 到 10 个字符", trigger: "change" },  
98       { required: true, message: "姓名必须以字母开头", trigger: "change" },  
99     ],  
100    };  
101  }
```

● 问题代码12：

```
81         message: "名称长度应为 4 到 480 个字符",  
82         trigger: "change",  
83       },  
84     ],  
85     requiredRules: [  
86       { required: true, message: "此内容不可为空", trigger: "change" },  
87     ],  
88   };  
89   // 医生信息验证规则  
90   export const doctorRules = {  
91     phoneRules: [  
92       { required: true, message: "手机号长度应为 11 到 15 位", trigger: "change" },  
93       { required: true, message: "手机号必须以 1 开头", trigger: "change" },  
94       { required: true, message: "手机号必须以 3, 4, 5, 6, 7, 8, 9 结尾", trigger: "change" },  
95     ],  
96     nameRules: [  
97       { required: true, message: "姓名长度应为 2 到 10 个字符", trigger: "change" },  
98       { required: true, message: "姓名必须以字母开头", trigger: "change" },  
99     ],  
100    };  
101  }
```

● 问题代码13：

华为云 CodeArts Check 代码扫描报告

```
90 export const doctorRules = {
91   phoneRules: [
92     {
93       required: true,
94       validator: validatorPhone,
95       trigger: "change",
96     },
97   ],
98   nameRules: [
99     { required: true, validator: validatorName, trigger: "change" },
100   ],
```

● 问题代码14：

```
94       validator: validatorPhone,
95       trigger: "change",
96     },
97   ],
98   nameRules: [
99     { required: true, validator: validatorName, trigger: "change" },
100   ],
101   requiredRules: [
102     { required: true, message: "此内容不可为空", trigger: "change" },
103   ],
104   ageRules: [
```

● 问题代码15：

```
97   ],
98   nameRules: [
99     { required: true, validator: validatorName, trigger: "change" },
100   ],
101   requiredRules: [
102     { required: true, message: "此内容不可为空", trigger: "change" },
103   ],
104   ageRules: [
105     {
106       required: true,
107       validator: validatorAge,
```

● 问题代码16：

```
97   ],
98   nameRules: [
99     { required: true, validator: validatorName, trigger: "change" },
100   ],
101   requiredRules: [
102     { required: true, message: "此内容不可为空", trigger: "change" },
103   ],
104   ageRules: [
105     {
106       required: true,
107       validator: validatorAge,
```

● 问题代码17：

```

103     ],
104     ageRules: [
105       {
106         required: true,
107         validator: validatorAge,
108         trigger: "change",
109       },
110     ],
111   };
112   // 登录规则
113   export const loginRules = {

```

● 问题代码18：

```

112   // 登录规则
113   export const loginRules = {
114     usernameRules: [
115       {
116         required: true,
117         message: "用户名不能为空",
118         trigger: "blur",
119       },
120       {
121         min: 3,
122         max: 11,

```

● 问题代码19：

```

113   export const loginRules = {
114     usernameRules: [
115       {
116         required: true,
117         message: "用户名不能为空",
118         trigger: "blur",
119       },
120       {
121         min: 3,
122         max: 11,
123         message: "用户名长度在 3 到 11 个字符",

```

● 问题代码20：

```

118         trigger: "blur",
119       },
120       {
121         min: 3,
122         max: 11,
123         message: "用户名长度在 3 到 11 个字符",
124         trigger: "blur",
125       },
126     ],
127     passwordRules: [
128       { required: true, message: "密码不能为空", trigger: "blur" },

```

● 问题代码21：

华为云 CodeArts Check 代码扫描报告

```
119     },
120     {
121         min: 3,
122         max: 11,
123         message: "用户名长度在 3 到 11 个字符",
124         trigger: "blur",
125     },
126 ],
127 passwordRules: [
128     { required: true, message: "密码不能为空", trigger: "blur" },
129     {
```

• 问题代码22：

```
123         message: "用户名长度在 3 到 11 个字符",
124         trigger: "blur",
125     },
126 ],
127 passwordRules: [
128     { required: true, message: "密码不能为空", trigger: "blur" },
129     {
130         min: 5,
131         max: 18,
132         message: "密码长度在 5 到 18 个字符",
133         trigger: "blur",
```

• 问题代码23：

```
123         message: "用户名长度在 3 到 11 个字符",
124         trigger: "blur",
125     },
126 ],
127 passwordRules: [
128     { required: true, message: "密码不能为空", trigger: "blur" },
129     {
130         min: 5,
131         max: 18,
132         message: "密码长度在 5 到 18 个字符",
133         trigger: "blur",
```

• 问题代码24：

```
127     passwordRules: [
128         { required: true, message: "密码不能为空", trigger: "blur" },
129         {
130             min: 5,
131             max: 18,
132             message: "密码长度在 5 到 18 个字符",
133             trigger: "blur",
134         },
135     ],
136 };
```

• 问题代码25：

华为云 CodeArts Check 代码扫描报告

```
128     { required: true, message: "密码不能为空", trigger: "blur" },
129     {
130       min: 5,
131       max: 18,
132       message: "密码长度在 5 到 18 个字符",
133       trigger: "blur",
134     },
135   ],
136 };
```

- 问题18: medical-managerment-system/src/store/index.js:1,2,3,6,9,1,2,3,4,16,17,19,22,23,28,33,34,35,36,45,47,48,56,58,59,65,66,67

- 问题代码1 :

```
1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
```

- 问题代码2 :

```
1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
```

- 问题代码3 :

```
1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
```

- 问题代码4 :

```
1 import Vue from "vue";
2 import Vuex from "vuex";
3 import getters from "./getters";
4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9   const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10   const value = modulesFiles(modulePath);
11   modules[moduleName] = value.default;
```

- 问题代码5 :

```

4 Vue.use(Vuex);
5 //通过正则表达式获取modules文件夹下的所有js文件
6 const modulesFiles = require.context("./modules", true, /\.js$/);
7 //遍历模块文件,将所有的单个模块,汇总成符合vuex规范的modules.
8 const modules = modulesFiles.keys().reduce((modules, modulePath) => {
9   const moduleName = modulePath.replace(/^\.\/(.*)\.\w+$/, "$1");
10   const value = modulesFiles(modulePath);
11   modules[moduleName] = value.default;
12   return modules;
13 }, {});

```

● 问题代码6：

```

1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";

```

● 问题代码7：

```

1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";
6
7 Vue.use(VueRouter);

```

● 问题代码8：

```

1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";
6
7 Vue.use(VueRouter);

```

● 问题代码9：

```

1 import Vue from "vue";
2 import VueRouter from "vue-router";
3 import Login from "../views/Login.vue";
4 import { Message } from "element-ui";
5 // import Layout from "../layout/index.vue";
6
7 Vue.use(VueRouter);
8
9 // 解决导航栏或者底部导航tabBar中的vue-router在3.0版本以上频繁点击菜单报错的问题。

```

● 问题代码10：

华为云 CodeArts Check 代码扫描报告

```
11 VueRouter.prototype.push = function push(location) {
12   return originalPush.call(this, location).catch((err) => err);
13 };
14 export const constantRoutes = [
15   {
16     path: "/user/login",
17     name: "Login",
18     component: Login,
19     meta: { title: "登录" },
20   },
21   {
```

• 问题代码11：

```
12   return originalPush.call(this, location).catch((err) => err);
13 };
14 export const constantRoutes = [
15   {
16     path: "/user/login",
17     name: "Login",
18     component: Login,
19     meta: { title: "登录" },
20   },
21   {
22     path: "/",
```

• 问题代码12：

```
14 export const constantRoutes = [
15   {
16     path: "/user/login",
17     name: "Login",
18     component: Login,
19     meta: { title: "登录" },
20   },
21   {
22     path: "/",
23     redirect: "/home",
24   },
```

• 问题代码13：

```
17     name: "Login",
18     component: Login,
19     meta: { title: "登录" },
20   },
21   {
22     path: "/",
23     redirect: "/home",
24   },
25 ]
26
27 const router = new VueRouter({
```

• 问题代码14：

华为云 CodeArts Check 代码扫描报告

```
18     component: Login,
19     meta: { title: "登录" },
20   },
21   {
22     path: "/",
23     redirect: "/home",
24   },
25 ]
26
27 const router = new VueRouter({
28   mode: "hash",
```

● 问题代码15：

```
23     redirect: "/home",
24   },
25 ]
26
27 const router = new VueRouter({
28   mode: "hash",
29   routes: constantRoutes
30 });
31 // 判断登录状态
32 router.beforeEach((to, from, next) => {
33   document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
```

● 问题代码16：

```
28   mode: "hash",
29   routes: constantRoutes
30 });
31 // 判断登录状态
32 router.beforeEach((to, from, next) => {
33   document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
34   const token = localStorage.getItem("token");
35   if (!token && to.path !== "/user/login") {
36     next("/user/login");
37     return;
38   }
```

● 问题代码17：

```
29   routes: constantRoutes
30 });
31 // 判断登录状态
32 router.beforeEach((to, from, next) => {
33   document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
34   const token = localStorage.getItem("token");
35   if (!token && to.path !== "/user/login") {
36     next("/user/login");
37     return;
38   }
39   if (!token) {
```

● 问题代码18：

```

30  });
31  // 判断登录状态
32  router.beforeEach((to, from, next) => {
33    document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
34    const token = localStorage.getItem("token");
35    if (!token && to.path !== "/user/login") {
36      next("/user/login");
37      return;
38    }
39    if (!token) {
40      next();

```

● 问题代码19：

```

31  // 判断登录状态
32  router.beforeEach((to, from, next) => {
33    document.title = (to.meta && to.meta.title) || "慧医数字医疗应用系统";
34    const token = localStorage.getItem("token");
35    if (!token && to.path !== "/user/login") {
36      next("/user/login");
37      return;
38    }
39    if (!token) {
40      next();
41      return;

```

● 问题代码20：

```

40    next();
41    return;
42  }
43
44  // store 在守卫执行时再加载，避免 router/store 相互引用导致初始化竞态。
45  const store = require("../store").default;
46  if (store.state.app.routesLoaded) {
47    if (to.path === "/user/login") {
48      next("/");
49    } else {
50      next();

```

● 问题代码21：

```

42  }
43
44  // store 在守卫执行时再加载，避免 router/store 相互引用导致初始化竞态。
45  const store = require("../store").default;
46  if (store.state.app.routesLoaded) {
47    if (to.path === "/user/login") {
48      next("/");
49    } else {
50      next();
51    }
52    return;

```

● 问题代码22：

```

43
44    // store 在守卫执行时再加载，避免 router/store 相互引用导致初始化竞态。
45    const store = require("../store").default;
46    if (store.state.app.routesLoaded) {
47        if (to.path === "/user/login") {
48            next("/");
49        } else {
50            next();
51        }
52        return;
53    }

```

● 问题代码23：

```

51    }
52    return;
53    }
54
55    store
56    .dispatch("app/setMenuList")
57    .then(() => {
58        if (to.path === "/user/login") {
59            next("/");
60        } else {
61            next({ path: to.fullPath, replace: true });

```

● 问题代码24：

```

53    }
54
55    store
56    .dispatch("app/setMenuList")
57    .then(() => {
58        if (to.path === "/user/login") {
59            next("/");
60        } else {
61            next({ path: to.fullPath, replace: true });
62        }
63    })

```

● 问题代码25：

```

54
55    store
56    .dispatch("app/setMenuList")
57    .then(() => {
58        if (to.path === "/user/login") {
59            next("/");
60        } else {
61            next({ path: to.fullPath, replace: true });
62        }
63    })
64    .catch((error) => {

```

● 问题代码26：

华为云 CodeArts Check 代码扫描报告

```
60     } else {
61       next({ path: to.fullPath, replace: true });
62     }
63   })
64   .catch((error) => {
65     store.dispatch("app/logout");
66     Message.error(error.message || "登录状态已失效，请重新登录");
67     next("/user/login");
68   });
69 });
70
```

● 问题代码27：

```
61     next({ path: to.fullPath, replace: true });
62   }
63 })
64 .catch((error) => {
65   store.dispatch("app/logout");
66   Message.error(error.message || "登录状态已失效，请重新登录");
67   next("/user/login");
68 });
69 });
70
71 export default router;
```

● 问题代码28：

```
62   }
63 })
64 .catch((error) => {
65   store.dispatch("app/logout");
66   Message.error(error.message || "登录状态已失效，请重新登录");
67   next("/user/login");
68 });
69 });
70
71 export default router;
```

● 问题19: medical-managerment-system/src/store/modules /medicalPolicyInfoManage.js:6,6,7

● 问题代码1：

```
1 import {
2   getMedicalPolicyInfo,
3   addMedicalPolicy,
4   modifyMedicalPolicyInfo,
5   deleteMedicalPolicy,
6 } from "../../api/admin/medicalPolicyInfoManage";
7
8 const state = {
9   medicalPolicyInfo: {}, //医保政策信息
10};
```

● 问题代码2：

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询医保政策信息api
11 export function getMedicalPolicyInfo(params) {
```

• 问题代码3：

```
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询医保政策信息api
11 export function getMedicalPolicyInfo(params) {
12   return request({
```

• 问题20: medical-managerment-system/src/store/modules
/medicalPolicyInfoManage.js:22,14

• 问题代码1：

```
17 const actions = {
18   // 医保政策信息分页，关键字查询
19   getMedicalPolicyInfo({ commit }, params) {
20     getMedicalPolicyInfo(params).then((res) => {
21       if (res) {
22         commit("GET_MEDICAL_POLICY_INFO", res.data.data.policyInfo);
23       }
24     });
25   },
26   // 新增
27   addMedicalPolicy({ dispatch }, { cityId, title, updateTime, message, size }) {
```

• 问题代码2：

```
9
10 // 查询医保政策信息api
11 export function getMedicalPolicyInfo(params) {
12   return request({
13     url: '/medical_policys',
14     method: "GET",
15     params,
16   }).then((res) => judgeQueryResult(res));
17 }
18 // 新增医保政策api
19 export function addMedicalPolicy(cityId, title, updateTime, message) {
```

• 问题21: medical-managerment-system/src/store/modules
/medicalPolicyInfoManage.js:30,21,22

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
25     },
26     // 新增
27     addMedicalPolicy({ dispatch }, { cityId, title, updateTime, message, size }) {
28         addMedicalPolicy(cityId, title, updateTime, message).then((res) => {
29             // 新增之后跳转到最后一页
30             dispatch("getMedicalPolicyInfo", { pn: res.data.data.pages, size });
31         });
32     },
33     // 修改医保政策
34     modifyMedicalPolicyInfo(
35         { dispatch },
```

• 问题代码2：

```
16     }).then((res) => judgeQueryResult(res));
17 }
18 // 新增医保政策api
19 export function addMedicalPolicy(cityId, title, updateTime, message) {
20     return request({
21         url: "/medical_policys",
22         method: "POST",
23         data: {
24             cityId,
25             title,
26             updateTime,
```

• 问题代码3：

```
17 }
18 // 新增医保政策api
19 export function addMedicalPolicy(cityId, title, updateTime, message) {
20     return request({
21         url: "/medical_policys",
22         method: "POST",
23         data: {
24             cityId,
25             title,
26             updateTime,
27             message,
```

• 问题22: medical-managerment-system/src/store/modules /medicalPolicyInfoManage.js:39,53

• 问题代码1：

```
34     modifyMedicalPolicyInfo(
35         { dispatch },
36         { id, cityId, title, updateTime, message, params }
37     ) {
38         modifyMedicalPolicyInfo(id, cityId, title, updateTime, message).then(()
=> {
39             dispatch("getMedicalPolicyInfo", params);
40         });
41     },
42     // 删除医保政策
43     deleteMedicalPolicy({ dispatch }, { id, params }) {
44         deleteMedicalPolicy(id).then(() => {
```

• 问题代码2：

```

48     updateTime,
49     message
50 ) {
51     return request({
52         url: '/medical_policys/${id}',
53         method: "PUT",
54         data: {
55             cityId,
56             title,
57             updateTime,
58             message,

```

- 问题23: medical-managerment-system/src/store/modules/medicalPolicyInfoManage.js:45,35

- 问题代码1 :

```

40     });
41 },
42 // 删除医保政策
43 deleteMedicalPolicy({ dispatch }, { id, params }) {
44     deleteMedicalPolicy(id).then(() => {
45         dispatch("getMedicalPolicyInfo", params);
46     });
47 },
48 };
49 export default {
50     namespaced: true,

```

- 问题代码2 :

```

30 }
31 // 删除医保政策api
32 export function deleteMedicalPolicy(id) {
33     return request({
34         url: '/medical_policys/${id}',
35         method: "DELETE",
36         data: {
37             id,
38         },
39     }).then((res) => {
40         judgeDeleteResult(res);

```

- 问题24: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:6,6,7

- 问题代码1 :

```

1 import {
2     getCompanyPolicyInfo,
3     addCompanyPolicy,
4     deleteCompanyPolicy,
5     modifyCompanyPolicyInfo,
6 } from "../../api/admin/companyPolicyInfoManage";
7
8 const state = {
9     companyPolicyInfo: {}, //医药公司政策管理信息
10 };
11 const mutations = {

```

- 问题代码2 :


```

1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询医药公司政策管理信息api
10 export function getCompanyPolicyInfo(pn, size, keyword = "") {
11   return request({

```

● 问题代码3：

```

2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询医药公司政策管理信息api
10 export function getCompanyPolicyInfo(pn, size, keyword = "") {
11   return request({
12     url: '/company_policys',

```

● 问题25: medical-managerment-system/src/store/modules
/companyPolicyInfoManage.js:21,10,13

● 问题代码1：

```

16 const actions = {
17   // 医药公司政策管理信息分页,关键字查询
18   getCompanyPolicyInfo({ commit }, { pn, size, keyword }) {
19     getCompanyPolicyInfo(pn, size, keyword).then((res) => {
20       if (res) {
21         commit("GET_COMPANY_POLICY_INFO", res.data.data.policyInfo);
22       }
23     });
24   },
25   // 新增医药公司政策管理信息
26   addCompanyPolicy({ dispatch }, { companyId, message, title, size }) {

```

● 问题代码2：

```

5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询医药公司政策管理信息api
10 export function getCompanyPolicyInfo(pn, size, keyword = "") {
11   return request({
12     url: '/company_policys',
13     method: "GET",
14     params: {
15       pn,

```

● 问题代码3：

```

8
9 // 查询医药公司政策管理信息api
10 export function getCompanyPolicyInfo(pn, size, keyword = "") {
11     return request({
12         url: '/company_policys',
13         method: "GET",
14         params: {
15             pn,
16             size,
17             keyword,
18         },

```

- 问题26: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:29,24,25

- 问题代码1 :

```

24         },
25         // 新增医药公司政策管理信息
26         addCompanyPolicy({ dispatch }, { companyId, message, title, size }) {
27             addCompanyPolicy(companyId, message, title).then((res) => {
28                 // 新增之后跳转到最后一页
29                 dispatch("getCompanyPolicyInfo", { pn: res.data.data.pages, size });
30             });
31         },
32         // 删除
33         deleteCompanyPolicy({ dispatch }, { id, pn, size, keyword }) {
34             deleteCompanyPolicy(id).then(() => {

```

- 问题代码2 :

```

19     }).then((res) => judgeQueryResult(res));
20 }
21 // 新增
22 export function addCompanyPolicy(companyId, message, title) {
23     return request({
24         url: "/company_policys",
25         method: "POST",
26         data: {
27             companyId,
28             message,
29             title,

```

- 问题代码3 :

```

20 }
21 // 新增
22 export function addCompanyPolicy(companyId, message, title) {
23     return request({
24         url: "/company_policys",
25         method: "POST",
26         data: {
27             companyId,
28             message,
29             title,
30         },

```

- 问题27: medical-managerment-system/src/store/modules/companyPolicyInfoManage.js:35,37

- 问题代码1 :

```

30     });
31   },
32   // 删除
33   deleteCompanyPolicy({ dispatch }, { id, pn, size, keyword }) {
34     deleteCompanyPolicy(id).then(() => {
35       dispatch("getCompanyPolicyInfo", { pn, size, keyword });
36     });
37   },
38   // 修改
39   modifyCompanyPolicyInfo(
40     { dispatch },

```

• 问题代码2：

```

32 }
33 // 删除
34 export function deleteCompanyPolicy(id) {
35   return request({
36     url: '/company_policys/${id}',
37     method: "DELETE",
38   }).then((res) => {
39     judgeDeleteResult(res);
40   });
41 }
42 // 修改

```

• 问题28: medical-managerment-system/src/store/modules
/companyPolicyInfoManage.js:44,46

• 问题代码1：

```

39   modifyCompanyPolicyInfo(
40     { dispatch },
41     { id, companyId, title, message, pn, size }
42   ) {
43     modifyCompanyPolicyInfo(id, companyId, title, message).then(() => {
44       dispatch("getCompanyPolicyInfo", { pn, size });
45     });
46   },
47 }
48 export default {
49   namespaced: true,

```

• 问题代码2：

```

41 }
42 // 修改
43 export function modifyCompanyPolicyInfo(id, companyId, title, message) {
44   return request({
45     url: '/company_policys/${id}',
46     method: "PUT",
47     data: {
48       companyId,
49       title,
50       message,
51     },

```

• 问题29: medical-managerment-system/src/api/admin/materialInfoManage.
js:6,7,6

• 问题代码1：

```

1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询必备材料信息api
10 export function getMaterialInfo(pn, size, keyword = "") {
11   return request({

```

● 问题代码2：

```

2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询必备材料信息api
10 export function getMaterialInfo(pn, size, keyword = "") {
11   return request({
12     url: "/materials",

```

● 问题代码3：

```

1 import {
2   getMaterialInfo,
3   addMaterial,
4   deleteMaterial,
5   modifyMaterial,
6 } from "../../api/admin/materialInfoManage.js";
7
8 const state = {
9   materialInfo: {}, //必备材料信息
10 };
11 const mutations = {

```

- 问题30: medical-managerment-system/src/api/admin/materialInfoManage.js:10,12,13,21

● 问题代码1：

```

5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询必备材料信息api
10 export function getMaterialInfo(pn, size, keyword = "") {
11   return request({
12     url: "/materials",
13     method: "GET",
14     params: {
15       pn,

```

● 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
7 import request from "../../utils/request";
8
9 // 查询必备材料信息api
10 export function getMaterialInfo(pn, size, keyword = "") {
11     return request({
12         url: "/materials",
13         method: "GET",
14         params: {
15             pn,
16             size,
17             keyword,
```

• 问题代码3：

```
8
9 // 查询必备材料信息api
10 export function getMaterialInfo(pn, size, keyword = "") {
11     return request({
12         url: "/materials",
13         method: "GET",
14         params: {
15             pn,
16             size,
17             keyword,
18     },
```

• 问题代码4：

```
16 const actions = {
17     // 信息分页, 关键字查询
18     getMaterialInfo({ commit }, { pn, size, keyword }) {
19         getMaterialInfo(pn, size, keyword).then((res) => {
20             if (res) {
21                 commit("GET_MATERIAL_INFO", res.data.data.materialInfo);
22             }
23         });
24     },
25     // 新增
26     addMaterial({ dispatch }, { message, title, size }) {
```

- 问题31: medical-managerment-system/src/api/admin/materialInfoManage.js:24,25,29

• 问题代码1：

```
19     }).then((res) => judgeQueryResult(res));
20 }
21 // 新增
22 export function addMaterial(message, title) {
23     return request({
24         url: "/materials",
25         method: "POST",
26         data: { message, title },
27     }).then((res) => judgeAddResult(res));
28 }
29 // 删除
```

• 问题代码2：

```

20 }
21 // 新增
22 export function addMaterial(message, title) {
23     return request({
24         url: "/materials",
25         method: "POST",
26         data: { message, title },
27     }).then((res) => judgeAddResult(res));
28 }
29 // 删除
30 export function deleteMaterial(id) {

```

• 问题代码3：

```

24     },
25     // 新增
26     addMaterial({ dispatch }, { message, title, size }) {
27         addMaterial(message, title).then((res) => {
28             // 新增之后跳转到最后一页
29             dispatch("getMaterialInfo", { pn: res.data.data.pages, size });
30         });
31     },
32     // 删除
33     deleteMaterial({ dispatch }, { id, pn, size, keyword }) {
34         deleteMaterial(id).then(() => {

```

- 问题32: medical-managerment-system/src/api/admin/materialInfoManage.js:33,35

• 问题代码1：

```

28 }
29 // 删除
30 export function deleteMaterial(id) {
31     return request({
32         url: '/materials/${id}',
33         method: "DELETE",
34         data: {
35             id,
36         },
37     }).then((res) => {
38         judgeDeleteResult(res);

```

• 问题代码2：

```

30     });
31     },
32     // 删除
33     deleteMaterial({ dispatch }, { id, pn, size, keyword }) {
34         deleteMaterial(id).then(() => {
35             dispatch("getMaterialInfo", { pn, size, keyword });
36         });
37     },
38     // 修改
39     modifyMaterial({ dispatch }, { id, message, title, pn, size, keyword }) {
40         modifyMaterial(id, message, title).then(() => {

```

- 问题33: medical-managerment-system/src/api/admin/materialInfoManage.js:45,41

• 问题代码1：

```

40 }
41 // 修改
42 export function modifyMaterial(id, message, title) {
43     return request({
44         url: '/materials/${id}',
45         method: "PUT",
46         data: {
47             message,
48             title,
49         },
50     }).then((res) => {

```

• 问题代码2：

```

36     });
37 },
38 // 修改
39 modifyMaterial({ dispatch }, { id, message, title, pn, size, keyword }) {
40     modifyMaterial(id, message, title).then(() => {
41         dispatch("getMaterialInfo", { pn, size, keyword });
42     });
43 },
44 }
45 export default {
46     namespaced: true,

```

• 问题34: medical-management-system/src/api/admin/doctorInfoManage.js: 7,8,7

• 问题代码1：

```

2     judgeDeleteResult,
3     judgeAddResult,
4     judgeQueryResult,
5     judgeModifyResult,
6     judgeResetResult,
7 } from "../../utils/app";
8 import request from "../../utils/request";
9
10 // 查询医生管理信息api
11 export function getDoctorInfo(pn, size, keyword = "") {
12     return request({

```

• 问题代码2：

```

3     judgeAddResult,
4     judgeQueryResult,
5     judgeModifyResult,
6     judgeResetResult,
7 } from "../../utils/app";
8 import request from "../../utils/request";
9
10 // 查询医生管理信息api
11 export function getDoctorInfo(pn, size, keyword = "") {
12     return request({
13         url: "/doctors",

```

• 问题代码3：

```

2   getDoctorInfo,
3   getDoctorLevelAndType,
4   addDoctor,
5   deleteDoctor,
6   modifyDoctor,
7 } from "../../api/admin/doctorInfoManage.js";
8
9 const state = {
10   doctorInfo: {},
11   doctorLevelAndType: {},
12 };

```

- 问题35: medical-managment-system/src/api/admin/doctorInfoManage.js: 11,13,14,26

- 问题代码1 :

```

6   judgeResetResult,
7 } from "../../utils/app";
8 import request from "../../utils/request";
9
10 // 查询医生管理信息api
11 export function getDoctorInfo(pn, size, keyword = "") {
12   return request({
13     url: "/doctors",
14     method: "GET",
15     params: {
16       pn,

```

- 问题代码2 :

```

8 import request from "../../utils/request";
9
10 // 查询医生管理信息api
11 export function getDoctorInfo(pn, size, keyword = "") {
12   return request({
13     url: "/doctors",
14     method: "GET",
15     params: {
16       pn,
17       size,
18       keyword,

```

- 问题代码3 :

```

9
10 // 查询医生管理信息api
11 export function getDoctorInfo(pn, size, keyword = "") {
12   return request({
13     url: "/doctors",
14     method: "GET",
15     params: {
16       pn,
17       size,
18       keyword,
19   },

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
21 const actions = {
22   // 医生信息分页, 关键字查询
23   getDoctorInfo({ commit }, { pn, size, keyword }) {
24     getDoctorInfo(pn, size, keyword).then((res) => {
25       if (res) {
26         commit("GET_DOCTOR_INFO", res.data.data.doctorInfo);
27       }
28     });
29   },
30   // 查询医生级别及诊治部位
31   getDoctorLevelAndType({ commit }) {
```

- 问题36: medical-managerment-system/src/api/admin/doctorInfoManage.js: 25,26,33

- 问题代码1 :

```
20   }).then((res) => judgeQueryResult(res));
21 }
22 // 查询医生级别及诊治部位
23 export function getDoctorLevelAndType() {
24   return request({
25     url: "/doctors/info",
26     method: "GET",
27   });
28 }
29 // 新增
30 export function addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId) {
```

- 问题代码2 :

```
21 }
22 // 查询医生级别及诊治部位
23 export function getDoctorLevelAndType() {
24   return request({
25     url: "/doctors/info",
26     method: "GET",
27   });
28 }
29 // 新增
30 export function addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId) {
31   return request({
```

- 问题代码3 :

```
28   });
29 },
30 // 查询医生级别及诊治部位
31 getDoctorLevelAndType({ commit }) {
32   getDoctorLevelAndType().then((res) => {
33     commit("GET_DOCTOR_LEVEL_AND_TYPE", res.data.data);
34   });
35 },
36 // 新增
37 addDoctor(
38   { dispatch },
```

- 问题37: medical-managerment-system/src/api/admin/doctorInfoManage.js: 32,33,47

- 问题代码1 :

```

27     });
28 }
29 // 新增
30 export function addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId) {
31     return request({
32         url: "/doctors",
33         method: "POST",
34         data: { age, levelId, name, phoneNumber, pwd, sex, typeId },
35     }).then((res) => judgeAddResult(res));
36 }
37 // 删除api

```

• 问题代码2：

```

28 }
29 // 新增
30 export function addDoctor(age, levelId, name, phoneNumber, pwd, sex, typeId) {
31     return request({
32         url: "/doctors",
33         method: "POST",
34         data: { age, levelId, name, phoneNumber, pwd, sex, typeId },
35     }).then((res) => judgeAddResult(res));
36 }
37 // 删除api
38 export function deleteDoctor(id) {

```

• 问题代码3：

```

42         (res) => {
43             if (res.data.code == 10001) {
44                 return false;
45             } else {
46                 // 新增之后跳转到最后一页
47                 dispatch("getDoctorInfo", { pn: res.data.data.pages, size });
48                 return true;
49             }
50         }
51     );
52 },

```

- 问题38: medical-managerment-system/src/api/admin/doctorInfoManage.js: 41,56

• 问题代码1：

```

36 }
37 // 删除api
38 export function deleteDoctor(id) {
39     return request({
40         url: '/doctors/${id}',
41         method: "DELETE",
42     }).then((res) => {
43         judgeDeleteResult(res);
44     });
45 }
46 // // 修改

```

• 问题代码2：

```

51     );
52   },
53   // 删除
54   deleteDoctor({ dispatch }, { id, pn, size, keyword }) {
55     deleteDoctor(id).then(() => {
56       dispatch("getDoctorInfo", { pn, size, keyword });
57     });
58   },
59   // 修改
60   modifyDoctor(
61     { dispatch },

```

- 问题39: medical-managerment-system/src/api/admin/doctorInfoManage.js: 60,92

- 问题代码1 :

```

55     typeId,
56     id
57   ) {
58     return request({
59       url: '/doctors/${id}',
60       method: "PUT",
61       data: {
62         accountId,
63         age,
64         levelId,
65         name,

```

- 问题代码2 :

```

87     ).then((res) => {
88       console.log(res);
89       if (res.data.code == 10001) {
90         return false;
91       } else {
92         dispatch("getDoctorInfo", { pn, size, keyword });
93         return true;
94       }
95     });
96   },
97 }

```

- 问题40: medical-managerment-system/src/api/admin/doctorInfoManage.js: 77

- 问题代码1 :

```

72   }
73   // 重置医生密码
74   export function resetPassword(id) {
75     return request({
76       url: '/doctors/reset/${id}',
77       method: "PUT",
78     }).then((res) => {
79       judgeResetResult(res);
80     });
81   }

```

- 问题41: medical-managerment-system/src/api/admin/companyInfoManage.js:6,7,7

- 问题代码1：

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询公司信息api
11 export function getCompanyInfo(pn, size, keyword = "") {
```

- 问题代码2：

```
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询公司信息api
11 export function getCompanyInfo(pn, size, keyword = "") {
12   return request({
```

- 问题代码3：

```
2   getCompanyInfo,
3   addCompany,
4   deleteCompany,
5   modifyCompanyInfo,
6   getAllCompanyInfo,
7 } from "../../api/admin/companyInfoManage";
8
9 const state = {
10   companyInfo: {}, //公司信息
11 };
12 const mutations = {
```

- 问题42: medical-managerment-system/src/api/admin/companyInfoManage.js:11,14,22

- 问题代码1：

```
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // import Qs from 'qs'
9
10 // 查询公司信息api
11 export function getCompanyInfo(pn, size, keyword = "") {
12   return request({
13     url: '/companys/${pn}/${size}',
14     method: "GET",
15     params: {
16       name: keyword,
```

- 问题代码2：

```

9
10 // 查询公司信息api
11 export function getCompanyInfo(pn, size, keyword = "") {
12     return request({
13         url: '/companys/${pn}/${size}',
14         method: "GET",
15         params: {
16             name: keyword,
17         },
18     }).then((res) => judgeQueryResult(res));
19 }

```

● 问题代码3：

```

17 const actions = {
18     // 公司信息分页，关键字查询
19     getCompanyInfo({ commit }, { pn, size, keyword }) {
20         getCompanyInfo(pn, size, keyword).then((res) => {
21             if (res) {
22                 commit("GET_COMPANY_INFO", res.data.data.pageInfo);
23             }
24         });
25     },
26     // 新增公司
27     addCompany({ dispatch }, { companyName, companyPhone, size }) {

```

● 问题43: medical-managerment-system/src/api/admin/companyInfoManage.js:23,24,51

● 问题代码1：

```

18     }).then((res) => judgeQueryResult(res));
19 }
20 // 查询所有公司信息api
21 export function getAllCompanyInfo() {
22     return request({
23         url: "/companys",
24         method: "GET",
25     });
26 }
27 // 新增公司api
28 export function addCompany(companyName, companyPhone) {

```

● 问题代码2：

```

19 }
20 // 查询所有公司信息api
21 export function getAllCompanyInfo() {
22     return request({
23         url: "/companys",
24         method: "GET",
25     });
26 }
27 // 新增公司api
28 export function addCompany(companyName, companyPhone) {
29     return request({

```

● 问题代码3：

```

46     });
47   },
48   // 查询所有公司信息
49   getAllCompanyInfo({ commit }) {
50     getAllCompanyInfo().then((res) => {
51       commit("GET_COMPANY_INFO", res.data.data.pageInfo);
52     });
53   }
54 }
55 export default {
56   namespaced: true,

```

- 问题44: medical-managerment-system/src/api/admin/companyInfoManage.js:30,31,30

- 问题代码1 :

```

25   });
26 }
27 // 新增公司api
28 export function addCompany(companyName, companyPhone) {
29   return request({
30     url: "/companys",
31     method: "POST",
32     data: {
33       companyName,
34       companyPhone,
35     },

```

- 问题代码2 :

```

26 }
27 // 新增公司api
28 export function addCompany(companyName, companyPhone) {
29   return request({
30     url: "/companys",
31     method: "POST",
32     data: {
33       companyName,
34       companyPhone,
35     },
36   }).then((res) => judgeAddResult(res));

```

- 问题代码3 :

```

25   },
26   // 新增公司
27   addCompany({ dispatch }, { companyName, companyPhone, size }) {
28     addCompany(companyName, companyPhone).then((res) => {
29       // 新增之后跳转到最后一页s
30       dispatch("getCompanyInfo", { pn: res.data.data.pages, size });
31     });
32   },
33   // 删除公司信息
34   deleteCompany({ dispatch }, { companyId, pn, size, keyword }) {
35     deleteCompany(companyId).then(() => {

```

- 问题45: medical-managerment-system/src/api/admin/companyInfoManage.js:42,36

- 问题代码1 :

```

37 }
38 // 删除公司api
39 export function deleteCompany(companyId) {
40     return request({
41         url: '/companys/${companyId}',
42         method: "DELETE",
43     }).then((res) => {
44         judgeDeleteResult(res);
45     });
46 }
47 // 修改公司api

```

• 问题代码2：

```

31     });
32 },
33 // 删除公司信息
34 deleteCompany({ dispatch }, { companyId, pn, size, keyword }) {
35     deleteCompany(companyId).then(() => {
36         dispatch("getCompanyInfo", { pn, size, keyword });
37     });
38 },
39 // 修改公司信息
40 modifyCompanyInfo(
41     { dispatch },

```

- 问题46: medical-managerment-system/src/api/admin/companyInfoManage.js:51,45

• 问题代码1：

```

46 }
47 // 修改公司api
48 export function modifyCompanyInfo(companyId, companyName, companyPhone) {
49     return request({
50         url: '/companys/${companyId}',
51         method: "PUT",
52         data: {
53             companyName,
54             companyPhone,
55         },
56     }).then((res) => {

```

• 问题代码2：

```

40     modifyCompanyInfo(
41         { dispatch },
42         { companyId, companyName, companyPhone, pn, size, keyword }
43     ) {
44         modifyCompanyInfo(companyId, companyName, companyPhone).then(() => {
45             dispatch("getCompanyInfo", { pn, size, keyword });
46         });
47     },
48     // 查询所有公司信息
49     getAllCompanyInfo({ commit }) {
50         getAllCompanyInfo().then((res) => {

```

- 问题47: medical-managerment-system/src/api/admin/saleInfoManage.js:6,7,7

• 问题代码1：

```

1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询销售地点信息api
10 export function getSalePlaceInfo(pn, size, keyword = "") {
11   return request({

```

● 问题代码2：

```

2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询销售地点信息api
10 export function getSalePlaceInfo(pn, size, keyword = "") {
11   return request({
12     url: '/sales/${pn}/${size}',

```

● 问题代码3：

```

2   getSalePlaceInfo,
3   addSalePlace,
4   deleteSalePlace,
5   modifySalePlaceInfo,
6   getAllSalePlaceInfo,
7 } from "../../api/admin/saleInfoManage";
8
9 const state = {
10   salePlaceInfo: {}, //销售地点信息
11 };
12 const mutations = {

```

● 问题48: medical-managerment-system/src/api/admin/saleInfoManage.js: 10,13,22

● 问题代码1：

```

5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8
9 // 查询销售地点信息api
10 export function getSalePlaceInfo(pn, size, keyword = "") {
11   return request({
12     url: '/sales/${pn}/${size}',
13     method: "GET",
14     params: {
15       name: keyword,

```

● 问题代码2：


```

8
9 // 查询销售地点信息api
10 export function getSalePlaceInfo(pn, size, keyword = "") {
11     return request({
12         url: '/sales/${pn}/${size}',
13         method: "GET",
14         params: {
15             name: keyword,
16         },
17     }).then((res) => judgeQueryResult(res));
18 }

```

● 问题代码3：

```

17 const actions = {
18     // 销售地点信息分页，关键字查询
19     getSalePlaceInfo({ commit }, { pn, size, keyword }) {
20         getSalePlaceInfo(pn, size, keyword).then((res) => {
21             if (res) {
22                 commit("GET_SALE_PLACE_INFO", res.data.data.salePageInfo);
23             }
24         });
25     },
26     // 新增销售地点
27     addSalePlace(

```

- 问题49: medical-managerment-system/src/api/admin/saleInfoManage.js: 22,23,60

● 问题代码1：

```

17     }).then((res) => judgeQueryResult(res));
18 }
19 // 查询所有销售地点信息
20 export function getAllSalePlaceInfo() {
21     return request({
22         url: "/sales",
23         method: "GET",
24     });
25 }
26 // 新增销售地点api
27 export function addSalePlace(saleInfo) {

```

● 问题代码2：

```

18 }
19 // 查询所有销售地点信息
20 export function getAllSalePlaceInfo() {
21     return request({
22         url: "/sales",
23         method: "GET",
24     });
25 }
26 // 新增销售地点api
27 export function addSalePlace(saleInfo) {
28     return request({

```

● 问题代码3：

```

55     });
56   },
57   // 获取所有销售地点
58   getAllSalePlaceInfo({ commit }) {
59     getAllSalePlaceInfo().then((res) => {
60       commit("GET_SALE_PLACE_INFO", res.data.data.salePageInfo);
61     });
62   },
63 };
64 export default {
65   namespaced: true,

```

- 问题50: medical-managerment-system/src/api/admin/saleInfoManage.js: 29,30,33

- 问题代码1 :

```

24   });
25 }
26 // 新增销售地点api
27 export function addSalePlace(saleInfo) {
28   return request({
29     url: "/sales",
30     method: "POST",
31     data: saleInfo,
32   }).then((res) => judgeAddResult(res));
33 }
34 // 删除销售地点api

```

- 问题代码2 :

```

25 }
26 // 新增销售地点api
27 export function addSalePlace(saleInfo) {
28   return request({
29     url: "/sales",
30     method: "POST",
31     data: saleInfo,
32   }).then((res) => judgeAddResult(res));
33 }
34 // 删除销售地点api
35 export function deleteSalePlace(saleId) {

```

- 问题代码3 :

```

28     { dispatch },
29     { saleName, salePhone, address, longitude, latitude, size }
30   ) {
31     addSalePlace({ saleName, salePhone, address, longitude, latitude }).then
((res) => {
32       // 新增之后跳转到最后一页
33       dispatch("getSalePlaceInfo", { pn: res.data.data.pages, size });
34     });
35   },
36   // 删除销售地点信息
37   deleteSalePlace({ dispatch }, { saleId, pn, size, keyword }) {
38     deleteSalePlace(saleId).then(() => {

```

- 问题51: medical-managerment-system/src/api/admin/saleInfoManage.js: 38,39

- 问题代码1 :

```

33 }
34 // 删除销售地点api
35 export function deleteSalePlace(saleId) {
36     return request({
37         url: '/sales/${saleId}',
38         method: "DELETE",
39     }).then((res) => {
40         judgeDeleteResult(res);
41     });
42 }
43 // 修改销售地点api

```

• 问题代码2：

```

34     });
35 },
36 // 删除销售地点信息
37 deleteSalePlace({ dispatch }, { saleId, pn, size, keyword }) {
38     deleteSalePlace(saleId).then(() => {
39         dispatch("getSalePlaceInfo", { pn, size, keyword });
40     });
41 },
42 // 修改销售地点信息
43 modifySalePlaceInfo(
44     { dispatch },

```

• 问题52: medical-managerment-system/src/api/admin/saleInfoManage.js: 47,54

• 问题代码1：

```

42 }
43 // 修改销售地点api
44 export function modifySalePlaceInfo(saleId, saleInfo) {
45     return request({
46         url: '/sales/${saleId}',
47         method: "PUT",
48         data: saleInfo,
49     }).then((res) => {
50         judgeModifyResult(res);
51     });
52 }

```

• 问题代码2：

```

49         salePhone,
50         address,
51         longitude,
52         latitude,
53     }).then(() => {
54         dispatch("getSalePlaceInfo", { pn, size, keyword });
55     });
56 },
57 // 获取所有销售地点
58 getAllSalePlaceInfo({ commit }) {
59     getAllSalePlaceInfo().then((res) => {

```

• 问题53: medical-managerment-system/src/api/admin/drugInfoManage.js: 6,7,6

• 问题代码1：

```
1 import {
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // 查询药品信息api
9 export function getDrugInfo(pn, size, keyword = "") {
10   return request({
11     url: '/drugs/${pn}/${size}',
```

● 问题代码2：

```
2   judgeDeleteResult,
3   judgeAddResult,
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // 查询药品信息api
9 export function getDrugInfo(pn, size, keyword = "") {
10   return request({
11     url: '/drugs/${pn}/${size}',
12     method: "GET",
```

● 问题代码3：

```
1 import {
2   getDrugInfo,
3   addDrug,
4   deleteDrug,
5   modifyDrugInfo,
6 } from "../../api/admin/drugInfoManage";
7
8 const state = {
9   drugInfo: {}, //药品信息
10 };
11 const mutations = {
```

- 问题54: medical-managerment-system/src/api/admin/drugInfoManage.js: 9,12,21

● 问题代码1：

```
4   judgeQueryResult,
5   judgeModifyResult,
6 } from "../../utils/app";
7 import request from "../../utils/request";
8 // 查询药品信息api
9 export function getDrugInfo(pn, size, keyword = "") {
10   return request({
11     url: '/drugs/${pn}/${size}',
12     method: "GET",
13     params: {
14       name: keyword,
```

● 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
7 import request from "../../utils/request";
8 // 查询药品信息api
9 export function getDrugInfo(pn, size, keyword = "") {
10     return request({
11         url: '/drugs/${pn}/${size}',
12         method: "GET",
13         params: {
14             name: keyword,
15         },
16     }).then((res) => judgeQueryResult(res));
17 }
```

● 问题代码3：

```
16 const actions = {
17     // 药品信息分页，关键字查询
18     getDrugInfo({ commit }, { pn, size, keyword }) {
19         getDrugInfo(pn, size, keyword).then((res) => {
20             if (res) {
21                 commit("GET_DRUG_INFO", res.data.data.drugPageInfo);
22             }
23         });
24     },
25     // 新增药品
26     addDrug(
```

- 问题55: medical-managerment-system/src/api/admin/drugInfoManage.js: 21,22,32

● 问题代码1：

```
16     }).then((res) => judgeQueryResult(res));
17 }
18 // 新增药品api
19 export function addDrug(drugName, drugInfo, drugEffect, drugImg, saleIds,
drugPublisher) {
20     return request({
21         url: "/drugs",
22         method: "POST",
23         data: {
24             drugName,
25             drugInfo,
26             drugEffect,
```

● 问题代码2：

```
17 }
18 // 新增药品api
19 export function addDrug(drugName, drugInfo, drugEffect, drugImg, saleIds,
drugPublisher) {
20     return request({
21         url: "/drugs",
22         method: "POST",
23         data: {
24             drugName,
25             drugInfo,
26             drugEffect,
27             drugImg,
```

● 问题代码3：

华为云 CodeArts Check 代码扫描报告

```
27     { dispatch },
28     { drugName, drugInfo, drugEffect, drugImg, saleIds, size, drugPublisher }
29   ) {
30     addDrug(drugName, drugInfo, drugEffect, drugImg, saleIds, drugPublisher).
then((res) => {
31       // 新增之后跳转到最后一页
32       dispatch("getDrugInfo", { pn: res.data.data.pages, size });
33     });
34   },
35   // 删除药品信息
36   deleteDrug({ dispatch }, { drugId, pn, size, keyword }) {
37     deleteDrug(drugId).then(() => {
```

- 问题56: medical-managerment-system/src/api/admin/drugInfoManage.js: 37,38

- 问题代码1 :

```
32 }
33 // 删除药品api
34 export function deleteDrug(drugId) {
35   return request({
36     url: '/drugs/${drugId}',
37     method: "DELETE",
38   }).then((res) => {
39     judgeDeleteResult(res);
40   });
41 }
42 // 修改药品api
```

- 问题代码2 :

```
33   });
34 },
35 // 删除药品信息
36 deleteDrug({ dispatch }, { drugId, pn, size, keyword }) {
37   deleteDrug(drugId).then(() => {
38     dispatch("getDrugInfo", { pn, size, keyword });
39   });
40 },
41 // 修改药品信息
42 modifyDrugInfo(
43   { dispatch },
```

- 问题57: medical-managerment-system/src/api/admin/drugInfoManage.js: 53,64

- 问题代码1 :

```
48   drugImg,
49   saleIds
50 ) {
51   return request({
52     url: '/drugs/${drugId}',
53     method: "PUT",
54     data: {
55       drugName,
56       drugInfo,
57       drugEffect,
58       drugImg,
```

- 问题代码2 :

华为云 CodeArts Check 代码扫描报告

```
59         drugInfo,  
60         drugEffect,  
61         drugImg,  
62         saleIds  
63     ).then(() => {  
64         dispatch("getDrugInfo", { pn, size, keyword });  
65     });  
66 },  
67 };  
68 export default {  
69     namespaced: true,
```

- 问题58: medical-managerment-system/src/api/admin/cityInfoManage.js: 5,6,6

- 问题代码1 :

```
1 import {  
2     judgeDeleteResult,  
3     judgeAddResult,  
4     judgeQueryResult,  
5 } from "../../utils/app";  
6 import request from "../../utils/request";  
7  
8 // 查询城市管理信息api  
9 export function getCityInfo(pn, size, keyword = "") {  
10     return request({
```

- 问题代码2 :

```
1 import {  
2     judgeDeleteResult,  
3     judgeAddResult,  
4     judgeQueryResult,  
5 } from "../../utils/app";  
6 import request from "../../utils/request";  
7  
8 // 查询城市管理信息api  
9 export function getCityInfo(pn, size, keyword = "") {  
10     return request({  
11         url: '/citys/${pn}/${size}',
```

- 问题代码3 :

```
1 import {  
2     getCityInfo,  
3     addCity,  
4     deleteCity,  
5     getAllCityInfo,  
6 } from "../../api/admin/cityInfoManage.js";  
7  
8 const state = {  
9     cityInfo: {}, //城市管理信息  
10 };  
11 const mutations = {
```

- 问题59: medical-managerment-system/src/api/admin/cityInfoManage.js: 9,12,21

- 问题代码1 :

```

4     judgeQueryResult,
5 } from "../../utils/app";
6 import request from "../../utils/request";
7
8 // 查询城市管理信息api
9 export function getCityInfo(pn, size, keyword = "") {
10     return request({
11         url: '/citys/${pn}/${size}',
12         method: "GET",
13         params: {
14             name: keyword,

```

● 问题代码2：

```

7
8 // 查询城市管理信息api
9 export function getCityInfo(pn, size, keyword = "") {
10     return request({
11         url: '/citys/${pn}/${size}',
12         method: "GET",
13         params: {
14             name: keyword,
15         },
16     }).then((res) => judgeQueryResult(res));
17 }

```

● 问题代码3：

```

16 const actions = {
17     // 城市管理信息分页，关键字查询
18     getCityInfo({ commit }, { pn, size, keyword }) {
19         getCityInfo(pn, size, keyword).then((res) => {
20             if (res) {
21                 commit("GET_CITY_INFO", res.data.data.cityPageInfo);
22             }
23         });
24     },
25     // 新增城市
26     addCity({ dispatch }, { cityNumber, size }) {

```

● 问题60: medical-managerment-system/src/api/admin/cityInfoManage.js: 21,22,43

● 问题代码1：

```

16     }).then((res) => judgeQueryResult(res));
17 }
18 // 查询所有城市信息api
19 export function getAllCityInfo() {
20     return request({
21         url: "/citys",
22         method: "GET",
23     });
24 }
25 // 新增城市api
26 export function addCity(cityNumber) {

```

● 问题代码2：


```

17 }
18 // 查询所有城市信息api
19 export function getAllCityInfo() {
20     return request({
21         url: "/citys",
22         method: "GET",
23     });
24 }
25 // 新增城市api
26 export function addCity(cityNumber) {
27     return request({

```

• 问题代码3：

```

38     });
39 },
40 // 查询所有城市信息
41 getAllCityInfo({ commit }) {
42     getAllCityInfo().then((res) => {
43         commit("GET_CITY_INFO", res.data.data.cityPageInfo);
44     });
45 },
46
47 }
48 export default {

```

• 问题61: medical-managerment-system/src/api/admin/cityInfoManage.js: 29,30

• 问题代码1：

```

24 }
25 // 新增城市api
26 export function addCity(cityNumber) {
27     return request({
28         url: '/citys?cityNumber=${cityNumber}',
29         method: "POST",
30     }).then((res) => judgeAddResult(res));
31 }
32 // 删除城市api
33 export function deleteCity(cityId) {
34     return request({

```

• 问题代码2：

```

25 // 新增城市
26 addCity({ dispatch }, { cityNumber, size }) {
27     addCity(cityNumber).then((res) => {
28         // 新增之后跳转到最后一页
29         if (res.data.code == 20000) {
30             dispatch("getCityInfo", { pn: res.data.data.pages, size });
31         }
32     });
33 },
34 // 删除城市信息
35 deleteCity({ dispatch }, { cityId, pn, size, keyword }) {

```

• 问题62: medical-managerment-system/src/api/admin/cityInfoManage.js: 36,37

• 问题代码1：

```

31 }
32 // 删除城市api
33 export function deleteCity(cityId) {
34     return request({
35         url: '/citys/${cityId}',
36         method: "DELETE",
37     }).then((res) => {
38         judgeDeleteResult(res);
39     });
40 }

```

• 问题代码2：

```

32     });
33 },
34 // 删除城市信息
35 deleteCity({ dispatch }, { cityId, pn, size, keyword }) {
36     deleteCity(cityId).then(() => {
37         dispatch("getCityInfo", { pn, size, keyword });
38     });
39 },
40 // 查询所有城市信息
41 getAllCityInfo({ commit }) {
42     getAllCityInfo().then((res) => {

```

• 问题63: medical-managerment-system/src/api/Login.js:1,2

• 问题代码1：

```

1 import request from "../utils/request"
2 import Qs from "qs";
3
4 export function login(username, password) {
5     return request({
6         url: "/login",

```

• 问题代码2：

```

1 import request from "../utils/request"
2 import Qs from "qs";
3
4 export function login(username, password) {
5     return request({
6         url: "/login",
7         method: "POST",

```

• 问题64: medical-managerment-system/src/api/Login.js:6,7

• 问题代码1：

```

1 import request from "../utils/request"
2 import Qs from "qs";
3
4 export function login(username, password) {
5     return request({
6         url: "/login",
7         method: "POST",
8         data: Qs.stringify({ username, password }),
9     });
10 }
11 export function getMenuList(roleName) {

```

• 问题代码2：

```

2 import Qs from "qs";
3
4 export function login(username, password) {
5     return request({
6         url: "/login",
7         method: "POST",
8         data: Qs.stringify({ username, password }),
9     });
10 }
11 export function getMenuList(roleName) {
12     return request({

```

- 问题65: medical-managerment-system/src/api/Login.js:13,14

- 问题代码1 :

```

8         data: Qs.stringify({ username, password }),
9     });
10 }
11 export function getMenuList(roleName) {
12     return request({
13         url: "/permissions",
14         method: "GET",
15         params: {
16             roleName
17         }
18     })

```

- 问题代码2 :

```

9     });
10 }
11 export function getMenuList(roleName) {
12     return request({
13         url: "/permissions",
14         method: "GET",
15         params: {
16             roleName
17         }
18     })
19 }

```

- 问题66: medical-managerment-system/src/api/dashboard.js:1

- 问题代码1 :

```

1 import request from "../utils/request";
2
3 export function getDashboard() {
4     return request({
5         url: "/dashboard",
6         method: "GET",

```

- 问题67: medical-managerment-system/src/api/dashboard.js:5,6

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 import request from "../utils/request";
2
3 export function getDashboard() {
4   return request({
5     url: "/dashboard",
6     method: "GET",
7   });
8 }
```

- 问题代码2：

```
1 import request from "../utils/request";
2
3 export function getDashboard() {
4   return request({
5     url: "/dashboard",
6     method: "GET",
7   });
8 }
```

- 问题68: medical-managerment-system/src/store/modules/app.js:25

- 问题代码1：

```
20   state.routesLoaded = true;
21   router.options.routes = routes;
22   router.addRoutes(dynamicRoutes);
23 },
24 RESET_AUTH(state) {
25   state.token = "";
26   state.menuList = constantRoutes.slice();
27   state.routesLoaded = false;
28 }
29 };
30 const actions = {
```

- 问题69: medical-managerment-system/src/store/modules/app.js:34,38,43,46,47,48,50,51

- 问题代码1：

```
29 };
30 const actions = {
31   // 登录接口
32   async login({ commit }, loginInfo) {
33     // 清除同一浏览器会话中可能残留的上一账号菜单状态。
34     commit("RESET_AUTH");
35     const username = loginInfo.username.trim();
36     const res = await login(username, loginInfo.password);
37     if (!res.data || Number(res.data.code) !== 20000) {
38       throw new Error((res.data && res.data.message) || "账号或密码错误");
39     }
40   }
41 }
```

- 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
33 // 清除同一浏览器会话中可能残留的上一账号菜单状态。
34 commit("RESET_AUTH");
35 const username = loginInfo.username.trim();
36 const res = await login(username, loginInfo.password);
37 if (!res.data || Number(res.data.code) !== 20000) {
38     throw new Error((res.data && res.data.message) || "账号或密码错误");
39 }
40
41 const data = res.data.data || {};
42 if (!data.token || !data.userInfo) {
43     throw new Error("登录接口返回的数据不完整");
```

• 问题代码3：

```
38     throw new Error((res.data && res.data.message) || "账号或密码错误");
39 }
40
41 const data = res.data.data || {};
42 if (!data.token || !data.userInfo) {
43     throw new Error("登录接口返回的数据不完整");
44 }
45
46 localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47 localStorage.setItem("token", data.token);
48 commit("SET_TOKEN", data.token);
```

• 问题代码4：

```
41 const data = res.data.data || {};
42 if (!data.token || !data.userInfo) {
43     throw new Error("登录接口返回的数据不完整");
44 }
45
46 localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47 localStorage.setItem("token", data.token);
48 commit("SET_TOKEN", data.token);
49 Message({
50     type: "success",
51     message: "登录成功",
```

• 问题代码5：

```
42 if (!data.token || !data.userInfo) {
43     throw new Error("登录接口返回的数据不完整");
44 }
45
46 localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47 localStorage.setItem("token", data.token);
48 commit("SET_TOKEN", data.token);
49 Message({
50     type: "success",
51     message: "登录成功",
52 });
```

• 问题代码6：

华为云 CodeArts Check 代码扫描报告

```
43     throw new Error("登录接口返回的数据不完整");
44   }
45
46   localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47   localStorage.setItem("token", data.token);
48   commit("SET_TOKEN", data.token);
49   Message({
50     type: "success",
51     message: "登录成功",
52   });
53   return data;
```

- 问题代码7：

```
45
46   localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47   localStorage.setItem("token", data.token);
48   commit("SET_TOKEN", data.token);
49   Message({
50     type: "success",
51     message: "登录成功",
52   });
53   return data;
54 },
55 // 获取后端传来的路由列表
```

- 问题代码8：

```
46   localStorage.setItem("userInfo", JSON.stringify(data.userInfo));
47   localStorage.setItem("token", data.token);
48   commit("SET_TOKEN", data.token);
49   Message({
50     type: "success",
51     message: "登录成功",
52   });
53   return data;
54 },
55 // 获取后端传来的路由列表
56 async setMenuList({ commit, state }) {
```

- 问题70: medical-managerment-system/src/store/modules/app.js:61

- 问题代码1：

```
56   async setMenuList({ commit, state }) {
57     if (state.routesLoaded) {
58       return state.menuList.slice(constantRoutes.length);
59     }
60     const routes = await getMenu();
61     commit("SET_ROUTER_MENULIST", routes);
62     return routes;
63   },
64   logout({ commit }) {
65     localStorage.removeItem("token");
66     localStorage.removeItem("userInfo");
```

- 问题71: medical-managerment-system/src/store/modules/app.js:65,66,67

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
60     const routes = await getMenu();
61     commit("SET_ROUTER_MENULIST", routes);
62     return routes;
63   },
64   logout({ commit }) {
65     localStorage.removeItem("token");
66     localStorage.removeItem("userInfo");
67     commit("RESET_AUTH");
68   },
69 };
70 export default {
```

• 问题代码2：

```
61     commit("SET_ROUTER_MENULIST", routes);
62     return routes;
63   },
64   logout({ commit }) {
65     localStorage.removeItem("token");
66     localStorage.removeItem("userInfo");
67     commit("RESET_AUTH");
68   },
69 };
70 export default {
71   namespaced: true,
```

• 问题代码3：

```
62     return routes;
63   },
64   logout({ commit }) {
65     localStorage.removeItem("token");
66     localStorage.removeItem("userInfo");
67     commit("RESET_AUTH");
68   },
69 };
70 export default {
71   namespaced: true,
72   state,
```

- 问题72: medical-managerment-system/src/views/CompanyPolicy/index.vue: 352,353,98,99,100,101,104,200,57,23,21,22,24,172,173,174,176,310,230,231,232,299,300,301,302,305,519,520,282,283,284,285,288,516,517,58,62,63,63,63,63,64,65,66,67,70,71,71,71,71,72,73,74,75,78,79,79,79,79,79,80,81,82,83,86,87,87,87,87,88,89,90,91,96,182,183,184,187,326,240,241,242,243,245,390,391,204,205,206,207,210

• 问题代码1：

```
347     this.getCompanyPolicyInfo(); // 首次渲染
348     this.$store.dispatch("companyInfoManage/getAllCompanyInfo");
349   },
350   computed: {
351     ...mapGetters({
352       tableData: "companyPolicyInfo",
353       companyInfo: "companyInfo",
354     }), //后端返回的数据
355     keyword: {
356       get() {
357         return this.keywordDefault;
```

- 问题代码2：

```
348     this.$store.dispatch("companyInfoManage/getAllCompanyInfo");
349   },
350   computed: {
351     ...mapGetters({
352       tableData: "companyPolicyInfo",
353       companyInfo: "companyInfo",
354     }), //后端返回的数据
355     keyword: {
356       get() {
357         return this.keywordDefault;
358       },

```

- 问题代码3：

```
93     </el-dialog>
94   </el-container>
95 </template>
96
97 <script>
98 import Pagination from "../../components/Pagination";
99 import { mapGetters } from "vuex";
100 import rules from "../../utils/validator";
101 import { provinceAndCityData } from "element-china-area-data";
102
103 export default {

```

- 问题代码4：

```
94   </el-container>
95 </template>
96
97 <script>
98 import Pagination from "../../components/Pagination";
99 import { mapGetters } from "vuex";
100 import rules from "../../utils/validator";
101 import { provinceAndCityData } from "element-china-area-data";
102
103 export default {
104   name: "CityManage",

```

- 问题代码5：

```
95 </template>
96
97 <script>
98 import Pagination from "../../components/Pagination";
99 import { mapGetters } from "vuex";
100 import rules from "../../utils/validator";
101 import { provinceAndCityData } from "element-china-area-data";
102
103 export default {
104   name: "CityManage",
105   components: {

```

- 问题代码6：


```

96
97 <script>
98 import Pagination from "../../components/Pagination";
99 import { mapGetters } from "vuex";
100 import rules from "../../utils/validator";
101 import { provinceAndCityData } from "element-china-area-data";
102
103 export default {
104   name: "CityManage",
105   components: {
106     Pagination,

```

● 问题代码7：

```

99 import { mapGetters } from "vuex";
100 import rules from "../../utils/validator";
101 import { provinceAndCityData } from "element-china-area-data";
102
103 export default {
104   name: "CityManage",
105   components: {
106     Pagination,
107   },
108   data() {
109     return {

```

● 问题代码8：

```

195   mounted() {
196     this.getCityInfo(); // 首次渲染
197   },
198   computed: {
199     ...mapGetters({
200       tableData: "cityInfo",
201     }), //后端返回的数据
202     keyword: {
203       get() {
204         return this.keywordDefault;
205       },

```

● 问题代码9：

```

52   </el-menu>
53 </div>
54 </template>
55 <script>
56 export default {
57   name: "PageSider",
58   data() {
59     return {
60       submenuList: [],
61     };
62   },

```

● 问题代码10：

```

18     </div>
19   </div>
20 </template>
21 <script>
22 export default {
23   name: "PageHeader",
24   methods: {
25     handleLogout() {
26       this.$store.dispatch("app/logout");
27       this.$message.warning("已退出登录");
28       this.$router.replace("/user/login");

```

● 问题代码11：

```

16   </el-container>
17 </el-container>
18 </template>
19
20 <script>
21 import PageSider from "../components/PageSider/index.vue";
22 import PageHeader from "../components/PageHeader/index.vue";
23 export default {
24   name: "LayoutIndex",
25   components: { PageSider, PageHeader },
26 };

```

● 问题代码12：

```

17   </el-container>
18 </template>
19
20 <script>
21 import PageSider from "../components/PageSider/index.vue";
22 import PageHeader from "../components/PageHeader/index.vue";
23 export default {
24   name: "LayoutIndex",
25   components: { PageSider, PageHeader },
26 };
27 </script>

```

● 问题代码13：

```

19
20 <script>
21 import PageSider from "../components/PageSider/index.vue";
22 import PageHeader from "../components/PageHeader/index.vue";
23 export default {
24   name: "LayoutIndex",
25   components: { PageSider, PageHeader },
26 };
27 </script>
28
29 <style scoped lang="less">

```

● 问题代码14：

```

167         </div>
168     </el-dialog>
169 </el-container>
170 </template>
171 <script>
172 import Pagination from "../../components/Pagination";
173 import { mapGetters } from "vuex";
174 import rules from "../../utils/validator";
175 export default {
176   name: "",
177   components: {

```

● 问题代码15：

```

168     </el-dialog>
169 </el-container>
170 </template>
171 <script>
172 import Pagination from "../../components/Pagination";
173 import { mapGetters } from "vuex";
174 import rules from "../../utils/validator";
175 export default {
176   name: "",
177   components: {
178     Pagination,

```

● 问题代码16：

```

169 </el-container>
170 </template>
171 <script>
172 import Pagination from "../../components/Pagination";
173 import { mapGetters } from "vuex";
174 import rules from "../../utils/validator";
175 export default {
176   name: "",
177   components: {
178     Pagination,
179   },

```

● 问题代码17：

```

171 <script>
172 import Pagination from "../../components/Pagination";
173 import { mapGetters } from "vuex";
174 import rules from "../../utils/validator";
175 export default {
176   name: "",
177   components: {
178     Pagination,
179   },
180   data() {
181     return {

```

● 问题代码18：

```

305   mounted() {
306     this.getMaterialInfo(); // 首次渲染
307   },
308   computed: {
309     ...mapGetters({
310       tableData: "materialInfo",
311     }), //后端返回的数据
312     keyword: {
313       get() {
314         return this.keywordDefault;
315       },

```

● 问题代码19：

```

225     </el-dialog>
226   </el-container>
227 </template>
228
229 <script>
230 import Pagination from "../../components/Pagination";
231 import { mapGetters } from "vuex";
232 import rules from "../../utils/validator";
233
234 function coordinateValidator(min, max, label) {
235   return (rule, value, callback) => {

```

● 问题代码20：

```

226   </el-container>
227 </template>
228
229 <script>
230 import Pagination from "../../components/Pagination";
231 import { mapGetters } from "vuex";
232 import rules from "../../utils/validator";
233
234 function coordinateValidator(min, max, label) {
235   return (rule, value, callback) => {
236     if (value === "" || value === null || value === undefined) {

```

● 问题代码21：

```

227 </template>
228
229 <script>
230 import Pagination from "../../components/Pagination";
231 import { mapGetters } from "vuex";
232 import rules from "../../utils/validator";
233
234 function coordinateValidator(min, max, label) {
235   return (rule, value, callback) => {
236     if (value === "" || value === null || value === undefined) {
237       callback(new Error(`${label}不能为空`));

```

● 问题代码22：

```

294     </el-dialog>
295   </el-container>
296 </template>
297
298 <script>
299 import Pagination from "../../components/Pagination";
300 import { mapGetters } from "vuex";
301 import rules from "../../utils/validator";
302 import { resolveApiUrl } from "../../utils/request";
303
304 export default {

```

● 问题代码23：

```

295   </el-container>
296 </template>
297
298 <script>
299 import Pagination from "../../components/Pagination";
300 import { mapGetters } from "vuex";
301 import rules from "../../utils/validator";
302 import { resolveApiUrl } from "../../utils/request";
303
304 export default {
305   name: "CompanyManage",

```

● 问题代码24：

```

296 </template>
297
298 <script>
299 import Pagination from "../../components/Pagination";
300 import { mapGetters } from "vuex";
301 import rules from "../../utils/validator";
302 import { resolveApiUrl } from "../../utils/request";
303
304 export default {
305   name: "CompanyManage",
306   components: {

```

● 问题代码25：

```

297
298 <script>
299 import Pagination from "../../components/Pagination";
300 import { mapGetters } from "vuex";
301 import rules from "../../utils/validator";
302 import { resolveApiUrl } from "../../utils/request";
303
304 export default {
305   name: "CompanyManage",
306   components: {
307     Pagination,

```

● 问题代码26：

华为云 CodeArts Check 代码扫描报告

```
300 import { mapGetters } from "vuex";
301 import rules from "../../utils/validator";
302 import { resolveApiUrl } from "../../utils/request";
303
304 export default {
305   name: "CompanyManage",
306   components: {
307     Pagination,
308   },
309   data() {
310     return {
```

● 问题代码27：

```
514   this.getDrugInfo(); // 首次渲染
515   this.$store.dispatch("saleInfoManage/getAllSalePlaceInfo");
516 },
517 computed: {
518   ...mapGetters({
519     tableData: "drugInfo",
520     salePlaceInfo: "salePlaceInfo",
521   }), //后端返回的数据
522   keyword: {
523     get() {
524       return this.keywordDefault;
```

● 问题代码28：

```
515   this.$store.dispatch("saleInfoManage/getAllSalePlaceInfo");
516 },
517 computed: {
518   ...mapGetters({
519     tableData: "drugInfo",
520     salePlaceInfo: "salePlaceInfo",
521   }), //后端返回的数据
522   keyword: {
523     get() {
524       return this.keywordDefault;
525   },
```

● 问题代码29：

```
277   </el-dialog>
278 </el-container>
279 </template>
280
281 <script>
282 import Pagination from "../../components/Pagination";
283 import { mapGetters } from "vuex";
284 import { doctorRules, validatePass } from "../../utils/validator";
285 import { resetPassword } from "../../api/admin/doctorInfoManage";
286
287 export default {
```

● 问题代码30：

华为云 CodeArts Check 代码扫描报告

```
278   </el-container>
279 </template>
280
281 <script>
282 import Pagination from "../../components/Pagination";
283 import { mapGetters } from "vuex";
284 import { doctorRules, validatePass } from "../../utils/validator";
285 import { resetPassword } from "../../api/admin/doctorInfoManage";
286
287 export default {
288   name: "DoctorManage",
```

● 问题代码31：

```
279 </template>
280
281 <script>
282 import Pagination from "../../components/Pagination";
283 import { mapGetters } from "vuex";
284 import { doctorRules, validatePass } from "../../utils/validator";
285 import { resetPassword } from "../../api/admin/doctorInfoManage";
286
287 export default {
288   name: "DoctorManage",
289   components: {
```

● 问题代码32：

```
280
281 <script>
282 import Pagination from "../../components/Pagination";
283 import { mapGetters } from "vuex";
284 import { doctorRules, validatePass } from "../../utils/validator";
285 import { resetPassword } from "../../api/admin/doctorInfoManage";
286
287 export default {
288   name: "DoctorManage",
289   components: {
290     Pagination,
```

● 问题代码33：

```
283 import { mapGetters } from "vuex";
284 import { doctorRules, validatePass } from "../../utils/validator";
285 import { resetPassword } from "../../api/admin/doctorInfoManage";
286
287 export default {
288   name: "DoctorManage",
289   components: {
290     Pagination,
291   },
292   data() {
293     let validatorPass = (rule, value, callback) => {
```

● 问题代码34：

华为云 CodeArts Check 代码扫描报告

```
511     this.getDoctorInfo(); // 首次渲染
512     this.$store.dispatch("doctorInfoManage/getDoctorLevelAndType");
513   },
514   computed: {
515     ...mapGetters({
516       tableData: "doctorInfo",
517       levelAndTypeData: "doctorLevelAndType",
518     }), //后端返回的数据
519     keyword: {
520       get() {
521         return this.keywordDefault;
```

● 问题代码35：

```
512     this.$store.dispatch("doctorInfoManage/getDoctorLevelAndType");
513   },
514   computed: {
515     ...mapGetters({
516       tableData: "doctorInfo",
517       levelAndTypeData: "doctorLevelAndType",
518     }), //后端返回的数据
519     keyword: {
520       get() {
521         return this.keywordDefault;
```

● 问题代码36：

```
53     </section>
54   </div>
55 </template>
56
57 <script>
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
```

● 问题代码37：

```
57 <script>
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
```

● 问题代码38：

华为云 CodeArts Check 代码扫描报告

```
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
```

● 问题代码39：

```
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
```

● 问题代码40：

```
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
```

● 问题代码41：

```
58 import { getDashboard } from "../../api/dashboard";
59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
```

● 问题代码42：

```

59
60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {

```

● 问题代码43：

```

60 const metricDefinitions = [
61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",

```

● 问题代码44：

```

61   {
62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],

```

● 问题代码45：

```

62     key: "drugCount",
63     aliases: ["drugCount", "drugTotal", "totalDrugs", "drugs"],
64     label: "药品总数",
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",

```

● 问题代码46：

华为云 CodeArts Check 代码扫描报告

```
65     unit: "种",
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
```

● 问题代码47：

```
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
```

● 问题代码48：

```
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
```

● 问题代码49：

```
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
```

● 问题代码50：

华为云 CodeArts Check 代码扫描报告

```
66     icon: "el-icon-first-aid-kit",
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
```

● 问题代码51：

```
67     color: "linear-gradient(135deg, #21b7a8, #45d3ba)",
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
```

● 问题代码52：

```
68   },
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
```

● 问题代码53：

```
69   {
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
```

● 问题代码54：

华为云 CodeArts Check 代码扫描报告

```
70     key: "doctorCount",
71     aliases: ["doctorCount", "doctorTotal", "totalDoctors", "doctors"],
72     label: "医生总数",
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
```

● 问题代码55：

```
73     unit: "人",
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
```

● 问题代码56：

```
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
```

● 问题代码57：

```
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
```

● 问题代码58：

华为云 CodeArts Check 代码扫描报告

```
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
```

● 问题代码59：

```
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
```

● 问题代码60：

```
74     icon: "el-icon-user",
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
```

● 问题代码61：

```
75     color: "linear-gradient(135deg, #3f8efc, #69b7ff)",
76   },
77   {
78     key: "saleCount",
79     aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80     label: "销售地点",
81     unit: "家",
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
```

● 问题代码62：

```

76  },
77  {
78    key: "saleCount",
79    aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80    label: "销售地点",
81    unit: "家",
82    icon: "el-icon-location-outline",
83    color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84  },
85  {
86    key: "companyCount",

```

● 问题代码63：

```

77  {
78    key: "saleCount",
79    aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80    label: "销售地点",
81    unit: "家",
82    icon: "el-icon-location-outline",
83    color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84  },
85  {
86    key: "companyCount",
87    aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],

```

● 问题代码64：

```

78    key: "saleCount",
79    aliases: ["saleCount", "salesCount", "saleTotal", "totalSales", "sales"],
80    label: "销售地点",
81    unit: "家",
82    icon: "el-icon-location-outline",
83    color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84  },
85  {
86    key: "companyCount",
87    aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88    label: "医药企业",

```

● 问题代码65：

```

81    unit: "家",
82    icon: "el-icon-location-outline",
83    color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84  },
85  {
86    key: "companyCount",
87    aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88    label: "医药企业",
89    unit: "家",
90    icon: "el-icon-office-building",
91    color: "linear-gradient(135deg, #7a66ee, #a58cf5)",

```

● 问题代码66：

华为云 CodeArts Check 代码扫描报告

```
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
```

● 问题代码67：

```
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
```

● 问题代码68：

```
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
```

● 问题代码69：

```
82     icon: "el-icon-location-outline",
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
```

● 问题代码70：

华为云 CodeArts Check 代码扫描报告

```
83     color: "linear-gradient(135deg, #f59d32, #ffc45d)",
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
93 ];
```

● 问题代码71：

```
84   },
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
93 ];
```

● 问题代码72：

```
85   {
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
93 ];
94
95 export default {
```

● 问题代码73：

```
86     key: "companyCount",
87     aliases: ["companyCount", "companyTotal", "totalCompanies", "companies"],
88     label: "医药企业",
89     unit: "家",
90     icon: "el-icon-office-building",
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
93 ];
94
95 export default {
96   name: "welcome",
```

● 问题代码74：

华为云 CodeArts Check 代码扫描报告

```
91     color: "linear-gradient(135deg, #7a66ee, #a58cf5)",
92   },
93 ];
94
95 export default {
96   name: "welcome",
97   data() {
98     return {
99       dashboardLoading: false,
100       dashboardDegraded: false,
101       dashboardData: {},
```

- 问题代码75：

```
177     </el-dialog>
178   </el-container>
179 </template>
180
181 <script>
182 import Pagination from "../../components/Pagination";
183 import { mapGetters } from "vuex";
184 import rules from "../../utils/validator";
185
186 export default {
187   name: "CompanyManage",
```

- 问题代码76：

```
178   </el-container>
179 </template>
180
181 <script>
182 import Pagination from "../../components/Pagination";
183 import { mapGetters } from "vuex";
184 import rules from "../../utils/validator";
185
186 export default {
187   name: "CompanyManage",
188   components: {
```

- 问题代码77：

```
179 </template>
180
181 <script>
182 import Pagination from "../../components/Pagination";
183 import { mapGetters } from "vuex";
184 import rules from "../../utils/validator";
185
186 export default {
187   name: "CompanyManage",
188   components: {
189     Pagination,
```

- 问题代码78：

华为云 CodeArts Check 代码扫描报告

```
182 import Pagination from "../../components/Pagination";
183 import { mapGetters } from "vuex";
184 import rules from "../../utils/validator";
185
186 export default {
187   name: "CompanyManage",
188   components: {
189     Pagination,
190   },
191   data() {
192     return {
```

● 问题代码79：

```
321   mounted() {
322     this.getCompanyInfo(); // 首次渲染
323   },
324   computed: {
325     ...mapGetters({
326       tableData: "companyInfo",
327     }), //后端返回的数据
328     keyword: {
329       get() {
330         return this.keywordDefault;
331       },
```

● 问题代码80：

```
235   </el-dialog>
236 </el-container>
237 </template>
238
239 <script>
240 import Pagination from "../../components/Pagination";
241 import { mapGetters } from "vuex";
242 import rules, { searchRules } from "../../utils/validator";
243 import dayjs from "dayjs";
244 export default {
245   name: "MedicalPolicyManage",
```

● 问题代码81：

```
236   </el-container>
237 </template>
238
239 <script>
240 import Pagination from "../../components/Pagination";
241 import { mapGetters } from "vuex";
242 import rules, { searchRules } from "../../utils/validator";
243 import dayjs from "dayjs";
244 export default {
245   name: "MedicalPolicyManage",
246   components: {
```

● 问题代码82：

```

237 </template>
238
239 <script>
240 import Pagination from "../../components/Pagination";
241 import { mapGetters } from "vuex";
242 import rules, { searchRules } from "../../utils/validator";
243 import dayjs from "dayjs";
244 export default {
245   name: "MedicalPolicyManage",
246   components: {
247     Pagination,

```

● 问题代码83：

```

238
239 <script>
240 import Pagination from "../../components/Pagination";
241 import { mapGetters } from "vuex";
242 import rules, { searchRules } from "../../utils/validator";
243 import dayjs from "dayjs";
244 export default {
245   name: "MedicalPolicyManage",
246   components: {
247     Pagination,
248   },

```

● 问题代码84：

```

240 import Pagination from "../../components/Pagination";
241 import { mapGetters } from "vuex";
242 import rules, { searchRules } from "../../utils/validator";
243 import dayjs from "dayjs";
244 export default {
245   name: "MedicalPolicyManage",
246   components: {
247     Pagination,
248   },
249   data() {
250     return {

```

● 问题代码85：

```

385   this.getMedicalPolicyInfo();
386   this.$store.dispatch("cityInfoManage/getAllCityInfo");
387 },
388 computed: {
389   ...mapGetters({
390     tableData: "medicalPolicyInfo",
391     cityInfo: "cityInfo",
392   }), //后端返回的数据
393   params() {
394     //查询操作用到的参数
395     return {

```

● 问题代码86：

华为云 CodeArts Check 代码扫描报告

```
386     this.$store.dispatch("cityInfoManage/getAllCityInfo");
387   },
388   computed: {
389     ...mapGetters({
390       tableData: "medicalPolicyInfo",
391       cityInfo: "cityInfo",
392     }), //后端返回的数据
393     params() {
394       //查询操作用到的参数
395       return {
396         pn: this.currentPage,
```

● 问题代码87：

```
199     </el-dialog>
200   </el-container>
201 </template>
202
203 <script>
204 import Pagination from "../../components/Pagination";
205 import { mapGetters } from "vuex";
206 import rules from "../../utils/validator";
207 import dayjs from "dayjs";
208
209 export default {
```

● 问题代码88：

```
200   </el-container>
201 </template>
202
203 <script>
204 import Pagination from "../../components/Pagination";
205 import { mapGetters } from "vuex";
206 import rules from "../../utils/validator";
207 import dayjs from "dayjs";
208
209 export default {
210   name: "CompanyPolicy",
```

● 问题代码89：

```
201 </template>
202
203 <script>
204 import Pagination from "../../components/Pagination";
205 import { mapGetters } from "vuex";
206 import rules from "../../utils/validator";
207 import dayjs from "dayjs";
208
209 export default {
210   name: "CompanyPolicy",
211   components: {
```

● 问题代码90：

```

202
203 <script>
204 import Pagination from "../../components/Pagination";
205 import { mapGetters } from "vuex";
206 import rules from "../../utils/validator";
207 import dayjs from "dayjs";
208
209 export default {
210   name: "CompanyPolicy",
211   components: {
212     Pagination,

```

● 问题代码91：

```

205 import { mapGetters } from "vuex";
206 import rules from "../../utils/validator";
207 import dayjs from "dayjs";
208
209 export default {
210   name: "CompanyPolicy",
211   components: {
212     Pagination,
213   },
214   data() {
215     return {

```

- 问题73: medical-managerment-system/src/views/MaterialManage/index.
vue:184,187,188,192,193,194,313,316,317,318,319,324,325,326,327,328,332,333,294,295,299,303,304,310,311,313,321,325,326,327,328,329,330,331,332,336,337,338,339,340,341,342,343,346,348,103,104,105,106,107,110,110,111,111,112,112,113,113,114,114,115,115,195,198,199,203,204,205,256,257,258,259,262,263,264,265,269,270,271,272,218,221,222,223,227,228,229,230

● 问题代码1：

```

179   },
180   data() {
181     return {
182       currentPage: 1,
183       pageSize: 5,
184       keywordDefault: "",
185       addFormVisible: false,
186       addForm: {
187         title: "",
188         message: "",
189       },

```

● 问题代码2：

```

182     currentPage: 1,
183     pageSize: 5,
184     keywordDefault: "",
185     addFormVisible: false,
186     addForm: {
187         title: "",
188         message: "",
189     },
190     modifyFormVisible: false,
191     modifyForm: {
192         id: "",

```

● 问题代码3：

```

183     pageSize: 5,
184     keywordDefault: "",
185     addFormVisible: false,
186     addForm: {
187         title: "",
188         message: "",
189     },
190     modifyFormVisible: false,
191     modifyForm: {
192         id: "",
193         message: "",

```

● 问题代码4：

```

187         title: "",
188         message: "",
189     },
190     modifyFormVisible: false,
191     modifyForm: {
192         id: "",
193         message: "",
194         title: "",
195     },
196     rules,
197 };

```

● 问题代码5：

```

188         message: "",
189     },
190     modifyFormVisible: false,
191     modifyForm: {
192         id: "",
193         message: "",
194         title: "",
195     },
196     rules,
197 };
198 },

```

● 问题代码6：

```

189     },
190     modifyFormVisible: false,
191     modifyForm: {
192         id: "",
193         message: "",
194         title: "",
195     },
196     rules,
197 };
198 },
199 methods:{

```

● 问题代码7：

```

308 },
309 data() {
310     return {
311         currentPage: 1,
312         pageSize: 5, // 每页的数据条数
313         keywordDefault: "",
314         addFormVisible: false, // 控制新增药品页面的显示
315         addForm: {
316             drugName: "",
317             drugInfo: "",
318             drugEffect: "",

```

● 问题代码8：

```

311         currentPage: 1,
312         pageSize: 5, // 每页的数据条数
313         keywordDefault: "",
314         addFormVisible: false, // 控制新增药品页面的显示
315         addForm: {
316             drugName: "",
317             drugInfo: "",
318             drugEffect: "",
319             drugImg: "",
320             saleIds: [],
321         },

```

● 问题代码9：

```

312         pageSize: 5, // 每页的数据条数
313         keywordDefault: "",
314         addFormVisible: false, // 控制新增药品页面的显示
315         addForm: {
316             drugName: "",
317             drugInfo: "",
318             drugEffect: "",
319             drugImg: "",
320             saleIds: [],
321         },
322         modifyFormVisible: false, // 控制修改信息页面的显示

```

● 问题代码10：

华为云 CodeArts Check 代码扫描报告

```
313     keywordDefault: "",
314     addFormVisible: false, // 控制新增药品页面的显示
315     addForm: {
316         drugName: "",
317         drugInfo: "",
318         drugEffect: "",
319         drugImg: "",
320         saleIds: [],
321     },
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
```

● 问题代码11：

```
314     addFormVisible: false, // 控制新增药品页面的显示
315     addForm: {
316         drugName: "",
317         drugInfo: "",
318         drugEffect: "",
319         drugImg: "",
320         saleIds: [],
321     },
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
324         drugId: "",
```

● 问题代码12：

```
319         drugImg: "",
320         saleIds: [],
321     },
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
324         drugId: "",
325         drugName: "",
326         drugInfo: "",
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
```

● 问题代码13：

```
320         saleIds: [],
321     },
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
324         drugId: "",
325         drugName: "",
326         drugInfo: "",
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
330     },
```

● 问题代码14：

华为云 CodeArts Check 代码扫描报告

```
321     },
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
324         drugId: "",
325         drugName: "",
326         drugInfo: "",
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
330     },
331     rules, // 封装好的表单验证
```

● 问题代码15：

```
322     modifyFormVisible: false, // 控制修改信息页面的显示
323     modifyForm: {
324         drugId: "",
325         drugName: "",
326         drugInfo: "",
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
330     },
331     rules, // 封装好的表单验证
332     token: localStorage.getItem("token"), //用于给上传操作添加token请求头
```

● 问题代码16：

```
323     modifyForm: {
324         drugId: "",
325         drugName: "",
326         drugInfo: "",
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
330     },
331     rules, // 封装好的表单验证
332     token: localStorage.getItem("token"), //用于给上传操作添加token请求头
333     actionUrl: resolveApiUrl("/base/upload"), //图片上传接口
```

● 问题代码17：

```
327         drugEffect: "",
328         drugImg: "",
329         saleIds: [],
330     },
331     rules, // 封装好的表单验证
332     token: localStorage.getItem("token"), //用于给上传操作添加token请求头
333     actionUrl: resolveApiUrl("/base/upload"), //图片上传接口
334     uploading: false, // 是否显示上传进度条
335     percentage: 0, // 进度条进度
336     status: null, // 进度条状态
337     };
```

● 问题代码18：

华为云 CodeArts Check 代码扫描报告

```
328     drugImg: "",
329     saleIds: [],
330   },
331   rules, // 封装好的表单验证
332   token: localStorage.getItem("token"), //用于给上传操作添加token请求头
333   actionUrl: resolveApiUrl("/base/upload"), //图片上传接口
334   uploading: false, // 是否显示上传进度条
335   percentage: 0, // 进度条进度
336   status: null, // 进度条状态
337 };
338 },
```

• 问题代码19：

```
289   components: {
290     Pagination,
291   },
292   data() {
293     let validatorPass = (rule, value, callback) => {
294       if (value === "") {
295         callback(new Error("请输入密码"));
296       } else if (!validatePass(value)) {
297         callback(
298           new Error(
299             "密码应以字母开头 长度在5~18之间 只能包含字母、数字和下划线"
```

• 问题代码20：

```
290     Pagination,
291   },
292   data() {
293     let validatorPass = (rule, value, callback) => {
294       if (value === "") {
295         callback(new Error("请输入密码"));
296       } else if (!validatePass(value)) {
297         callback(
298           new Error(
299             "密码应以字母开头 长度在5~18之间 只能包含字母、数字和下划线"
300         )
301       }
302     }
303   },
304   validate() {
305     this.$refs.addForm.validateField("pwdCheck");
306   },
307   methods: {
308     validate() {
309       this.$refs.addForm.validateField("pwdCheck");
310     }
311   }
312 },
313 },
314 },
315 },
316 },
317 },
318 },
319 },
320 },
321 },
322 },
323 },
324 },
325 },
326 },
327 },
328 },
329 },
330 },
331 },
332 },
333 },
334 },
335 },
336 },
337 },
338 },
339 },
340 },
341 },
342 },
343 },
344 },
345 },
346 },
347 },
348 },
349 },
350 },
351 },
352 },
353 },
354 },
355 },
356 },
357 },
358 },
359 },
360 },
361 },
362 },
363 },
364 },
365 },
366 },
367 },
368 },
369 },
370 },
371 },
372 },
373 },
374 },
375 },
376 },
377 },
378 },
379 },
380 },
381 },
382 },
383 },
384 },
385 },
386 },
387 },
388 },
389 },
390 },
391 },
392 },
393 },
394 },
395 },
396 },
397 },
398 },
399 },
400 },
401 },
402 },
403 },
404 },
405 },
406 },
407 },
408 },
409 },
410 },
411 },
412 },
413 },
414 },
415 },
416 },
417 },
418 },
419 },
420 },
421 },
422 },
423 },
424 },
425 },
426 },
427 },
428 },
429 },
430 },
431 },
432 },
433 },
434 },
435 },
436 },
437 },
438 },
439 },
440 },
441 },
442 },
443 },
444 },
445 },
446 },
447 },
448 },
449 },
450 },
451 },
452 },
453 },
454 },
455 },
456 },
457 },
458 },
459 },
460 },
461 },
462 },
463 },
464 },
465 },
466 },
467 },
468 },
469 },
470 },
471 },
472 },
473 },
474 },
475 },
476 },
477 },
478 },
479 },
480 },
481 },
482 },
483 },
484 },
485 },
486 },
487 },
488 },
489 },
490 },
491 },
492 },
493 },
494 },
495 },
496 },
497 },
498 },
499 },
500 },
501 },
502 },
503 },
504 },
505 },
506 },
507 },
508 },
509 },
510 },
511 },
512 },
513 },
514 },
515 },
516 },
517 },
518 },
519 },
520 },
521 },
522 },
523 },
524 },
525 },
526 },
527 },
528 },
529 },
530 },
531 },
532 },
533 },
534 },
535 },
536 },
537 },
538 },
539 },
540 },
541 },
542 },
543 },
544 },
545 },
546 },
547 },
548 },
549 },
550 },
551 },
552 },
553 },
554 },
555 },
556 },
557 },
558 },
559 },
560 },
561 },
562 },
563 },
564 },
565 },
566 },
567 },
568 },
569 },
570 },
571 },
572 },
573 },
574 },
575 },
576 },
577 },
578 },
579 },
580 },
581 },
582 },
583 },
584 },
585 },
586 },
587 },
588 },
589 },
590 },
591 },
592 },
593 },
594 },
595 },
596 },
597 },
598 },
599 },
600 },
601 },
602 },
603 },
604 },
605 },
606 },
607 },
608 },
609 },
610 },
611 },
612 },
613 },
614 },
615 },
616 },
617 },
618 },
619 },
620 },
621 },
622 },
623 },
624 },
625 },
626 },
627 },
628 },
629 },
630 },
631 },
632 },
633 },
634 },
635 },
636 },
637 },
638 },
639 },
640 },
641 },
642 },
643 },
644 },
645 },
646 },
647 },
648 },
649 },
650 },
651 },
652 },
653 },
654 },
655 },
656 },
657 },
658 },
659 },
660 },
661 },
662 },
663 },
664 },
665 },
666 },
667 },
668 },
669 },
670 },
671 },
672 },
673 },
674 },
675 },
676 },
677 },
678 },
679 },
680 },
681 },
682 },
683 },
684 },
685 },
686 },
687 },
688 },
689 },
690 },
691 },
692 },
693 },
694 },
695 },
696 },
697 },
698 },
699 },
700 },
701 },
702 },
703 },
704 },
705 },
706 },
707 },
708 },
709 },
710 },
711 },
712 },
713 },
714 },
715 },
716 },
717 },
718 },
719 },
720 },
721 },
722 },
723 },
724 },
725 },
726 },
727 },
728 },
729 },
730 },
731 },
732 },
733 },
734 },
735 },
736 },
737 },
738 },
739 },
740 },
741 },
742 },
743 },
744 },
745 },
746 },
747 },
748 },
749 },
750 },
751 },
752 },
753 },
754 },
755 },
756 },
757 },
758 },
759 },
760 },
761 },
762 },
763 },
764 },
765 },
766 },
767 },
768 },
769 },
770 },
771 },
772 },
773 },
774 },
775 },
776 },
777 },
778 },
779 },
780 },
781 },
782 },
783 },
784 },
785 },
786 },
787 },
788 },
789 },
790 },
791 },
792 },
793 },
794 },
795 },
796 },
797 },
798 },
799 },
800 },
801 },
802 },
803 },
804 },
805 },
806 },
807 },
808 },
809 },
810 },
811 },
812 },
813 },
814 },
815 },
816 },
817 },
818 },
819 },
820 },
821 },
822 },
823 },
824 },
825 },
826 },
827 },
828 },
829 },
830 },
831 },
832 },
833 },
834 },
835 },
836 },
837 },
838 },
839 },
840 },
841 },
842 },
843 },
844 },
845 },
846 },
847 },
848 },
849 },
850 },
851 },
852 },
853 },
854 },
855 },
856 },
857 },
858 },
859 },
860 },
861 },
862 },
863 },
864 },
865 },
866 },
867 },
868 },
869 },
870 },
871 },
872 },
873 },
874 },
875 },
876 },
877 },
878 },
879 },
880 },
881 },
882 },
883 },
884 },
885 },
886 },
887 },
888 },
889 },
890 },
891 },
892 },
893 },
894 },
895 },
896 },
897 },
898 },
899 },
900 },
901 },
902 },
903 },
904 },
905 },
906 },
907 },
908 },
909 },
910 },
911 },
912 },
913 },
914 },
915 },
916 },
917 },
918 },
919 },
920 },
921 },
922 },
923 },
924 },
925 },
926 },
927 },
928 },
929 },
930 },
931 },
932 },
933 },
934 },
935 },
936 },
937 },
938 },
939 },
940 },
941 },
942 },
943 },
944 },
945 },
946 },
947 },
948 },
949 },
950 },
951 },
952 },
953 },
954 },
955 },
956 },
957 },
958 },
959 },
960 },
961 },
962 },
963 },
964 },
965 },
966 },
967 },
968 },
969 },
970 },
971 },
972 },
973 },
974 },
975 },
976 },
977 },
978 },
979 },
980 },
981 },
982 },
983 },
984 },
985 },
986 },
987 },
988 },
989 },
990 },
991 },
992 },
993 },
994 },
995 },
996 },
997 },
998 },
999 },
1000 }
```

• 问题代码21：

```
294     if (value === "") {
295       callback(new Error("请输入密码"));
296     } else if (!validatePass(value)) {
297       callback(
298         new Error(
299           "密码应以字母开头 长度在5~18之间 只能包含字母、数字和下划线"
300         )
301       );
302     } else {
303       if (this.addForm.pwdCheck !== "") {
304         this.$refs.addForm.validateField("pwdCheck");
305       }
306     }
307   },
308   validate() {
309     this.$refs.addForm.validateField("pwdCheck");
310   },
311   methods: {
312     validate() {
313       this.$refs.addForm.validateField("pwdCheck");
314     }
315   }
316 },
317 },
318 },
319 },
320 },
321 },
322 },
323 },
324 },
325 },
326 },
327 },
328 },
329 },
330 },
331 },
332 },
333 },
334 },
335 },
336 },
337 },
338 },
339 },
340 },
341 },
342 },
343 },
344 },
345 },
346 },
347 },
348 },
349 },
350 },
351 },
352 },
353 },
354 },
355 },
356 },
357 },
358 },
359 },
360 },
361 },
362 },
363 },
364 },
365 },
366 },
367 },
368 },
369 },
370 },
371 },
372 },
373 },
374 },
375 },
376 },
377 },
378 },
379 },
380 },
381 },
382 },
383 },
384 },
385 },
386 },
387 },
388 },
389 },
390 },
391 },
392 },
393 },
394 },
395 },
396 },
397 },
398 },
399 },
400 },
401 },
402 },
403 },
404 },
405 },
406 },
407 },
408 },
409 },
410 },
411 },
412 },
413 },
414 },
415 },
416 },
417 },
418 },
419 },
420 },
421 },
422 },
423 },
424 },
425 },
426 },
427 },
428 },
429 },
430 },
431 },
432 },
433 },
434 },
435 },
436 },
437 },
438 },
439 },
440 },
441 },
442 },
443 },
444 },
445 },
446 },
447 },
448 },
449 },
450 },
451 },
452 },
453 },
454 },
455 },
456 },
457 },
458 },
459 },
460 },
461 },
462 },
463 },
464 },
465 },
466 },
467 },
468 },
469 },
470 },
471 },
472 },
473 },
474 },
475 },
476 },
477 },
478 },
479 },
480 },
481 },
482 },
483 },
484 },
485 },
486 },
487 },
488 },
489 },
490 },
491 },
492 },
493 },
494 },
495 },
496 },
497 },
498 },
499 },
500 },
501 },
502 },
503 },
504 },
505 },
506 },
507 },
508 },
509 },
510 },
511 },
512 },
513 },
514 },
515 },
516 },
517 },
518 },
519 },
520 },
521 },
522 },
523 },
524 },
525 },
526 },
527 },
528 },
529 },
530 },
531 },
532 },
533 },
534 },
535 },
536 },
537 },
538 },
539 },
540 },
541 },
542 },
543 },
544 },
545 },
546 },
547 },
548 },
549 },
550 },
551 },
552 },
553 },
554 },
555 },
556 },
557 },
558 },
559 },
560 },
561 },
562 },
563 },
564 },
565 },
566 },
567 },
568 },
569 },
570 },
571 },
572 },
573 },
574 },
575 },
576 },
577 },
578 },
579 },
580 },
581 },
582 },
583 },
584 },
585 },
586 },
587 },
588 },
589 },
590 },
591 },
592 },
593 },
594 },
595 },
596 },
597 },
598 },
599 },
600 },
601 },
602 },
603 },
604 },
605 },
606 },
607 },
608 },
609 },
610 },
611 },
612 },
613 },
614 },
615 },
616 },
617 },
618 },
619 },
620 },
621 },
622 },
623 },
624 },
625 },
626 },
627 },
628 },
629 },
630 },
631 },
632 },
633 },
634 },
635 },
636 },
637 },
638 },
639 },
640 },
641 },
642 },
643 },
644 },
645 },
646 },
647 },
648 },
649 },
650 },
651 },
652 },
653 },
654 },
655 },
656 },
657 },
658 },
659 },
660 },
661 },
662 },
663 },
664 },
665 },
666 },
667 },
668 },
669 },
670 },
671 },
672 },
673 },
674 },
675 },
676 },
677 },
678 },
679 },
680 },
681 },
682 },
683 },
684 },
685 },
686 },
687 },
688 },
689 },
690 },
691 },
692 },
693 },
694 },
695 },
696 },
697 },
698 },
699 },
700 },
701 },
702 },
703 },
704 },
705 },
706 },
707 },
708 },
709 },
710 },
711 },
712 },
713 },
714 },
715 },
716 },
717 },
718 },
719 },
720 },
721 },
722 },
723 },
724 },
725 },
726 },
727 },
728 },
729 },
730 },
731 },
732 },
733 },
734 },
735 },
736 },
737 },
738 },
739 },
740 },
741 },
742 },
743 },
744 },
745 },
746 },
747 },
748 },
749 },
750 },
751 },
752 },
753 },
754 },
755 },
756 },
757 },
758 },
759 },
760 },
761 },
762 },
763 },
764 },
765 },
766 },
767 },
768 },
769 },
770 },
771 },
772 },
773 },
774 },
775 },
776 },
777 },
778 },
779 },
780 },
781 },
782 },
783 },
784 },
785 },
786 },
787 },
788 },
789 },
790 },
791 },
792 },
793 },
794 },
795 },
796 },
797 },
798 },
799 },
800 },
801 },
802 },
803 },
804 },
805 },
806 },
807 },
808 },
809 },
810 },
811 },
812 },
813 },
814 },
815 },
816 },
817 },
818 },
819 },
820 },
821 },
822 },
823 },
824 },
825 },
826 },
827 },
828 },
829 },
830 },
831 },
832 },
833 },
834 },
835 },
836 },
837 },
838 },
839 },
840 },
841 },
842 },
843 },
844 },
845 },
846 },
847 },
848 },
849 },
850 },
851 },
852 },
853 },
854 },
855 },
856 },
857 },
858 },
859 },
860 },
861 },
862 },
863 },
864 },
865 },
866 },
867 },
868 },
869 },
870 },
871 },
872 },
873 },
874 },
875 },
876 },
877 },
878 },
879 },
880 },
881 },
882 },
883 },
884 },
885 },
886 },
887 },
888 },
889 },
890 },
891 },
892 },
893 },
894 },
895 },
896 },
897 },
898 },
899 },
900 },
901 },
902 },
903 },
904 },
905 },
906 },
907 },
908 },
909 },
910 },
911 },
912 },
913 },
914 },
915 },
916 },
917 },
918 },
919 },
920 },
921 },
922 },
923 },
924 },
925 },
926 },
927 },
928 },
929 },
930 },
931 },
932 },
933 },
934 },
935 },
936 },
937 },
938 },
939 },
940 },
941 },
942 },
943 },
944 },
945 },
946 },
947 },
948 },
949 },
950 },
951 },
952 },
953 },
954 },
955 },
956 },
957 },
958 },
959 },
960 },
961 },
962 },
963 },
964 },
965 },
966 },
967 },
968 },
969 },
970 },
971 },
972 },
973 },
974 },
975 },
976 },
977 },
978 },
979 },
980 },
981 },
982 },
983 },
984 },
985 },
986 },
987 },
988 },
989 },
990 },
991 },
992 },
993 },
994 },
995 },
996 },
997 },
998 },
999 },
1000 }
```

• 问题代码22：

华为云 CodeArts Check 代码扫描报告

```
298         new Error(  
299             "密码应以字母开头 长度在5~18之间 只能包含字母、数字和下划线"  
300         )  
301     );  
302 } else {  
303     if (this.addForm.pwdCheck !== "") {  
304         this.$refs.addForm.validateField("pwdCheck");  
305     }  
306     callback();  
307 }  
308 };
```

• 问题代码23：

```
299         "密码应以字母开头 长度在5~18之间 只能包含字母、数字和下划线"  
300     )  
301     );  
302 } else {  
303     if (this.addForm.pwdCheck !== "") {  
304         this.$refs.addForm.validateField("pwdCheck");  
305     }  
306     callback();  
307 }  
308 };  
309 let validatorPass2 = (rule, value, callback) => {
```

• 问题代码24：

```
305     }  
306     callback();  
307 }  
308 };  
309 let validatorPass2 = (rule, value, callback) => {  
310     if (value === "") {  
311         callback(new Error("请再次输入密码"));  
312     } else if (value !== this.addForm.pwd) {  
313         callback(new Error("两次输入密码不一致!"));  
314     } else {  
315         callback();  
316     }  
317 }  
318 };
```

• 问题代码25：

```
306     callback();  
307 }  
308 };  
309 let validatorPass2 = (rule, value, callback) => {  
310     if (value === "") {  
311         callback(new Error("请再次输入密码"));  
312     } else if (value !== this.addForm.pwd) {  
313         callback(new Error("两次输入密码不一致!"));  
314     } else {  
315         callback();  
316     }  
317 }  
318 };
```

• 问题代码26：

```

308     };
309     let validatorPass2 = (rule, value, callback) => {
310         if (value === "") {
311             callback(new Error("请再次输入密码"));
312         } else if (value !== this.addForm.pwd) {
313             callback(new Error("两次输入密码不一致!"));
314         } else {
315             callback();
316         }
317     };
318     return {

```

• 问题代码27：

```

316     }
317 };
318 return {
319     currentPage: 1,
320     pageSize: 5, // 每页的数据条数
321     keywordDefault: "",
322     addFormVisible: false, // 控制新增页面的显示
323     resetPwdDialogVisible: false, //控制重置密码对话框显示
324     addForm: {
325         age: "",
326         levelId: "",

```

• 问题代码28：

```

320     pageSize: 5, // 每页的数据条数
321     keywordDefault: "",
322     addFormVisible: false, // 控制新增页面的显示
323     resetPwdDialogVisible: false, //控制重置密码对话框显示
324     addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",

```

• 问题代码29：

```

321     keywordDefault: "",
322     addFormVisible: false, // 控制新增页面的显示
323     resetPwdDialogVisible: false, //控制重置密码对话框显示
324     addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",
331         sex: "",

```

• 问题代码30：

华为云 CodeArts Check 代码扫描报告

```
322     addFormVisible: false, // 控制新增页面的显示
323     resetPwdDialogVisible: false, //控制重置密码对话框显示
324     addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",
331         sex: "",
332         typeId: "",
```

● 问题代码31：

```
323     resetPwdDialogVisible: false, //控制重置密码对话框显示
324     addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",
331         sex: "",
332         typeId: "",
333     },
```

● 问题代码32：

```
324     addForm: {
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",
331         sex: "",
332         typeId: "",
333     },
334     modifyFormVisible: false, // 控制修改信息页面的显示
```

● 问题代码33：

```
325         age: "",
326         levelId: "",
327         name: "",
328         phoneNumber: "",
329         pwd: "",
330         pwdCheck: "",
331         sex: "",
332         typeId: "",
333     },
334     modifyFormVisible: false, // 控制修改信息页面的显示
335     modifyForm: {
```

● 问题代码34：

华为云 CodeArts Check 代码扫描报告

```
326     levelId: "",
327     name: "",
328     phoneNumber: "",
329     pwd: "",
330     pwdCheck: "",
331     sex: "",
332     typeId: "",
333 },
334 modifyFormVisible: false, // 控制修改信息页面的显示
335 modifyForm: {
336     accountId: "",
```

● 问题代码35：

```
327     name: "",
328     phoneNumber: "",
329     pwd: "",
330     pwdCheck: "",
331     sex: "",
332     typeId: "",
333 },
334 modifyFormVisible: false, // 控制修改信息页面的显示
335 modifyForm: {
336     accountId: "",
337     age: "",
```

● 问题代码36：

```
331     sex: "",
332     typeId: "",
333 },
334 modifyFormVisible: false, // 控制修改信息页面的显示
335 modifyForm: {
336     accountId: "",
337     age: "",
338     levelId: "",
339     name: "",
340     phoneNumber: "",
341     sex: "",
```

● 问题代码37：

```
332     typeId: "",
333 },
334 modifyFormVisible: false, // 控制修改信息页面的显示
335 modifyForm: {
336     accountId: "",
337     age: "",
338     levelId: "",
339     name: "",
340     phoneNumber: "",
341     sex: "",
342     typeId: "",
```

● 问题代码38：

华为云 CodeArts Check 代码扫描报告

```
333     },
334     modifyFormVisible: false, // 控制修改信息页面的显示
335     modifyForm: {
336         accountId: "",
337         age: "",
338         levelId: "",
339         name: "",
340         phoneNumber: "",
341         sex: "",
342         typeId: "",
343         id: "",
```

● 问题代码39：

```
334     modifyFormVisible: false, // 控制修改信息页面的显示
335     modifyForm: {
336         accountId: "",
337         age: "",
338         levelId: "",
339         name: "",
340         phoneNumber: "",
341         sex: "",
342         typeId: "",
343         id: "",
344     },
```

● 问题代码40：

```
335     modifyForm: {
336         accountId: "",
337         age: "",
338         levelId: "",
339         name: "",
340         phoneNumber: "",
341         sex: "",
342         typeId: "",
343         id: "",
344     },
345     doctorRules, // 封装好的表单验证
```

● 问题代码41：

```
336         accountId: "",
337         age: "",
338         levelId: "",
339         name: "",
340         phoneNumber: "",
341         sex: "",
342         typeId: "",
343         id: "",
344     },
345     doctorRules, // 封装好的表单验证
346     pwdRules: [{ required: true, validator: validatorPass, trigger: "blur" }],
```

● 问题代码42：

华为云 CodeArts Check 代码扫描报告

```
337     age: "",
338     levelId: "",
339     name: "",
340     phoneNumber: "",
341     sex: "",
342     typeId: "",
343     id: "",
344   },
345   doctorRules, // 封装好的表单验证
346   pwdRules: [{ required: true, validator: validatorPass, trigger: "blur" }],
347   checkPwdRules: [
```

● 问题代码43：

```
338     levelId: "",
339     name: "",
340     phoneNumber: "",
341     sex: "",
342     typeId: "",
343     id: "",
344   },
345   doctorRules, // 封装好的表单验证
346   pwdRules: [{ required: true, validator: validatorPass, trigger: "blur" }],
347   checkPwdRules: [
348     { required: true, validator: validatorPass2, trigger: "blur" },
```

● 问题代码44：

```
341     sex: "",
342     typeId: "",
343     id: "",
344   },
345   doctorRules, // 封装好的表单验证
346   pwdRules: [{ required: true, validator: validatorPass, trigger: "blur" }],
347   checkPwdRules: [
348     { required: true, validator: validatorPass2, trigger: "blur" },
349   ],
350   };
351 },
```

● 问题代码45：

```
343     id: "",
344   },
345   doctorRules, // 封装好的表单验证
346   pwdRules: [{ required: true, validator: validatorPass, trigger: "blur" }],
347   checkPwdRules: [
348     { required: true, validator: validatorPass2, trigger: "blur" },
349   ],
350   };
351 },
352   methods: {
353     // 切换分页及首次进入获取数据
```

● 问题代码46：

华为云 CodeArts Check 代码扫描报告

```
98     return {
99         dashboardLoading: false,
100         dashboardDegraded: false,
101         dashboardData: {},
102         picList: [
103             { image: require("../assets/hU1LAP.png") },
104             { image: require("../assets/hU1H0I.png") },
105             { image: require("../assets/hU1OtF.jpg") },
106             { image: require("../assets/hU1b7t.jpg") },
107             { image: require("../assets/hU17nA.jpg") },
108         ],
```

● 问题代码47：

```
99         dashboardLoading: false,
100         dashboardDegraded: false,
101         dashboardData: {},
102         picList: [
103             { image: require("../assets/hU1LAP.png") },
104             { image: require("../assets/hU1H0I.png") },
105             { image: require("../assets/hU1OtF.jpg") },
106             { image: require("../assets/hU1b7t.jpg") },
107             { image: require("../assets/hU17nA.jpg") },
108         ],
109         cardList: [
```

● 问题代码48：

```
100         dashboardDegraded: false,
101         dashboardData: {},
102         picList: [
103             { image: require("../assets/hU1LAP.png") },
104             { image: require("../assets/hU1H0I.png") },
105             { image: require("../assets/hU1OtF.jpg") },
106             { image: require("../assets/hU1b7t.jpg") },
107             { image: require("../assets/hU17nA.jpg") },
108         ],
109         cardList: [
110             { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
```

● 问题代码49：

```
101         dashboardData: {},
102         picList: [
103             { image: require("../assets/hU1LAP.png") },
104             { image: require("../assets/hU1H0I.png") },
105             { image: require("../assets/hU1OtF.jpg") },
106             { image: require("../assets/hU1b7t.jpg") },
107             { image: require("../assets/hU17nA.jpg") },
108         ],
109         cardList: [
110             { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111             { pic: require("../assets/hU0KdF.jpg"), content: "药品信息管理" },
```

● 问题代码50：

华为云 CodeArts Check 代码扫描报告

```
102     picList: [  
103       { image: require("../assets/hU1LAP.png") },  
104       { image: require("../assets/hU1H0I.png") },  
105       { image: require("../assets/hU10tf.jpg") },  
106       { image: require("../assets/hU1b7t.jpg") },  
107       { image: require("../assets/hU17nA.jpg") },  
108     ],  
109     cardList: [  
110       { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },  
111       { pic: require("../assets/hU0KDf.jpg"), content: "药品信息管理" },  
112       { pic: require("../assets/hUBref.jpg"), content: "医保政策管理" },
```

● 问题代码51 :

```
105       { image: require("../assets/hU10tf.jpg") },  
106       { image: require("../assets/hU1b7t.jpg") },  
107       { image: require("../assets/hU17nA.jpg") },  
108     ],  
109     cardList: [  
110       { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },  
111       { pic: require("../assets/hU0KDf.jpg"), content: "药品信息管理" },  
112       { pic: require("../assets/hUBref.jpg"), content: "医保政策管理" },  
113       { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },  
114       { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },  
115       { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
```

● 问题代码52 :

```
105       { image: require("../assets/hU10tf.jpg") },  
106       { image: require("../assets/hU1b7t.jpg") },  
107       { image: require("../assets/hU17nA.jpg") },  
108     ],  
109     cardList: [  
110       { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },  
111       { pic: require("../assets/hU0KDf.jpg"), content: "药品信息管理" },  
112       { pic: require("../assets/hUBref.jpg"), content: "医保政策管理" },  
113       { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },  
114       { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },  
115       { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
```

● 问题代码53 :

```
106       { image: require("../assets/hU1b7t.jpg") },  
107       { image: require("../assets/hU17nA.jpg") },  
108     ],  
109     cardList: [  
110       { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },  
111       { pic: require("../assets/hU0KDf.jpg"), content: "药品信息管理" },  
112       { pic: require("../assets/hUBref.jpg"), content: "医保政策管理" },  
113       { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },  
114       { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },  
115       { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },  
116     ],
```

● 问题代码54 :

华为云 CodeArts Check 代码扫描报告

```
106     { image: require("../assets/hU1b7t.jpg") },
107     { image: require("../assets/hU17nA.jpg") },
108   ],
109   cardList: [
110     { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111     { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112     { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113     { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114     { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115     { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116   ],
```

● 问题代码55：

```
107     { image: require("../assets/hU17nA.jpg") },
108   ],
109   cardList: [
110     { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111     { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112     { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113     { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114     { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115     { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116   ],
117   };
```

● 问题代码56：

```
107     { image: require("../assets/hU17nA.jpg") },
108   ],
109   cardList: [
110     { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111     { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112     { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113     { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114     { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115     { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116   ],
117   };
```

● 问题代码57：

```
108   ],
109   cardList: [
110     { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111     { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112     { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113     { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114     { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115     { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116   ],
117   };
118 },
```

● 问题代码58：

```

108     ],
109     cardList: [
110         { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111         { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112         { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113         { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114         { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115         { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116     ],
117 };
118 },

```

● 问题代码59：

```

109     cardList: [
110         { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111         { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112         { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113         { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114         { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115         { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116     ],
117 };
118 },
119 computed: {

```

● 问题代码60：

```

109     cardList: [
110         { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111         { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112         { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113         { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114         { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115         { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116     ],
117 };
118 },
119 computed: {

```

● 问题代码61：

```

110         { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111         { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112         { pic: require("../assets/hUBRef.jpg"), content: "医保政策管理" },
113         { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114         { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115         { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116     ],
117 };
118 },
119 computed: {
120     dashboardStatusText() {

```

● 问题代码62：

华为云 CodeArts Check 代码扫描报告

```
110      { pic: require("../assets/hUDHDP.jpg"), content: "基础信息管理" },
111      { pic: require("../assets/hU0KDF.jpg"), content: "药品信息管理" },
112      { pic: require("../assets/hUBref.jpg"), content: "医保政策管理" },
113      { pic: require("../assets/hU0yG9.jpg"), content: "企业政策管理" },
114      { pic: require("../assets/hUB2Wj.jpg"), content: "医生信息管理" },
115      { pic: require("../assets/hUDYn0.jpg"), content: "必备材料管理" },
116    ],
117  };
118 },
119 computed: {
120   dashboardStatusText() {
```

• 问题代码63：

```
190  },
191  data() {
192    return {
193      currentPage: 1,
194      pageSize: 5, // 每页的数据条数
195      keywordDefault: "",
196      addFormVisible: false, // 控制新增公司页面的显示
197      addForm: {
198        companyName: "",
199        companyPhone: "",
200      },
```

• 问题代码64：

```
193      currentPage: 1,
194      pageSize: 5, // 每页的数据条数
195      keywordDefault: "",
196      addFormVisible: false, // 控制新增公司页面的显示
197      addForm: {
198        companyName: "",
199        companyPhone: "",
200      },
201      modifyFormVisible: false, // 控制修改信息页面的显示
202      modifyForm: {
203        companyId: "",
```

• 问题代码65：

```
194      pageSize: 5, // 每页的数据条数
195      keywordDefault: "",
196      addFormVisible: false, // 控制新增公司页面的显示
197      addForm: {
198        companyName: "",
199        companyPhone: "",
200      },
201      modifyFormVisible: false, // 控制修改信息页面的显示
202      modifyForm: {
203        companyId: "",
204        companyName: "",
```

• 问题代码66：

华为云 CodeArts Check 代码扫描报告

```
198     companyName: "",
199     companyPhone: "",
200 },
201 modifyFormVisible: false, // 控制修改信息页面的显示
202 modifyForm: {
203     companyId: "",
204     companyName: "",
205     companyPhone: "",
206 },
207 rules, // 封装好的表单验证
208 };
```

• 问题代码67：

```
199     companyPhone: "",
200 },
201 modifyFormVisible: false, // 控制修改信息页面的显示
202 modifyForm: {
203     companyId: "",
204     companyName: "",
205     companyPhone: "",
206 },
207 rules, // 封装好的表单验证
208 };
209 },
```

• 问题代码68：

```
200 },
201 modifyFormVisible: false, // 控制修改信息页面的显示
202 modifyForm: {
203     companyId: "",
204     companyName: "",
205     companyPhone: "",
206 },
207 rules, // 封装好的表单验证
208 };
209 },
210 methods: {
```

• 问题代码69：

```
251     rules,
252     currentPage: 1,
253     pageSize: 5, // 每页的数据条数
254     searchLimit: {
255         // 查询条件
256         id: "",
257         title: "",
258         publishTime: "",
259         city: "",
260     },
261     addForm: {
```

• 问题代码70：

华为云 CodeArts Check 代码扫描报告

```
252     currentPage: 1,  
253     pageSize: 5, // 每页的数据条数  
254     searchLimit: {  
255         // 查询条件  
256         id: "",  
257         title: "",  
258         publishTime: "",  
259         city: "",  
260     },  
261     addForm: {  
262         title: "",
```

• 问题代码71：

```
253     pageSize: 5, // 每页的数据条数  
254     searchLimit: {  
255         // 查询条件  
256         id: "",  
257         title: "",  
258         publishTime: "",  
259         city: "",  
260     },  
261     addForm: {  
262         title: "",  
263         message: "",
```

• 问题代码72：

```
254     searchLimit: {  
255         // 查询条件  
256         id: "",  
257         title: "",  
258         publishTime: "",  
259         city: "",  
260     },  
261     addForm: {  
262         title: "",  
263         message: "",  
264         city: "",
```

• 问题代码73：

```
257         title: "",  
258         publishTime: "",  
259         city: "",  
260     },  
261     addForm: {  
262         title: "",  
263         message: "",  
264         city: "",  
265         updateTime: dayjs().format("YYYY-MM-DD"),  
266     },  
267     addFormVisible: false,
```

• 问题代码74：

华为云 CodeArts Check 代码扫描报告

```
258     publishTime: "",
259     city: "",
260 },
261     addForm: {
262         title: "",
263         message: "",
264         city: "",
265         updateTime: dayjs().format("YYYY-MM-DD"),
266     },
267     addFormVisible: false,
268     modifyForm: {
```

● 问题代码75：

```
259     city: "",
260 },
261     addForm: {
262         title: "",
263         message: "",
264         city: "",
265         updateTime: dayjs().format("YYYY-MM-DD"),
266     },
267     addFormVisible: false,
268     modifyForm: {
269         id: "",
```

● 问题代码76：

```
260 },
261     addForm: {
262         title: "",
263         message: "",
264         city: "",
265         updateTime: dayjs().format("YYYY-MM-DD"),
266     },
267     addFormVisible: false,
268     modifyForm: {
269         id: "",
270         title: "",
```

● 问题代码77：

```
264     city: "",
265     updateTime: dayjs().format("YYYY-MM-DD"),
266 },
267     addFormVisible: false,
268     modifyForm: {
269         id: "",
270         title: "",
271         message: "",
272         city: "",
273     },
274     modifyFormVisible: false,
```

● 问题代码78：

华为云 CodeArts Check 代码扫描报告

```
265     updateTime: dayjs().format("YYYY-MM-DD"),
266   },
267   addFormVisible: false,
268   modifyForm: {
269     id: "",
270     title: "",
271     message: "",
272     city: "",
273   },
274   modifyFormVisible: false,
275   searchRules,
```

● 问题代码79：

```
266   },
267   addFormVisible: false,
268   modifyForm: {
269     id: "",
270     title: "",
271     message: "",
272     city: "",
273   },
274   modifyFormVisible: false,
275   searchRules,
276 };
```

● 问题代码80：

```
267   addFormVisible: false,
268   modifyForm: {
269     id: "",
270     title: "",
271     message: "",
272     city: "",
273   },
274   modifyFormVisible: false,
275   searchRules,
276 };
277 },
```

● 问题代码81：

```
213   },
214   data() {
215     return {
216       currentPage: 1,
217       pageSize: 5, // 每页的数据条数
218       keywordDefault: "",
219       addFormVisible: false, // 控制新增公司页面的显示
220       addForm: {
221         companyId: "",
222         message: "",
223         title: "",
```

● 问题代码82：

```

216     currentPage: 1,
217     pageSize: 5, // 每页的数据条数
218     keywordDefault: "",
219     addFormVisible: false, // 控制新增公司页面的显示
220     addForm: {
221         companyId: "",
222         message: "",
223         title: "",
224     },
225     modifyFormVisible: false,
226     modifyForm: {

```

● 问题代码83：

```

217     pageSize: 5, // 每页的数据条数
218     keywordDefault: "",
219     addFormVisible: false, // 控制新增公司页面的显示
220     addForm: {
221         companyId: "",
222         message: "",
223         title: "",
224     },
225     modifyFormVisible: false,
226     modifyForm: {
227         companyId: "",

```

● 问题代码84：

```

218     keywordDefault: "",
219     addFormVisible: false, // 控制新增公司页面的显示
220     addForm: {
221         companyId: "",
222         message: "",
223         title: "",
224     },
225     modifyFormVisible: false,
226     modifyForm: {
227         companyId: "",
228         id: "",

```

● 问题代码85：

```

222         message: "",
223         title: "",
224     },
225     modifyFormVisible: false,
226     modifyForm: {
227         companyId: "",
228         id: "",
229         message: "",
230         title: "",
231     },
232     rules, // 封装好的表单验证

```

● 问题代码86：

```

223     title: "",
224   },
225   modifyFormVisible: false,
226   modifyForm: {
227     companyId: "",
228     id: "",
229     message: "",
230     title: "",
231   },
232   rules, // 封装好的表单验证
233 };

```

● 问题代码87：

```

224   },
225   modifyFormVisible: false,
226   modifyForm: {
227     companyId: "",
228     id: "",
229     message: "",
230     title: "",
231   },
232   rules, // 封装好的表单验证
233 };
234 },

```

● 问题代码88：

```

225   modifyFormVisible: false,
226   modifyForm: {
227     companyId: "",
228     id: "",
229     message: "",
230     title: "",
231   },
232   rules, // 封装好的表单验证
233 };
234 },
235 methods: {

```

● 问题74: medical-managerment-system/src/views/CompanyManage/index.vue: 213

● 问题代码1：

```

208   };
209 },
210 methods: {
211   // 切换分页及首次进入获取数据
212   getCompanyInfo() {
213     this.$store.dispatch("companyInfoManage/getCompanyInfo", {
214       pn: this.currentPage,
215       size: this.pageSize,
216     });
217   },
218   //当前页改变时触发,跳转其他页

```

● 问题75: medical-managerment-system/src/views/MaterialManage/index.vue:218,409,371,229,254

● 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
213         this.getMaterialInfo();
214     }
215 },
216     // 通过关键字查询数据
217     handelQuery(keyword) {
218         this.$store.dispatch("materialInfoManage/getMaterialInfo", {
219             pn: this.currentPage,
220             size: this.pageSize,
221             keyword,
222         });
223     },
```

• 问题代码2：

```
404         this.getDrugInfo();
405     }
406 },
407     // 通过关键字查询数据
408     handelQuery(keyword) {
409         this.$store.dispatch("drugInfoManage/getDrugInfo", {
410             pn: this.currentPage,
411             size: this.pageSize,
412             keyword,
413         });
414     },
```

• 问题代码3：

```
366         this.getDoctorInfo();
367     }
368 },
369     // 通过关键字查询数据
370     handelQuery(keyword) {
371         this.$store.dispatch("doctorInfoManage/getDoctorInfo", {
372             pn: this.currentPage,
373             size: this.pageSize,
374             keyword,
375         });
376     },
```

• 问题代码4：

```
224         this.getCompanyInfo();
225     }
226 },
227     // 通过关键字查询数据
228     handelQuery(keyword) {
229         this.$store.dispatch("companyInfoManage/getCompanyInfo", {
230             pn: this.currentPage,
231             size: this.pageSize,
232             keyword,
233         });
234     },
```

• 问题代码5：

华为云 CodeArts Check 代码扫描报告

```
249         this.getCompanyPolicyInfo();
250     }
251 },
252 // 通过关键字查询数据
253 handelQuery(keyword) {
254     this.$store.dispatch("companyPolicyInfoManage/getCompanyPolicyInfo", {
255         pn: this.currentPage,
256         size: this.pageSize,
257         keyword,
258     });
259 },
```

- 问题76: medical-managerment-system/src/views/CompanyManage/index.vue: 240,247,248

- 问题代码1 :

```
235     //新增公司
236     handleAddCompany(formName) {
237         this.$refs[formName].validate((valid) => {
238             if (valid) {
239                 this.addFormVisible = false;
240                 this.$store.dispatch("companyInfoManage/addCompany", {
241                     companyName: this.addForm.companyName,
242                     companyPhone: this.addForm.companyPhone,
243                     size: this.pageSize,
244                 });
245             } else {
```

- 问题代码2 :

```
242                 companyPhone: this.addForm.companyPhone,
243                 size: this.pageSize,
244             });
245         } else {
246             this.$message({
247                 message: "请检查输入的内容是否合规",
248                 type: "warning",
249             });
250             return false;
251         }
252     });
```

- 问题代码3 :

```
243                 size: this.pageSize,
244             });
245         } else {
246             this.$message({
247                 message: "请检查输入的内容是否合规",
248                 type: "warning",
249             });
250             return false;
251         }
252     });
253 },
```

- 问题77: medical-managerment-system/src/views/CompanyManage/index.vue: 258,260,261,262,266,275,276

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
253     },
254     // 删除公司
255     handleDeleteCompany(companyId, companyName) {
256       this.$confirm(
257         '确定要删除 “${companyName}” 的相关信息吗？该操作会同时删除对应的公司政策',
258         "提示",
259         {
260           confirmButtonText: "确定",
261           cancelButtonText: "取消",
262           type: "warning",
263         }
264       )
265     }
266   },
267   data() {
268     return {
269       companyList: [],
270       companyPolicyList: []
271     }
272   },
273   methods: {
274     // 获取公司列表
275     getCompanyList() {
276       this.$http.get('company/list').then(res => {
277         this.companyList = res.data
278       })
279     },
280     // 获取公司政策列表
281     getCompanyPolicyList() {
282       this.$http.get('companyPolicy/list').then(res => {
283         this.companyPolicyList = res.data
284       })
285     },
286     // 添加公司
287     addCompany() {
288       this.$router.push('/company/add')
289     },
290     // 编辑公司
291     editCompany() {
292       this.$router.push('/company/edit')
293     },
294     // 删除公司
295     deleteCompany() {
296       this.$router.push('/company/delete')
297     }
298   }
299 }
300 
```

- 问题代码2：

```

255     handleDeleteCompany(companyId, companyName) {
256         this.$confirm(
257             '确定要删除 "${companyName}" 的相关信息吗？该操作会同时删除对应的公司政策，
258             "提示"，
259             {
260                 confirmButtonText: "确定",
261                 cancelButtonText: "取消",
262                 type: "warning",
263             }
264         )
265         .then(() => {

```

- 问题代码3：

```

256     this.$confirm(
257       '确定要删除 "${companyName}" 的相关信息吗？该操作会同时删除对应的公司政策',
258       "提示",
259       {
260         confirmButtonText: "确定",
261         cancelButtonText: "取消",
262         type: "warning",
263       }
264     )
265     .then(() => {
266       this.$store.dispatch("companyInfoManage/deleteCompany", {

```

- 问题代码4：

```

257 '确定要删除 "${companyName}" 的相关信息吗？该操作会同时删除对应的公司政策',
258 "提示",
259 {
260   confirmButtonText: "确定",
261   cancelButtonText: "取消",
262   type: "warning",
263 }
264 )
265 .then(() => {
266   this.$store.dispatch("companyInfoManage/deleteCompany", {
267     companyId,

```

- 问题代码5：

华为云 CodeArts Check 代码扫描报告

```
261         cancelButtonText: "取消",
262         type: "warning",
263     }
264 )
265     .then(() => {
266         this.$store.dispatch("companyInfoManage/deleteCompany", {
267             companyId,
268             pn: this.currentPage,
269             size: this.pageSize,
270             keyword: this.keyword,
271         });
```

• 问题代码6：

```
270             keyword: this.keyword,
271         });
272     })
273     .catch(() => {
274         this.$message({
275             type: "info",
276             message: "已取消删除",
277         });
278     });
279 },
280 // 控制修改公司信息的表单弹出
```

• 问题代码7：

```
271         });
272     })
273     .catch(() => {
274         this.$message({
275             type: "info",
276             message: "已取消删除",
277         });
278     });
279 },
280 // 控制修改公司信息的表单弹出
281 handleModifyFormVisible(companyId, companyName, companyPhone) {
```

- 问题78: medical-managerment-system/src/views/CompanyManage/index.vue: 294,304,305

• 问题代码1：

```
289 // 修改公司信息
290 handleModifyCompany(formName) {
291     this.$refs[formName].validate((valid) => {
292         if (valid) {
293             this.modifyFormVisible = false;
294             this.$store.dispatch("companyInfoManage/modifyCompanyInfo", {
295                 companyId: this.modifyForm.companyId,
296                 companyName: this.modifyForm.companyName,
297                 companyPhone: this.modifyForm.companyPhone,
298                 pn: this.currentPage,
299                 size: this.pageSize,
```

• 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
299         size: this.pageSize,
300         keyword: this.keyword,
301     });
302     } else {
303         this.$message({
304             message: "请检查输入的内容是否合规",
305             type: "warning",
306         });
307         return false;
308     }
309 });
```

● 问题代码3：

```
300         keyword: this.keyword,
301     });
302     } else {
303         this.$message({
304             message: "请检查输入的内容是否合规",
305             type: "warning",
306         });
307         return false;
308     }
309 });
310 },
```

- 问题79: medical-managerment-system/src/views/MedicalPolicy/index.vue: 287

● 问题代码1：

```
282     this.getMedicalPolicyInfo();
283 },
284 // 查询医药政策信息
285 getMedicalPolicyInfo() {
286     this.$store.dispatch(
287         "medicalPolicyInfoManage/getMedicalPolicyInfo",
288         this.params
289     );
290 },
291 // 条件查询
292 handleLimitedSearch(formName) {
```

- 问题80: medical-managerment-system/src/views/MedicalPolicy/index.vue: 297

● 问题代码1：

```
292     handleLimitedSearch(formName) {
293         this.$refs[formName].validate((valid) => {
294             if (valid) {
295                 this.getMedicalPolicyInfo();
296             } else {
297                 this.$message.warning("请检查输入的内容是否合规");
298                 return false;
299             }
300         });
301     },
302     //新增医保政策
```

- 问题81: medical-managerment-system/src/views/MedicalPolicy/index.vue: 307,316

● 问题代码1：

```

302     //新增医保政策
303     handleAddMedicalPolicy(formName) {
304         this.$refs[formName].validate((valid) => {
305             if (valid) {
306                 this.addFormVisible = false;
307                 this.$store.dispatch("medicalPolicyInfoManage/addMedicalPolicy", {
308                     cityId: this.addForm.city,
309                     title: this.addForm.title,
310                     updateTime: this.addForm.updateTime,
311                     message: this.addForm.message,
312                     size: this.pageSize,

```

● 问题代码2：

```

311         message: this.addForm.message,
312         size: this.pageSize,
313     });
314     this.$refs.searchLimit.resetFields();
315 } else {
316     this.$message.warning("请检查输入的内容是否合规");
317     return false;
318 }
319 });
320 },
321 // 删除医保政策

```

- 问题82: medical-managerment-system/src/views/MedicalPolicy/index.vue: 323, 324, 325, 326, 329, 336, 337

● 问题代码1：

```

318     }
319     });
320 },
321 // 删除医保政策
322 handleDeletMedicalPolicy(id, title) {
323     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
324         confirmButtonText: "确定",
325         cancelButtonText: "取消",
326         type: "warning",
327     })
328     .then(() => {

```

● 问题代码2：

```

319     });
320 },
321 // 删除医保政策
322 handleDeletMedicalPolicy(id, title) {
323     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
324         confirmButtonText: "确定",
325         cancelButtonText: "取消",
326         type: "warning",
327     })
328     .then(() => {
329         this.$store.dispatch("medicalPolicyInfoManage/deleteMedicalPolicy", {

```

● 问题代码3：

华为云 CodeArts Check 代码扫描报告

```
320     },
321     // 删除医保政策
322     handleDeletMedicalPolicy(id, title) {
323         this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
324             confirmButtonText: "确定",
325             cancelButtonText: "取消",
326             type: "warning",
327         })
328         .then(() => {
329             this.$store.dispatch("medicalPolicyInfoManage/deleteMedicalPolicy", {
330                 id,
```

• 问题代码4：

```
321     // 删除医保政策
322     handleDeletMedicalPolicy(id, title) {
323         this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
324             confirmButtonText: "确定",
325             cancelButtonText: "取消",
326             type: "warning",
327         })
328         .then(() => {
329             this.$store.dispatch("medicalPolicyInfoManage/deleteMedicalPolicy", {
330                 id,
331                 params: this.params,
```

• 问题代码5：

```
324         confirmButtonText: "确定",
325         cancelButtonText: "取消",
326         type: "warning",
327     })
328     .then(() => {
329         this.$store.dispatch("medicalPolicyInfoManage/deleteMedicalPolicy", {
330             id,
331             params: this.params,
332         });
333     })
334     .catch(() => {
```

• 问题代码6：

```
331         params: this.params,
332     });
333 })
334 .catch(() => {
335     this.$message({
336         type: "info",
337         message: "已取消删除",
338     });
339 });
340 },
341 // 控制修改医保政策信息的表单弹出
```

• 问题代码7：

```

332     });
333   })
334   .catch(() => {
335     this.$message({
336       type: "info",
337       message: "已取消删除",
338     });
339   });
340 },
341 // 控制修改医保政策信息的表单弹出
342 handleModifyFormVisible(id, title, message, city) {

```

- 问题83: medical-managerment-system/src/views/CompanyPolicy/index.vue: 317, 322, 330, 331, 357, 362, 369, 370

- 问题代码1 :

```

312   handleModifyMedicalPolicy(formName) {
313     this.$refs[formName].validate((valid) => {
314       if (valid) {
315         this.modifyFormVisible = false;
316         this.$store.dispatch(
317           "companyPolicyInfoManage/modifyCompanyPolicyInfo",
318           {
319             id: this.modifyForm.id,
320             companyId: this.modifyForm.companyId,
321             title: this.modifyForm.title,
322             updateTime: dayjs().format("YYYY-MM-DD"),

```

- 问题代码2 :

```

317     "companyPolicyInfoManage/modifyCompanyPolicyInfo",
318     {
319       id: this.modifyForm.id,
320       companyId: this.modifyForm.companyId,
321       title: this.modifyForm.title,
322       updateTime: dayjs().format("YYYY-MM-DD"),
323       message: this.modifyForm.message,
324       pn: this.currentPage,
325       size: this.pageSize,
326     }
327   );

```

- 问题代码3 :

```

325       size: this.pageSize,
326     }
327   );
328   } else {
329     this.$message({
330       message: "请检查输入的内容是否合规",
331       type: "warning",
332     });
333     return false;
334   }
335 });

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
326         }
327     );
328     } else {
329         this.$message({
330             message: "请检查输入的内容是否合规",
331             type: "warning",
332         });
333         return false;
334     }
335     });
336 },
```

• 问题代码5：

```
352     handleModifyMedicalPolicy(formName) {
353         this.$refs[formName].validate((valid) => {
354             if (valid) {
355                 this.modifyFormVisible = false;
356                 this.$store.dispatch(
357                     "medicalPolicyInfoManage/modifyMedicalPolicyInfo",
358                     {
359                         id: this.modifyForm.id,
360                         cityId: this.modifyForm.city,
361                         title: this.modifyForm.title,
362                         updateTime: dayjs().format("YYYY-MM-DD"),
```

• 问题代码6：

```
357         "medicalPolicyInfoManage/modifyMedicalPolicyInfo",
358         {
359             id: this.modifyForm.id,
360             cityId: this.modifyForm.city,
361             title: this.modifyForm.title,
362             updateTime: dayjs().format("YYYY-MM-DD"),
363             message: this.modifyForm.message,
364             params: this.params,
365         }
366     );
367     } else {
```

• 问题代码7：

```
364         params: this.params,
365     }
366 );
367 } else {
368     this.$message({
369         message: "请检查输入的内容是否合规",
370         type: "warning",
371     });
372     return false;
373 }
374 });
```

• 问题代码8：

```

365         }
366     });
367     } else {
368         this.$message({
369             message: "请检查输入的内容是否合规",
370             type: "warning",
371         });
372         return false;
373     }
374 });
375 },

```

- 问题84: medical-managerment-system/src/views/CompanyPolicy/index.vue: 348,515,512,386

- 问题代码1 :

```

343         this.$refs.modifyForm.clearValidate();
344     },
345 },
346 mounted() {
347     this.getCompanyPolicyInfo(); // 首次渲染
348     this.$store.dispatch("companyInfoManage/getAllCompanyInfo");
349 },
350 computed: {
351     ...mapGetters({
352         tableData: "companyPolicyInfo",
353         companyInfo: "companyInfo",

```

- 问题代码2 :

```

510         this.$refs.modifyForm.clearValidate();
511     },
512 },
513 mounted() {
514     this.getDrugInfo(); // 首次渲染
515     this.$store.dispatch("saleInfoManage/getAllSalePlaceInfo");
516 },
517 computed: {
518     ...mapGetters({
519         tableData: "drugInfo",
520         salePlaceInfo: "salePlaceInfo",

```

- 问题代码3 :

```

507         this.$refs.modifyForm.clearValidate();
508     },
509 },
510 mounted() {
511     this.getDoctorInfo(); // 首次渲染
512     this.$store.dispatch("doctorInfoManage/getDoctorLevelAndType");
513 },
514 computed: {
515     ...mapGetters({
516         tableData: "doctorInfo",
517         levelAndTypeData: "doctorLevelAndType",

```

- 问题代码4 :

```

381     this.$refs.modifyForm.clearValidate();
382   },
383 },
384 mounted() {
385   this.getMedicalPolicyInfo();
386   this.$store.dispatch("cityInfoManage/getAllCityInfo");
387 },
388 computed: {
389   ...mapGetters({
390     tableData: "medicalPolicyInfo",
391     cityInfo: "cityInfo",

```

- 问题85: medical-managerment-system/src/views/CompanyPolicy/index.vue: 238

- 问题代码1 :

```

233   };
234 },
235 methods: {
236   // 切换分页及首次进入获取数据
237   getCompanyPolicyInfo() {
238     this.$store.dispatch("companyPolicyInfoManage/getCompanyPolicyInfo", {
239       pn: this.currentPage,
240       size: this.pageSize,
241     });
242   },
243   //当前页改变时触发,跳转其他页

```

- 问题86: medical-managerment-system/src/views/CompanyPolicy/index.vue: 265, 273, 274

- 问题代码1 :

```

260   //新增公司
261   handleAddCompanyPolicy(formName) {
262     this.$refs[formName].validate((valid) => {
263       if (valid) {
264         this.addFormVisible = false;
265         this.$store.dispatch("companyPolicyInfoManage/addCompanyPolicy", {
266           companyId: this.addForm.companyId,
267           message: this.addForm.message,
268           title: this.addForm.title,
269           size: this.pageSize,
270         });

```

- 问题代码2 :

```

268       title: this.addForm.title,
269       size: this.pageSize,
270     });
271   } else {
272     this.$message({
273       message: "请检查输入的内容是否合规",
274       type: "warning",
275     });
276     return false;
277   }
278 });

```

- 问题代码3 :

```

269         size: this.pageSize,
270     });
271     } else {
272         this.$message({
273             message: "请检查输入的内容是否合规",
274             type: "warning",
275         });
276         return false;
277     }
278 });
279 },

```

- 问题87: medical-managerment-system/src/views/CompanyPolicy/index.vue: 282,283,284,285,288,296,297

- 问题代码1 :

```

277     }
278     });
279 },
280 // 删除
281 handleDeleteCompanyPolicy(id, title) {
282     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
283         confirmButtonText: "确定",
284         cancelButtonText: "取消",
285         type: "warning",
286     })
287     .then(() => {

```

- 问题代码2 :

```

278     });
279 },
280 // 删除
281 handleDeleteCompanyPolicy(id, title) {
282     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
283         confirmButtonText: "确定",
284         cancelButtonText: "取消",
285         type: "warning",
286     })
287     .then(() => {
288         this.$store.dispatch("companyPolicyInfoManage/deleteCompanyPolicy", {

```

- 问题代码3 :

```

279 },
280 // 删除
281 handleDeleteCompanyPolicy(id, title) {
282     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
283         confirmButtonText: "确定",
284         cancelButtonText: "取消",
285         type: "warning",
286     })
287     .then(() => {
288         this.$store.dispatch("companyPolicyInfoManage/deleteCompanyPolicy", {
289             id,

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
280 // 删除
281 handleDeleteCompanyPolicy(id, title) {
282     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
283         confirmButtonText: "确定",
284         cancelButtonText: "取消",
285         type: "warning",
286     })
287     .then(() => {
288         this.$store.dispatch("companyPolicyInfoManage/deleteCompanyPolicy", {
289             id,
290             pn: this.currentPage,
```

• 问题代码5：

```
283         confirmButtonText: "确定",
284         cancelButtonText: "取消",
285         type: "warning",
286     })
287     .then(() => {
288         this.$store.dispatch("companyPolicyInfoManage/deleteCompanyPolicy", {
289             id,
290             pn: this.currentPage,
291             size: this.pageSize,
292         });
293     })
```

• 问题代码6：

```
291         size: this.pageSize,
292     });
293 })
294 .catch(() => {
295     this.$message({
296         type: "info",
297         message: "已取消删除",
298     });
299 });
300 },
301 // 控制修改表单弹出
```

• 问题代码7：

```
292     });
293 })
294 .catch(() => {
295     this.$message({
296         type: "info",
297         message: "已取消删除",
298     });
299 });
300 },
301 // 控制修改表单弹出
302 handleModifyFormVisible(id, title, message, companyId) {
```

• 问题88: medical-managerment-system/src/views/CityManage/index.vue: 112,117

• 问题代码1：

```

107   },
108   data() {
109     return {
110       currentPage: 1,
111       pageSize: 5, // 每页的数据条数
112       keywordDefault: "",
113       addFormVisible: false, // 控制新增城市页面的显示
114       addForm: {
115         cityNumber: [],
116       },
117       formLabelWidth: "110px", // 表单 label 的宽度

```

• 问题代码2：

```

112     keywordDefault: "",
113     addFormVisible: false, // 控制新增城市页面的显示
114     addForm: {
115       cityNumber: [],
116     },
117     formLabelWidth: "110px", // 表单 label 的宽度
118     rules, // 封装好的表单验证
119     options: provinceAndCityData, //element-china-area-data组件
120   };
121 },
122 methods: {

```

• 问题89: medical-managerment-system/src/views/CityManage/index.vue:124

• 问题代码1：

```

119     options: provinceAndCityData, //element-china-area-data组件
120   };
121 },
122 methods: {
123   getCityInfo() {
124     this.$store.dispatch("cityInfoManage/getCityInfo", {
125       pn: this.currentPage,
126       size: this.pageSize,
127     });
128   },
129   //当前页改变时触发,跳转其他页

```

• 问题90: medical-managerment-system/src/views/CityManage/index.vue:140

• 问题代码1：

```

135     this.getCityInfo();
136   }
137 },
138 // 通过关键字查询数据
139 handelQuery(keyword) {
140   this.$store.dispatch("cityInfoManage/getCityInfo", {
141     pn: this.currentPage,
142     size: this.pageSize,
143     keyword,
144   });
145 },

```

• 问题91: medical-managerment-system/src/views/CityManage/index.vue:151,157,158

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
146 //新增城市
147 handleAddcity(formName) {
148   this.$refs[formName].validate((valid) => {
149     if (valid) {
150       this.addFormVisible = false;
151       this.$store.dispatch("cityInfoManage/addCity", {
152         cityNumber: this.addForm.cityNumber[1],
153         size: this.pageSize,
154       });
155     } else {
156       this.$message({
```

• 问题代码2：

```
152         cityNumber: this.addForm.cityNumber[1],
153         size: this.pageSize,
154       });
155     } else {
156       this.$message({
157         message: "请检查输入的内容是否合规",
158         type: "warning",
159       });
160       return false;
161     }
162   });
```

• 问题代码3：

```
153         size: this.pageSize,
154       });
155     } else {
156       this.$message({
157         message: "请检查输入的内容是否合规",
158         type: "warning",
159       });
160       return false;
161     }
162   });
163 },
```

- 问题92: medical-managerment-system/src/views/CityManage/index.vue: 168,170,171,172,176,185,186

• 问题代码1：

```
163   },
164   // 删除城市
165   handleDeletecity(cityId, cityName) {
166     this.$confirm(
167       '确定要删除 "${cityName}" 的相关信息吗？该操作会同时删除该城市相关的医保政策',
168       "提示",
169       {
170         confirmButtonText: "确定",
171         cancelButtonText: "取消",
172         type: "warning",
173       }
174     )
```

• 问题代码2：

华为云 CodeArts Check 代码扫描报告

```
165     handleDeletecity(cityId, cityName) {
166         this.$confirm(
167             '确定要删除 "${cityName}" 的相关信息吗？该操作会同时删除该城市相关的医保政策',
168             "提示",
169             {
170                 confirmButtonText: "确定",
171                 cancelButtonText: "取消",
172                 type: "warning",
173             }
174         )
175         .then(() => {
```

• 问题代码3：

```
166         this.$confirm(
167             '确定要删除 "${cityName}" 的相关信息吗？该操作会同时删除该城市相关的医保政策',
168             "提示",
169             {
170                 confirmButtonText: "确定",
171                 cancelButtonText: "取消",
172                 type: "warning",
173             }
174         )
175         .then(() => {
176             this.$store.dispatch("cityInfoManage/deleteCity", {
```

• 问题代码4：

```
167             '确定要删除 "${cityName}" 的相关信息吗？该操作会同时删除该城市相关的医保政策',
168             "提示",
169             {
170                 confirmButtonText: "确定",
171                 cancelButtonText: "取消",
172                 type: "warning",
173             }
174         )
175         .then(() => {
176             this.$store.dispatch("cityInfoManage/deleteCity", {
177                 cityId,
```

• 问题代码5：

```
171                 cancelButtonText: "取消",
172                 type: "warning",
173             }
174         )
175         .then(() => {
176             this.$store.dispatch("cityInfoManage/deleteCity", {
177                 cityId,
178                 pn: this.currentPage,
179                 size: this.pageSize,
180                 keyword: this.keyword,
181             });
```

• 问题代码6：

华为云 CodeArts Check 代码扫描报告

```
180         keyword: this.keyword,
181     });
182 })
183 .catch(() => {
184     this.$message({
185         type: "info",
186         message: "已取消删除",
187     });
188 });
189 },
190 // 每次关闭表单的时候重置表单
```

• 问题代码7：

```
181     });
182 })
183 .catch(() => {
184     this.$message({
185         type: "info",
186         message: "已取消删除",
187     });
188 });
189 },
190 // 每次关闭表单的时候重置表单
191 handleAddClose() {
```

- 问题93: medical-management-system/src/layout/components/PageSider/index.vue:66,69,70

• 问题代码1：

```
61     };
62 },
63 methods: {
64     handleMenuListData(data, arr) {
65         (Array.isArray(data) ? data : []).forEach((route) => {
66             if (!route || !route.path || route.path === "/user/login") return;
67             arr.push({
68                 path: route.path,
69                 title: (route.meta && route.meta.title) || route.name || "未命名菜单",
70                 icon: "el-icon-menu",
71                 children: this.handleMenuListData(route.children, []),
```

• 问题代码2：

```
64     handleMenuListData(data, arr) {
65         (Array.isArray(data) ? data : []).forEach((route) => {
66             if (!route || !route.path || route.path === "/user/login") return;
67             arr.push({
68                 path: route.path,
69                 title: (route.meta && route.meta.title) || route.name || "未命名菜单",
70                 icon: "el-icon-menu",
71                 children: this.handleMenuListData(route.children, []),
72             });
73         });
74         return arr;
```

• 问题代码3：

华为云 CodeArts Check 代码扫描报告

```
65     (Array.isArray(data) ? data : []).forEach((route) => {
66       if (!route || !route.path || route.path === "/user/login") return;
67       arr.push({
68         path: route.path,
69         title: (route.meta && route.meta.title) || route.name || "未命名菜单",
70         icon: "el-icon-menu",
71         children: this.handleMenuListData(route.children, []),
72       });
73     });
74     return arr;
75   },
```

- 问题94: medical-managment-system/src/layout/components/PageSider/index.vue:78

- 问题代码1 :

```
73     });
74     return arr;
75   },
76   refreshMenuList(routes) {
77     const availableRoutes = (Array.isArray(routes) ? routes : []).filter(
78       (route) => route && route.path !== "/user/login" && !route.redirect
79     );
80     const layoutRoute = availableRoutes.find(
81       (route) => Array.isArray(route.children) && route.children.length
82     );
83     const menuRoutes = layoutRoute ? layoutRoute.children : availableRoutes;
```

- 问题95: medical-managment-system/src/layout/components/PageHeader/index.vue:26,27,28

- 问题代码1 :

```
21 <script>
22 export default {
23   name: "PageHeader",
24   methods: {
25     handleLogout() {
26       this.$store.dispatch("app/logout");
27       this.$message.warning("已退出登录");
28       this.$router.replace("/user/login");
29       this.$router.go(0);
30     },
31   },
```

- 问题代码2 :

```
22 export default {
23   name: "PageHeader",
24   methods: {
25     handleLogout() {
26       this.$store.dispatch("app/logout");
27       this.$message.warning("已退出登录");
28       this.$router.replace("/user/login");
29       this.$router.go(0);
30     },
31   },
32   computed: {
```

- 问题代码3 :

```

23   name: "PageHeader",
24   methods: {
25     handleLogout() {
26       this.$store.dispatch("app/logout");
27       this.$message.warning("已退出登录");
28       this.$router.replace("/user/login");
29       this.$router.go(0);
30     },
31   },
32   computed: {
33     userName() {

```

- 问题96: medical-managerment-system/src/layout/components/PageHeader/index.vue:35,35,36,38

• 问题代码1 :

```

30   },
31 },
32 computed: {
33   userName() {
34     try {
35       const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
36       return (userInfo && (userInfo.realname || userInfo.username)) || "用户";
37     } catch (error) {
38       return "用户";
39     }
40   },

```

• 问题代码2 :

```

30   },
31 },
32 computed: {
33   userName() {
34     try {
35       const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
36       return (userInfo && (userInfo.realname || userInfo.username)) || "用户";
37     } catch (error) {
38       return "用户";
39     }
40   },

```

• 问题代码3 :

```

31   },
32 computed: {
33   userName() {
34     try {
35       const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
36       return (userInfo && (userInfo.realname || userInfo.username)) || "用户";
37     } catch (error) {
38       return "用户";
39     }
40   },
41 },

```

• 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
33     userName() {
34         try {
35             const userInfo = JSON.parse(localStorage.getItem("userInfo") || "null");
36             return (userInfo && (userInfo.realname || userInfo.username)) || "用户";
37         } catch (error) {
38             return "用户";
39         }
40     },
41 },
42 };
43 </script>
```

- 问题97: medical-managerment-system/src/App.vue:9

- 问题代码1 :

```
4     </div>
5 </template>
6
7 <script>
8 export default {
9     name: "app",
10 };
11 </script>
```

- 问题98: medical-managerment-system/src/views/Login.vue:47

- 问题代码1 :

```
42         </div>
43     </div>
44 </div>
45 </template>
46 <script>
47 import { loginRules } from "../utils/validator";
48
49 export default {
50     data() {
51         return {
52             loginForm: {
```

- 问题99: medical-managerment-system/src/views/Login.vue:53,54

- 问题代码1 :

```
48
49 export default {
50     data() {
51         return {
52             loginForm: {
53                 username: "",
54                 password: "",
55             },
56             loginRules,
57             loggingIn: false,
58         };
59     },
```

- 问题代码2 :


```

49 export default {
50   data() {
51     return {
52       loginForm: {
53         username: "",
54         password: "",
55       },
56       loginRules,
57       loggingIn: false,
58     };
59   },

```

- 问题100: medical-managerment-system/src/views/Login.vue:
68,69,71,78,81,85,86,94,95

- 问题代码1 :

```

63   this.$refs[formName].validate((valid) => {
64     if (valid) {
65       if (this.loggingIn) return;
66       this.loggingIn = true;
67       this.$store
68         .dispatch("app/login", this.loginForm)
69         .then(() => this.$store.dispatch("app/setMenuList"))
70         .then(() => {
71           this.$router.replace("/");
72         })
73         .catch((error) => {

```

- 问题代码2 :

```

64     if (valid) {
65       if (this.loggingIn) return;
66       this.loggingIn = true;
67       this.$store
68         .dispatch("app/login", this.loginForm)
69         .then(() => this.$store.dispatch("app/setMenuList"))
70         .then(() => {
71           this.$router.replace("/");
72         })
73         .catch((error) => {
74           const isNetworkError = Boolean(

```

- 问题代码3 :

```

66       this.loggingIn = true;
67       this.$store
68         .dispatch("app/login", this.loginForm)
69         .then(() => this.$store.dispatch("app/setMenuList"))
70         .then(() => {
71           this.$router.replace("/");
72         })
73         .catch((error) => {
74           const isNetworkError = Boolean(
75             error && (error.isAxiosError || error.request) && !error.response
76           );

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
73         .catch((error) => {
74             const isNetworkError = Boolean(
75                 error && (error.isAxiosError || error.request) && !error.response
76             );
77             if (
78                 localStorage.getItem("token") &&
79                 !this.$store.state.app.routesLoaded
80             ) {
81                 this.$store.dispatch("app/logout");
82             }
83             this.$message.error(
```

• 问题代码5：

```
76         );
77         if (
78             localStorage.getItem("token") &&
79             !this.$store.state.app.routesLoaded
80         ) {
81             this.$store.dispatch("app/logout");
82         }
83         this.$message.error(
84             isNetworkError
85             ? "无法连接服务器，请检查网络或后端服务"
86             : error.message || "账号或密码错误"
```

• 问题代码6：

```
80         ) {
81             this.$store.dispatch("app/logout");
82         }
83         this.$message.error(
84             isNetworkError
85             ? "无法连接服务器，请检查网络或后端服务"
86             : error.message || "账号或密码错误"
87         );
88     })
89     .finally(() => {
90         this.loggingIn = false;
```

• 问题代码7：

```
81         this.$store.dispatch("app/logout");
82     }
83     this.$message.error(
84         isNetworkError
85         ? "无法连接服务器，请检查网络或后端服务"
86         : error.message || "账号或密码错误"
87     );
88 })
89 .finally(() => {
90     this.loggingIn = false;
91 });
```

• 问题代码8：

华为云 CodeArts Check 代码扫描报告

```
89         .finally(() => {
90             this.loggingIn = false;
91         });
92     } else {
93         this.$notify.error({
94             title: " 错误",
95             message: " 请输入正确的用户名密码",
96         });
97     }
98     return false;
99 }
```

- 问题代码9：

```
90         this.loggingIn = false;
91     });
92 } else {
93     this.$notify.error({
94         title: " 错误",
95         message: " 请输入正确的用户名密码",
96     });
97 }
98 return false;
99 }
100 });
```

- 问题101: medical-managerment-system/src/components/Pagination.vue:15,26

- 问题代码1：

```
10 </div>
11 </template>
12
13 <script>
14 export default {
15     name: "Pagination",
16     props: {
17         total: {
18             required: true,
19         },
20         page: {
```

- 问题代码2：

```
21         type: Number,
22         default: 1,
23     },
24     layout: {
25         type: String,
26         default: "total, sizes, prev, pager, next, jumper",
27     },
28     pageSize: {
29         type: Number,
30         default: 1,
31     },
```

- 问题102: medical-managerment-system/src/components/Pagination.vue:39

- 问题代码1：

```

34     currentPage: {
35       get() {
36         return this.page;
37       },
38       set(val) {
39         this.$emit("update:page", val);
40       },
41     },
42   },
43   methods: {
44     handleCurrentChange(val) {

```

- 问题103: medical-managerment-system/src/components/Pagination.vue:45

- 问题代码1 :

```

40     },
41   },
42 },
43 methods: {
44   handleCurrentChange(val) {
45     this.$emit("currentChange", { page: val, limit: this.pageSize });
46   },
47 },
48 };
49 </script>

```

- 问题104: medical-managerment-system/src/views/MaterialManage/index.vue:202

- 问题代码1 :

```

197   };
198 },
199 methods:{
200   // 切换分页及首次进入获取数据
201   getMaterialInfo() {
202     this.$store.dispatch("materialInfoManage/getMaterialInfo", {
203       pn: this.currentPage,
204       size: this.pageSize,
205     });
206   },
207   //当前页改变时触发,跳转其他页

```

- 问题105: medical-managerment-system/src/views/MaterialManage/index.vue:229,237,238

- 问题代码1 :

```

224     //新增
225     handleAddMaterial(formName) {
226       this.$refs[formName].validate((valid) => {
227         if (valid) {
228           this.addFormVisible = false;
229           this.$store.dispatch("materialInfoManage/addMaterial", {
230             title: this.addForm.title,
231             message: this.addForm.message,
232             size: this.pageSize,
233           });
234           this.currentPage += 1;

```

- 问题代码2 :

```

232         size: this.pageSize,
233     });
234     this.currentPage += 1;
235 } else {
236     this.$message({
237         message: "请检查输入的内容是否合规",
238         type: "warning",
239     });
240     return false;
241 }
242 });

```

• 问题代码3：

```

233     });
234     this.currentPage += 1;
235 } else {
236     this.$message({
237         message: "请检查输入的内容是否合规",
238         type: "warning",
239     });
240     return false;
241 }
242 });
243 },

```

- 问题106: medical-managerment-system/src/views/MaterialManage/index.vue:246,247,248,249,252,261,262

• 问题代码1：

```

241     }
242     });
243 },
244     // 删除
245     handleDeleteMaterial(id, title) {
246         this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
247             confirmButtonText: "确定",
248             cancelButtonText: "取消",
249             type: "warning",
250         })
251         .then(() => {

```

• 问题代码2：

```

242     });
243 },
244     // 删除
245     handleDeleteMaterial(id, title) {
246         this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
247             confirmButtonText: "确定",
248             cancelButtonText: "取消",
249             type: "warning",
250         })
251         .then(() => {
252             this.$store.dispatch("materialInfoManage/deleteMaterial", {

```

• 问题代码3：

华为云 CodeArts Check 代码扫描报告

```
243     },
244     // 删除
245     handleDeleteMaterial(id, title) {
246     this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
247         confirmButtonText: "确定",
248         cancelButtonText: "取消",
249         type: "warning",
250     })
251     .then(() => {
252         this.$store.dispatch("materialInfoManage/deleteMaterial", {
253             id,
```

• 问题代码4：

```
244         // 删除
245         handleDeleteMaterial(id, title) {
246         this.$confirm('确定要删除 "${title}" 的相关信息吗?', "提示", {
247             confirmButtonText: "确定",
248             cancelButtonText: "取消",
249             type: "warning",
250         })
251         .then(() => {
252             this.$store.dispatch("materialInfoManage/deleteMaterial", {
253                 id,
254                 pn: this.currentPage,
```

• 问题代码5：

```
247         confirmButtonText: "确定",
248         cancelButtonText: "取消",
249         type: "warning",
250     })
251     .then(() => {
252         this.$store.dispatch("materialInfoManage/deleteMaterial", {
253             id,
254             pn: this.currentPage,
255             size: this.pageSize,
256             keyword: this.keyword,
257         });
```

• 问题代码6：

```
256         keyword: this.keyword,
257     });
258 })
259 .catch(() => {
260     this.$message({
261         type: "info",
262         message: "已取消删除",
263     });
264 });
265 },
266 // 控制修改表单弹出
```

• 问题代码7：

```

257     });
258   })
259   .catch(() => {
260     this.$message({
261       type: "info",
262       message: "已取消删除",
263     });
264   });
265 },
266 // 控制修改表单弹出
267 handleModifyFormVisible(id, message, title) {

```

- 问题107: medical-managment-system/src/views/MaterialManage/index.vue:280,290,291

- 问题代码1 :

```

275     // 修改
276     handleModifyMeterial(formName) {
277       this.$refs[formName].validate((valid) => {
278         if (valid) {
279           this.modifyFormVisible = false;
280           this.$store.dispatch("materialInfoManage/modifyMaterial", {
281             id: this.modifyForm.id,
282             message: this.modifyForm.message,
283             title: this.modifyForm.title,
284             pn: this.currentPage,
285             size: this.pageSize,

```

- 问题代码2 :

```

285       size: this.pageSize,
286       keyword: this.keyword,
287     });
288   } else {
289     this.$message({
290       message: "请检查输入的内容是否合规",
291       type: "warning",
292     });
293     return false;
294   }
295 });

```

- 问题代码3 :

```

286       keyword: this.keyword,
287     });
288   } else {
289     this.$message({
290       message: "请检查输入的内容是否合规",
291       type: "warning",
292     });
293     return false;
294   }
295 });
296 },

```

- 问题108: medical-managment-system/src/views/SaleManage/index.vue:236

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
231 import { mapGetters } from "vuex";
232 import rules from "../utils/validator";
233
234 function coordinateValidator(min, max, label) {
235   return (rule, value, callback) => {
236     if (value === "" || value === null || value === undefined) {
237       callback(new Error(`${label}不能为空`));
238     }
239   }
240   const coordinate = Number(value);
241   if (!Number.isFinite(coordinate) || coordinate < min || coordinate > max) {
```

- 问题109: medical-managment-system/src/views/SaleManage/index.vue: 250,251,252

- 问题代码1 :

```
245   callback();
246 };
247 }
248
249 const emptySaleForm = () => ({
250   saleName: "",
251   salePhone: "",
252   address: "",
253   longitude: null,
254   latitude: null,
255 });
```

- 问题代码2 :

```
246 };
247 }
248
249 const emptySaleForm = () => ({
250   saleName: "",
251   salePhone: "",
252   address: "",
253   longitude: null,
254   latitude: null,
255 });
```

- 问题代码3 :

```
247 }
248
249 const emptySaleForm = () => ({
250   saleName: "",
251   salePhone: "",
252   address: "",
253   longitude: null,
254   latitude: null,
255 });
256
257 export default {
```

- 问题110: medical-managment-system/src/views/SaleManage/index.vue: 258,431

- 问题代码1 :


```

253   longitude: null,
254   latitude: null,
255 });
256
257 export default {
258   name: "SaleManage",
259   components: {
260     Pagination,
261   },
262   data() {
263     return {

```

• 问题代码2：

```

426   this.getSalePlaceInfo(); // 首次渲染
427 },
428   computed: {
429     //后端返回的数据
430     ...mapGetters({
431       tableData: "salePlaceInfo",
432     }),
433     // 用户输入的关键词
434     keyword: {
435       get() {
436         return this.keywordDefault;

```

- 问题111: medical-managerment-system/src/views/SaleManage/index.vue: 266,271,272,273,274,281,281,282,282,285,285,288,288

• 问题代码1：

```

261   },
262   data() {
263     return {
264       currentPage: 1,
265       pageSize: 5, // 每页的数据条数
266       keywordDefault: "",
267       addFormVisible: false, // 控制新增销售地点页面的显示
268       addForm: emptySaleForm(),
269       modifyFormVisible: false, // 控制修改信息页面的显示
270       modifyForm: {
271         saleId: "",

```

• 问题代码2：

```

266       keywordDefault: "",
267       addFormVisible: false, // 控制新增销售地点页面的显示
268       addForm: emptySaleForm(),
269       modifyFormVisible: false, // 控制修改信息页面的显示
270       modifyForm: {
271         saleId: "",
272         saleName: "",
273         salePhone: "",
274         address: "",
275         longitude: null,
276         latitude: null,

```

• 问题代码3：

华为云 CodeArts Check 代码扫描报告

```
267     addFormVisible: false, // 控制新增销售地点页面的显示
268     addForm: emptySaleForm(),
269     modifyFormVisible: false, // 控制修改信息页面的显示
270     modifyForm: {
271         saleId: "",
272         saleName: "",
273         salePhone: "",
274         address: "",
275         longitude: null,
276         latitude: null,
277     },
```

• 问题代码4：

```
268     addForm: emptySaleForm(),
269     modifyFormVisible: false, // 控制修改信息页面的显示
270     modifyForm: {
271         saleId: "",
272         saleName: "",
273         salePhone: "",
274         address: "",
275         longitude: null,
276         latitude: null,
277     },
278     rules, // 封装好的表单验证
```

• 问题代码5：

```
269     modifyFormVisible: false, // 控制修改信息页面的显示
270     modifyForm: {
271         saleId: "",
272         saleName: "",
273         salePhone: "",
274         address: "",
275         longitude: null,
276         latitude: null,
277     },
278     rules, // 封装好的表单验证
279     saleRules: {
```

• 问题代码6：

```
276         latitude: null,
277     },
278     rules, // 封装好的表单验证
279     saleRules: {
280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
283               trigger: "blur" },
284             ],
285         longitude: [
286             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
287             },
288         ],
```

• 问题代码7：

华为云 CodeArts Check 代码扫描报告

```
276         latitude: null,
277     },
278     rules, // 封装好的表单验证
279     saleRules: {
280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
trigger: "blur" },
283         ],
284         longitude: [
285             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286         ],
```

● 问题代码8：

```
277     },
278     rules, // 封装好的表单验证
279     saleRules: {
280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
trigger: "blur" },
283         ],
284         longitude: [
285             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286         ],
287         latitude: [
```

● 问题代码9：

```
277     },
278     rules, // 封装好的表单验证
279     saleRules: {
280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
trigger: "blur" },
283         ],
284         longitude: [
285             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286         ],
287         latitude: [
```

● 问题代码10：

```
280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
trigger: "blur" },
283         ],
284         longitude: [
285             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286         ],
287         latitude: [
288             { validator: coordinateValidator(-90, 90, "纬度"), trigger: "change" },
289         ],
290     },
```

● 问题代码11：

```

280         address: [
281             { required: true, message: "详细地址不能为空", trigger: "blur" },
282             { min: 4, max: 200, message: "详细地址长度应为 4 到 200 个字符",
trigger: "blur" },
283         ],
284         longitude: [
285             { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286         ],
287         latitude: [
288             { validator: coordinateValidator(-90, 90, "纬度"), trigger: "change" },
289         ],
290     },

```

● 问题代码12：

```

283     ],
284     longitude: [
285         { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286     ],
287     latitude: [
288         { validator: coordinateValidator(-90, 90, "纬度"), trigger: "change" },
289     ],
290 },
291 };
292 },
293 methods: {

```

● 问题代码13：

```

283     ],
284     longitude: [
285         { validator: coordinateValidator(-180, 180, "经度"), trigger: "change"
},
286     ],
287     latitude: [
288         { validator: coordinateValidator(-90, 90, "纬度"), trigger: "change" },
289     ],
290 },
291 };
292 },
293 methods: {

```

● 问题112: medical-managerment-system/src/views/SaleManage/index.vue: 296

● 问题代码1：

```

291     };
292 },
293 methods: {
294     // 切换分页及首次进入获取数据
295     getSalePlaceInfo() {
296         this.$store.dispatch("saleInfoManage/getSalePlaceInfo", {
297             pn: this.currentPage,
298             size: this.pageSize,
299         });
300     },
301     //当前页改变时触发,跳转其他页

```

- 问题113: medical-managerment-system/src/views/SaleManage/index.vue: 312

- 问题代码1 :

```
307         this.getSalePlaceInfo();
308     }
309 },
310 // 通过关键字查询数据
311 handelQuery(keyword) {
312     this.$store.dispatch("saleInfoManage/getSalePlaceInfo", {
313         pn: this.currentPage,
314         size: this.pageSize,
315         keyword,
316     });
317 },
```

- 问题114: medical-managerment-system/src/views/SaleManage/index.vue: 323, 333, 334

- 问题代码1 :

```
318 //新增销售地点
319 handleAddSalePlace(formName) {
320     this.$refs[formName].validate((valid) =>{
321         if (valid) {
322             this.addFormVisible = false;
323             this.$store.dispatch("saleInfoManage/addSalePlace", {
324                 saleName: this.addForm.saleName,
325                 salePhone: this.addForm.salePhone,
326                 address: this.addForm.address,
327                 longitude: this.addForm.longitude,
328                 latitude: this.addForm.latitude,
```

- 问题代码2 :

```
328         latitude: this.addForm.latitude,
329         size: this.pageSize,
330     });
331 } else {
332     this.$message({
333         message: "请检查输入的内容是否合规",
334         type: "warning",
335     });
336     return false;
337 }
338 });
```

- 问题代码3 :

```
329         size: this.pageSize,
330     });
331 } else {
332     this.$message({
333         message: "请检查输入的内容是否合规",
334         type: "warning",
335     });
336     return false;
337 }
338 });
339 },
```

- 问题115: medical-managerment-system/src/views/SaleManage/index.vue: 342, 343, 344, 345, 348, 357, 358

- 问题代码1 :

```

337     }
338   });
339 },
340 // 删除销售地点
341 handleDeleteSalePlace(saleId, saleName) {
342   this.$confirm('确定要删除 "${saleName}" 的相关信息吗?', "提示", {
343     confirmButtonText: "确定",
344     cancelButtonText: "取消",
345     type: "warning",
346   })
347   .then(() => {

```

- 问题代码2 :

```

338   });
339 },
340 // 删除销售地点
341 handleDeleteSalePlace(saleId, saleName) {
342   this.$confirm('确定要删除 "${saleName}" 的相关信息吗?', "提示", {
343     confirmButtonText: "确定",
344     cancelButtonText: "取消",
345     type: "warning",
346   })
347   .then(() => {
348     this.$store.dispatch("saleInfoManage/deleteSalePlace", {

```

- 问题代码3 :

```

339   },
340 // 删除销售地点
341 handleDeleteSalePlace(saleId, saleName) {
342   this.$confirm('确定要删除 "${saleName}" 的相关信息吗?', "提示", {
343     confirmButtonText: "确定",
344     cancelButtonText: "取消",
345     type: "warning",
346   })
347   .then(() => {
348     this.$store.dispatch("saleInfoManage/deleteSalePlace", {
349       saleId,

```

- 问题代码4 :

```

340 // 删除销售地点
341 handleDeleteSalePlace(saleId, saleName) {
342   this.$confirm('确定要删除 "${saleName}" 的相关信息吗?', "提示", {
343     confirmButtonText: "确定",
344     cancelButtonText: "取消",
345     type: "warning",
346   })
347   .then(() => {
348     this.$store.dispatch("saleInfoManage/deleteSalePlace", {
349       saleId,
350       pn: this.currentPage,

```

- 问题代码5 :

华为云 CodeArts Check 代码扫描报告

```
343     confirmButtonText: "确定",
344     cancelButtonText: "取消",
345     type: "warning",
346   })
347   .then(() => {
348     this.$store.dispatch("saleInfoManage/deleteSalePlace", {
349       saleId,
350       pn: this.currentPage,
351       size: this.pageSize,
352       keyword: this.keyword,
353     });
```

• 问题代码6：

```
352       keyword: this.keyword,
353     });
354   })
355   .catch(() => {
356     this.$message({
357       type: "info",
358       message: "已取消删除",
359     });
360   });
361 },
362 // 控制修改销售地点信息的表单弹出
```

• 问题代码7：

```
353   });
354   })
355   .catch(() => {
356     this.$message({
357       type: "info",
358       message: "已取消删除",
359     });
360   });
361 },
362 // 控制修改销售地点信息的表单弹出
363 handleModifyFormVisible(saleInfo) {
```

• 问题116: medical-managerment-system/src/views/SaleManage/index.vue: 368

• 问题代码1：

```
363   handleModifyFormVisible(saleInfo) {
364     this.modifyForm = {
365       saleId: saleInfo.saleId,
366       saleName: saleInfo.saleName,
367       salePhone: saleInfo.salePhone,
368       address: saleInfo.address || "",
369       longitude: this.toCoordinate(saleInfo.longitude),
370       latitude: this.toCoordinate(saleInfo.latitude),
371     };
372     this.modifyFormVisible = true;
373   },
```

• 问题117: medical-managerment-system/src/views/SaleManage/index.vue: 379,392,393

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
374 // 修改销售地点信息
375 handleModifySalePlace(formName) {
376   this.$refs[formName].validate((valid) => {
377     if (valid) {
378       this.modifyFormVisible = false;
379       this.$store.dispatch("saleInfoManage/modifySalePlaceInfo", {
380         saleId: this.modifyForm.saleId,
381         saleName: this.modifyForm.saleName,
382         salePhone: this.modifyForm.salePhone,
383         address: this.modifyForm.address,
384         longitude: this.modifyForm.longitude,
```

• 问题代码2：

```
387       size: this.pageSize,
388       keyword: this.keyword,
389     });
390   } else {
391     this.$message({
392       message: "请检查输入的内容是否合规",
393       type: "warning",
394     });
395     return false;
396   }
397 });
```

• 问题代码3：

```
388       keyword: this.keyword,
389     });
390   } else {
391     this.$message({
392       message: "请检查输入的内容是否合规",
393       type: "warning",
394     });
395     return false;
396   }
397 });
398 },
```

• 问题118: medical-managerment-system/src/views/SaleManage/index.vue: 409

• 问题代码1：

```
404 handleModifyClose() {
405   // this.$refs.modifyForm.clearValidate();
406   this.$refs.modifyForm.resetFields();
407 },
408 toCoordinate(value) {
409   if (value === "" || value === null || value === undefined) return null;
410   const coordinate = Number(value);
411   return Number.isFinite(coordinate) ? coordinate : null;
412 },
413 hasCoordinate(saleInfo) {
414   return (
```

• 问题119: medical-managerment-system/src/views/DrugManage/index.vue: 350

• 问题代码1：


```

345         num = num + 10;
346         this.percentage = num;
347         if (num == 90) {
348             clearInterval(t);
349             this.percentage = 100;
350             this.status = "success";
351         }
352     }, 50);
353 },
354 //选择完图片后自动上传，并拿到服务器返回的图片url地址
355 handleUploadSuccess(res) {

```

- 问题120: medical-managerment-system/src/views/DrugManage/index.vue: 356

• 问题代码1 :

```

351     }
352     }, 50);
353 },
354 //选择完图片后自动上传，并拿到服务器返回的图片url地址
355 handleUploadSuccess(res) {
356     this.$message.success("上传成功");
357     setTimeout(() => {
358         this.uploading = false;
359         this.percentage = 0;
360         this.status = null;
361         if (this.addFormVisible) {

```

- 问题121: medical-managerment-system/src/views/DrugManage/index.vue: 369, 375, 375

• 问题代码1 :

```

364         this.modifyForm.drugImg = res.data.url;
365     }
366     }, 800);
367 },
368 handleUploadError(err) {
369     this.$message.error("上传失败，请重试");
370     this.uploading = false;
371     this.percentage = 0;
372     this.status = null;
373     console.log(err);
374     let myError = err.toString(); //转字符串

```

• 问题代码2 :

```

370     this.uploading = false;
371     this.percentage = 0;
372     this.status = null;
373     console.log(err);
374     let myError = err.toString(); //转字符串
375     myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378 },
379 // 对上传的文件类型及大小进行限制
380 beforeImgUpload(file) {

```

• 问题代码3 :

```

370     this.uploading = false;
371     this.percentage = 0;
372     this.status = null;
373     console.log(err);
374     let myError = err.toString(); //转字符串
375     myError = myError.replace("Error: ", ""); // 去掉前面的" Error: "
376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378 },
379 // 对上传的文件类型及大小进行限制
380 beforeImgUpload(file) {

```

- 问题122: medical-managment-system/src/views/DrugManage/index.vue: 381,381,384,387

- 问题代码1 :

```

376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378 },
379 // 对上传的文件类型及大小进行限制
380 beforeImgUpload(file) {
381     const isJPG = file.type === "image/jpeg" || file.type === "image/png";
382     const isLt2M = file.size / 1024 / 1024 < 2;
383     if (!isJPG) {
384         this.$message.error("上传的图片只能是 JPG 格式或 PNG 格式");
385     }
386     if (!isLt2M) {

```

- 问题代码2 :

```

376     myError = JSON.parse(myError); //转对象
377     console.log(myError);
378 },
379 // 对上传的文件类型及大小进行限制
380 beforeImgUpload(file) {
381     const isJPG = file.type === "image/jpeg" || file.type === "image/png";
382     const isLt2M = file.size / 1024 / 1024 < 2;
383     if (!isJPG) {
384         this.$message.error("上传的图片只能是 JPG 格式或 PNG 格式");
385     }
386     if (!isLt2M) {

```

- 问题代码3 :

```

379 // 对上传的文件类型及大小进行限制
380 beforeImgUpload(file) {
381     const isJPG = file.type === "image/jpeg" || file.type === "image/png";
382     const isLt2M = file.size / 1024 / 1024 < 2;
383     if (!isJPG) {
384         this.$message.error("上传的图片只能是 JPG 格式或 PNG 格式");
385     }
386     if (!isLt2M) {
387         this.$message.error("上传药品图片大小不能超过 2MB");
388     }
389     return isJPG && isLt2M;

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
382     const isLt2M = file.size / 1024 / 1024 < 2;
383     if (!isJPG) {
384         this.$message.error("上传的图片只能是 JPG 格式或 PNG 格式");
385     }
386     if (!isLt2M) {
387         this.$message.error("上传药品图片大小不能超过 2MB");
388     }
389     return isJPG && isLt2M;
390 },
391 // 切换分页及首次进入获取数据
392 getDrugInfo() {
```

- 问题123: medical-managerment-system/src/views/DrugManage/index.vue: 393

- 问题代码1 :

```
388     }
389     return isJPG && isLt2M;
390 },
391 // 切换分页及首次进入获取数据
392 getDrugInfo() {
393     this.$store.dispatch("drugInfoManage/getDrugInfo", {
394         pn: this.currentPage,
395         size: this.pageSize,
396     });
397 },
398 //当前页改变时触发,跳转其他页
```

- 问题124: medical-managerment-system/src/views/DrugManage/index.vue: 420,427,431

- 问题代码1 :

```
415     //新增药品
416     handleAddDrug(formName) {
417         this.$refs[formName].validate((valid) => {
418             if (valid) {
419                 this.addFormVisible = false;
420                 this.$store.dispatch("drugInfoManage/addDrug", {
421                     drugName: this.addForm.drugName,
422                     drugInfo: this.addForm.drugInfo,
423                     drugEffect: this.addForm.drugEffect,
424                     drugImg: this.addForm.drugImg,
425                     saleIds: this.addForm.saleIds,
```

- 问题代码2 :

```
422         drugInfo: this.addForm.drugInfo,
423         drugEffect: this.addForm.drugEffect,
424         drugImg: this.addForm.drugImg,
425         saleIds: this.addForm.saleIds,
426         size: this.pageSize,
427         drugPublisher: JSON.parse(localStorage.getItem("userInfo"))
428             .realname,
429     });
430     } else {
431         this.$message.warning("请检查输入的内容是否合规");
432         return false;
```

- 问题代码3 :

华为云 CodeArts Check 代码扫描报告

```
426         size: this.pageSize,
427         drugPublisher: JSON.parse(localStorage.getItem("userInfo"))
428             .realname,
429     });
430     } else {
431         this.$message.warning("请检查输入的内容是否合规");
432         return false;
433     }
434 });
435 },
436 // 删除药品
```

- 问题125: medical-managerment-system/src/views/DrugManage/index.vue: 438,439,440,441,444,453,454

- 问题代码1 :

```
433     }
434     });
435 },
436 // 删除药品
437 handleDeleteDrug(drugId, drugName) {
438     this.$confirm('确定要删除 "${drugName}" 的相关信息吗?', "提示", {
439         confirmButtonText: "确定",
440         cancelButtonText: "取消",
441         type: "warning",
442     })
443     .then(() => {
```

- 问题代码2 :

```
434     });
435 },
436 // 删除药品
437 handleDeleteDrug(drugId, drugName) {
438     this.$confirm('确定要删除 "${drugName}" 的相关信息吗?', "提示", {
439         confirmButtonText: "确定",
440         cancelButtonText: "取消",
441         type: "warning",
442     })
443     .then(() => {
444         this.$store.dispatch("drugInfoManage/deleteDrug", {
```

- 问题代码3 :

```
435     },
436 // 删除药品
437 handleDeleteDrug(drugId, drugName) {
438     this.$confirm('确定要删除 "${drugName}" 的相关信息吗?', "提示", {
439         confirmButtonText: "确定",
440         cancelButtonText: "取消",
441         type: "warning",
442     })
443     .then(() => {
444         this.$store.dispatch("drugInfoManage/deleteDrug", {
445             drugId,
```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
436 // 删除药品
437 handleDeleteDrug(drugId, drugName) {
438     this.$confirm('确定要删除 "${drugName}" 的相关信息吗?', "提示", {
439         confirmButtonText: "确定",
440         cancelButtonText: "取消",
441         type: "warning",
442     })
443     .then(() => {
444         this.$store.dispatch("drugInfoManage/deleteDrug", {
445             drugId,
446             pn: this.currentPage,
```

- 问题代码5：

```
439         confirmButtonText: "确定",
440         cancelButtonText: "取消",
441         type: "warning",
442     })
443     .then(() => {
444         this.$store.dispatch("drugInfoManage/deleteDrug", {
445             drugId,
446             pn: this.currentPage,
447             size: this.pageSize,
448             keyword: this.keyword,
449         });
```

- 问题代码6：

```
448         keyword: this.keyword,
449     });
450 })
451 .catch(() => {
452     this.$message({
453         type: "info",
454         message: "已取消删除",
455     });
456 });
457 },
458 // 控制修改药品信息的表单弹出
```

- 问题代码7：

```
449     });
450 })
451 .catch(() => {
452     this.$message({
453         type: "info",
454         message: "已取消删除",
455     });
456 });
457 },
458 // 控制修改药品信息的表单弹出
459 handleModifyFormVisible(
```

- 问题126: medical-managment-system/src/views/DrugManage/index.vue: 485,498,499

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
480 // 修改药品信息
481 handleModifyDrug(formName) {
482   this.$refs[formName].validate((valid) => {
483     if (valid) {
484       this.modifyFormVisible = false;
485       this.$store.dispatch("drugInfoManage/modifyDrugInfo", {
486         drugId: this.modifyForm.drugId,
487         drugName: this.modifyForm.drugName,
488         drugInfo: this.modifyForm.drugInfo,
489         drugEffect: this.modifyForm.drugEffect,
490         drugImg: this.modifyForm.drugImg,
```

• 问题代码2：

```
493       size: this.pageSize,
494       keyword: this.keyword,
495     });
496   } else {
497     this.$message({
498       message: "请检查输入的内容是否合规",
499       type: "warning",
500     });
501     return false;
502   }
503 });
```

• 问题代码3：

```
494       keyword: this.keyword,
495     });
496   } else {
497     this.$message({
498       message: "请检查输入的内容是否合规",
499       type: "warning",
500     });
501     return false;
502   }
503 });
504 },
```

- 问题127: medical-managerment-system/src/views/DoctorManage/index.vue: 355

• 问题代码1：

```
350   };
351 },
352 methods: {
353   // 切换分页及首次进入获取数据
354   getDoctorInfo() {
355     this.$store.dispatch("doctorInfoManage/getDoctorInfo", {
356       pn: this.currentPage,
357       size: this.pageSize,
358     });
359   },
360   //当前页改变时触发,跳转其他页
```

- 问题128: medical-managerment-system/src/views/DoctorManage/index.vue: 382,399,400

• 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
377 //新增
378 handleAddDoctor(formName) {
379     this.$refs[formName].validate((valid) => {
380         if (valid) {
381             this.$store
382             .dispatch("doctorInfoManage/addDoctor", {
383                 age: this.addForm.age,
384                 levelId: this.addForm.levelId,
385                 name: this.addForm.name,
386                 phoneNumber: this.addForm.phoneNumber,
387                 pwd: this.addForm.pwd,
```

• 问题代码2：

```
394         this.addFormVisible = false;
395     }
396 });
397 } else {
398     this.$message({
399         message: "请检查输入的内容是否合规",
400         type: "warning",
401     });
402     return false;
403 }
404 });
```

• 问题代码3：

```
395     }
396 });
397 } else {
398     this.$message({
399         message: "请检查输入的内容是否合规",
400         type: "warning",
401     });
402     return false;
403 }
404 });
405 },
```

- 问题129: medical-managerment-system/src/views/DoctorManage/index.vue: 408,409,410,411,414,423,424

• 问题代码1：

```
403     }
404 });
405 },
406 // 删除
407 handleDeleteDoctor(id, name) {
408     this.$confirm('确定要删除 "${name}" 的相关信息吗?', "提示", {
409         confirmButtonText: "确定",
410         cancelButtonText: "取消",
411         type: "warning",
412     })
413     .then(() => {
```

• 问题代码2：

```

404     });
405   },
406   // 删除
407   handleDeleteDoctor(id, name) {
408     this.$confirm('确定要删除 "${name}" 的相关信息吗?', "提示", {
409       confirmButtonText: "确定",
410       cancelButtonText: "取消",
411       type: "warning",
412     })
413     .then(() => {
414       this.$store.dispatch("doctorInfoManage/deleteDoctor", {

```

● 问题代码3：

```

405   },
406   // 删除
407   handleDeleteDoctor(id, name) {
408     this.$confirm('确定要删除 "${name}" 的相关信息吗?', "提示", {
409       confirmButtonText: "确定",
410       cancelButtonText: "取消",
411       type: "warning",
412     })
413     .then(() => {
414       this.$store.dispatch("doctorInfoManage/deleteDoctor", {
415         id,

```

● 问题代码4：

```

406   // 删除
407   handleDeleteDoctor(id, name) {
408     this.$confirm('确定要删除 "${name}" 的相关信息吗?', "提示", {
409       confirmButtonText: "确定",
410       cancelButtonText: "取消",
411       type: "warning",
412     })
413     .then(() => {
414       this.$store.dispatch("doctorInfoManage/deleteDoctor", {
415         id,
416         pn: this.currentPage,

```

● 问题代码5：

```

409       confirmButtonText: "确定",
410       cancelButtonText: "取消",
411       type: "warning",
412     })
413     .then(() => {
414       this.$store.dispatch("doctorInfoManage/deleteDoctor", {
415         id,
416         pn: this.currentPage,
417         size: this.pageSize,
418         keyword: this.keyword,
419       });

```

● 问题代码6：

华为云 CodeArts Check 代码扫描报告

```
418         keyword: this.keyword,
419     });
420 })
421 .catch(() => {
422     this.$message({
423         type: "info",
424         message: "已取消删除",
425     });
426 });
427 },
428 // 控制修改表单的弹出
```

- 问题代码7：

```
419     });
420 })
421 .catch(() => {
422     this.$message({
423         type: "info",
424         message: "已取消删除",
425     });
426 });
427 },
428 // 控制修改表单的弹出
429 handleModifyFormVisible(
```

- 问题130: medical-managerment-system/src/views/DoctorManage/index.vue: 456,477,478

- 问题代码1：

```
451 // 修改
452 handleModifyDoctor(formName) {
453     this.$refs[formName].validate((valid) => {
454         if (valid) {
455             this.$store
456                 .dispatch("doctorInfoManage/modifyDoctor", {
457                     accountId: this.modifyForm.accountId,
458                     age: this.modifyForm.age,
459                     levelId: this.modifyForm.levelId,
460                     name: this.modifyForm.name,
461                     phoneNumber: this.modifyForm.phoneNumber,
```

- 问题代码2：

```
472         this.modifyFormVisible = false;
473     }
474 });
475 } else {
476     this.$message({
477         message: "请检查输入的内容是否合规",
478         type: "warning",
479     });
480     return false;
481 }
482 });
```

- 问题代码3：

```

473         }
474     });
475     } else {
476         this.$message({
477             message: "请检查输入的内容是否合规",
478             type: "warning",
479         });
480         return false;
481     }
482 });
483 },

```

- 问题131: medical-managerment-system/src/views/DoctorManage/index.vue: 486,487,488,489,496,497

- 问题代码1：

```

481     }
482     });
483 },
484 // 重置医生密码
485 resetPassword(id, name) {
486     this.$confirm('确定要重置 "${name}" 的密码吗?', "提示", {
487         confirmButtonText: "确定",
488         cancelButtonText: "取消",
489         type: "warning",
490     })
491     .then(() => {

```

- 问题代码2：

```

482     });
483 },
484 // 重置医生密码
485 resetPassword(id, name) {
486     this.$confirm('确定要重置 "${name}" 的密码吗?', "提示", {
487         confirmButtonText: "确定",
488         cancelButtonText: "取消",
489         type: "warning",
490     })
491     .then(() => {
492         resetPassword(id);

```

- 问题代码3：

```

483     },
484 // 重置医生密码
485 resetPassword(id, name) {
486     this.$confirm('确定要重置 "${name}" 的密码吗?', "提示", {
487         confirmButtonText: "确定",
488         cancelButtonText: "取消",
489         type: "warning",
490     })
491     .then(() => {
492         resetPassword(id);
493     })

```

- 问题代码4：

华为云 CodeArts Check 代码扫描报告

```
484 // 重置医生密码
485 resetPassword(id, name) {
486   this.$confirm('确定要重置 "${name}" 的密码吗?', "提示", {
487     confirmButtonText: "确定",
488     cancelButtonText: "取消",
489     type: "warning",
490   })
491   .then(() => {
492     resetPassword(id);
493   })
494   .catch(() => {
```

- 问题代码5：

```
491   .then(() => {
492     resetPassword(id);
493   })
494   .catch(() => {
495     this.$message({
496       type: "info",
497       message: "已取消重置",
498     });
499   });
500 },
501 // 每次关闭表单的时候重置表单
```

- 问题代码6：

```
492     resetPassword(id);
493   })
494   .catch(() => {
495     this.$message({
496       type: "info",
497       message: "已取消重置",
498     });
499   });
500 },
501 // 每次关闭表单的时候重置表单
502 handleAddClose() {
```

- 问题132: medical-managerment-system/src/views/Home/index.vue:121,121

- 问题代码1：

```
116   ],
117   };
118 },
119 computed: {
120   dashboardStatusText() {
121     return this.dashboardDegraded ? "统计接口暂不可用，业务入口仍可使用" : "数据已同步";
122   },
123   metrics() {
124     return metricDefinitions.map((definition) => ({
125       ...definition,
126       value: this.pickMetric(definition.aliases),
```

- 问题代码2：

```

116     ],
117   };
118 },
119   computed: {
120     dashboardStatusText() {
121       return this.dashboardDegraded ? "统计接口暂不可用，业务入口仍可使用" : "数据已同步";
122     },
123     metrics() {
124       return metricDefinitions.map((definition) => ({
125         ...definition,
126         value: this.pickMetric(definition.aliases),

```

- 问题133: medical-management-system/vue.config.js:5,6,8,9

- 问题代码1 :

```

1 module.exports = {
2   publicPath: '/',
3   lintOnSave: false, // 关闭ESLint检查
4   devServer: {
5     host: "0.0.0.0",
6     port: "9092", // 代理端口
7     proxy: {
8       "/api": {
9         target: process.env.VUE_APP_PROXY_TARGET || "http://localhost:8082",
10        changeOrigin: true,

```

- 问题代码2 :

```

1 module.exports = {
2   publicPath: '/',
3   lintOnSave: false, // 关闭ESLint检查
4   devServer: {
5     host: "0.0.0.0",
6     port: "9092", // 代理端口
7     proxy: {
8       "/api": {
9         target: process.env.VUE_APP_PROXY_TARGET || "http://localhost:8082",
10        changeOrigin: true,
11      },

```

- 问题代码3 :

```

3   lintOnSave: false, // 关闭ESLint检查
4   devServer: {
5     host: "0.0.0.0",
6     port: "9092", // 代理端口
7     proxy: {
8       "/api": {
9         target: process.env.VUE_APP_PROXY_TARGET || "http://localhost:8082",
10        changeOrigin: true,
11      },
12    },
13  },

```

- 问题代码4 :

华为云 CodeArts Check 代码扫描报告

```
4 devServer: {
5   host: "0.0.0.0",
6   port: "9092", // 代理端口
7   proxy: {
8     "/api": {
9       target: process.env.VUE_APP_PROXY_TARGET || "http://localhost:8082",
10      changeOrigin: true,
11    },
12  },
13 },
14 };
```

- 问题134: medical-managerment-system/src/views/Home/index.vue:148

- 问题代码1 :

```
143     if (source[key] !== undefined && source[key] !== null) {
144       return source[key];
145     }
146   }
147 }
148 return "--";
149 },
150 async loadDashboard() {
151   this.dashboardLoading = true;
152   try {
153     const res = await getDashboard();
```

- 问题135: medical-managerment-system/src/views/Home/index.vue:155

- 问题代码1 :

```
150   async loadDashboard() {
151     this.dashboardLoading = true;
152     try {
153       const res = await getDashboard();
154       if (!res.data || Number(res.data.code) !== 20000) {
155         throw new Error("统计数据加载失败");
156       }
157       this.dashboardData = res.data.data || {};
158       this.dashboardDegraded = false;
159     } catch (error) {
160       // 仪表盘是增强功能，失败不阻塞首页和其他业务模块。
```

- 问题136: medical-managerment-system/src/main.js:7,8,9,10,11

- 问题代码1 :

```
2 import App from './App.vue'
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
```

- 问题代码2 :

```
3 import router from './router'//引入router
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
```

● 问题代码3：

```
4 import store from './store'//引入vuex
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
14 Vue.use(Fragment.Plugin);
```

● 问题代码4：

```
5
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
14 Vue.use(Fragment.Plugin);
15 Vue.use(Element);
```

● 问题代码5：

```
6 import _ from 'lodash'//js库
7 import "./style/reset.css";//引入样式
8 import Fragment from "vue-fragment";//处理Dom插件
9 import "animate.css";//引入样式
10 import Element from "element-ui";
11 import "element-ui/lib/theme-chalk/index.css";
12
13 Vue.config.productionTip = false;
14 Vue.use(Fragment.Plugin);
15 Vue.use(Element);
16 Vue.prototype._ = _;
```

3.3.1.19 G.CMT.01 public或protected修饰的元素应添加Javadoc注释 (235)

● 问题描述：

最低限度要为每个public或protected修饰的类、接口、枚举、类方法和类属性添加注释，这些注释的格式应该采用Javadoc注释格式（即使用/** */进行注释），除此之外按需添加Javadoc注释。实现接口方法时，其Javadoc允许使用{@inheritDoc}。

- 正确示例：

场景1：

- 修复示例：

```
// 【GOOD】 public或protected修饰的元素应添加Javadoc注释
/**
 * doSomething方法的功能说明
 *
 * @param data xxx ( data的具体含义 )
 * @return List 返回结果集合，集合不会为null
 * @throws IOException 当出现xx时，会抛出IOException
 */
public static List<String> doSomething(int data) throws IOException {
    ...
}
```

- 错误示例：

场景1：

- 错误示例：

```
// 【POTENTIAL FLAW】 未添加注释
public static List<String> doSomething(int data) throws IOException {
    ...
}
```

- 建议的写法：

为public或protected修饰的元素应添加Javadoc注释。

- 问题1: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:13

- 问题代码1：

```
8 @Mapper
9 public interface CompanyMapper {
10     @Select("<script>SELECT COUNT(*) FROM drugcompany <where>"
11             + "<if test='name != null and name != '\">company_name LIKE CONCAT"
12             + "</where></script>")
13     long count(@Param("name") String name);
14
15     @Select("<script>SELECT company_id AS companyId, company_name AS companyName,"
16             + "company_phone AS companyPhone "
17             + "FROM drugcompany <where>"
18             + "<if test='name != null and name != '\">company_name LIKE CONCAT"
19             + "</where> ORDER BY company_id LIMIT #{offset}, #{size}</script>")
```

- 问题2: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:19

- 问题代码1：

```

14
15     @Select("<script>SELECT company_id AS companyId, company_name AS companyName,
16             company_phone AS companyPhone "
17             + "FROM drugcompany <where>"
18             + "<if test='name != null and name != \"\"'>company_name LIKE CONCAT
19             ('%', #{name}, '%')</if>"
20             + "</where> ORDER BY company_id LIMIT #{offset}, #{size}</script>")
21     List<Map<String, Object>> page(@Param("name") String name,
22                                   @Param("offset") int offset,
23                                   @Param("size") int size);
24
25     @Select("SELECT company_id AS companyId, company_name AS companyName,
26             company_phone AS companyPhone "
27             + "FROM drugcompany ORDER BY company_id")

```

- 问题3: medical-backend/src/main/java/com/medicine/business/service/FileStorageService.java:20

- 问题代码1 :

```

15 import java.util.Locale;
16 import java.util.Set;
17 import java.util.UUID;
18
19 @Service
20 public class FileStorageService {
21     private static final long MAX_IMAGE_SIZE = 2L * 1024 * 1024;
22     private static final Set<String> IMAGE_TYPES = Set.of("image/jpeg", "image/
23 png");
24     private final Path directory;

```

- 问题4: medical-backend/src/main/java/com/medicine/business/service/FileStorageService.java:30

- 问题代码1 :

```

25
26     public FileStorageService(@Value("${app.upload.directory:uploads}") String
27     directory) {
28         this.directory = Path.of(directory).toAbsolutePath().normalize();
29     }
30     public String saveImage(MultipartFile file) {
31         if (file == null || file.isEmpty()) {
32             throw new BusinessException(ErrorCode.INVALID_ARGUMENT, "请选择要上传的
33 图片");
34         }
35         String contentType = file.getContentType() == null ? "" : file.
36 getContentType().toLowerCase(Locale.ROOT);
37         if (!IMAGE_TYPES.contains(contentType)) {

```

- 问题5: medical-backend/src/main/java/com/medicine/dashboard/dto/NameValue.java:3

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.dashboard.dto;
2
3 public class NameValue {
4
5     private String name;
6     private long value;
7
8     public NameValue() {
```

- 问题6: medical-backend/src/main/java/com/medicine/security/RestAuthenticationEntryPoint.java:17

- 问题代码1 :

```
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAuthenticationEntryPoint implements AuthenticationEntryPoint {
18
19     private final ObjectMapper objectMapper;
20
21     public RestAuthenticationEntryPoint(ObjectMapper objectMapper) {
22         this.objectMapper = objectMapper;
```

- 问题7: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:8

- 问题代码1 :

```
3 import com.medicine.dashboard.dto.DashboardView;
4 import com.medicine.dashboard.mapper.DashboardMapper;
5 import org.springframework.stereotype.Service;
6
7 @Service
8 public class DashboardService {
9
10     private final DashboardMapper dashboardMapper;
11
12     public DashboardService(DashboardMapper dashboardMapper) {
13         this.dashboardMapper = dashboardMapper;
```

- 问题8: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:16

- 问题代码1 :

```
11
12     public DashboardService(DashboardMapper dashboardMapper) {
13         this.dashboardMapper = dashboardMapper;
14     }
15
16     public DashboardView getDashboard() {
17         return new DashboardView(
18             dashboardMapper.findCounts(),
19             dashboardMapper.findDoctorLevels(),
20             dashboardMapper.findTreatTypes(),
21             dashboardMapper.findNews()
```

- 问题9: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:9

- 问题代码1 :

```
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 import java.util.List;
8
9 public interface PermissionMapper {
10
11     @Select("SELECT p.id, p.pid, p.name, p.path, p.component, p.level, p.title "
12           + "FROM permission p JOIN role_permission rp ON rp.per_id = p.id "
13           + "WHERE rp.roleName = #{roleName} ORDER BY p.id")
14     List<PermissionRecord> findByRoleName(@Param("roleName") String roleName);
```

- 问题10: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:9

- 问题代码1 :

```
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface DrugMapper {
10     @Select("<script>SELECT COUNT(*) FROM drug <where>"
11           + "<if test='name != null and name != \"\"'>drug_name LIKE CONCAT"
12           + "('%', #{name}, '%')</if>"
13           + "</where></script>")
14     long count(@Param("name") String name);
```

- 问题11: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:14

- 问题代码1 :

```
9 public interface PermissionMapper {
10
11     @Select("SELECT p.id, p.pid, p.name, p.path, p.component, p.level, p.title "
12           + "FROM permission p JOIN role_permission rp ON rp.per_id = p.id "
13           + "WHERE rp.roleName = #{roleName} ORDER BY p.id")
14     List<PermissionRecord> findByRoleName(@Param("roleName") String roleName);
```

- 问题12: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:28

- 问题代码1 :

```

23
24     @Select("<script>SELECT ds.drug_id AS drugId, s.sale_id AS saleId, s.
sale_name AS saleName "
25         + "FROM drug_sale ds JOIN sale s ON s.sale_id=ds.sale_id WHERE ds.
drug_id IN "
26         + "<foreach item='id' collection='drugIds' open='(' separator=','
close=')'>#{id}</foreach> "
27         + "ORDER BY ds.id</script>")
28     List<Map<String, Object>> findSales(@Param("drugIds") List<Long> drugIds);
29
30     @Insert("INSERT INTO drug(drug_name, drug_info, drug_effect, drug_img,
createtime, updatetime, publisher) "
31         + "VALUES(#{drugName}, #{drugInfo}, #{drugEffect}, #{drugImg}, NOW(),
NOW(), #{drugPublisher})")
32     @Options(useGeneratedKeys = true, keyProperty = "drugId", keyColumn =
"drug_id")
33     int insertDrug(Map<String, Object> drug);

```

- 问题13: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:43

- 问题代码1 :

```

38     @Update("UPDATE drug SET drug_name=#{drugName}, drug_info=#{drugInfo},
drug_effect=#{drugEffect}, "
39         + "drug_img=#{drugImg}, updatetime=NOW() WHERE drug_id=#{drugId}")
40     int updateDrug(Map<String, Object> drug);
41
42     @Delete("DELETE FROM drug_sale WHERE drug_id=#{drugId}")
43     int deleteSaleRelations(@Param("drugId") Long drugId);
44
45     @Delete("DELETE FROM drug WHERE drug_id=#{drugId}")
46     int deleteDrug(@Param("drugId") Long drugId);
47 }

```

- 问题14: medical-backend/src/main/java/com/medicine/auth/dto/LoginRequest.java:6

- 问题代码1 :

```

1 package com.medicine.auth.dto;
2
3 import javax.validation.constraints.NotBlank;
4 import javax.validation.constraints.Size;
5
6 public class LoginRequest {
7
8     @NotBlank(message = "用户名不能为空")
9     @Size(max = 255, message = "用户名过长")
10     private String username;

```

- 问题15: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:33

- 问题代码1 :

```

28     List<Map<String, Object>> findSales(@Param("drugIds") List<Long> drugIds);
29
30     @Insert("INSERT INTO drug(drug_name, drug_info, drug_effect, drug_img,
31         createtime, updatetime, publisher) "
32         + "VALUES(#{drugName}, #{drugInfo}, #{drugEffect}, #{drugImg}, NOW(),
33         NOW(), #{drugPublisher})")
34     @Options(useGeneratedKeys = true, keyProperty = "drugId", keyColumn =
35         "drug_id")
36     int insertDrug(Map<String, Object> drug);
37
38     @Insert("INSERT INTO drug_sale(drug_id, sale_id) VALUES(#{drugId}, #
39         {saleId})")
40     int insertSaleRelation(@Param("drugId") Long drugId, @Param("saleId") Long
41         saleId);
42
43     @Update("UPDATE drug SET drug_name=#{drugName}, drug_info=#{drugInfo},
44         drug_effect=#{drugEffect}, "

```

- 问题16: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:13

- 问题代码1 :

```

8 @Mapper
9 public interface DrugMapper {
10     @Select("<script>SELECT COUNT(*) FROM drug <where>"
11         + "<if test='name != null and name != \"\"'>drug_name LIKE CONCAT
12         ('%', #{name}, '%')</if>"
13         + "</where></script>")
14     long count(@Param("name") String name);
15
16     @Select("<script>SELECT drug_id AS drugId, drug_name AS drugName, drug_info
17         AS drugInfo, "
18         + "drug_effect AS drugEffect, drug_img AS drugImg, publisher AS
19         drugPublisher "
20         + "FROM drug <where>"
21         + "<if test='name != null and name != \"\"'>drug_name LIKE CONCAT
22         ('%', #{name}, '%')</if>"

```

- 问题17: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:40

- 问题代码1 :

```

35     @Insert("INSERT INTO drug_sale(drug_id, sale_id) VALUES(#{drugId}, #
36         {saleId})")
37     int insertSaleRelation(@Param("drugId") Long drugId, @Param("saleId") Long
38         saleId);
39
40     @Update("UPDATE drug SET drug_name=#{drugName}, drug_info=#{drugInfo},
41         drug_effect=#{drugEffect}, "
42         + "drug_img=#{drugImg}, updatetime=NOW() WHERE drug_id=#{drugId}")
43     int updateDrug(Map<String, Object> drug);
44
45     @Delete("DELETE FROM drug_sale WHERE drug_id=#{drugId}")
46     int deleteSaleRelations(@Param("drugId") Long drugId);
47
48     @Delete("DELETE FROM drug WHERE drug_id=#{drugId}")

```

- 问题18: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:20

- 问题代码1 :

```

15      @Select("<script>SELECT drug_id AS drugId, drug_name AS drugName, drug_info
AS drugInfo, "
16          + "drug_effect AS drugEffect, drug_img AS drugImg, publisher AS
drugPublisher "
17          + "FROM drug <where>"
18          + "<if test='name != null and name != \"\"'>drug_name LIKE CONCAT
('%', #{name}, '%')</if>"
19          + "</where> ORDER BY drug_id LIMIT #{offset}, #{size}</script>")
20      List<Map<String, Object>> page(@Param("name") String name,
21                                   @Param("offset") int offset,
22                                   @Param("size") int size);
23
24      @Select("<script>SELECT ds.drug_id AS drugId, s.sale_id AS saleId, s.
sale_name AS saleName "
25          + "FROM drug_sale ds JOIN sale s ON s.sale_id=ds.sale_id WHERE ds.
drug_id IN "

```

- 问题19: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:36

- 问题代码1 :

```

31          + "VALUES(#{drugName}, #{drugInfo}, #{drugEffect}, #{drugImg}, NOW(),
NOW(), #{drugPublisher})")
32      @Options(useGeneratedKeys = true, keyProperty = "drugId", keyColumn =
"drug_id")
33      int insertDrug(Map<String, Object> drug);
34
35      @Insert("INSERT INTO drug_sale(drug_id, sale_id) VALUES(#{drugId}, #
{saleId})")
36      int insertSaleRelation(@Param("drugId") Long drugId, @Param("saleId") Long
saleId);
37
38      @Update("UPDATE drug SET drug_name=#{drugName}, drug_info=#{drugInfo},
drug_effect=#{drugEffect}, "
39          + "drug_img=#{drugImg}, updatetime=NOW() WHERE drug_id=#{drugId}")
40      int updateDrug(Map<String, Object> drug);

```

- 问题20: medical-backend/src/main/java/com/medicine/business/mapper/DrugMapper.java:46

- 问题代码1 :

```

41
42      @Delete("DELETE FROM drug_sale WHERE drug_id=#{drugId}")
43      int deleteSaleRelations(@Param("drugId") Long drugId);
44
45      @Delete("DELETE FROM drug WHERE drug_id=#{drugId}")
46      int deleteDrug(@Param("drugId") Long drugId);

```

- 问题21: medical-backend/src/main/java/com/medicine/auth/dto/UserInfo.java:3

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class UserInfo {
4
5     private Long id;
6     private String realname;
7     private String uname;
8     private String phonenumber;
```

- 问题22: medical-backend/src/main/java/com/medicine/auth/dto/PermissionMeta.java:3

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class PermissionMeta {
4
5     private String title;
6
7     public PermissionMeta() {
8     }
```

- 问题23: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:12

- 问题代码1 :

```
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/companys")
12 public class CompanyController {
13     private final CompanyService service;
14
15     public CompanyController(CompanyService service) {
16         this.service = service;
17     }
```

- 问题24: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:29

- 问题代码1 :

```
24         return BusinessResponses.wrapped("pageInfo", service.page(pn, size,
25         name));
26     }
27     @GetMapping
28     @PreAuthorize("hasAnyRole('1','2')")
29     public ApiResponse<Map<String, Object>> all() {
30         return BusinessResponses.wrapped("pageInfo", service.all());
31     }
32
33     @PostMapping
34     @PreAuthorize("hasRole('1')")
```

- 问题25: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:35

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
30         return BusinessResponses.wrapped("pageInfo", service.all());
31     }
32
33     @PostMapping
34     @PreAuthorize("hasRole('1')")
35     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
request) {
36         return BusinessResponses.pages(service.add(request, 5));
37     }
38
39     @PutMapping("/{companyId}")
40     @PreAuthorize("hasRole('1')")
```

- 问题26: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:21

- 问题代码1 :

```
16         this.service = service;
17     }
18
19     @GetMapping("/{pn}/{size}")
20     @PreAuthorize("hasAnyRole('1','2')")
21     public ApiResponse<Map<String, Object>> page(@PathVariable Integer pn,
22                                                 @PathVariable Integer size,
23                                                 @RequestParam(required = false)
String name) {
24         return BusinessResponses.wrapped("pageInfo", service.page(pn, size,
name));
25     }
```

- 问题27: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:48

- 问题代码1 :

```
43         return ApiResponse.success();
44     }
45
46     @DeleteMapping("/{companyId}")
47     @PreAuthorize("hasRole('1')")
48     public ApiResponse<Void> delete(@PathVariable Long companyId) {
49         service.delete(companyId);
50         return ApiResponse.success();
51     }
52 }
```

- 问题28: medical-backend/src/main/java/com/medicine/business/controller/CompanyController.java:41

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
36         return BusinessResponses.pages(service.add(request, 5));
37     }
38
39     @PutMapping("/{companyId}")
40     @PreAuthorize("hasRole('1')")
41     public ApiResponse<Void> update(@PathVariable Long companyId, @RequestBody
Map<String, Object> request) {
42         service.update(companyId, request);
43         return ApiResponse.success();
44     }
45
46     @DeleteMapping("/{companyId}")
```

- 问题29: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:12

- 问题代码1 :

```
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/materials")
12 public class MaterialController {
13     private final MaterialService service;
14
15     public MaterialController(MaterialService service) {
16         this.service = service;
17     }
```

- 问题30: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:7

- 问题代码1 :

```
2
3 import com.medicine.auth.model.Account;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 public interface AccountMapper {
8
9     @Select("SELECT id, realname, uname, pwd, phonenumber, utype FROM account
WHERE uname = #{username} LIMIT 1")
10     Account findByUsername(@Param("username") String username);
11 }
```

- 问题31: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:29

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
24         return BusinessResponses.wrapped("materialInfo", service.page(pn, size,
25         keyword));
26     }
27     @PostMapping
28     @PreAuthorize("hasRole('1')")
29     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
30     request) {
31         return BusinessResponses.pages(service.add(request, 5));
32     }
33     @PutMapping("/{id}")
34     @PreAuthorize("hasRole('1')")
```

- 问题32: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:10

- 问题代码1 :

```
5 import org.apache.ibatis.annotations.Select;
6
7 public interface AccountMapper {
8
9     @Select("SELECT id, realname, uname, pwd, phonenumber, utype FROM account
10     WHERE uname = #{username} LIMIT 1")
11     Account findByUsername(@Param("username") String username);
```

- 问题33: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:42

- 问题代码1 :

```
37         return ApiResponse.success();
38     }
39
40     @DeleteMapping("/{id}")
41     @PreAuthorize("hasRole('1')")
42     public ApiResponse<Void> delete(@PathVariable Long id) {
43         service.delete(id);
44         return ApiResponse.success();
45     }
46 }
```

- 问题34: medical-backend/src/main/java/com/medicine/business/service/CityService.java:10

- 问题代码1 :

```
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8
9 @Service
10 public class CityService {
11     private final CityMapper mapper;
12
13     public CityService(CityMapper mapper) {
14         this.mapper = mapper;
15     }
```

- 问题35: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:35

- 问题代码1：

```

30         return BusinessResponses.pages(service.add(request, 5));
31     }
32
33     @PutMapping("/{id}")
34     @PreAuthorize("hasRole('1')")
35     public ApiResponse<Void> update(@PathVariable Long id, @RequestBody
Map<String, Object> request) {
36         service.update(id, request);
37         return ApiResponse.success();
38     }
39
40     @DeleteMapping("/{id}")

```

- 问题36: medical-backend/src/main/java/com/medicine/business/service/CityService.java:43

- 问题代码1：

```

38         mapper.insert(cityNumber);
39         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
40     }
41
42     @Transactional
43     public void delete(Long cityId) {
44         mapper.delete(cityId);
45     }

```

- 问题37: medical-backend/src/main/java/com/medicine/business/controller/MaterialController.java:21

- 问题代码1：

```

16         this.service = service;
17     }
18
19     @GetMapping
20     @PreAuthorize("hasAnyRole('1','2')")
21     public ApiResponse<Map<String, Object>> page(@RequestParam(defaultValue =
"1") Integer pn,
22                                                     @RequestParam(defaultValue =
"5") Integer size,
23                                                     @RequestParam(required = false)
String keyword) {
24         return BusinessResponses.wrapped("materialInfo", service.page(pn, size,
keyword));
25     }

```

- 问题38: medical-backend/src/main/java/com/medicine/business/service/CityService.java:27

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
22         return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
23             pageSize), pageSize),
24             total, pageNumber, pageSize);
25     }
26     @Transactional(readOnly = true)
27     public Map<String, Object> all() {
28         return PageSupport.all(mapper.findAll());
29     }
30
31     @Transactional(readOnly = true)
32     public boolean exists(Integer cityNumber) {
```

- 问题39: medical-backend/src/main/java/com/medicine/business/service/CityService.java:32

- 问题代码1 :

```
27     public Map<String, Object> all() {
28         return PageSupport.all(mapper.findAll());
29     }
30
31     @Transactional(readOnly = true)
32     public boolean exists(Integer cityNumber) {
33         return cityNumber != null && mapper.countByNumber(cityNumber) > 0;
34     }
35
36     @Transactional
37     public int add(Integer cityNumber, int pageSize) {
```

- 问题40: medical-backend/src/main/java/com/medicine/business/service/CityService.java:18

- 问题代码1 :

```
13     public CityService(CityMapper mapper) {
14         this.mapper = mapper;
15     }
16
17     @Transactional(readOnly = true)
18     public Map<String, Object> page(Integer pn, Integer size, String name) {
19         int pageNumber = PageSupport.pageNumber(pn);
20         int pageSize = PageSupport.pageSize(size);
21         long total = mapper.count(name);
22         return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
23             pageSize), pageSize),
24             total, pageNumber, pageSize);
```

- 问题41: medical-backend/src/main/java/com/medicine/business/service/CityService.java:37

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
32     public boolean exists(Integer cityNumber) {
33         return cityNumber != null && mapper.countByNumber(cityNumber) > 0;
34     }
35
36     @Transactional
37     public int add(Integer cityNumber, int pageSize) {
38         mapper.insert(cityNumber);
39         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
40 (pageSize));
41     }
42     @Transactional
```

- 问题42: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:9

- 问题代码1 :

```
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface SaleMapper {
10     @Select("<script>SELECT COUNT(*) FROM sale <where>"
11         + "<if test='name != null and name != \"\"'>sale_name LIKE CONCAT
12 ('%', #{name}, '%')</if>"
13         + "</where></script>")
14     long count(@Param("name") String name);
```

- 问题43: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:13

- 问题代码1 :

```
8 @Mapper
9 public interface SaleMapper {
10     @Select("<script>SELECT COUNT(*) FROM sale <where>"
11         + "<if test='name != null and name != \"\"'>sale_name LIKE CONCAT
12 ('%', #{name}, '%')</if>"
13         + "</where></script>")
14     long count(@Param("name") String name);
15
16     @Select("<script>SELECT sale_id AS saleId, sale_name AS saleName, sale_phone
17 AS salePhone, "
18         + "address, longitude, latitude "
19         + "FROM sale <where>"
20         + "<if test='name != null and name != \"\"'>sale_name LIKE CONCAT
21 ('%', #{name}, '%')</if>")
```

- 问题44: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:20

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
15     @Select("<script>SELECT sale_id AS saleId, sale_name AS saleName, sale_phone  
AS salePhone, "  
16         + "address, longitude, latitude "  
17         + "FROM sale <where>"  
18         + "<if test='name != null and name != \"\"'>sale_name LIKE CONCAT  
( ' ', #{name}, '%')</if>"  
19         + "</where> ORDER BY sale_id LIMIT #{offset}, #{size}</script>")  
20     List<Map<String, Object>> page(@Param("name") String name,  
21                                   @Param("offset") int offset,  
22                                   @Param("size") int size);  
23  
24     @Select("SELECT sale_id AS saleId, sale_name AS saleName, sale_phone AS  
salePhone, "  
25         + "address, longitude, latitude FROM sale ORDER BY sale_id")
```

- 问题45: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:40

- 问题代码1 :

```
35  
36     @Delete("DELETE FROM drug_sale WHERE sale_id=#{saleId}")  
37     int deleteDrugRelations(@Param("saleId") Long saleId);  
38  
39     @Delete("DELETE FROM sale WHERE sale_id=#{saleId}")  
40     int delete(@Param("saleId") Long saleId);
```

- 问题46: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:28

- 问题代码1 :

```
23 import java.util.Collections;  
24 import java.util.stream.Collectors;  
25  
26 @Configuration  
27 @EnableGlobalMethodSecurity(prePostEnabled = true)  
28 public class SecurityConfig {  
29  
30     private final TokenAuthenticationFilter tokenAuthenticationFilter;  
31     private final RestAuthenticationEntryPoint authenticationEntryPoint;  
32     private final RestAccessDeniedHandler accessDeniedHandler;
```

- 问题47: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:26

- 问题代码1 :

```
21                                   @Param("offset") int offset,  
22                                   @Param("size") int size);  
23  
24     @Select("SELECT sale_id AS saleId, sale_name AS saleName, sale_phone AS  
salePhone, "  
25         + "address, longitude, latitude FROM sale ORDER BY sale_id")  
26     List<Map<String, Object>> findAll();  
27  
28     @Insert("INSERT INTO sale(sale_name, sale_phone, address, longitude,  
latitude, createtime, updatetime) "  
29         + "VALUES(#{saleName}, #{salePhone}, #{address}, #{longitude}, #  
{latitude}, NOW(), NOW())")  
30     int insert(Map<String, Object> sale);
```

- 问题48: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:66

- 问题代码1 :

```
61     public PasswordEncoder passwordEncoder() {
62         return new BCryptPasswordEncoder();
63     }
64
65     @Bean
66     public CorsConfigurationSource corsConfigurationSource(
67         @Value("${app.cors.allowed-origins}") String allowedOrigins) {
68         CorsConfiguration configuration = new CorsConfiguration();
69         configuration.setAllowedOrigins(Arrays.stream(allowedOrigins.split(","))
70             .map(String::trim)
71             .filter(value -> !value.isEmpty())
```

- 问题49: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:37

- 问题代码1 :

```
32     @Update("UPDATE sale SET sale_name=#{saleName}, sale_phone=#{salePhone},
33         address=#{address}, "
34         + "longitude=#{longitude}, latitude=#{latitude}, updatetime=NOW()
35         WHERE sale_id=#{saleId}")
36     int update(Map<String, Object> sale);
37
38     @Delete("DELETE FROM drug_sale WHERE sale_id=#{saleId}")
39     int deleteDrugRelations(@Param("saleId") Long saleId);
40
41     @Delete("DELETE FROM sale WHERE sale_id=#{saleId}")
42     int delete(@Param("saleId") Long saleId);
43 }
```

- 问题50: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:43

- 问题代码1 :

```
38     this.authenticationEntryPoint = authenticationEntryPoint;
39     this.accessDeniedHandler = accessDeniedHandler;
40 }
41
42 @Bean
43 public SecurityFilterChain securityFilterChain(HttpSecurity http) throws
44 Exception {
45     http
46         .csrf().disable()
47         .cors().and()
48         .sessionManagement().sessionCreationPolicy(SessionCreationPolicy.
49 STATELESS).and()
50         .exceptionHandling()
```

- 问题51: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:30

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
25         + "address, longitude, latitude FROM sale ORDER BY sale_id")
26     List<Map<String, Object>> findAll();
27
28     @Insert("INSERT INTO sale(sale_name, sale_phone, address, longitude,
latitude, createtime, updatetime) "
29         + "VALUES(#{saleName}, #{salePhone}, #{address}, #{longitude}, #
{latitude}, NOW(), NOW())")
30     int insert(Map<String, Object> sale);
31
32     @Update("UPDATE sale SET sale_name=#{saleName}, sale_phone=#{salePhone},
address=#{address}, "
33         + "longitude=#{longitude}, latitude=#{latitude}, updatetime=NOW()
WHERE sale_id=#{saleId}")
34     int update(Map<String, Object> sale);
```

- 问题52: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:61

- 问题代码1 :

```
56         .addFilterBefore(tokenAuthenticationFilter,
UsernamePasswordAuthenticationFilter.class);
57     return http.build();
58 }
59
60 @Bean
61 public PasswordEncoder passwordEncoder() {
62     return new BCryptPasswordEncoder();
63 }
64
65 @Bean
66 public CorsConfigurationSource corsConfigurationSource(
```

- 问题53: medical-backend/src/main/java/com/medicine/business/mapper/SaleMapper.java:34

- 问题代码1 :

```
29         + "VALUES(#{saleName}, #{salePhone}, #{address}, #{longitude}, #
{latitude}, NOW(), NOW())")
30     int insert(Map<String, Object> sale);
31
32     @Update("UPDATE sale SET sale_name=#{saleName}, sale_phone=#{salePhone},
address=#{address}, "
33         + "longitude=#{longitude}, latitude=#{latitude}, updatetime=NOW()
WHERE sale_id=#{saleId}")
34     int update(Map<String, Object> sale);
35
36     @Delete("DELETE FROM drug_sale WHERE sale_id=#{saleId}")
37     int deleteDrugRelations(@Param("saleId") Long saleId);
38
39     @Delete("DELETE FROM sale WHERE sale_id=#{saleId}")
```

- 问题54: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:15

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
10 import java.util.LinkedHashMap;
11 import java.util.List;
12 import java.util.Map;
13
14 @Service
15 public class PermissionService {
16
17     private final PermissionMapper permissionMapper;
18
19     public PermissionService(PermissionMapper permissionMapper) {
20         this.permissionMapper = permissionMapper;
21     }
22 }
```

- 问题55: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:15

- 问题代码1 :

```
10
11 import java.util.Map;
12
13 @RestController
14 @RequestMapping("/api/doctors")
15 public class DoctorController {
16     private final DoctorService service;
17
18     public DoctorController(DoctorService service) {
19         this.service = service;
20     }
21 }
```

- 问题56: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:23

- 问题代码1 :

```
18
19     public PermissionService(PermissionMapper permissionMapper) {
20         this.permissionMapper = permissionMapper;
21     }
22
23     public List<PermissionNode> findPermissionTree(String roleName) {
24         List<PermissionRecord> records = permissionMapper.findByRoleName(
25             roleName);
26         Map<Integer, PermissionNode> nodes = new LinkedHashMap<>();
27         for (PermissionRecord record : records) {
28             PermissionNode node = new PermissionNode();
29             node.setName(record.getName());
30         }
31     }
32 }
```

- 问题57: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:38

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
33         return ApiResponse.success(service.levelAndType());
34     }
35
36     @PostMapping
37     @PreAuthorize("hasRole('1')")
38     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
request) {
39         int pages = service.add(request, 5);
40         return pages < 0
41             ? ApiResponse.error(ErrorCode.DUPLICATE_DATA, "该手机号已被注册")
42             : BusinessResponses.pages(pages);
43     }
```

- 问题58: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:32

- 问题代码1 :

```
27         return BusinessResponses.wrapped("doctorInfo", service.page(pn, size,
keyword));
28     }
29
30     @GetMapping("/info")
31     @PreAuthorize("hasAnyRole('1','2')")
32     public ApiResponse<Map<String, Object>> levelAndType() {
33         return ApiResponse.success(service.levelAndType());
34     }
35
36     @PostMapping
37     @PreAuthorize("hasRole('1')")
```

- 问题59: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:63

- 问题代码1 :

```
58         return ApiResponse.success();
59     }
60
61     @PutMapping("/reset/{accountId}")
62     @PreAuthorize("hasRole('1')")
63     public ApiResponse<Void> reset(@PathVariable Long accountId,
@AuthenticationPrincipal AuthSession operator)
64     {
65         service.resetPassword(accountId, operator.getUserId());
66         return ApiResponse.success();
67     }
68 }
```

- 问题60: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:24

- 问题代码1 :

```

19         this.service = service;
20     }
21
22     @GetMapping
23     @PreAuthorize("hasAnyRole('1','2')")
24     public ApiResponse<Map<String, Object>> page(@RequestParam(defaultValue =
25     "1") Integer pn,
26     @RequestParam(defaultValue =
27     "5") Integer size,
28     @RequestParam(required = false)
29     String keyword) {
30         return BusinessResponses.wrapped("doctorInfo", service.page(pn, size,
31         keyword));
32     }

```

- 问题61: medical-backend/src/main/java/com/medicine/dashboard/mapper/DoctorController.java:10

- 问题代码1 :

```

5 import com.medicine.dashboard.dto.NameValue;
6 import org.apache.ibatis.annotations.Select;
7
8 import java.util.List;
9
10 public interface DashboardMapper {
11
12     @Select("SELECT "
13     + "(SELECT COUNT(*) FROM doctor) AS doctorCount, "
14     + "(SELECT COUNT(*) FROM drugcompany) AS companyCount, "
15     + "(SELECT COUNT(*) FROM drug) AS drugCount, "

```

- 问题62: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:47

- 问题代码1 :

```

42         : BusinessResponses.pages(pages);
43     }
44
45     @PutMapping("/{id}")
46     @PreAuthorize("hasRole('1')")
47     public ApiResponse<Void> update(@PathVariable Long id, @RequestBody
48     Map<String, Object> request) {
49         if (!service.update(id, request)) {
50             return ApiResponse.error(ErrorCode.DUPLICATE_DATA, "该手机号已被注册");
51         }
52         return ApiResponse.success();
53     }

```

- 问题63: medical-backend/src/main/java/com/medicine/dashboard/mapper/DoctorController.java:26

- 问题代码1 :

```

21     DashboardCounts findCounts();
22
23     @Select("SELECT dl.name AS name, COUNT(d.id) AS value "
24             + "FROM doctor_level dl LEFT JOIN doctor d ON d.level_id = dl.id "
25             + "GROUP BY dl.id, dl.name ORDER BY dl.id")
26     List<NameValue> findDoctorLevels();
27
28     @Select("SELECT tt.name AS name, COUNT(d.id) AS value "
29             + "FROM treat_type tt LEFT JOIN doctor d ON d.type_id = tt.id "
30             + "GROUP BY tt.id, tt.name ORDER BY tt.id")
31     List<NameValue> findTreatTypes();

```

- 问题64: medical-backend/src/main/java/com/medicine/business/controller/DoctorController.java:56

- 问题代码1 :

```

51         return ApiResponse.success();
52     }
53
54     @DeleteMapping("/{id}")
55     @PreAuthorize("hasRole('1')")
56     public ApiResponse<Void> delete(@PathVariable Long id) {
57         service.delete(id);
58         return ApiResponse.success();
59     }
60
61     @PutMapping("/reset/{accountId}")

```

- 问题65: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:31

- 问题代码1 :

```

26     List<NameValue> findDoctorLevels();
27
28     @Select("SELECT tt.name AS name, COUNT(d.id) AS value "
29             + "FROM treat_type tt LEFT JOIN doctor d ON d.type_id = tt.id "
30             + "GROUP BY tt.id, tt.name ORDER BY tt.id")
31     List<NameValue> findTreatTypes();
32
33     @Select("SELECT id, title, summary, publishedAt FROM ("
34             + "SELECT CONCAT('medical-', id) AS id, title, LEFT(message, 120) AS "
35             + "summary, "
36             + "COALESCE(NULLIF(update_time, ''), create_time) AS publishedAt FROM "
37             + "medical_policy "
38             + "UNION ALL "
39             + "SELECT CONCAT('material-', id), title, LEFT(message, 120), "
40             + "CAST(COALESCE(update_time, create_time) AS CHAR) FROM material"
41             + ") recent_news ORDER BY publishedAt DESC LIMIT 6")

```

- 问题66: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:43

- 问题代码1 :

```

38             + "CAST(COALESCE(update_time, create_time) AS CHAR) FROM "
39             + "company_policy "
40             + "UNION ALL "
41             + "SELECT CONCAT('material-', id), title, LEFT(message, 120), "
42             + "CAST(COALESCE(update_time, create_time) AS CHAR) FROM material"
43             + ") recent_news ORDER BY publishedAt DESC LIMIT 6")
44     List<DashboardNews> findNews();

```

- 问题67: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:21

- 问题代码1 :

```
16         + "(SELECT COUNT(*) FROM sale) AS saleCount, "  
17         + "(SELECT COUNT(*) FROM city) AS cityCount, "  
18         + "(SELECT COUNT(*) FROM medical_policy) AS medicalPolicyCount, "  
19         + "(SELECT COUNT(*) FROM company_policy) AS companyPolicyCount, "  
20         + "(SELECT COUNT(*) FROM material) AS materialCount")  
21     DashboardCounts findCounts();  
22  
23     @Select("SELECT dl.name AS name, COUNT(d.id) AS value "  
24             + "FROM doctor_level dl LEFT JOIN doctor d ON d.level_id = dl.id "  
25             + "GROUP BY dl.id, dl.name ORDER BY dl.id")  
26     List<NameValue> findDoctorLevels();
```

- 问题68: medical-backend/src/main/java/com/medicine/auth/model/Account.java:3

- 问题代码1 :

```
1 package com.medicine.auth.model;  
2  
3 public class Account {  
4  
5     private Long id;  
6     private String realname;  
7     private String uname;  
8     private String pwd;
```

- 问题69: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardNews.java:3

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;  
2  
3 public class DashboardNews {  
4  
5     private String id;  
6     private String title;  
7     private String summary;  
8     private String publishedAt;
```

- 问题70: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:10

- 问题代码1 :

```
5 import org.springframework.transaction.annotation.Transactional;  
6  
7 import java.util.Map;  
8  
9 @Service  
10 public class MaterialService {  
11     private final MaterialMapper mapper;  
12  
13     public MaterialService(MaterialMapper mapper) {  
14         this.mapper = mapper;  
15     }
```

- 问题71: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:38

- 问题代码1 :

```
33     public void update(Long id, Map<String, Object> request) {
34         mapper.update(id, PageSupport.stringValue(request.get("title")),
PageSupport.stringValue(request.get("message")));
35     }
36
37     @Transactional
38     public void delete(Long id) {
39         mapper.delete(id);
40     }
```

- 问题72: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:27

- 问题代码1 :

```
22         return PageSupport.page(mapper.page(keyword, PageSupport.offset
(pageNumber, pageSize), pageSize),
23             total, pageNumber, pageSize);
24     }
25
26     @Transactional
27     public int add(Map<String, Object> request, int pageSize) {
28         mapper.insert(PageSupport.stringValue(request.get("title")), PageSupport.
stringValue(request.get("message")));
29         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
30     }
31
32     @Transactional
```

- 问题73: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:18

- 问题代码1 :

```
13     public MaterialService(MaterialMapper mapper) {
14         this.mapper = mapper;
15     }
16
17     @Transactional(readOnly = true)
18     public Map<String, Object> page(Integer pn, Integer size, String keyword) {
19         int pageNumber = PageSupport.pageNumber(pn);
20         int pageSize = PageSupport.pageSize(size);
21         long total = mapper.count(keyword);
22         return PageSupport.page(mapper.page(keyword, PageSupport.offset
(pageNumber, pageSize), pageSize),
23             total, pageNumber, pageSize);
```

- 问题74: medical-backend/src/main/java/com/medicine/business/service/MaterialService.java:33

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
28     mapper.insert(PageSupport.stringValue(request.get("title")), PageSupport.
stringValue(request.get("message")));
29     return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
30 }
31
32 @Transactional
33 public void update(Long id, Map<String, Object> request) {
34     mapper.update(id, PageSupport.stringValue(request.get("title")),
PageSupport.stringValue(request.get("message")));
35 }
36
37 @Transactional
38 public void delete(Long id) {
```

- 问题75: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:30

- 问题代码1 :

```
25 import java.util.Map;
26
27 @Validated
28 @RestController
29 @RequestMapping("/api")
30 public class AuthController {
31
32     private final AuthService authService;
33     private final PermissionService permissionService;
34     private final TokenService tokenService;
```

- 问题76: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:43

- 问题代码1 :

```
38     this.permissionService = permissionService;
39     this.tokenService = tokenService;
40 }
41
42 @PostMapping(value = "/login", consumes = MediaType.
APPLICATION_FORM_URLENCODED_VALUE)
43 public ApiResponse<LoginResult> loginForm(@Valid LoginRequest request) {
44     return ApiResponse.success(authService.login(request.getUsername(),
request.getPassword()));
45 }
46
47 @PostMapping(value = "/login", consumes = MediaType.APPLICATION_JSON_VALUE)
48 public ApiResponse<LoginResult> loginJson(@Valid @RequestBody LoginRequest
request) {
```

- 问题77: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:48

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
43     public ApiResponse<LoginResult> loginForm(@Valid LoginRequest request) {
44         return ApiResponse.success(authService.login(request.getUsername(),
45             request.getPassword()));
46     }
47     @PostMapping(value = "/login", consumes = MediaType.APPLICATION_JSON_VALUE)
48     public ApiResponse<LoginResult> loginJson(@Valid @RequestBody LoginRequest
49         request) {
50         return ApiResponse.success(authService.login(request.getUsername(),
51             request.getPassword()));
52     }
53     @GetMapping("/permissions")
54     public ApiResponse<Map<String, List<PermissionNode>>> permissions(
```

- 问题78: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:62

- 问题代码1 :

```
57     List<PermissionNode> permissions = permissionService.findPermissionTree
58     (session.getRoleName());
59     return ApiResponse.success(Collections.singletonMap("permissions",
60         permissions));
61 }
62 @PostMapping("/logout")
63 public ApiResponse<Void> logout(@RequestHeader(value = "Authorization",
64     required = false) String authorization) {
65     tokenService.delete(TokenService.normalizeAuthorization(authorization));
66     return ApiResponse.success();
67 }
```

- 问题79: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:53

- 问题代码1 :

```
48     public ApiResponse<LoginResult> loginJson(@Valid @RequestBody LoginRequest
49         request) {
50         return ApiResponse.success(authService.login(request.getUsername(),
51             request.getPassword()));
52     }
53     @GetMapping("/permissions")
54     public ApiResponse<Map<String, List<PermissionNode>>> permissions(
55         @RequestParam(value = "roleName", required = false) String
56         ignoredRoleName,
57         Authentication authentication) {
58         AuthSession session = (AuthSession) authentication.getPrincipal();
59         List<PermissionNode> permissions = permissionService.findPermissionTree
60         (session.getRoleName());
61         return ApiResponse.success(Collections.singletonMap("permissions",
62             permissions));
63     }
```

- 问题80: medical-backend/src/main/java/com/medicine/security/RestAccessDeniedHandler.java:17

- 问题代码1 :

```

12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAccessDeniedHandler implements AccessDeniedHandler {
18
19     private final ObjectMapper objectMapper;
20
21     public RestAccessDeniedHandler(ObjectMapper objectMapper) {
22         this.objectMapper = objectMapper;
23     }
24 }

```

- 问题81: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:9

- 问题代码1 :

```

4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface DoctorMapper {
10     String FROM_SQL = " FROM doctor d LEFT JOIN doctor_level dl ON dl.id=d.
level_id "
11         + "LEFT JOIN treat_type tt ON tt.id=d.type_id ";
12
13     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"
14         + "<if test='keyword != null and keyword != \"\"'>"

```

- 问题82: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:10

- 问题代码1 :

```

5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface DoctorMapper {
10     String FROM_SQL = " FROM doctor d LEFT JOIN doctor_level dl ON dl.id=d.
level_id "
11         + "LEFT JOIN treat_type tt ON tt.id=d.type_id ";
12
13     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"
14         + "<if test='keyword != null and keyword != \"\"'>"
15         + "d.name LIKE CONCAT('%', #{keyword}, '%') OR d.phone LIKE CONCAT
('%', #{keyword}, '%') "

```

- 问题83: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:49

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
44     long countUsername(@Param("username") String username);
45
46     @Insert("INSERT INTO account(realname, uname, pwd, phonenumber, utype,
47             updatetime, createtime) "
48             + "VALUES(#{realname}, #{uname}, #{pwd}, #{phoneNumber}, 'ROLE_2',
49             NOW(), NOW())")
50     @Options(useGeneratedKeys = true, keyProperty = "id", keyColumn = "id")
51     int insertAccount(Map<String, Object> account);
52
53     @Insert("INSERT INTO doctor(name, age, sex, level_id, phone, type_id,
54             hospital, updatetime, createtime, account_id) "
55             + "VALUES(#{name}, #{age}, #{sex}, #{levelId}, #{phoneNumber}, #
56             {typeId}, "
57             + "'青岛第一人民医院', NOW(), NOW(), #{accountId})")
58     int insertDoctor(Map<String, Object> doctor);
```

- 问题84: medical-backend/src/main/java/com/medicine/security/AuthSession.java:3

- 问题代码1 :

```
1 package com.medicine.security;
2
3 public class AuthSession {
4
5     private Long userId;
6     private String username;
7     private String realname;
8     private String roleName;
```

- 问题85: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:41

- 问题代码1 :

```
36
37     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber}")
38     long countPhone(@Param("phoneNumber") String phoneNumber);
39
40     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber} AND id
41             != #{accountId}")
42     long countPhoneExcept(@Param("phoneNumber") String phoneNumber, @Param
43             ("accountId") Long accountId);
44
45     @Select("SELECT COUNT(*) FROM account WHERE uname=#{username}")
46     long countUsername(@Param("username") String username);
47
48     @Insert("INSERT INTO account(realname, uname, pwd, phonenumber, utype,
49             updatetime, createtime) "
```

- 问题86: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:73

- 问题代码1 :

```

68
69     @Delete("DELETE FROM account WHERE id=#{accountId}")
70     int deleteAccount(@Param("accountId") Long accountId);
71
72     @Update("UPDATE account SET pwd=#{encodedPassword}, updatetime=NOW() WHERE
id=#{accountId} AND utype='ROLE_2'")
73     int resetPassword(@Param("accountId") Long accountId,
74                       @Param("encodedPassword") String encodedPassword);
75
76     @Insert("INSERT INTO password_reset_audit(account_id, operator_account_id,
reset_at) "
77             + "VALUES(#{accountId}, #{operatorAccountId}, NOW())")
78     int insertPasswordResetAudit(@Param("accountId") Long accountId,

```

- 问题87: medical-backend/src/main/java/com/medicine/security/TokenService.java:16

- 问题代码1 :

```

11 import java.time.Duration;
12 import java.util.Optional;
13 import java.util.UUID;
14
15 @Service
16 public class TokenService {
17
18     private final StringRedisTemplate redisTemplate;
19     private final ObjectMapper objectMapper;
20     private final String tokenPrefix;
21     private final Duration tokenTtl;

```

- 问题88: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:38

- 问题代码1 :

```

33
34     @Select("SELECT id, name FROM treat_type ORDER BY id")
35     List<Map<String, Object>> findAllTreatTypes();
36
37     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber}")
38     long countPhone(@Param("phoneNumber") String phoneNumber);
39
40     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber} AND id
!= #{accountId}")
41     long countPhoneExcept(@Param("phoneNumber") String phoneNumber, @Param
("accountId") Long accountId);
42
43     @Select("SELECT COUNT(*) FROM account WHERE uname=#{username}")

```

- 问题89: medical-backend/src/main/java/com/medicine/security/TokenService.java:43

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
38         } catch (JsonProcessingException exception) {
39             throw new BusinessException(ErrorCode.INTERNAL_ERROR, "创建登录会话失
败");
40         }
41     }
42
43     public Optional<AuthSession> find(String token) {
44         if (token == null || token.trim().isEmpty()) {
45             return Optional.empty();
46         }
47         String value = redisTemplate.opsForValue().get(tokenPrefix + token);
48         if (value == null) {
```

- 问题90: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:32

- 问题代码1 :

```
27     List<Map<String, Object>> page(@Param("keyword") String keyword,
28                                   @Param("offset") int offset,
29                                   @Param("size") int size);
30
31     @Select("SELECT id, name FROM doctor_level ORDER BY id")
32     List<Map<String, Object>> findAllLevels();
33
34     @Select("SELECT id, name FROM treat_type ORDER BY id")
35     List<Map<String, Object>> findAllTreatTypes();
36
37     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber}")
```

- 问题91: medical-backend/src/main/java/com/medicine/security/TokenService.java:33

- 问题代码1 :

```
28         this.objectMapper = objectMapper;
29         this.tokenPrefix = tokenPrefix;
30         this.tokenTtl = tokenTtl;
31     }
32
33     public String create(AuthSession session) {
34         String token = UUID.randomUUID().toString().replace("-", "");
35         try {
36             redisTemplate.opsForValue().set(tokenPrefix + token, objectMapper.
writeValueAsString(session), tokenTtl);
37             return token;
38         } catch (JsonProcessingException exception) {
```

- 问题92: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:58

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
53         + "'青岛第一人民医院', NOW(), NOW(), #{accountId})")
54     int insertDoctor(Map<String, Object> doctor);
55
56     @Update("UPDATE doctor SET name=#{name}, age=#{age}, sex=#{sex}, level_id=#{levelId}, phone=#{phoneNumber}, "
57         + "type_id=#{typeId}, updatetime=NOW() WHERE id=#{id}")
58     int updateDoctor(Map<String, Object> doctor);
59
60     @Update("UPDATE account SET realname=#{name}, phonenumber=#{phoneNumber}, updatetime=NOW() WHERE id=#{accountId}")
61     int updateAccount(Map<String, Object> doctor);
62
63     @Select("SELECT account_id FROM doctor WHERE id=#{id}")
```

- 问题93: medical-backend/src/main/java/com/medicine/security/TokenService.java:65

- 问题代码1 :

```
60         if (token != null && !token.trim().isEmpty()) {
61             redisTemplate.delete(tokenPrefix + token);
62         }
63     }
64
65     public static String normalizeAuthorization(String authorization) {
66         if (authorization == null) {
67             return null;
68         }
69         String token = authorization.trim();
70         if (token.regionMatches(true, 0, "Bearer ", 0, 7)) {
```

- 问题94: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:18

- 问题代码1 :

```
13     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"
14         + "<if test='keyword != null and keyword != \"\"'>"
15         + "d.name LIKE CONCAT('%', #{keyword}, '%') OR d.phone LIKE CONCAT
16         ('%', #{keyword}, '%') "
17         + "OR dl.name LIKE CONCAT('%', #{keyword}, '%') OR tt.name LIKE CONCAT
18         ('%', #{keyword}, '%') "
19         + "</if></where></script>")
20     long count(@Param("keyword") String keyword);
21
22     @Select("<script>SELECT d.id, d.account_id AS accountId, d.name, d.age, d.
23         sex, d.level_id AS levelId, "
24         + "d.phone AS phoneNumber, d.type_id AS typeId, dl.name AS
25         doctorLevel, tt.name AS treatType"
26         + FROM_SQL + "<where>"
27         + "<if test='keyword != null and keyword != \"\"'>"
```

- 问题95: medical-backend/src/main/java/com/medicine/security/TokenService.java:59

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
54         redisTemplate.delete(tokenPrefix + token);
55         return Optional.empty();
56     }
57 }
58
59 public void delete(String token) {
60     if (token != null && !token.trim().isEmpty()) {
61         redisTemplate.delete(tokenPrefix + token);
62     }
63 }
```

- 问题96: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:54

- 问题代码1 :

```
49     int insertAccount(Map<String, Object> account);
50
51     @Insert("INSERT INTO doctor(name, age, sex, level_id, phone, type_id,
52 hospital, updatetime, createtime, account_id) "
53         + "VALUES(#{name}, #{age}, #{sex}, #{levelId}, #{phoneNumber}, #
54 {typeId}, "
55         + "'青岛第一人民医院', NOW(), NOW(), #{accountId})")
56     int insertDoctor(Map<String, Object> doctor);
57
58     @Update("UPDATE doctor SET name=#{name}, age=#{age}, sex=#{sex}, level_id=#
59 {levelId}, phone=#{phoneNumber}, "
60         + "type_id=#{typeId}, updatetime=NOW() WHERE id=#{id}")
61     int updateDoctor(Map<String, Object> doctor);
```

- 问题97: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:61

- 问题代码1 :

```
56     @Update("UPDATE doctor SET name=#{name}, age=#{age}, sex=#{sex}, level_id=#
57 {levelId}, phone=#{phoneNumber}, "
58         + "type_id=#{typeId}, updatetime=NOW() WHERE id=#{id}")
59     int updateDoctor(Map<String, Object> doctor);
60
61     @Update("UPDATE account SET realname=#{name}, phonenumber=#{phoneNumber},
62 updatetime=NOW() WHERE id=#{accountId}")
63     int updateAccount(Map<String, Object> doctor);
64
65     @Select("SELECT account_id FROM doctor WHERE id=#{id}")
66     Long findAccountId(@Param("id") Long id);
67
68     @Delete("DELETE FROM doctor WHERE id=#{id}")
```

- 问题98: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:35

- 问题代码1 :

```

30
31     @Select("SELECT id, name FROM doctor_level ORDER BY id")
32     List<Map<String, Object>> findAllLevels();
33
34     @Select("SELECT id, name FROM treat_type ORDER BY id")
35     List<Map<String, Object>> findAllTreatTypes();
36
37     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber}")
38     long countPhone(@Param("phoneNumber") String phoneNumber);
39
40     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber} AND id
    != #{accountId}")

```

- 问题99: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:78

- 问题代码1 :

```

73     int resetPassword(@Param("accountId") Long accountId,
74                       @Param("encodedPassword") String encodedPassword);
75
76     @Insert("INSERT INTO password_reset_audit(account_id, operator_account_id,
77 reset_at) "
78             + "VALUES(#{accountId}, #{operatorAccountId}, NOW())")
79     int insertPasswordResetAudit(@Param("accountId") Long accountId,
80                                 @Param("operatorAccountId") Long
81 operatorAccountId);
82 }

```

- 问题100: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:70

- 问题代码1 :

```

65
66     @Delete("DELETE FROM doctor WHERE id=#{id}")
67     int deleteDoctor(@Param("id") Long id);
68
69     @Delete("DELETE FROM account WHERE id=#{accountId}")
70     int deleteAccount(@Param("accountId") Long accountId);
71
72     @Update("UPDATE account SET pwd=#{encodedPassword}, updatetime=NOW() WHERE
73 id=#{accountId} AND utype='ROLE_2'")
74     int resetPassword(@Param("accountId") Long accountId,
75                       @Param("encodedPassword") String encodedPassword);

```

- 问题101: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:27

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
22         + FROM_SQL + "<where>"
23         + "<if test='keyword != null and keyword != \"\">"
24         + "d.name LIKE CONCAT('%', #{keyword}, '%') OR d.phone LIKE CONCAT
25         ('%', #{keyword}, '%') "
26         + "OR dl.name LIKE CONCAT('%', #{keyword}, '%') OR tt.name LIKE CONCAT
27         ('%', #{keyword}, '%') "
28         + "</if></where> ORDER BY d.id LIMIT #{offset}, #{size}</script>")
29     List<Map<String, Object>> page(@Param("keyword") String keyword,
30                                   @Param("offset") int offset,
31                                   @Param("size") int size);
32
33     @Select("SELECT id, name FROM doctor_level ORDER BY id")
34     List<Map<String, Object>> findAllLevels();
```

- 问题102: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:67

- 问题代码1 :

```
62
63     @Select("SELECT account_id FROM doctor WHERE id=#{id}")
64     Long findAccountId(@Param("id") Long id);
65
66     @Delete("DELETE FROM doctor WHERE id=#{id}")
67     int deleteDoctor(@Param("id") Long id);
68
69     @Delete("DELETE FROM account WHERE id=#{accountId}")
70     int deleteAccount(@Param("accountId") Long accountId);
71
72     @Update("UPDATE account SET pwd=#{encodedPassword}, updatetime=NOW() WHERE
73             id=#{accountId} AND utype='ROLE_2'")
```

- 问题103: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:44

- 问题代码1 :

```
39
40     @Select("SELECT COUNT(*) FROM account WHERE phonenumber=#{phoneNumber} AND id
41             != #{accountId}")
42     long countPhoneExcept(@Param("phoneNumber") String phoneNumber, @Param
43             ("accountId") Long accountId);
44
45     @Select("SELECT COUNT(*) FROM account WHERE uname=#{username}")
46     long countUsername(@Param("username") String username);
47
48     @Insert("INSERT INTO account(realname, uname, pwd, phonenumber, utype,
49             updatetime, createtime) "
50             + "VALUES(#{realname}, #{uname}, #{pwd}, #{phoneNumber}, 'ROLE_2',
51             NOW(), NOW())")
52     @Options(useGeneratedKeys = true, keyProperty = "id", keyColumn = "id")
53     int insertAccount(Map<String, Object> account);
```

- 问题104: medical-backend/src/main/java/com/medicine/business/mapper/DoctorMapper.java:64

- 问题代码1 :

```

59
60     @Update("UPDATE account SET realname=#{name}, phonenumber=#{phoneNumber},
61     updatetime=NOW() WHERE id=#{accountId}")
62     int updateAccount(Map<String, Object> doctor);
63     @Select("SELECT account_id FROM doctor WHERE id=#{id}")
64     Long findAccountId(@Param("id") Long id);
65
66     @Delete("DELETE FROM doctor WHERE id=#{id}")
67     int deleteDoctor(@Param("id") Long id);
68
69     @Delete("DELETE FROM account WHERE id=#{accountId}")

```

- 问题105: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:15

- 问题代码1 :

```

10 import com.medicine.security.TokenService;
11 import org.springframework.security.crypto.password.PasswordEncoder;
12 import org.springframework.stereotype.Service;
13
14 @Service
15 public class AuthService {
16
17     private final AccountMapper accountMapper;
18     private final PasswordEncoder passwordEncoder;
19     private final TokenService tokenService;

```

- 问题106: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:27

- 问题代码1 :

```

22     this.accountMapper = accountMapper;
23     this.passwordEncoder = passwordEncoder;
24     this.tokenService = tokenService;
25 }
26
27 public LoginResult login(String username, String password) {
28     Account account = accountMapper.findByUsername(username.trim());
29     if (account == null || account.getPwd() == null || !passwordEncoder.
30 matches(password, account.getPwd())) {
31         throw new BusinessException(ErrorCode.LOGIN_FAILED, "账号或密码错误");
32     }
33     int userType = toNumericUserType(account.getUtype());

```

- 问题107: medical-backend/src/main/java/com/medicine/business/config/UploadWebConfig.java:9

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
4 import org.springframework.context.annotation.Configuration;
5 import org.springframework.web.servlet.config.annotation.ResourceHandlerRegistry;
6 import org.springframework.web.servlet.config.annotation.WebMvcConfigurer;
7
8 @Configuration
9 public class UploadWebConfig implements WebMvcConfigurer {
10     private final FileStorageService storageService;
11
12     public UploadWebConfig(FileStorageService storageService) {
13         this.storageService = storageService;
14     }
```

- 问题108: medical-backend/src/main/java/com/medicine/business/controller/UploadController.java:18

- 问题代码1 :

```
13 import java.util.LinkedHashMap;
14 import java.util.Map;
15
16 @RestController
17 @RequestMapping("/api/base")
18 public class UploadController {
19     private final FileStorageService storageService;
20
21     public UploadController(FileStorageService storageService) {
22         this.storageService = storageService;
23     }
```

- 问题109: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:12

- 问题代码1 :

```
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/sales")
12 public class SaleController {
13     private final SaleService service;
14
15     public SaleController(SaleService service) {
16         this.service = service;
17     }
```

- 问题110: medical-backend/src/main/java/com/medicine/business/controller/UploadController.java:27

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
22     this.storageService = storageService;
23 }
24
25 @PostMapping("/upload")
26 @PreAuthorize("hasRole('1')")
27 public ApiResponse<Map<String, Object>> upload(@RequestParam("file")
MultipartFile file) {
28     String fileName = storageService.saveImage(file);
29     String url = ServletUriComponentsBuilder.fromCurrentContextPath()
30         .path("/image/").path(fileName).toUriString();
31     Map<String, Object> data = new LinkedHashMap<>();
32     data.put("url", url);
```

- 问题111: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:21

- 问题代码1 :

```
16     this.service = service;
17 }
18
19 @GetMapping("/{pn}/{size}")
20 @PreAuthorize("hasAnyRole('1','2')")
21 public ApiResponse<Map<String, Object>> page(@PathVariable Integer pn,
22                                             @PathVariable Integer size,
23                                             @RequestParam(required = false)
String name) {
24     return BusinessResponses.wrapped("salePageInfo", service.page(pn, size,
name));
25 }
```

- 问题112: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:29

- 问题代码1 :

```
24     return BusinessResponses.wrapped("salePageInfo", service.page(pn, size,
name));
25 }
26
27 @GetMapping
28 @PreAuthorize("hasAnyRole('1','2')")
29 public ApiResponse<Map<String, Object>> all() {
30     return BusinessResponses.wrapped("salePageInfo", service.all());
31 }
32
33 @PostMapping
34 @PreAuthorize("hasRole('1')")
```

- 问题113: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:48

- 问题代码1 :

```

43         return ApiResponse.success();
44     }
45
46     @DeleteMapping("/{saleId}")
47     @PreAuthorize("hasRole('1')")
48     public ApiResponse<Void> delete(@PathVariable Long saleId) {
49         service.delete(saleId);
50         return ApiResponse.success();
51     }
52 }

```

- 问题114: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:41

- 问题代码1 :

```

36         return BusinessResponses.pages(service.add(request, 5));
37     }
38
39     @PutMapping("/{saleId}")
40     @PreAuthorize("hasRole('1')")
41     public ApiResponse<Void> update(@PathVariable Long saleId, @RequestBody
Map<String, Object> request) {
42         service.update(saleId, request);
43         return ApiResponse.success();
44     }
45
46     @DeleteMapping("/{saleId}")

```

- 问题115: medical-backend/src/main/java/com/medicine/business/controller/SaleController.java:35

- 问题代码1 :

```

30         return BusinessResponses.wrapped("salePageInfo", service.all());
31     }
32
33     @PostMapping
34     @PreAuthorize("hasRole('1')")
35     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
request) {
36         return BusinessResponses.pages(service.add(request, 5));
37     }
38
39     @PutMapping("/{saleId}")
40     @PreAuthorize("hasRole('1')")

```

- 问题116: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:9

- 问题代码1 :

```

4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface MedicalPolicyMapper {
10     String FROM_SQL = " FROM medical_policy mp LEFT JOIN city c ON c.city_id=mp.
city_id "
11         + "LEFT JOIN sysregion r ON r.id=c.city_number LEFT JOIN sysregion p
ON p.id=r.parent_id ";
12     String FILTER_SQL = "<where>"
13         + "<if test='id != null'>AND mp.id=#{id}</if>"
14         + "<if test='cityId != null'>AND mp.city_id=#{cityId}</if>"

```

- 问题117: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:10

- 问题代码1 :

```

5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface MedicalPolicyMapper {
10     String FROM_SQL = " FROM medical_policy mp LEFT JOIN city c ON c.city_id=mp.
city_id "
11         + "LEFT JOIN sysregion r ON r.id=c.city_number LEFT JOIN sysregion p
ON p.id=r.parent_id ";
12     String FILTER_SQL = "<where>"
13         + "<if test='id != null'>AND mp.id=#{id}</if>"
14         + "<if test='cityId != null'>AND mp.city_id=#{cityId}</if>"
15         + "<if test='title != null and title != \"\"\">AND mp.title LIKE CONCAT
('%', #{title}, '%')</if>"

```

- 问题118: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:12

- 问题代码1 :

```

7
8 @Mapper
9 public interface MedicalPolicyMapper {
10     String FROM_SQL = " FROM medical_policy mp LEFT JOIN city c ON c.city_id=mp.
city_id "
11         + "LEFT JOIN sysregion r ON r.id=c.city_number LEFT JOIN sysregion p
ON p.id=r.parent_id ";
12     String FILTER_SQL = "<where>"
13         + "<if test='id != null'>AND mp.id=#{id}</if>"
14         + "<if test='cityId != null'>AND mp.city_id=#{cityId}</if>"
15         + "<if test='title != null and title != \"\"\">AND mp.title LIKE CONCAT
('%', #{title}, '%')</if>"
16         + "<if test='updateTime != null and updateTime != \"\"\">AND mp.
update_time=#{updateTime}</if>"
17         + "</where>";

```

- 问题119: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:38

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
33             @Param("offset") int offset,
34             @Param("size") int size);
35
36     @Insert("INSERT INTO medical_policy(title, message, city_id, create_time,
update_time) "
37           + "VALUES(#{title}, #{message}, #{cityId}, #{updateTime}, #
{updateTime})")
38     int insert(@Param("cityId") Long cityId,
39               @Param("title") String title,
40               @Param("updateTime") String updateTime,
41               @Param("message") String message);
42
43     @Update("UPDATE medical_policy SET city_id=#{cityId}, title=#{title},
message=#{message}, update_time=#{updateTime} "
```

- 问题120: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:20

- 问题代码1 :

```
15         + "<if test='title != null and title != \"\">AND mp.title LIKE CONCAT
(' ', #{title}, ' ')</if>"
16         + "<if test='updateTime != null and updateTime != \"\">AND mp.
update_time=#{updateTime}</if>"
17         + "</where>";
18
19     @Select("<script>SELECT COUNT(*)" + FROM_SQL + FILTER_SQL + "</script>")
20     long count(@Param("id") Long id,
21               @Param("cityId") Long cityId,
22               @Param("title") String title,
23               @Param("updateTime") String updateTime);
24
25     @Select("<script>SELECT mp.id, mp.title, mp.message, mp.city_id AS cityId, mp.
update_time AS updateTime, "
```

- 问题121: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:29

- 问题代码1 :

```
24
25     @Select("<script>SELECT mp.id, mp.title, mp.message, mp.city_id AS cityId, mp.
update_time AS updateTime, "
26           + "c.city_number AS cityNumber, COALESCE(r.name, CAST(c.city_number
AS CHAR)) AS city, "
27           + "COALESCE(p.name, '') AS province" + FROM_SQL + FILTER_SQL
28           + " ORDER BY mp.id LIMIT #{offset}, #{size}</script>")
29     List<Map<String, Object>> page(@Param("id") Long id,
30                                  @Param("cityId") Long cityId,
31                                  @Param("title") String title,
32                                  @Param("updateTime") String updateTime,
33                                  @Param("offset") int offset,
34                                  @Param("size") int size);
```

- 问题122: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:52

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
47         @Param("title") String title,  
48         @Param("updateTime") String updateTime,  
49         @Param("message") String message);  
50  
51     @Delete("DELETE FROM medical_policy WHERE id=#{id}")  
52     int delete(@Param("id") Long id);
```

- 问题123: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:45

- 问题代码1 :

```
40         @Param("updateTime") String updateTime,  
41         @Param("message") String message);  
42  
43     @Update("UPDATE medical_policy SET city_id=#{cityId}, title=#{title},  
message=#{message}, update_time=#{updateTime} "  
44         + "WHERE id=#{id}")  
45     int update(@Param("id") Long id,  
46         @Param("cityId") Long cityId,  
47         @Param("title") String title,  
48         @Param("updateTime") String updateTime,  
49         @Param("message") String message);
```

- 问题124: medical-backend/src/main/java/com/medicine/auth/dto/PermissionNode.java:6

- 问题代码1 :

```
1 package com.medicine.auth.dto;  
2  
3 import java.util.ArrayList;  
4 import java.util.List;  
5  
6 public class PermissionNode {  
7  
8     private String path;  
9     private String name;  
10    private String component;  
11    private PermissionMeta meta;
```

- 问题125: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:9

- 问题代码1 :

```
4  
5 import java.util.List;  
6 import java.util.Map;  
7  
8 @Mapper  
9 public interface CompanyPolicyMapper {  
10     String FROM_SQL = " FROM company_policy cp LEFT JOIN drugcompany dc ON dc.  
company_id=cp.company_id ";  
11  
12     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"  
13         + "<if test='keyword != null and keyword != \"\">"  
14         + "(cp.title LIKE CONCAT('%', #{keyword}, '%') OR cp.message LIKE  
CONCAT('%', #{keyword}, '%') "
```

- 问题126: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:10

- 问题代码1 :

```
5 import org.springframework.transaction.annotation.Transactional;
6
7 import java.util.Map;
8
9 @Service
10 public class CompanyService {
11     private final CompanyMapper mapper;
12
13     public CompanyService(CompanyMapper mapper) {
14         this.mapper = mapper;
15     }
```

- 问题127: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:10

- 问题代码1 :

```
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface CompanyPolicyMapper {
10     String FROM_SQL = " FROM company_policy cp LEFT JOIN drugcompany dc ON dc.
company_id=cp.company_id ";
11
12     @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"
13         + "<if test='keyword != null and keyword != \"\">"
14         + "(cp.title LIKE CONCAT('%', #{keyword}, '%') OR cp.message LIKE
CONCAT('%', #{keyword}, '%') "
15         + "OR dc.company_name LIKE CONCAT('%', #{keyword}, '%'))"
```

- 问题128: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:18

- 问题代码1 :

```
13     public CompanyService(CompanyMapper mapper) {
14         this.mapper = mapper;
15     }
16
17     @Transactional(readOnly = true)
18     public Map<String, Object> page(Integer pn, Integer size, String name) {
19         int pageNumber = PageSupport.pageNumber(pn);
20         int pageSize = PageSupport.pageSize(size);
21         long total = mapper.count(name);
22         return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
pageSize), pageSize),
23             total, pageNumber, pageSize);
```

- 问题129: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:38

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
33         @Param("title") String title,
34         @Param("message") String message);
35
36     @Update("UPDATE company_policy SET company_id=#{companyId}, title=#{title},
message=#{message}, update_time=NOW() "
37         + "WHERE id=#{id}")
38     int update(@Param("id") Long id,
39         @Param("companyId") Long companyId,
40         @Param("title") String title,
41         @Param("message") String message);
42
43     @Delete("DELETE FROM company_policy WHERE id=#{id}")
```

- 问题130: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:32

- 问题代码1 :

```
27     public Map<String, Object> all() {
28         return PageSupport.all(mapper.findAll());
29     }
30
31     @Transactional
32     public int add(Map<String, Object> request, int pageSize) {
33         mapper.insert(PageSupport.stringValue(request.get("companyName")),
34             PageSupport.stringValue(request.get("companyPhone")));
35         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
36             (pageSize));
37     }
```

- 问题131: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:44

- 问题代码1 :

```
39         @Param("companyId") Long companyId,
40         @Param("title") String title,
41         @Param("message") String message);
42
43     @Delete("DELETE FROM company_policy WHERE id=#{id}")
44     int delete(@Param("id") Long id);
```

- 问题132: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:27

- 问题代码1 :

```
22         return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
23             pageSize), pageSize),
24             total, pageNumber, pageSize);
25     }
26     @Transactional(readOnly = true)
27     public Map<String, Object> all() {
28         return PageSupport.all(mapper.findAll());
29     }
30
31     @Transactional
32     public int add(Map<String, Object> request, int pageSize) {
```

- 问题133: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:17

- 问题代码1 :

```

12      @Select("<script>SELECT COUNT(*)" + FROM_SQL + "<where>"
13              + "<if test='keyword != null and keyword != \"\">"
14              + "(cp.title LIKE CONCAT('%', #{keyword}, '%') OR cp.message LIKE
CONCAT('%', #{keyword}, '%') "
15              + "OR dc.company_name LIKE CONCAT('%', #{keyword}, '%'))"
16              + "</if></where></script>")
17      long count(@Param("keyword") String keyword);
18
19      @Select("<script>SELECT cp.id, cp.title, cp.message, cp.company_id AS
companyId, "
20              + "DATE_FORMAT(cp.update_time, '%Y-%m-%d') AS updateTime, dc.
company_name AS companyName"
21              + FROM_SQL + "<where>"
22              + "<if test='keyword != null and keyword != \"\">"

```

- 问题134: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:39

- 问题代码1 :

```

34          PageSupport.stringValue(request.get("companyPhone")));
35      return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
36  }
37
38  @Transactional
39  public void update(Long id, Map<String, Object> request) {
40      mapper.update(id, PageSupport.stringValue(request.get("companyName")),
41                  PageSupport.stringValue(request.get("companyPhone")));
42  }
43
44  @Transactional

```

- 问题135: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:26

- 问题代码1 :

```

21          + FROM_SQL + "<where>"
22          + "<if test='keyword != null and keyword != \"\">"
23          + "(cp.title LIKE CONCAT('%', #{keyword}, '%') OR cp.message LIKE
CONCAT('%', #{keyword}, '%') "
24          + "OR dc.company_name LIKE CONCAT('%', #{keyword}, '%'))"
25          + "</if></where> ORDER BY cp.id LIMIT #{offset}, #{size}</script>")
26      List<Map<String, Object>> page(@Param("keyword") String keyword,
27                                   @Param("offset") int offset,
28                                   @Param("size") int size);
29
30      @Insert("INSERT INTO company_policy(title, message, company_id, create_time,
update_time) "
31              + "VALUES(#{title}, #{message}, #{companyId}, NOW(), NOW())")

```

- 问题136: medical-backend/src/main/java/com/medicine/business/service/CompanyService.java:45

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
40     mapper.update(id, PageSupport.stringValue(request.get("companyName")),
41                 PageSupport.stringValue(request.get("companyPhone")));
42 }
43
44 @Transactional
45 public void delete(Long id) {
46     mapper.delete(id);
47 }
```

- 问题137: medical-backend/src/main/java/com/medicine/business/mapper/CompanyPolicyMapper.java:32

- 问题代码1 :

```
27         @Param("offset") int offset,
28         @Param("size") int size);
29
30     @Insert("INSERT INTO company_policy(title, message, company_id, create_time,
31 update_time) "
32         + "VALUES(#{title}, #{message}, #{companyId}, NOW(), NOW())")
33     int insert(@Param("companyId") Long companyId,
34               @Param("title") String title,
35               @Param("message") String message);
36
37     @Update("UPDATE company_policy SET company_id=#{companyId}, title=#{title},
38 message=#{message}, update_time=NOW() "
39         + "WHERE id=#{id}")
```

- 问题138: medical-backend/src/main/java/com/medicine/MedicalBackendApplication.java:9

- 问题代码1 :

```
4 import org.springframework.boot.SpringApplication;
5 import org.springframework.boot.autoconfigure.SpringBootApplication;
6
7 @MapperScan({"com.medicine.auth.mapper", "com.medicine.business.mapper", "com.
8 medicine.dashboard.mapper"})
9 @SpringBootApplication
10 public class MedicalBackendApplication {
11
12     public static void main(String[] args) {
13         SpringApplication.run(MedicalBackendApplication.class, args);
14     }
15 }
```

- 问题139: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardView.java:5

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 import java.util.List;
4
5 public class DashboardView {
6
7     private DashboardCounts counts;
8     private List<NameValue> doctorLevels;
9     private List<NameValue> treatTypes;
10    private List<DashboardNews> news;
```

- 问题140: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:3

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class ApiResponse<T> {
4
5     private int code;
6     private String message;
7     private T data;
```

- 问题141: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:26

- 问题代码1 :

```
21
22     public static ApiResponse<Void> success() {
23         return success(null);
24     }
25
26     public static <T> ApiResponse<T> error(int code, String message) {
27         return new ApiResponse<>(code, message, null);
28     }
29
30     public int getCode() {
31         return code;
```

- 问题142: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:18

- 问题代码1 :

```
13         this.code = code;
14         this.message = message;
15         this.data = data;
16     }
17
18     public static <T> ApiResponse<T> success(T data) {
19         return new ApiResponse<>(ErrorCode.SUCCESS, "操作成功", data);
20     }
21
22     public static ApiResponse<Void> success() {
23         return success(null);
```

- 问题143: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:13

- 问题代码1 :

```

8
9 import java.util.Map;
10
11 @RestController
12 @RequestMapping("/api/citys")
13 public class CityController {
14     private final CityService service;
15
16     public CityController(CityService service) {
17         this.service = service;
18     }

```

- 问题144: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:22

- 问题代码1 :

```

17
18     public static <T> ApiResponse<T> success(T data) {
19         return new ApiResponse<>(ErrorCode.SUCCESS, "操作成功", data);
20     }
21
22     public static ApiResponse<Void> success() {
23         return success(null);
24     }
25
26     public static <T> ApiResponse<T> error(int code, String message) {
27         return new ApiResponse<>(code, message, null);

```

- 问题145: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:22

- 问题代码1 :

```

17         this.service = service;
18     }
19
20     @GetMapping("/{pn}/{size}")
21     @PreAuthorize("hasAnyRole('1','2')")
22     public ApiResponse<Map<String, Object>> page(@PathVariable Integer pn,
23                                                 @PathVariable Integer size,
24                                                 @RequestParam(required = false)
String name) {
25         return BusinessResponses.wrapped("cityPageInfo", service.page(pn, size,
name));
26     }

```

- 问题146: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:36

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
31         return BusinessResponses.wrapped("cityPageInfo", service.all());
32     }
33
34     @PostMapping
35     @PreAuthorize("hasRole('1')")
36     public ApiResponse<Map<String, Object>> add(@RequestParam Integer cityNumber)
37     {
38         if (service.exists(cityNumber)) {
39             return ApiResponse.error(ErrorCode.DUPLICATE_DATA, "该城市已存在");
40         }
41         return BusinessResponses.pages(service.add(cityNumber, 5));
42     }
```

- 问题147: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardCounts.java:3

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardCounts {
4
5     private long doctorCount;
6     private long companyCount;
7     private long drugCount;
8     private long saleCount;
```

- 问题148: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:30

- 问题代码1 :

```
25         return BusinessResponses.wrapped("cityPageInfo", service.page(pn, size,
26         name));
27     }
28
29     @GetMapping
30     @PreAuthorize("hasAnyRole('1', '2')")
31     public ApiResponse<Map<String, Object>> all() {
32         return BusinessResponses.wrapped("cityPageInfo", service.all());
33     }
34
35     @PostMapping
36     @PreAuthorize("hasRole('1')")
```

- 问题149: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:15

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
10 import org.springframework.web.bind.annotation.RestControllerAdvice;
11
12 import javax.validation.ConstraintViolationException;
13
14 @RestControllerAdvice
15 public class GlobalExceptionHandler {
16
17     private static final Logger log = LoggerFactory.getLogger
18     (GlobalExceptionHandler.class);
19
20     @ExceptionHandler(BusinessException.class)
21     public ApiResponse<Void> handleBusinessException(BusinessException exception)
22     {
```

- 问题150: medical-backend/src/main/java/com/medicine/business/controller/CityController.java:45

- 问题代码1 :

```
40         return BusinessResponses.pages(service.add(cityNumber, 5));
41     }
42
43     @DeleteMapping("/{cityId}")
44     @PreAuthorize("hasRole('1')")
45     public ApiResponse<Void> delete(@PathVariable Long cityId) {
46         service.delete(cityId);
47         return ApiResponse.success();
48     }
49 }
```

- 问题151: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:20

- 问题代码1 :

```
15 public class GlobalExceptionHandler {
16
17     private static final Logger log = LoggerFactory.getLogger
18     (GlobalExceptionHandler.class);
19
20     @ExceptionHandler(BusinessException.class)
21     public ApiResponse<Void> handleBusinessException(BusinessException exception)
22     {
23         return ApiResponse.error(exception.getCode(), exception.getMessage());
24     }
25
26     @ExceptionHandler(MethodArgumentNotValidException.class)
27     public ApiResponse<Void> handleMethodArgumentNotValid
28     (MethodArgumentNotValidException exception) {
```

- 问题152: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:33

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
28         : exception.getBindingResult().getFieldErrors().get(0).
getDefaultMessage();
29         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, message);
30     }
31
32     @ExceptionHandler(BindException.class)
33     public ApiResponse<Void> handleBindException(BindException exception) {
34         String message = exception.getBindingResult().getFieldErrors().isEmpty()
35             ? "请求参数不合法"
36             : exception.getBindingResult().getFieldErrors().get(0).
getDefaultMessage();
37         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, message);
38     }
```

- 问题153: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:41

- 问题代码1 :

```
36         : exception.getBindingResult().getFieldErrors().get(0).
getDefaultMessage();
37         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, message);
38     }
39
40     @ExceptionHandler({ConstraintViolationException.class,
HttpMessageNotReadableException.class})
41     public ApiResponse<Void> handleInvalidRequest(Exception exception) {
42         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, "请求参数不合法");
43     }
44
45     @ExceptionHandler(AccessDeniedException.class)
46     public ApiResponse<Void> handleAccessDenied(AccessDeniedException exception) {
```

- 问题154: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:46

- 问题代码1 :

```
41     public ApiResponse<Void> handleInvalidRequest(Exception exception) {
42         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, "请求参数不合法");
43     }
44
45     @ExceptionHandler(AccessDeniedException.class)
46     public ApiResponse<Void> handleAccessDenied(AccessDeniedException exception) {
47         return ApiResponse.error(ErrorCode.FORBIDDEN, "无权执行此操作");
48     }
49
50     @ExceptionHandler(Exception.class)
51     public ApiResponse<Void> handleUnexpected(Exception exception) {
```

- 问题155: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:25

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
20     public ApiResponse<Void> handleBusinessException(BusinessException exception)
21     {
22         return ApiResponse.error(exception.getCode(), exception.getMessage());
23     }
24     @ExceptionHandler(MethodArgumentNotValidException.class)
25     public ApiResponse<Void> handleMethodArgumentNotValid
26     (MethodArgumentNotValidException exception) {
27         String message = exception.getBindingResult().getFieldErrors().isEmpty()
28             ? "请求参数不合法"
29             : exception.getBindingResult().getFieldErrors().get(0).
30             getDefaultMessage();
31         return ApiResponse.error(ErrorCode.INVALID_ARGUMENT, message);
32     }
```

- 问题156: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:51

- 问题代码1 :

```
46     public ApiResponse<Void> handleAccessDenied(AccessDeniedException exception) {
47         return ApiResponse.error(ErrorCode.FORBIDDEN, "无权执行此操作");
48     }
49
50     @ExceptionHandler(Exception.class)
51     public ApiResponse<Void> handleUnexpected(Exception exception) {
52         log.error("Unhandled application exception", exception);
53         return ApiResponse.error(ErrorCode.INTERNAL_ERROR, "服务器内部错误");
54     }
55 }
```

- 问题157: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:13

- 问题代码1 :

```
8 import java.util.LinkedHashMap;
9 import java.util.List;
10 import java.util.Map;
11
12 @Service
13 public class MedicalPolicyService {
14     private final MedicalPolicyMapper mapper;
15
16     public MedicalPolicyService(MedicalPolicyMapper mapper) {
17         this.mapper = mapper;
18     }
19 }
```

- 问题158: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:40

- 问题代码1 :


```

35     }
36     return PageSupport.page(rows, total, pageNumber, pageSize);
37 }
38
39 @Transactional
40 public int add(Map<String, Object> request, int pageSize) {
41     String updateTime = dateOrToday(request.get("updateTime"));
42     mapper.insert(PageSupport.longValue(request.get("cityId")),
43                 PageSupport.stringValue(request.get("title")), updateTime,
44                 PageSupport.stringValue(request.get("message")));
45     return PageSupport.pages(mapper.count(null, null, null, null),
46                             PageSupport.pageSize(pageSize));

```

- 问题159: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:21

- 问题代码1 :

```

16     public MedicalPolicyService(MedicalPolicyMapper mapper) {
17         this.mapper = mapper;
18     }
19
20     @Transactional(readonly = true)
21     public Map<String, Object> page(Integer pn, Integer size, Long id, Long
22     cityId,
23                                     String title, String updateTime) {
24         int pageNumber = PageSupport.pageNumber(pn);
25         int pageSize = PageSupport.pageSize(size);
26         long total = mapper.count(id, cityId, title, updateTime);
27         List<Map<String, Object>> rows = mapper.page(id, cityId, title,
28         updateTime,

```

- 问题160: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:56

- 问题代码1 :

```

51         PageSupport.stringValue(request.get("title")), dateOrToday
52         (request.get("updateTime")),
53         PageSupport.stringValue(request.get("message"))));
54     }
55     @Transactional
56     public void delete(Long id) {
57         mapper.delete(id);
58     }
59
60     private static String dateOrToday(Object value) {
61         String date = PageSupport.stringValue(value);

```

- 问题161: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:49

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
44         PageSupport.stringValue(request.get("message"))));
45         return PageSupport.pages(mapper.count(null, null, null, null),
PageSupport.pageSize(pageSize));
46     }
47
48     @Transactional
49     public void update(Long id, Map<String, Object> request) {
50         mapper.update(id, PageSupport.longValue(request.get("cityId")),
51             PageSupport.stringValue(request.get("title")), dateOrToday
(request.get("updateTime")),
52             PageSupport.stringValue(request.get("message")));
53     }
```

- 问题162: medical-backend/src/main/java/com/medicine/security/TokenAuthenticationFilter.java:17

- 问题代码1 :

```
12 import javax.servlet.http.HttpServletResponse;
13 import java.io.IOException;
14 import java.util.Collections;
15
16 @Component
17 public class TokenAuthenticationFilter extends OncePerRequestFilter {
18
19     private final TokenService tokenService;
20
21     public TokenAuthenticationFilter(TokenService tokenService) {
22         this.tokenService = tokenService;
23     }
24 }
```

- 问题163: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:12

- 问题代码1 :

```
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/drugs")
12 public class DrugController {
13     private final DrugService service;
14
15     public DrugController(DrugService service) {
16         this.service = service;
17     }
18 }
```

- 问题164: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:35

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
30         return BusinessResponses.pages(service.add(request, 5));
31     }
32
33     @PutMapping("/{drugId}")
34     @PreAuthorize("hasRole('1')")
35     public ApiResponse<Void> update(@PathVariable Long drugId, @RequestBody
Map<String, Object> request) {
36         service.update(drugId, request);
37         return ApiResponse.success();
38     }
39
40     @DeleteMapping("/{drugId}")
```

- 问题165: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:42

- 问题代码1 :

```
37         return ApiResponse.success();
38     }
39
40     @DeleteMapping("/{drugId}")
41     @PreAuthorize("hasRole('1')")
42     public ApiResponse<Void> delete(@PathVariable Long drugId) {
43         service.delete(drugId);
44         return ApiResponse.success();
45     }
46 }
```

- 问题166: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:29

- 问题代码1 :

```
24         return BusinessResponses.wrapped("drugPageInfo", service.page(pn, size,
name));
25     }
26
27     @PostMapping
28     @PreAuthorize("hasRole('1')")
29     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
request) {
30         return BusinessResponses.pages(service.add(request, 5));
31     }
32
33     @PutMapping("/{drugId}")
34     @PreAuthorize("hasRole('1')")
```

- 问题167: medical-backend/src/main/java/com/medicine/common/PageView.java:6

- 问题代码1 :

```
1 package com.medicine.common;
2
3 import java.util.Collections;
4 import java.util.List;
5
6 public class PageView<T> {
7
8     private long total;
9     private List<T> list;
10    private int pageNum;
11    private int pageSize;
```

- 问题168: medical-backend/src/main/java/com/medicine/business/controller/DrugController.java:21

- 问题代码1 :

```
16         this.service = service;
17     }
18
19     @GetMapping("/{pn}/{size}")
20     @PreAuthorize("hasAnyRole('1','2')")
21     public ApiResponse<Map<String, Object>> page(@PathVariable Integer pn,
22                                                  @PathVariable Integer size,
23                                                  @RequestParam(required = false)
String name) {
24         return BusinessResponses.wrapped("drugPageInfo", service.page(pn, size,
name));
25     }
```

- 问题169: medical-backend/src/main/java/com/medicine/auth/dto/LoginResult.java:3

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class LoginResult {
4
5     private String token;
6     private UserInfo userInfo;
7
8     public LoginResult() {
```

- 问题170: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:12

- 问题代码1 :

```
7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/medical_policys")
12 public class MedicalPolicyController {
13     private final MedicalPolicyService service;
14
15     public MedicalPolicyController(MedicalPolicyService service) {
16         this.service = service;
17     }
```

- 问题171: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:38

- 问题代码1 :

```

33         return BusinessResponses.pages(service.add(request, 5));
34     }
35
36     @PutMapping("/{id}")
37     @PreAuthorize("hasRole('1')")
38     public ApiResponse<Void> update(@PathVariable Long id, @RequestBody
Map<String, Object> request) {
39         service.update(id, request);
40         return ApiResponse.success();
41     }
42
43     @DeleteMapping("/{id}")

```

- 问题172: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:21

- 问题代码1 :

```

16         this.service = service;
17     }
18
19     @GetMapping
20     @PreAuthorize("hasAnyRole('1','2')")
21     public ApiResponse<Map<String, Object>> page(@RequestParam(defaultValue =
"1") Integer pn,
22                                                     @RequestParam(defaultValue =
"5") Integer size,
23                                                     @RequestParam(required = false)
Long id,
24                                                     @RequestParam(required = false)
Long cityId,
25                                                     @RequestParam(required = false)
String title,
26                                                     @RequestParam(required = false)
String updateTime) {

```

- 问题173: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:12

- 问题代码1 :

```

7
8 import java.util.Map;
9
10 @RestController
11 @RequestMapping("/api/company_policys")
12 public class CompanyPolicyController {
13     private final CompanyPolicyService service;
14
15     public CompanyPolicyController(CompanyPolicyService service) {
16         this.service = service;
17     }

```

- 问题174: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:32

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
27         return BusinessResponses.wrapped("policyInfo", service.page(pn, size, id,
28         cityId, title, updateTime));
29     }
30     @PostMapping
31     @PreAuthorize("hasRole('1')")
32     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
33     request) {
34         return BusinessResponses.pages(service.add(request, 5));
35     }
36     @PutMapping("/{id}")
37     @PreAuthorize("hasRole('1')")
```

- 问题175: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:29

- 问题代码1 :

```
24         return BusinessResponses.wrapped("policyInfo", service.page(pn, size,
25         keyword));
26     }
27     @PostMapping
28     @PreAuthorize("hasRole('1')")
29     public ApiResponse<Map<String, Object>> add(@RequestBody Map<String, Object>
30     request) {
31         return BusinessResponses.pages(service.add(request, 5));
32     }
33     @PutMapping("/{id}")
34     @PreAuthorize("hasRole('1')")
```

- 问题176: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:45

- 问题代码1 :

```
40         return ApiResponse.success();
41     }
42
43     @DeleteMapping("/{id}")
44     @PreAuthorize("hasRole('1')")
45     public ApiResponse<Void> delete(@PathVariable Long id) {
46         service.delete(id);
47         return ApiResponse.success();
48     }
49 }
```

- 问题177: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:35

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
30         return BusinessResponses.pages(service.add(request, 5));
31     }
32
33     @PutMapping("/{id}")
34     @PreAuthorize("hasRole('1')")
35     public ApiResponse<Void> update(@PathVariable Long id, @RequestBody
36     Map<String, Object> request) {
37         service.update(id, request);
38         return ApiResponse.success();
39     }
40     @DeleteMapping("/{id}")
```

- 问题178: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:21

- 问题代码1 :

```
16         this.service = service;
17     }
18
19     @GetMapping
20     @PreAuthorize("hasAnyRole('1','2')")
21     public ApiResponse<Map<String, Object>> page(@RequestParam(defaultValue =
22     "1") Integer pn,
23     @RequestParam(defaultValue =
24     "5") Integer size,
25     @RequestParam(required = false)
26     String keyword) {
27         return BusinessResponses.wrapped("policyInfo", service.page(pn, size,
28     keyword));
29     }
```

- 问题179: medical-backend/src/main/java/com/medicine/business/controller/CompanyPolicyController.java:42

- 问题代码1 :

```
37         return ApiResponse.success();
38     }
39
40     @DeleteMapping("/{id}")
41     @PreAuthorize("hasRole('1')")
42     public ApiResponse<Void> delete(@PathVariable Long id) {
43         service.delete(id);
44         return ApiResponse.success();
45     }
46 }
```

- 问题180: medical-backend/src/main/java/com/medicine/auth/model/PermissionRecord.java:3

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class PermissionRecord {
4
5     private Integer id;
6     private Integer pid;
7     private String name;
8     private String path;
```

华为云 CodeArts Check 代码扫描报告

- 问题181: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:3

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
```

- 问题182: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:8

- 问题代码1 :

```
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12    public static final int INTERNAL_ERROR = 50000;
```

- 问题183: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:11

- 问题代码1 :

```
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12    public static final int INTERNAL_ERROR = 50000;
13
14    private ErrorCode() {
15    }
16 }
```

- 问题184: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:12

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
7 import org.springframework.web.bind.annotation.RequestMapping;
8 import org.springframework.web.bind.annotation.RestController;
9
10 @RestController
11 @RequestMapping("/api/dashboard")
12 public class DashboardController {
13
14     private final DashboardService dashboardService;
15
16     public DashboardController(DashboardService dashboardService) {
17         this.dashboardService = dashboardService;
18     }
19 }
```

- 问题185: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:6

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12 }
```

- 问题186: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:21

- 问题代码1 :

```
16     public DashboardController(DashboardService dashboardService) {
17         this.dashboardService = dashboardService;
18     }
19
20     @GetMapping
21     public ApiResponse<DashboardView> dashboard() {
22         return ApiResponse.success(dashboardService.getDashboard());
23     }
24 }
```

- 问题187: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:9

- 问题代码1 :

```
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12    public static final int INTERNAL_ERROR = 50000;
13
14    private ErrorCode() {
15    }
16 }
```

- 问题188: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:7

- 问题代码1 :

```

2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12    public static final int INTERNAL_ERROR = 50000;

```

- 问题189: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:13

- 问题代码1 :

```

8
9 import java.util.List;
10 import java.util.Map;
11
12 @Mapper
13 public interface CityMapper {
14     String FROM_SQL = " FROM city c "
15         + "LEFT JOIN sysregion r ON r.id = c.city_number "
16         + "LEFT JOIN sysregion p ON p.id = r.parent_id ";
17
18     @Select("<script>SELECT COUNT(*)" + FROM_SQL

```

- 问题190: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:5

- 问题代码1 :

```

1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;

```

- 问题191: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:14

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
9 import java.util.List;
10 import java.util.Map;
11
12 @Mapper
13 public interface CityMapper {
14     String FROM_SQL = " FROM city c "
15         + "LEFT JOIN sysregion r ON r.id = c.city_number "
16         + "LEFT JOIN sysregion p ON p.id = r.parent_id ";
17
18     @Select("<script>SELECT COUNT(*)" + FROM_SQL
19         + "<where><if test='name != null and name != \"\"'>"
```

- 问题192: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:10

- 问题代码1 :

```
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
10    public static final int NOT_FOUND = 10004;
11    public static final int TOKEN_EXPIRED = 10006;
12    public static final int INTERNAL_ERROR = 50000;
13
14    private ErrorCode() {
15    }
```

- 问题193: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:40

- 问题代码1 :

```
35         + "COALESCE(p.name, '') AS province, COALESCE(r.name, CAST(c.
city_number AS CHAR)) AS city"
36         + FROM_SQL + "ORDER BY c.city_id")
37     List<Map<String, Object>> findAll();
38
39     @Select("SELECT COUNT(*) FROM city WHERE city_number = #{cityNumber}")
40    long countByNumber(@Param("cityNumber") Integer cityNumber);
41
42     @Insert("INSERT INTO city(city_number, createtime, updatetime) VALUES(#{
cityNumber}, NOW(), NOW())")
43     int insert(@Param("cityNumber") Integer cityNumber);
44
45     @Delete("DELETE FROM city WHERE city_id = #{cityId}")
```

- 问题194: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:12

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
7    public static final int DUPLICATE_DATA = 10001;
8    public static final int LOGIN_FAILED = 10002;
9    public static final int FORBIDDEN = 10003;
10   public static final int NOT_FOUND = 10004;
11   public static final int TOKEN_EXPIRED = 10006;
12   public static final int INTERNAL_ERROR = 50000;
13
14   private ErrorCode() {
15   }
16 }
```

- 问题195: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:22

- 问题代码1 :

```
17
18   @Select("<script>SELECT COUNT(*)" + FROM_SQL
19           + "<where><if test='name != null and name != \"\"\">"
20           + "AND (r.name LIKE CONCAT('%', #{name}, '%') OR p.name LIKE CONCAT
21           + "</if></where></script>")
22   long count(@Param("name") String name);
23
24   @Select("<script>SELECT c.city_id AS cityId, c.city_number AS cityNumber, "
25           + "COALESCE(p.name, '') AS province, COALESCE(r.name, CAST(c.
26           city_number AS CHAR)) AS city"
27           + FROM_SQL
28           + "<where><if test='name != null and name != \"\"\">"
```

- 问题196: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:30

- 问题代码1 :

```
25           + "COALESCE(p.name, '') AS province, COALESCE(r.name, CAST(c.
26           city_number AS CHAR)) AS city"
27           + FROM_SQL
28           + "<where><if test='name != null and name != \"\"\">"
29           + "AND (r.name LIKE CONCAT('%', #{name}, '%') OR p.name LIKE CONCAT
30           + "</if></where> ORDER BY c.city_id LIMIT #{offset}, #{size}<
31           /script>")
32   List<Map<String, Object>> page(@Param("name") String name,
33                                @Param("offset") int offset,
34                                @Param("size") int size);
35
36   @Select("SELECT c.city_id AS cityId, c.city_number AS cityNumber, "
37           + "COALESCE(p.name, '') AS province, COALESCE(r.name, CAST(c.
38           city_number AS CHAR)) AS city"
```

- 问题197: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:43

- 问题代码1 :

```

38
39     @Select("SELECT COUNT(*) FROM city WHERE city_number = #{cityNumber}")
40     long countByNumber(@Param("cityNumber") Integer cityNumber);
41
42     @Insert("INSERT INTO city(city_number, createtime, updatetime) VALUES(#{cityNumber}, NOW(), NOW())")
43     int insert(@Param("cityNumber") Integer cityNumber);
44
45     @Delete("DELETE FROM city WHERE city_id = #{cityId}")
46     int delete(@Param("cityId") Long cityId);
47 }

```

- 问题198: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:37

- 问题代码1 :

```

32                                     @Param("size") int size);
33
34     @Select("SELECT c.city_id AS cityId, c.city_number AS cityNumber, "
35             + "COALESCE(p.name, '') AS province, COALESCE(r.name, CAST(c."
36             + "city_number AS CHAR)) AS city"
37             + FROM_SQL + "ORDER BY c.city_id")
38     List<Map<String, Object>> findAll();
39
40     @Select("SELECT COUNT(*) FROM city WHERE city_number = #{cityNumber}")
41     long countByNumber(@Param("cityNumber") Integer cityNumber);
42
43     @Insert("INSERT INTO city(city_number, createtime, updatetime) VALUES(#{cityNumber}, NOW(), NOW())")
44
45
46

```

- 问题199: medical-backend/src/main/java/com/medicine/business/mapper/CityMapper.java:46

- 问题代码1 :

```

41
42     @Insert("INSERT INTO city(city_number, createtime, updatetime) VALUES(#{cityNumber}, NOW(), NOW())")
43     int insert(@Param("cityNumber") Integer cityNumber);
44
45     @Delete("DELETE FROM city WHERE city_id = #{cityId}")
46     int delete(@Param("cityId") Long cityId);

```

- 问题200: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:11

- 问题代码1 :

```

6
7 import java.util.Map;
8 import java.util.LinkedHashMap;
9
10 @Service
11 public class SaleService {
12     private final SaleMapper mapper;
13
14     public SaleService(SaleMapper mapper) {
15         this.mapper = mapper;
16     }

```

- 问题201: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:19

- 问题代码1 :

```
14     public SaleService(SaleMapper mapper) {
15         this.mapper = mapper;
16     }
17
18     @Transactional(readOnly = true)
19     public Map<String, Object> page(Integer pn, Integer size, String name) {
20         int pageNumber = PageSupport.pageNumber(pn);
21         int pageSize = PageSupport.pageSize(size);
22         long total = mapper.count(name);
23         return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
24             pageSize), pageSize),
25             total, pageNumber, pageSize);
```

- 问题202: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:33

- 问题代码1 :

```
28     public Map<String, Object> all() {
29         return PageSupport.all(mapper.findAll());
30     }
31
32     @Transactional
33     public int add(Map<String, Object> request, int pageSize) {
34         mapper.insert(values(null, request));
35         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
36             (pageSize));
37     }
38     @Transactional
```

- 问题203: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:44

- 问题代码1 :

```
39     public void update(Long id, Map<String, Object> request) {
40         mapper.update(values(id, request));
41     }
42
43     @Transactional
44     public void delete(Long id) {
45         mapper.deleteDrugRelations(id);
46         mapper.delete(id);
47     }
48
49     private Map<String, Object> values(Long id, Map<String, Object> request) {
```

- 问题204: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:39

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
34     mapper.insert(values(null, request));
35     return PageSupport.pages(mapper.count(null), PageSupport.pageSize
    (pageSize));
36 }
37
38 @Transactional
39 public void update(Long id, Map<String, Object> request) {
40     mapper.update(values(id, request));
41 }
42
43 @Transactional
44 public void delete(Long id) {
```

- 问题205: medical-backend/src/main/java/com/medicine/business/service/SaleService.java:28

- 问题代码1 :

```
23     return PageSupport.page(mapper.page(name, PageSupport.offset(pageNumber,
    pageSize), pageSize),
24                             total, pageNumber, pageSize);
25 }
26
27 @Transactional(readOnly = true)
28 public Map<String, Object> all() {
29     return PageSupport.all(mapper.findAll());
30 }
31
32 @Transactional
33 public int add(Map<String, Object> request, int pageSize) {
```

- 问题206: medical-backend/src/main/java/com/medicine/common/BusinessException.java:3

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class BusinessException extends RuntimeException {
4
5     private final int code;
6
7     public BusinessException(int code, String message) {
8         super(message);
```

- 问题207: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:12

- 问题代码1 :

```
7 import java.util.LinkedHashMap;
8 import java.util.List;
9 import java.util.Map;
10
11 @Service
12 public class CompanyPolicyService {
13     private final CompanyPolicyMapper mapper;
14
15     public CompanyPolicyService(CompanyPolicyMapper mapper) {
16         this.mapper = mapper;
17     }
```

- 问题208: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:9

- 问题代码1 :

```

4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface MaterialMapper {
10     @Select("<script>SELECT COUNT(*) FROM material <where>"
11           + "<if test='keyword != null and keyword != \"\">"
12           + "title LIKE CONCAT('%', #{keyword}, '%') OR message LIKE CONCAT
13           ('%', #{keyword}, '%')</if></where></script>")
14     long count(@Param("keyword") String keyword);

```

- 问题209: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:42

- 问题代码1 :

```

37         PageSupport.stringValue(request.get("title")), PageSupport.
stringValue(request.get("message")));
38         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
39     }
40
41     @Transactional
42     public void update(Long id, Map<String, Object> request) {
43         mapper.update(id, PageSupport.longValue(request.get("companyId")),
44             PageSupport.stringValue(request.get("title")), PageSupport.
stringValue(request.get("message")));
45     }
46
47     @Transactional

```

- 问题210: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:29

- 问题代码1 :

```

24
25     @Insert("INSERT INTO material(title, message, create_time, update_time) VALUES
({title}, {message}, NOW(), NOW())")
26     int insert(@Param("title") String title, @Param("message") String message);
27
28     @Update("UPDATE material SET title=#{title}, message=#{message},
update_time=NOW() WHERE id=#{id}")
29     int update(@Param("id") Long id, @Param("title") String title, @Param
("message") String message);
30
31     @Delete("DELETE FROM material WHERE id=#{id}")
32     int delete(@Param("id") Long id);
33 }

```

- 问题211: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:35

- 问题代码1 :


```

30     }
31     return PageSupport.page(rows, total, pageNumber, pageSize);
32 }
33
34 @Transactional
35 public int add(Map<String, Object> request, int pageSize) {
36     mapper.insert(PageSupport.longValue(request.get("companyId")),
37         PageSupport.stringValue(request.get("title")), PageSupport.
38         stringValue(request.get("message")));
39     return PageSupport.pages(mapper.count(null), PageSupport.pageSize
40         (pageSize));
41 }

```

- 问题212: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:32

- 问题代码1 :

```

27
28 @Update("UPDATE material SET title=#{title}, message=#{message},
29     update_time=NOW() WHERE id=#{id}")
30 int update(@Param("id") Long id, @Param("title") String title, @Param
31     ("message") String message);
32
33 @Delete("DELETE FROM material WHERE id=#{id}")
34 int delete(@Param("id") Long id);

```

- 问题213: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:20

- 问题代码1 :

```

15 public CompanyPolicyService(CompanyPolicyMapper mapper) {
16     this.mapper = mapper;
17 }
18
19 @Transactional(readOnly = true)
20 public Map<String, Object> page(Integer pn, Integer size, String keyword) {
21     int pageNumber = PageSupport.pageNumber(pn);
22     int pageSize = PageSupport.pageSize(size);
23     long total = mapper.count(keyword);
24     List<Map<String, Object>> rows = mapper.page(keyword, PageSupport.offset
25         (pageNumber, pageSize), pageSize);
26     for (Map<String, Object> row : rows) {

```

- 问题214: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:14

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
9 public interface MaterialMapper {
10     @Select("<script>SELECT COUNT(*) FROM material <where>"
11             + "<if test='keyword != null and keyword != \"\">"
12             + "title LIKE CONCAT('%', #{keyword}, '%') OR message LIKE CONCAT
13             ('%', #{keyword}, '%')>"
14             + "</if></where></script>")
15     long count(@Param("keyword") String keyword);
16     @Select("<script>SELECT id, title, message, DATE_FORMAT(update_time, '%Y-%m-%
17     d') AS updateTime "
18             + "FROM material <where>"
19             + "<if test='keyword != null and keyword != \"\">"
20             + "title LIKE CONCAT('%', #{keyword}, '%') OR message LIKE CONCAT
21             ('%', #{keyword}, '%')>"
```

- 问题215: medical-backend/src/main/java/com/medicine/business/service/CompanyPolicyService.java:48

- 问题代码1 :

```
43     mapper.update(id, PageSupport.longValue(request.get("companyId")),
44                 PageSupport.stringValue(request.get("title")), PageSupport.
45                 stringValue(request.get("message")));
46 }
47 @Transactional
48 public void delete(Long id) {
49     mapper.delete(id);
50 }
```

- 问题216: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:21

- 问题代码1 :

```
16     @Select("<script>SELECT id, title, message, DATE_FORMAT(update_time, '%Y-%m-%
17     d') AS updateTime "
18             + "FROM material <where>"
19             + "<if test='keyword != null and keyword != \"\">"
20             + "title LIKE CONCAT('%', #{keyword}, '%') OR message LIKE CONCAT
21             ('%', #{keyword}, '%')>"
22             + "</if></where> ORDER BY id LIMIT #{offset}, #{size}</script>")
23     List<Map<String, Object>> page(@Param("keyword") String keyword,
24                                   @Param("offset") int offset,
25                                   @Param("size") int size);
26     @Insert("INSERT INTO material(title, message, create_time, update_time) VALUES
27             (#{title}, #{message}, NOW(), NOW())")
28     int insert(@Param("title") String title, @Param("message") String message);
```

- 问题217: medical-backend/src/main/java/com/medicine/business/mapper/MaterialMapper.java:26

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
21     List<Map<String, Object>> page(@Param("keyword") String keyword,
22                                   @Param("offset") int offset,
23                                   @Param("size") int size);
24
25     @Insert("INSERT INTO material(title, message, create_time, update_time) VALUES
26     (#{title}, #{message}, NOW(), NOW())")
27     int insert(@Param("title") String title, @Param("message") String message);
28
29     @Update("UPDATE material SET title=#{title}, message=#{message},
30     update_time=NOW() WHERE id=#{id}")
31     int update(@Param("id") Long id, @Param("title") String title, @Param
32     ("message") String message);
33
34     @Delete("DELETE FROM material WHERE id=#{id}")
```

- 问题218: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:14

- 问题代码1 :

```
9
10 import java.util.LinkedHashMap;
11 import java.util.Map;
12
13 @Service
14 public class DoctorService {
15     public static final String RESET_PASSWORD = "123456";
16
17     private final DoctorMapper mapper;
18     private final PasswordEncoder passwordEncoder;
```

- 问题219: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:15

- 问题代码1 :

```
10 import java.util.LinkedHashMap;
11 import java.util.Map;
12
13 @Service
14 public class DoctorService {
15     public static final String RESET_PASSWORD = "123456";
16
17     private final DoctorMapper mapper;
18     private final PasswordEncoder passwordEncoder;
19
20     public DoctorService(DoctorMapper mapper, PasswordEncoder passwordEncoder) {
```

- 问题220: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:26

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
21     this.mapper = mapper;
22     this.passwordEncoder = passwordEncoder;
23 }
24
25 @Transactional(readOnly = true)
26 public Map<String, Object> page(Integer pn, Integer size, String keyword) {
27     int pageNumber = PageSupport.pageNumber(pn);
28     int pageSize = PageSupport.pageSize(size);
29     long total = mapper.count(keyword);
30     return PageSupport.page(mapper.page(keyword, PageSupport.offset
31 (pageNumber, pageSize), pageSize),
32     total, pageNumber, pageSize);
```

- 问题221: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:86

- 问题代码1 :

```
81     mapper.updateAccount(values);
82     return true;
83 }
84
85 @Transactional
86 public void delete(Long id) {
87     Long accountId = mapper.findAccountId(id);
88     mapper.deleteDoctor(id);
89     if (accountId != null) {
90         mapper.deleteAccount(accountId);
91     }
```

- 问题222: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:9

- 问题代码1 :

```
4
5 import java.util.List;
6 import java.util.Map;
7
8 @Mapper
9 public interface CompanyMapper {
10     @Select("<script>SELECT COUNT(*) FROM drugcompany <where>"
11         + "<if test='name != null and name != \"\"'>company_name LIKE CONCAT
12 ('%', #{name}, '%')</if>"
13         + "</where></script>")
14     long count(@Param("name") String name);
```

- 问题223: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:35

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
30         return PageSupport.page(mapper.page(keyword, PageSupport.offset
(pageNumber, pageSize), pageSize),
31             total, pageNumber, pageSize);
32     }
33
34     @Transactional(readOnly = true)
35     public Map<String, Object> levelAndType() {
36         Map<String, Object> result = new LinkedHashMap<>();
37         result.put("allLevel", mapper.findAllLevels());
38         result.put("allTreatType", mapper.findAllTreatTypes());
39         return result;
40     }
```

- 问题224: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:25

- 问题代码1 :

```
20             @Param("offset") int offset,
21             @Param("size") int size);
22
23     @Select("SELECT company_id AS companyId, company_name AS companyName,
company_phone AS companyPhone "
24         + "FROM drugcompany ORDER BY company_id")
25     List<Map<String, Object>> findAll();
26
27     @Insert("INSERT INTO drugcompany(company_name, company_phone, createtime,
updatetime) "
28         + "VALUES(#{companyName}, #{companyPhone}, NOW(), NOW())")
29     int insert(@Param("companyName") String companyName, @Param("companyPhone")
String companyPhone);
```

- 问题225: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:43

- 问题代码1 :

```
38         result.put("allTreatType", mapper.findAllTreatTypes());
39         return result;
40     }
41
42     @Transactional
43     public int add(Map<String, Object> request, int pageSize) {
44         String phone = PageSupport.stringValue(request.get("phoneNumber"));
45         if (phone != null && mapper.countPhone(phone) > 0) {
46             return -1;
47         }
48         String name = PageSupport.stringValue(request.get("name"));
```

- 问题226: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:29

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
24         + "FROM drugcompany ORDER BY company_id")
25     List<Map<String, Object>> findAll();
26
27     @Insert("INSERT INTO drugcompany(company_name, company_phone, createtime,
28         updatetime) "
29         + "VALUES(#{companyName}, #{companyPhone}, NOW(), NOW())")
29     int insert(@Param("companyName") String companyName, @Param("companyPhone")
30         String companyPhone);
31
32     @Update("UPDATE drugcompany SET company_name=#{companyName}, company_phone=#{
33         companyPhone}, updatetime=NOW() "
34         + "WHERE company_id=#{companyId}")
35     int update(@Param("companyId") Long companyId,
36         @Param("companyName") String companyName,
```

- 问题227: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:66

- 问题代码1 :

```
61     mapper.insertDoctor(doctor);
62     return PageSupport.pages(mapper.count(null), PageSupport.pageSize
63         (pageSize));
64 }
65 @Transactional
66 public boolean update(Long id, Map<String, Object> request) {
67     Long accountId = mapper.findAccountId(id);
68     if (accountId == null) {
69         throw new BusinessException(ErrorCode.NOT_FOUND, "医生信息不存在");
70     }
71     String phone = PageSupport.stringValue(request.get("phoneNumber"));
```

- 问题228: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:33

- 问题代码1 :

```
28         + "VALUES(#{companyName}, #{companyPhone}, NOW(), NOW())")
29     int insert(@Param("companyName") String companyName, @Param("companyPhone")
30         String companyPhone);
31
32     @Update("UPDATE drugcompany SET company_name=#{companyName}, company_phone=#{
33         companyPhone}, updatetime=NOW() "
34         + "WHERE company_id=#{companyId}")
35     int update(@Param("companyId") Long companyId,
36         @Param("companyName") String companyName,
37         @Param("companyPhone") String companyPhone);
38
39     @Delete("DELETE FROM drugcompany WHERE company_id=#{companyId}")
40     int delete(@Param("companyId") Long companyId);
```

- 问题229: medical-backend/src/main/java/com/medicine/business/service/DoctorService.java:95

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
90         mapper.deleteAccount(accountId);
91     }
92 }
93
94 @Transactional
95 public void resetPassword(Long accountId, Long operatorAccountId) {
96     if (mapper.resetPassword(accountId, passwordEncoder.encode
(RESET_PASSWORD)) == 0) {
97         throw new BusinessException(ErrorCode.NOT_FOUND, "医生账号不存在");
98     }
99     mapper.insertPasswordResetAudit(accountId, operatorAccountId);
100 }
```

- 问题230: medical-backend/src/main/java/com/medicine/business/mapper/CompanyMapper.java:38

- 问题代码1 :

```
33     int update(@Param("companyId") Long companyId,
34               @Param("companyName") String companyName,
35               @Param("companyPhone") String companyPhone);
36
37     @Delete("DELETE FROM drugcompany WHERE company_id=#{companyId}")
38     int delete(@Param("companyId") Long companyId);
```

- 问题231: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:14

- 问题代码1 :

```
9 import java.util.List;
10 import java.util.Map;
11 import java.util.stream.Collectors;
12
13 @Service
14 public class DrugService {
15     private final DrugMapper mapper;
16
17     public DrugService(DrugMapper mapper) {
18         this.mapper = mapper;
19     }
```

- 问题232: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:39

- 问题代码1 :

```
34     }
35     return PageSupport.page(rows, total, pageNumber, pageSize);
36 }
37
38 @Transactional
39 public int add(Map<String, Object> request, int pageSize) {
40     Map<String, Object> values = new LinkedHashMap<>(request);
41     values.put("drugName", PageSupport.stringValue(request.get("drugName")));
42     values.put("drugInfo", PageSupport.stringValue(request.get("drugInfo")));
43     values.put("drugEffect", PageSupport.stringValue(request.get
("drugEffect")));
44     values.put("drugImg", PageSupport.stringValue(request.get("drugImg")));
```

- 问题233: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:53

- 问题代码1：

```

48         replaceSales(drugId, request.get("saleIds"));
49         return PageSupport.pages(mapper.count(null), PageSupport.pageSize
(pageSize));
50     }
51
52     @Transactional
53     public void update(Long id, Map<String, Object> request) {
54         Map<String, Object> values = new LinkedHashMap<>(request);
55         values.put("drugId", id);
56         mapper.updateDrug(values);
57         replaceSales(id, request.get("saleIds"));
58     }
    
```

- 问题234: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:61

- 问题代码1：

```

56         mapper.updateDrug(values);
57         replaceSales(id, request.get("saleIds"));
58     }
59
60     @Transactional
61     public void delete(Long id) {
62         mapper.deleteSaleRelations(id);
63         mapper.deleteDrug(id);
64     }
65
66     private void replaceSales(Long drugId, Object rawSaleIds) {
    
```

- 问题235: medical-backend/src/main/java/com/medicine/business/service/DrugService.java:22

- 问题代码1：

```

17     public DrugService(DrugMapper mapper) {
18         this.mapper = mapper;
19     }
20
21     @Transactional(readonly = true)
22     public Map<String, Object> page(Integer pn, Integer size, String name) {
23         int pageNumber = PageSupport.pageNumber(pn);
24         int pageSize = PageSupport.pageSize(size);
25         long total = mapper.count(name);
26         List<Map<String, Object>> rows = mapper.page(name, PageSupport.offset
(pageNumber, pageSize), pageSize);
27         if (!rows.isEmpty()) {
    
```

3.3.1.20 G.MET.01 方法要简短--方法的参数不应超过5个（4）

- 问题描述：

复杂过长的方法往往意味着方法抽象层次不足或功能不够单一。建议方法要进行合理抽象分层，对功能不够单一的方法使用合理的手段进行重构，以提升代码的可读性、可维护性。

可以考虑从以下维度间接约束方法的尺寸和复杂度：

- 方法行数建议不超过50行（非空非注释）；
- 方法的参数，建议不超过5个；

- 方法最大代码块嵌套深度，建议不要超过4层。

方法参数

方法的参数过多，会使得该方法易于受外部（其他部分的代码）变化的影响，从而影响维护工作，同时也会增大测试的工作量。方法的参数个数如果超过5个，可以考虑如下优化方式：

- 对方法进行抽象或重构；
- 将相关参数合在一起，定义成类，用对象封装；
- 当构造方法含有多个参数时，尝试建造者（Builder）或工厂模式，JDK源码中有很多示例可供参考，例如Calendar.Builder，HttpClient.Builder。

代码块嵌套深度

方法的代码块嵌套深度指的是方法中的代码控制块（例如：if、for、while、switch等）之间互相包含的深度。方法本身算一层，try-catch不算一层嵌套。方法内的lambda表达式、局部类和匿名类嵌套层次以最内层方法来计算，不累计enclosing method的嵌套层次。使用卫语句可以有效的减少if相关的嵌套层次。

该规则有可配置参数，具体配置详见规则集中该规则的选项配置。

- 正确示例：

```
class Parameters {
    private int var1;
    private int var2;
    private int var3;
    private int var4;
    private int var5;
    private int var6;
    ...
}
public void doSomething(Parameters parameters) {
    ...
}
```

- 错误示例：

```
public void doSomething(int var1, int var2, int var3, int var4, int var5, int var6) {
    ...
}
```

- 建议的写法：

重构和简化方法。

- 问题1：medical-backend/src/test/java/com/medicine/auth/service/PermissionServiceTest.java:34

- 问题代码1：

华为云 CodeArts Check 代码扫描报告

```
29      assertThat(roots.get(0).getName()).isEqualTo("Layout");
30      assertThat(roots.get(0).getChildren().hasSize(1);
31      assertThat(roots.get(0).getChildren().get(0).getMeta().getTitle()).
isEqualTo("首页");
32  }
33
34  private PermissionRecord record(int id, int pid, String name, String path,
String component, String title) {
35      PermissionRecord record = new PermissionRecord();
36      record.setId(id);
37      record.setPid(pid);
38      record.setName(name);
39      record.setPath(path);
```

- 问题2: medical-backend/src/main/java/com/medicine/business/mapper/MedicalPolicyMapper.java:29

- 问题代码1 :

```
24
25      @Select("<script>SELECT mp.id, mp.title, mp.message, mp.city_id AS cityId, mp.
update_time AS updateTime, "
26          + "c.city_number AS cityNumber, COALESCE(r.name, CAST(c.city_number
AS CHAR)) AS city, "
27          + "COALESCE(p.name, '') AS province" + FROM_SQL + FILTER_SQL
28          + " ORDER BY mp.id LIMIT #{offset}, #{size}</script>")
29      List<Map<String, Object>> page(@Param("id") Long id,
30                                  @Param("cityId") Long cityId,
31                                  @Param("title") String title,
32                                  @Param("updateTime") String updateTime,
33                                  @Param("offset") int offset,
34                                  @Param("size") int size);
```

- 问题3: medical-backend/src/main/java/com/medicine/business/controller/MedicalPolicyController.java:21

- 问题代码1 :

```
16      this.service = service;
17  }
18
19      @GetMapping
20      @PreAuthorize("hasAnyRole('1','2')")
21      public ApiResponse<Map<String, Object>> page(@RequestParam(defaultValue =
"1") Integer pn,
22                                                  @RequestParam(defaultValue =
"5") Integer size,
23                                                  @RequestParam(required = false)
Long id,
24                                                  @RequestParam(required = false)
Long cityId,
25                                                  @RequestParam(required = false)
String title,
26                                                  @RequestParam(required = false)
String updateTime) {
```

- 问题4: medical-backend/src/main/java/com/medicine/business/service/MedicalPolicyService.java:21

- 问题代码1 :

```

16     public MedicalPolicyService(MedicalPolicyMapper mapper) {
17         this.mapper = mapper;
18     }
19
20     @Transactional(readonly = true)
21     public Map<String, Object> page(Integer pn, Integer size, Long id, Long
cityId,
22                                     String title, String updateTime) {
23         int pageNumber = PageSupport.pageNumber(pn);
24         int pageSize = PageSupport.pageSize(size);
25         long total = mapper.count(id, cityId, title, updateTime);
26         List<Map<String, Object>> rows = mapper.page(id, cityId, title,
updateTime,

```

3.3.1.21 G.FMT.12 减少不必要的空行，保持代码紧凑（37）

- 问题描述：

减少不必要的空行，可以显示更多的代码，方便代码阅读。建议：

- 根据上下内容的相关程度，合理安排空行：空行出现在属性，构造方法，方法，嵌套类，静态初始化块之间；
- 方法内部、类型定义内部、初始化表达式内部，不使用连续空行；
- 不使用连续3个或更多空行；
- 大括号内的代码块行首之前和行尾之后不要加空行，包括类型和方法定义、语句代码块。

- 正确示例：

场景1：空行过多

- 修复示例1：

```

int foo() {
    ...
}

int bar() {
    ...
}

int baz() {
    doSomething();
    ...
}

```

- 错误示例：

场景1：空行过多

- 错误示例：

```
int foo() {
    ...
}

int bar() {
    ...
}

int baz() {

    doSomething();
    ...
}
```

- 建议的写法:

对代码进行格式化处理。

- 问题1: medical-backend/src/main/java/com/medicine/security/RestAuthenticationEntryPoint.java:18

- 问题代码1 :

```
13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAuthenticationEntryPoint implements AuthenticationEntryPoint {
18
19     private final ObjectMapper objectMapper;
20
21     public RestAuthenticationEntryPoint(ObjectMapper objectMapper) {
22         this.objectMapper = objectMapper;
23     }
```

- 问题2: medical-backend/src/main/java/com/medicine/auth/model/PermissionRecord.java:4

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class PermissionRecord {
4
5     private Integer id;
6     private Integer pid;
7     private String name;
8     private String path;
9     private String component;
```

- 问题3: medical-backend/src/main/java/com/medicine/dashboard/controller/DashboardController.java:13

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
8 import org.springframework.web.bind.annotation.RestController;
9
10 @RestController
11 @RequestMapping("/api/dashboard")
12 public class DashboardController {
13
14     private final DashboardService dashboardService;
15
16     public DashboardController(DashboardService dashboardService) {
17         this.dashboardService = dashboardService;
18     }
```

- 问题4: medical-backend/src/main/java/com/medicine/auth/dto/PermissionMeta.java:4

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class PermissionMeta {
4
5     private String title;
6
7     public PermissionMeta() {
8     }
```

- 问题5: medical-backend/src/main/java/com/medicine/auth/mapper/PermissionMapper.java:10

- 问题代码1 :

```
5 import org.apache.ibatis.annotations.Select;
6
7 import java.util.List;
8
9 public interface PermissionMapper {
10
11     @Select("SELECT p.id, p.pid, p.name, p.path, p.component, p.level, p.title "
12            + "FROM permission p JOIN role_permission rp ON rp.per_id = p.id "
13            + "WHERE rp.roleName = #{roleName} ORDER BY p.id")
14     List<PermissionRecord> findByRoleName(@Param("roleName") String roleName);
15 }
```

- 问题6: medical-backend/src/main/java/com/medicine/auth/dto/LoginRequest.java:7

- 问题代码1 :

```
2
3 import javax.validation.constraints.NotBlank;
4 import javax.validation.constraints.Size;
5
6 public class LoginRequest {
7
8     @NotBlank(message = "用户名不能为空")
9     @Size(max = 255, message = "用户名过长")
10     private String username;
11
12     @NotBlank(message = "密码不能为空")
```

- 问题7: medical-backend/src/main/java/com/medicine/dashboard/mapper/DashboardMapper.java:11

- 问题代码1 :

```
6 import org.apache.ibatis.annotations.Select;
7
8 import java.util.List;
9
10 public interface DashboardMapper {
11
12     @Select("SELECT "
13         + "(SELECT COUNT(*) FROM doctor) AS doctorCount, "
14         + "(SELECT COUNT(*) FROM drugcompany) AS companyCount, "
15         + "(SELECT COUNT(*) FROM drug) AS drugCount, "
16         + "(SELECT COUNT(*) FROM sale) AS saleCount, "
```

- 问题8: medical-backend/src/main/java/com/medicine/auth/model/Account.java:4

- 问题代码1 :

```
1 package com.medicine.auth.model;
2
3 public class Account {
4
5     private Long id;
6     private String realname;
7     private String uname;
8     private String pwd;
9     private String phonenum;
```

- 问题9: medical-backend/src/main/java/com/medicine/dashboard/service/DashboardService.java:9

- 问题代码1 :

```
4 import com.medicine.dashboard.mapper.DashboardMapper;
5 import org.springframework.stereotype.Service;
6
7 @Service
8 public class DashboardService {
9
10     private final DashboardMapper dashboardMapper;
11
12     public DashboardService(DashboardMapper dashboardMapper) {
13         this.dashboardMapper = dashboardMapper;
14     }
```

- 问题10: medical-backend/src/main/java/com/medicine/auth/dto/UserInfo.java:4

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class UserInfo {
4
5     private Long id;
6     private String realname;
7     private String uname;
8     private String phonenum;
9     private int utype;
```

- 问题11: medical-backend/src/main/java/com/medicine/dashboard/dto/NameValue.java:4

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class NameValue {
4
5     private String name;
6     private long value;
7
8     public NameValue() {
9     }
```

- 问题12: medical-backend/src/main/java/com/medicine/auth/mapper/AccountMapper.java:8

- 问题代码1 :

```
3 import com.medicine.auth.model.Account;
4 import org.apache.ibatis.annotations.Param;
5 import org.apache.ibatis.annotations.Select;
6
7 public interface AccountMapper {
8
9     @Select("SELECT id, realname, uname, pwd, phonenumber, utype FROM account
WHERE uname = #{username} LIMIT 1")
10     Account findByUsername(@Param("username") String username);
```

- 问题13: medical-backend/src/main/java/com/medicine/auth/service/PermissionService.java:16

- 问题代码1 :

```
11 import java.util.List;
12 import java.util.Map;
13
14 @Service
15 public class PermissionService {
16
17     private final PermissionMapper permissionMapper;
18
19     public PermissionService(PermissionMapper permissionMapper) {
20         this.permissionMapper = permissionMapper;
21     }
```

- 问题14: medical-backend/src/main/java/com/medicine/config/SecurityConfig.java:29

- 问题代码1 :

```

24 import java.util.stream.Collectors;
25
26 @Configuration
27 @EnableGlobalMethodSecurity(prePostEnabled = true)
28 public class SecurityConfig {
29
30     private final TokenAuthenticationFilter tokenAuthenticationFilter;
31     private final RestAuthenticationEntryPoint authenticationEntryPoint;
32     private final RestAccessDeniedHandler accessDeniedHandler;
33
34     public SecurityConfig(TokenAuthenticationFilter tokenAuthenticationFilter,

```

- 问题15: medical-backend/src/test/java/com/medicine/auth/service/AuthServiceTest.java:21

- 问题代码1 :

```

16 import static org.mockito.Mockito.mock;
17 import static org.mockito.Mockito.verify;
18 import static org.mockito.Mockito.when;
19
20 class AuthServiceTest {
21
22     @Test
23     void loginReturnsRawTokenAndNumericUserType() {
24         AccountMapper accountMapper = mock(AccountMapper.class);
25         TokenService tokenService = mock(TokenService.class);
26         BCryptPasswordEncoder encoder = new BCryptPasswordEncoder();

```

- 问题16: medical-backend/src/main/java/com/medicine/security/RestAccessDeniedHandler.java:18

- 问题代码1 :

```

13 import java.io.IOException;
14 import java.nio.charset.StandardCharsets;
15
16 @Component
17 public class RestAccessDeniedHandler implements AccessDeniedHandler {
18
19     private final ObjectMapper objectMapper;
20
21     public RestAccessDeniedHandler(ObjectMapper objectMapper) {
22         this.objectMapper = objectMapper;
23     }

```

- 问题17: medical-backend/src/main/java/com/medicine/security/AuthSession.java:4

- 问题代码1 :

```

1 package com.medicine.security;
2
3 public class AuthSession {
4
5     private Long userId;
6     private String username;
7     private String realname;
8     private String roleName;
9     private int userType;

```


- 问题18: medical-backend/src/main/java/com/medicine/security/TokenService.java:17

- 问题代码1 :

```
12 import java.util.Optional;
13 import java.util.UUID;
14
15 @Service
16 public class TokenService {
17
18     private final StringRedisTemplate redisTemplate;
19     private final ObjectMapper objectMapper;
20     private final String tokenPrefix;
21     private final Duration tokenTtl;
```

- 问题19: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardNews.java:4

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardNews {
4
5     private String id;
6     private String title;
7     private String summary;
8     private String publishedAt;
```

- 问题20: medical-backend/src/main/java/com/medicine/auth/service/AuthService.java:16

- 问题代码1 :

```
11 import org.springframework.security.crypto.password.PasswordEncoder;
12 import org.springframework.stereotype.Service;
13
14 @Service
15 public class AuthService {
16
17     private final AccountMapper accountMapper;
18     private final PasswordEncoder passwordEncoder;
19     private final TokenService tokenService;
20
21     public AuthService(AccountMapper accountMapper, PasswordEncoder
passwordEncoder, TokenService tokenService) {
```

- 问题21: medical-backend/src/main/java/com/medicine/auth/controller/AuthController.java:31

- 问题代码1 :

```

26
27 @Validated
28 @RestController
29 @RequestMapping("/api")
30 public class AuthController {
31
32     private final AuthService authService;
33     private final PermissionService permissionService;
34     private final TokenService tokenService;
35
36     public AuthController(AuthService authService, PermissionService
permissionService, TokenService tokenService) {

```

- 问题22: medical-backend/src/test/java/com/medicine/security/TokenServiceTest.java:8

- 问题代码1 :

```

3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class TokenServiceTest {
8
9     @Test
10     void acceptsLegacyRawAuthorizationToken() {
11         assertThat(TokenService.normalizeAuthorization(" abc123 ")).isEqualTo
("abc123");
12     }

```

- 问题23: medical-backend/src/test/java/com/medicine/auth/service/PermissionServiceTest.java:16

- 问题代码1 :

```

11 import static org.assertj.core.api.Assertions.assertThat;
12 import static org.mockito.Mockito.mock;
13 import static org.mockito.Mockito.when;
14
15 class PermissionServiceTest {
16
17     @Test
18     void buildsFrontendRouteTree() {
19         PermissionMapper mapper = mock(PermissionMapper.class);
20         when(mapper.findByName("ROLE_1")).thenReturn(Arrays.asList(
21             record(1, 0, "Layout", "/", "Layout", "Layout"),

```

- 问题24: medical-backend/src/main/java/com/medicine/MedicalBackendApplication.java:10

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
5 import org.springframework.boot.autoconfigure.SpringBootApplication;
6
7 @MapperScan({"com.medicine.auth.mapper", "com.medicine.business.mapper", "com.
medicine.dashboard.mapper"})
8 @SpringBootApplication
9 public class MedicalBackendApplication {
10
11     public static void main(String[] args) {
12         SpringApplication.run(MedicalBackendApplication.class, args);
13     }
14 }
```

- 问题25: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardView.java:6

- 问题代码1 :

```
1 package com.medicine.dashboard.dto;
2
3 import java.util.List;
4
5 public class DashboardView {
6
7     private DashboardCounts counts;
8     private List<NameValue> doctorLevels;
9     private List<NameValue> treatTypes;
10    private List<DashboardNews> news;
```

- 问题26: medical-backend/src/main/java/com/medicine/common/ApiResponse.java:4

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class ApiResponse<T> {
4
5     private int code;
6     private String message;
7     private T data;
8
9     public ApiResponse() {
```

- 问题27: medical-backend/src/test/java/com/medicine/common/ApiResponseTest.java:8

- 问题代码1 :

```
3 import org.junit.jupiter.api.Test;
4
5 import static org.assertj.core.api.Assertions.assertThat;
6
7 class ApiResponseTest {
8
9     @Test
10     void successUsesFrontendCompatibleCode() {
11         ApiResponse<String> response = ApiResponse.success("ok");
12
13         assertThat(response.getCode()).isEqualTo(20000);
```

- 问题28: medical-backend/src/main/java/com/medicine/common/GlobalExceptionHandler.java:16

- 问题代码1 :

```

11
12 import javax.validation.ConstraintViolationException;
13
14 @RestControllerAdvice
15 public class GlobalExceptionHandler {
16
17     private static final Logger log = LoggerFactory.getLogger
18     (GlobalExceptionHandler.class);
19
20     @ExceptionHandler(BusinessException.class)
21     public ApiResponse<Void> handleBusinessException(BusinessException exception)
22     {
23         return ApiResponse.error(exception.getCode(), exception.getMessage());
24     }
25 }

```

- 问题29: medical-backend/src/main/java/com/medicine/auth/dto/PermissionNode.java:7

- 问题代码1 :

```

2
3 import java.util.ArrayList;
4 import java.util.List;
5
6 public class PermissionNode {
7
8     private String path;
9     private String name;
10    private String component;
11    private PermissionMeta meta;
12    private List<PermissionNode> children = new ArrayList<>();
13 }

```

- 问题30: medical-backend/src/test/java/com/medicine/dashboard/service/DashboardServiceTest.java:17

- 问题代码1 :

```

12 import static org.assertj.core.api.Assertions.assertThat;
13 import static org.mockito.Mockito.mock;
14 import static org.mockito.Mockito.when;
15
16 class DashboardServiceTest {
17
18     @Test
19     void assemblesAllDashboardSections() {
20         DashboardMapper mapper = mock(DashboardMapper.class);
21         DashboardCounts counts = new DashboardCounts();
22         counts.setDoctorCount(12);
23     }
24 }

```

- 问题31: medical-backend/src/main/java/com/medicine/dashboard/dto/DashboardCounts.java:4

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
1 package com.medicine.dashboard.dto;
2
3 public class DashboardCounts {
4
5     private long doctorCount;
6     private long companyCount;
7     private long drugCount;
8     private long saleCount;
9     private long cityCount;
```

- 问题32: medical-backend/src/main/java/com/medicine/common/PageView.java:7

- 问题代码1 :

```
2
3 import java.util.Collections;
4 import java.util.List;
5
6 public class PageView<T> {
7
8     private long total;
9     private List<T> list;
10    private int pageNum;
11    private int pageSize;
```

- 问题33: medical-backend/src/test/java/com/medicine/business/service/DoctorServiceTest.java:12

- 问题代码1 :

```
7 import static org.mockito.Mockito.mock;
8 import static org.mockito.Mockito.verify;
9 import static org.mockito.Mockito.when;
10
11 class DoctorServiceTest {
12
13     @Test
14     void deleteRemovesDoctorAndAccountInOneTransaction() {
15         DoctorMapper mapper = mock(DoctorMapper.class);
16         PasswordEncoder encoder = mock(PasswordEncoder.class);
17         DoctorService service = new DoctorService(mapper, encoder);
```

- 问题34: medical-backend/src/main/java/com/medicine/common/ErrorCode.java:4

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public final class ErrorCode {
4
5     public static final int SUCCESS = 20000;
6     public static final int INVALID_ARGUMENT = 10000;
7     public static final int DUPLICATE_DATA = 10001;
8     public static final int LOGIN_FAILED = 10002;
9     public static final int FORBIDDEN = 10003;
```

- 问题35: medical-backend/src/main/java/com/medicine/security/TokenAuthenticationFilter.java:18

- 问题代码1 :

华为云 CodeArts Check 代码扫描报告

```
13 import java.io.IOException;
14 import java.util.Collections;
15
16 @Component
17 public class TokenAuthenticationFilter extends OncePerRequestFilter {
18
19     private final TokenService tokenService;
20
21     public TokenAuthenticationFilter(TokenService tokenService) {
22         this.tokenService = tokenService;
23     }
```

- 问题36: medical-backend/src/main/java/com/medicine/auth/dto/LoginResult.java:4

- 问题代码1 :

```
1 package com.medicine.auth.dto;
2
3 public class LoginResult {
4
5     private String token;
6     private UserInfo userInfo;
7
8     public LoginResult() {
9     }
```

- 问题37: medical-backend/src/main/java/com/medicine/common/BusinessException.java:4

- 问题代码1 :

```
1 package com.medicine.common;
2
3 public class BusinessException extends RuntimeException {
4
5     private final int code;
6
7     public BusinessException(int code, String message) {
8         super(message);
9         this.code = code;
```