speculative: %rax, %rbx both secret-dependent

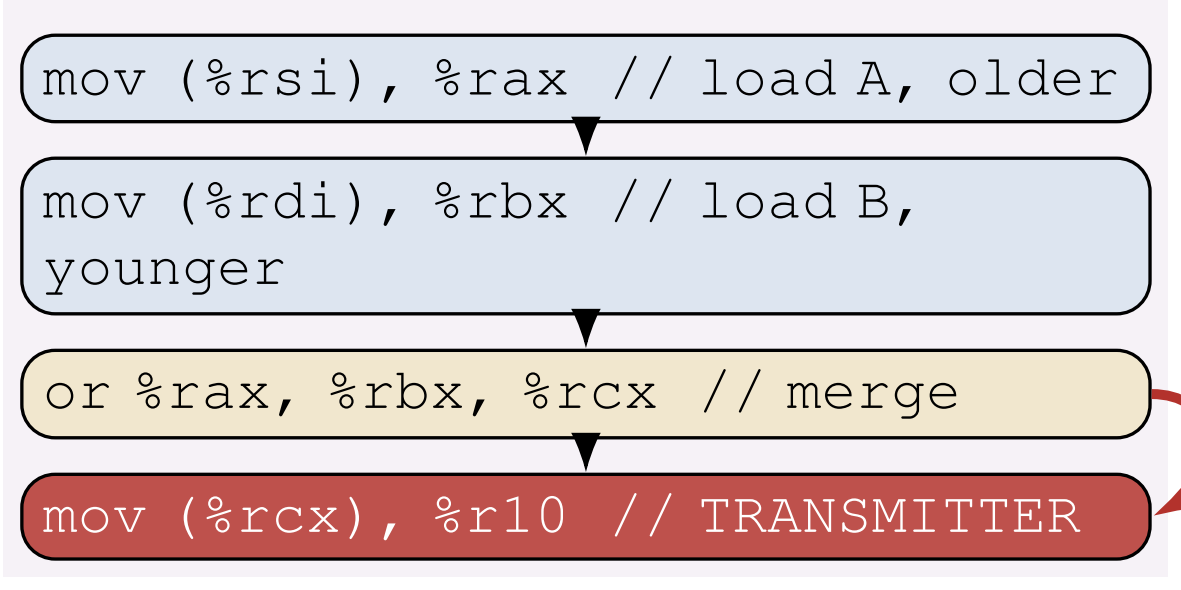

br $_A$ resolves $\Rightarrow$ %rcx ruled untainted, but br $_B$ still spec.

`getOldestTaint` keeps only the *oldest* source (br $_A$)