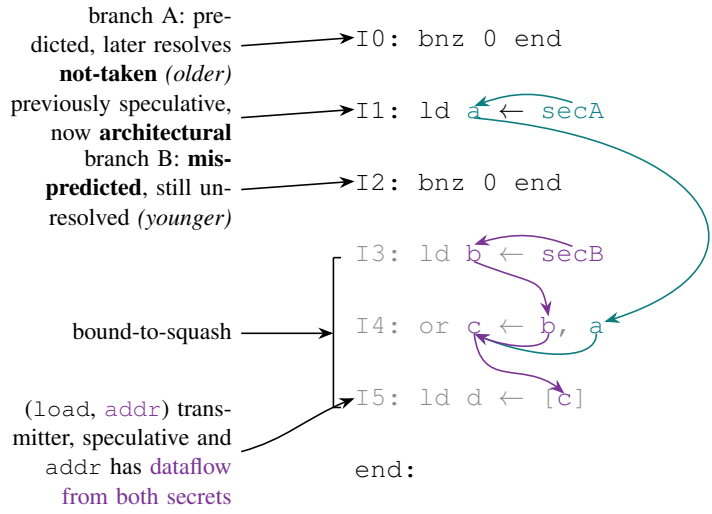

`getOldestTaint` keeps only branch A (**oldest**). When branch A resolves not-taken, `c` is ruled untainted and **I5 issues despite being a speculative transmitter** — but branch B is still unresolved, so `b` (hence `c`) is still secret-dependent.