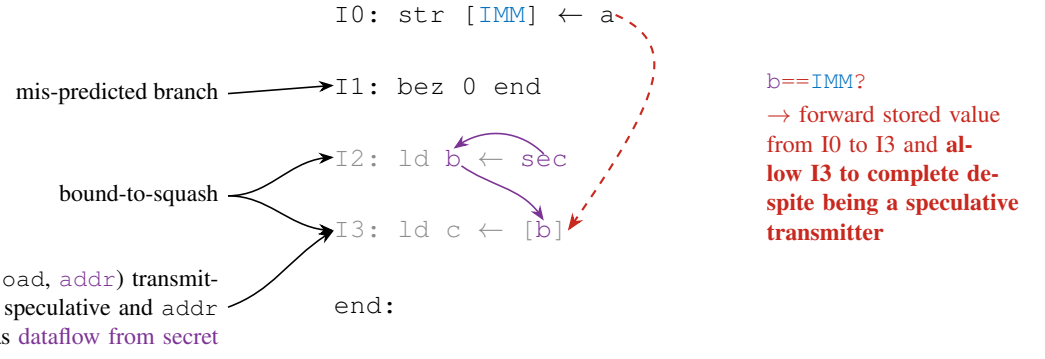
I0: str [IMM] ← a
mis-predicted branch
I1: bez 0 end
I2: ld b ← sec
bound-to-squash
I3: ld c ← [b]
(load, addr) transmitter, speculative and addr has dataflow from secret
end:
b==IMM?
→ forward stored value from I0 to I3 and allow I3 to complete despite being a speculative transmitter