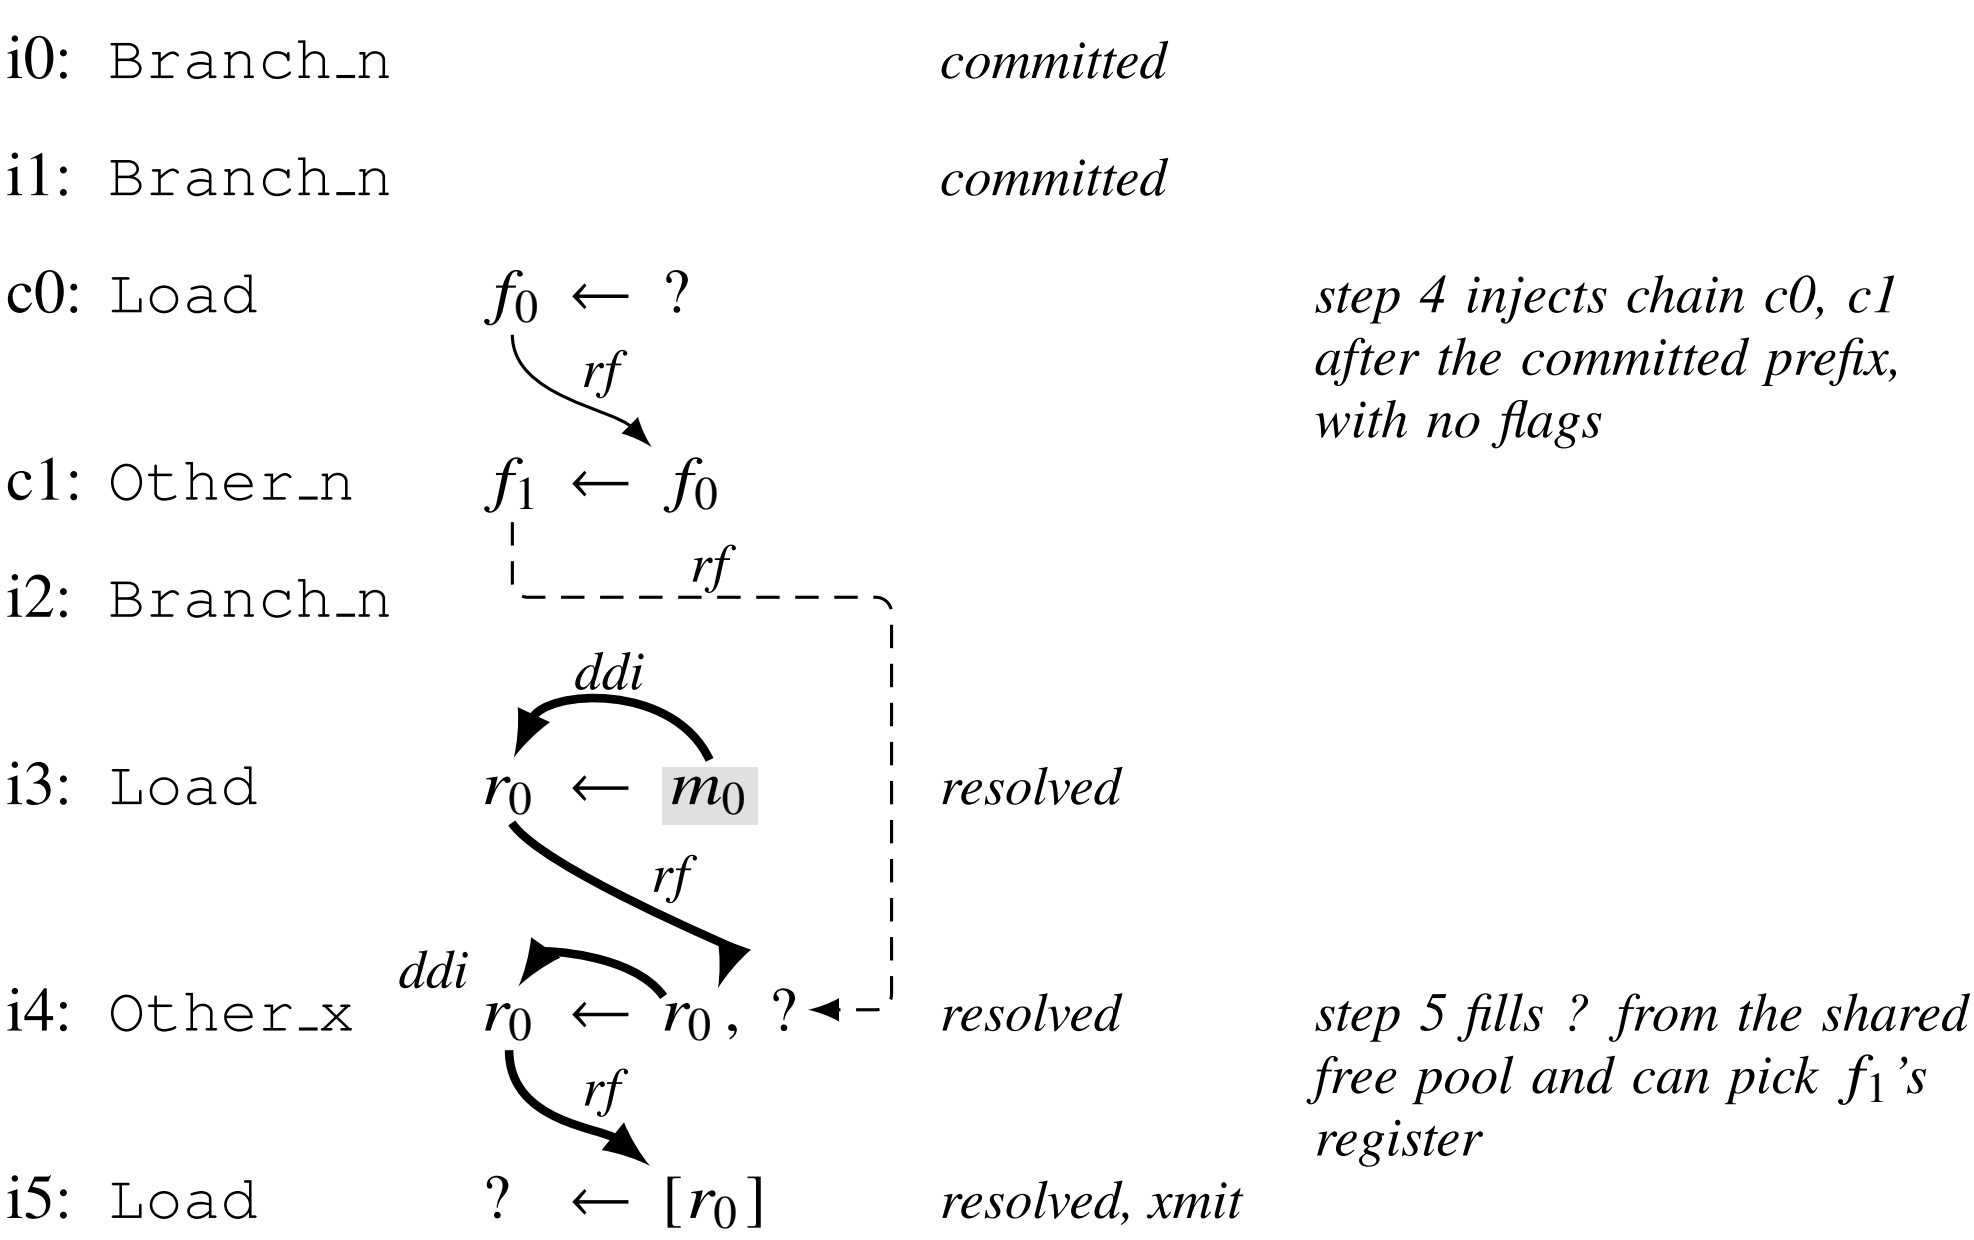

i0: Branch_n
committed
i1: Branch_n
committed
c0: Load
$f_0 \leftarrow ?$
rf
step 4 injects chain c0, c1 after the committed prefix, with no flags
c1: Other_n
$f_1 \leftarrow f_0$
rf
i2: Branch_n
ddi
i3: Load
$r_0 \leftarrow m_0$
resolved
rf
ddi
i4: Other_x
$r_0 \leftarrow r_0, ?$
resolved
step 5 fills ? from the shared free pool and can pick f_1's register
rf
i5: Load
$? \leftarrow [r_0]$
resolved, xmit