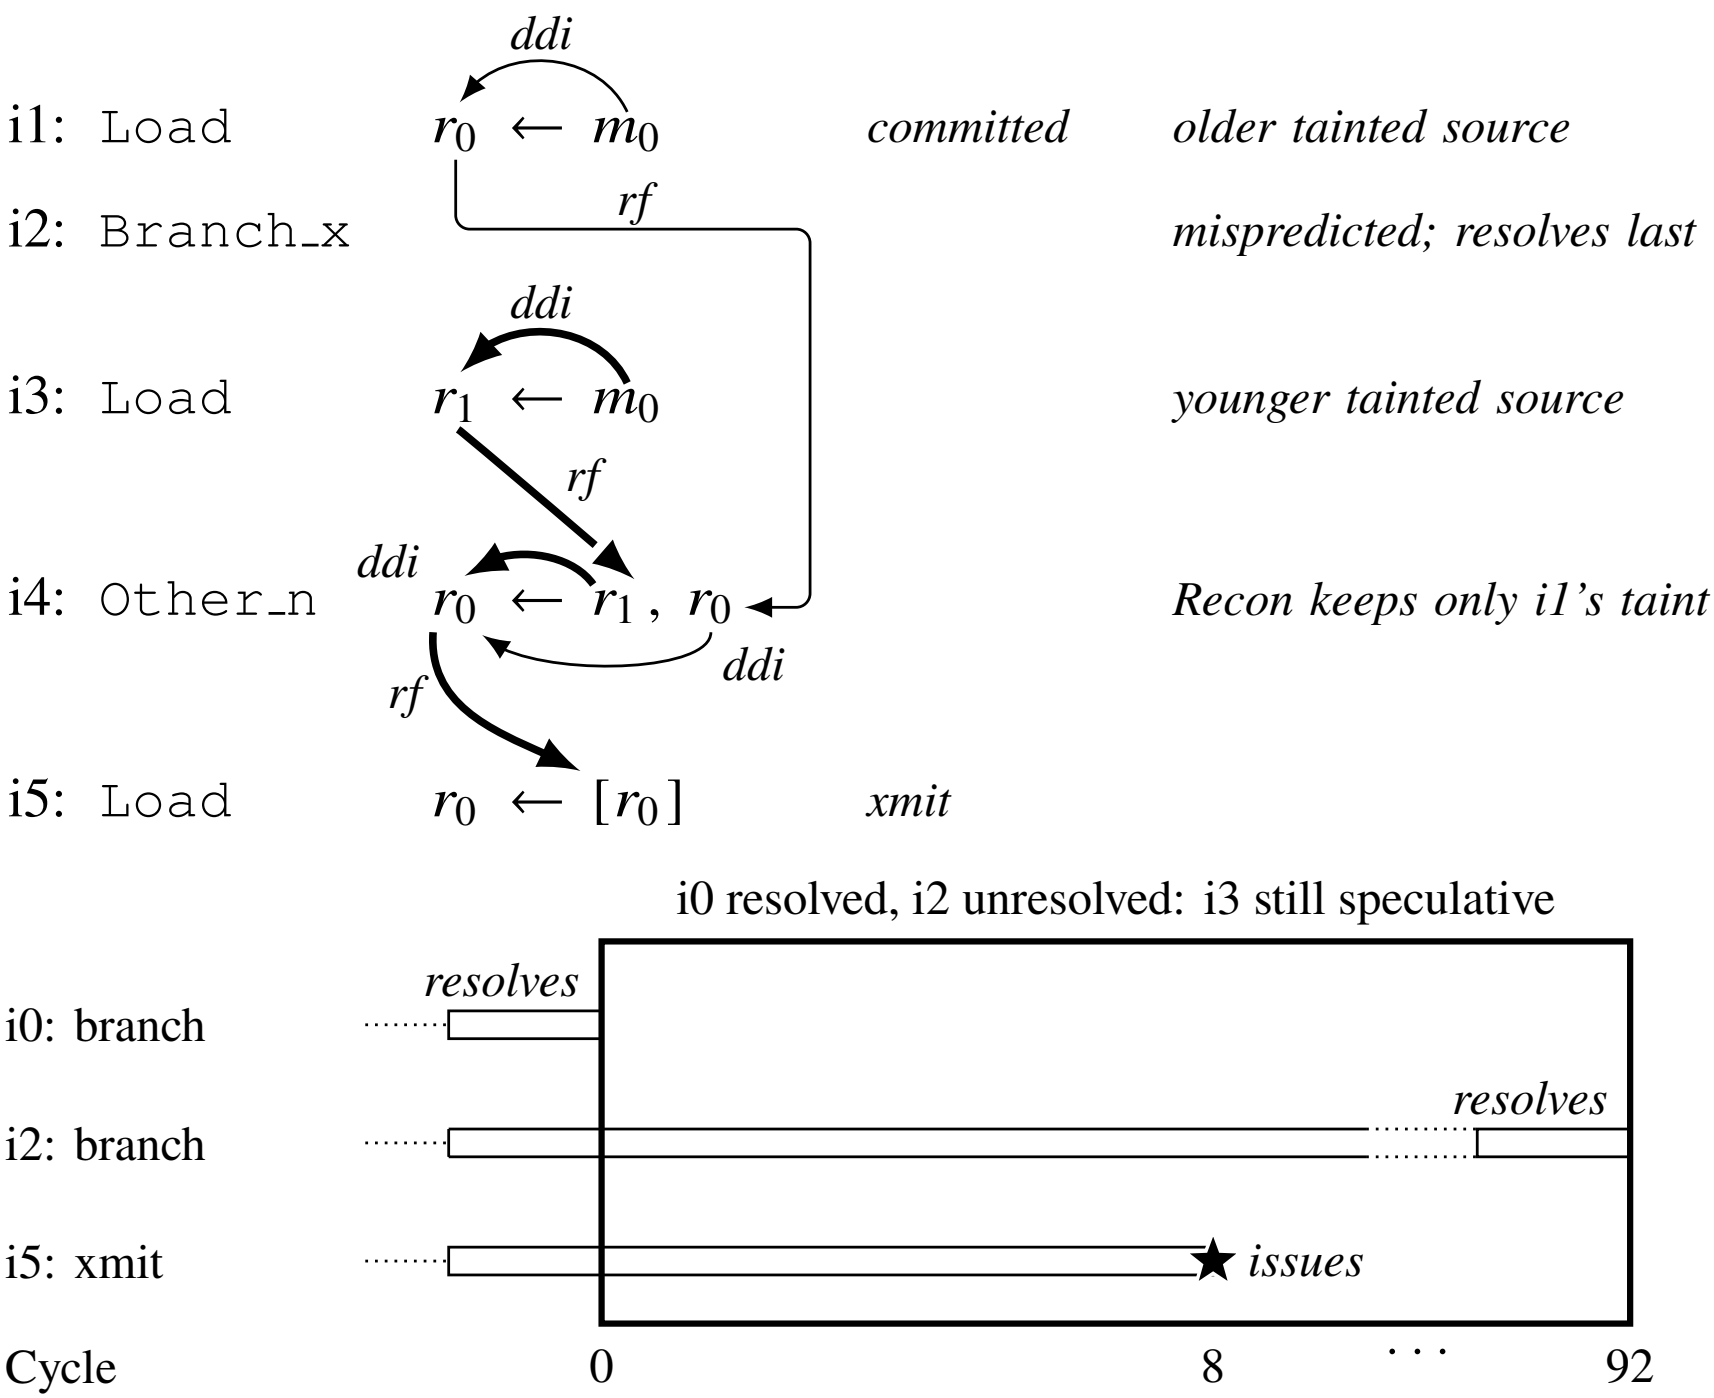


Recon-STT rule: an ALU result keeps the taint of only its oldest tainted source (`getOldestTaint`), and the taint is freed once that source is no longer speculative (`freeTaints`). i4 keeps i1's taint, which is freed when i0 resolves, although i3 still feeds i4 under the unresolved i2.