
N: dispatch E: execute C: complete ☐ Defense-specific

```
i2   jne   .end                    Mispredicted: wrong path below
i3   movq  (%rsi), %rax            Speculative load: %rax tainted
     leaq  64(%rsp), %rsi
i4   movq  %rdi, (%rsi,%rax)       Store, tainted address
i5   movq  (%rsi,%rax), %r12       xmit: same tainted address
```

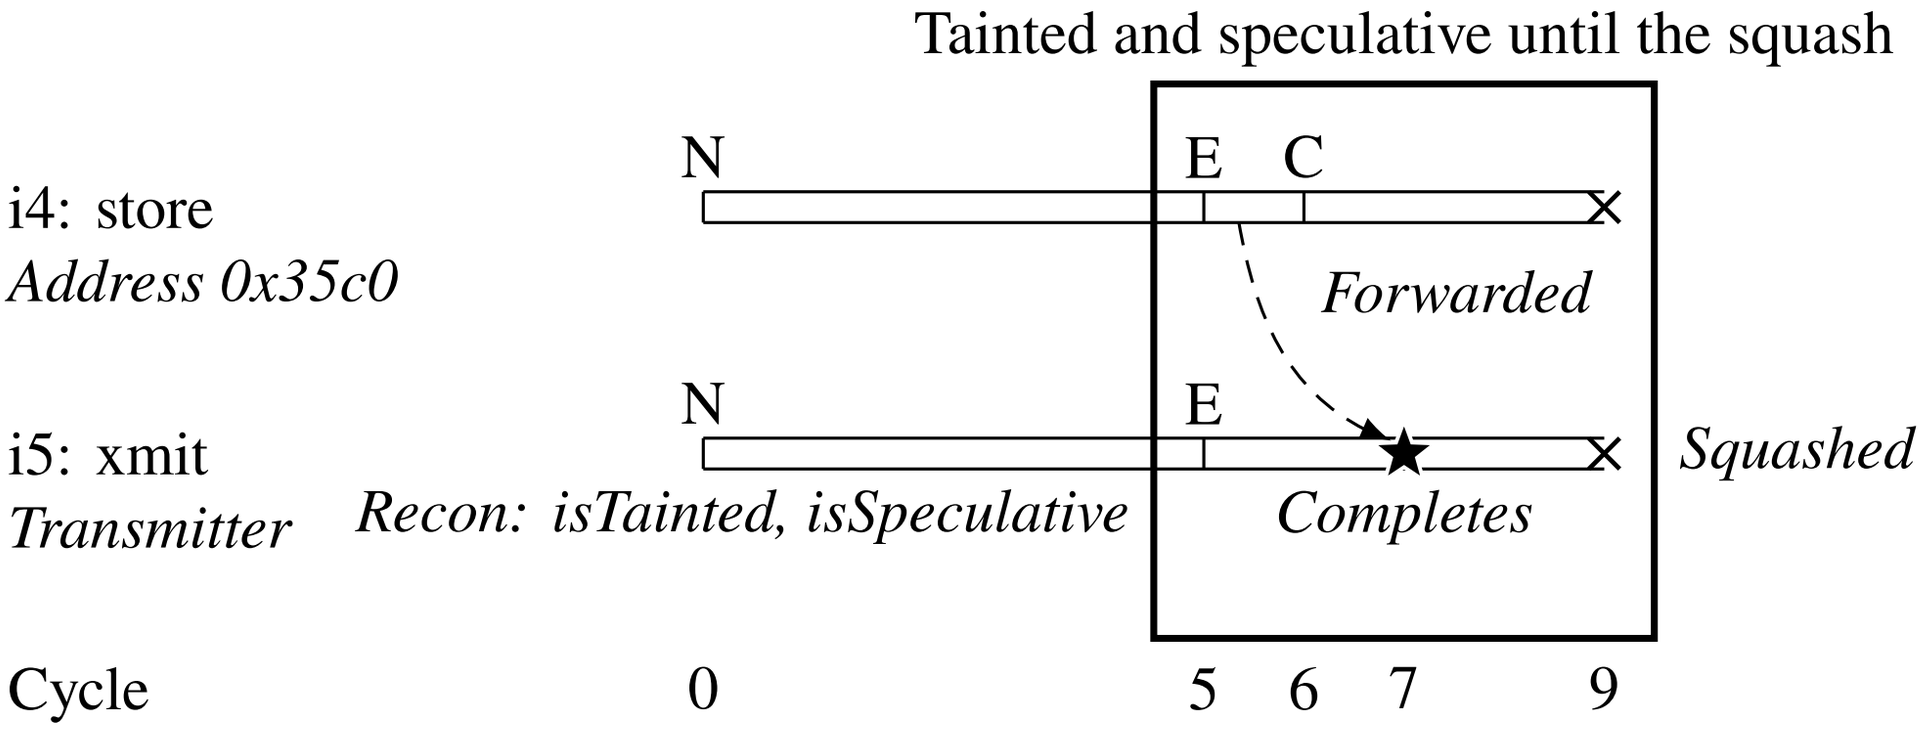

Recon-STT rule: a load whose address is tainted waits in the delay unit until it is no longer speculative. Recon checks taint only on the cache path, after store-to-load forwarding has already returned, so i5 completes at 7 with i4's value.