
N: dispatch E: execute C: complete Defense-specific

i0: `Other_x`	$r0 \leftarrow ?$	*committed*	
i1: `Branch_n`		*resolved*	
i2: `Branch_n`		*unresolved*	*mispredicted*
i3: `Load`	$r0 \leftarrow m0$		*m0: protected*
i4: `Store`	$? \leftarrow [r0]$	*resolved*	*address r0, as i5*
i5: `Load`	$? \leftarrow [r0]$	*xmit*	*leaks its address*

ddi *rf* *speculative*

Tainted and speculative until the squash

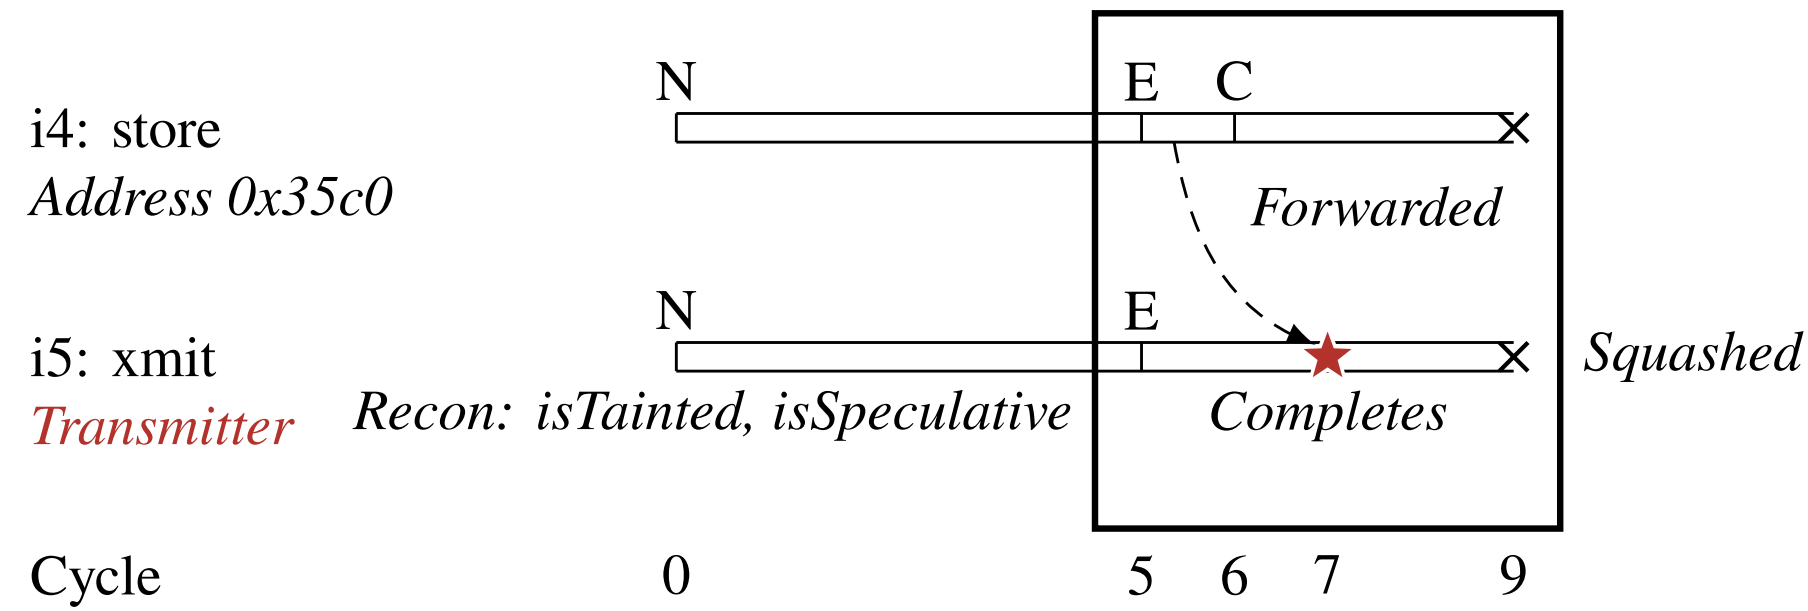

Recon-STT rule: a load whose address is tainted waits in the delay unit until it is no longer speculative. Recon checks taint only on the cache path, after store-to-load forwarding has already returned, so i5 completes at 7 with i4's value.