


Supplementary Material for: Methodological Flexibility in the Iowa Gambling Task

Figure S1.

Average-linkage hierarchical clustering of IGT scoring methods based on pairwise Pearson correlations.

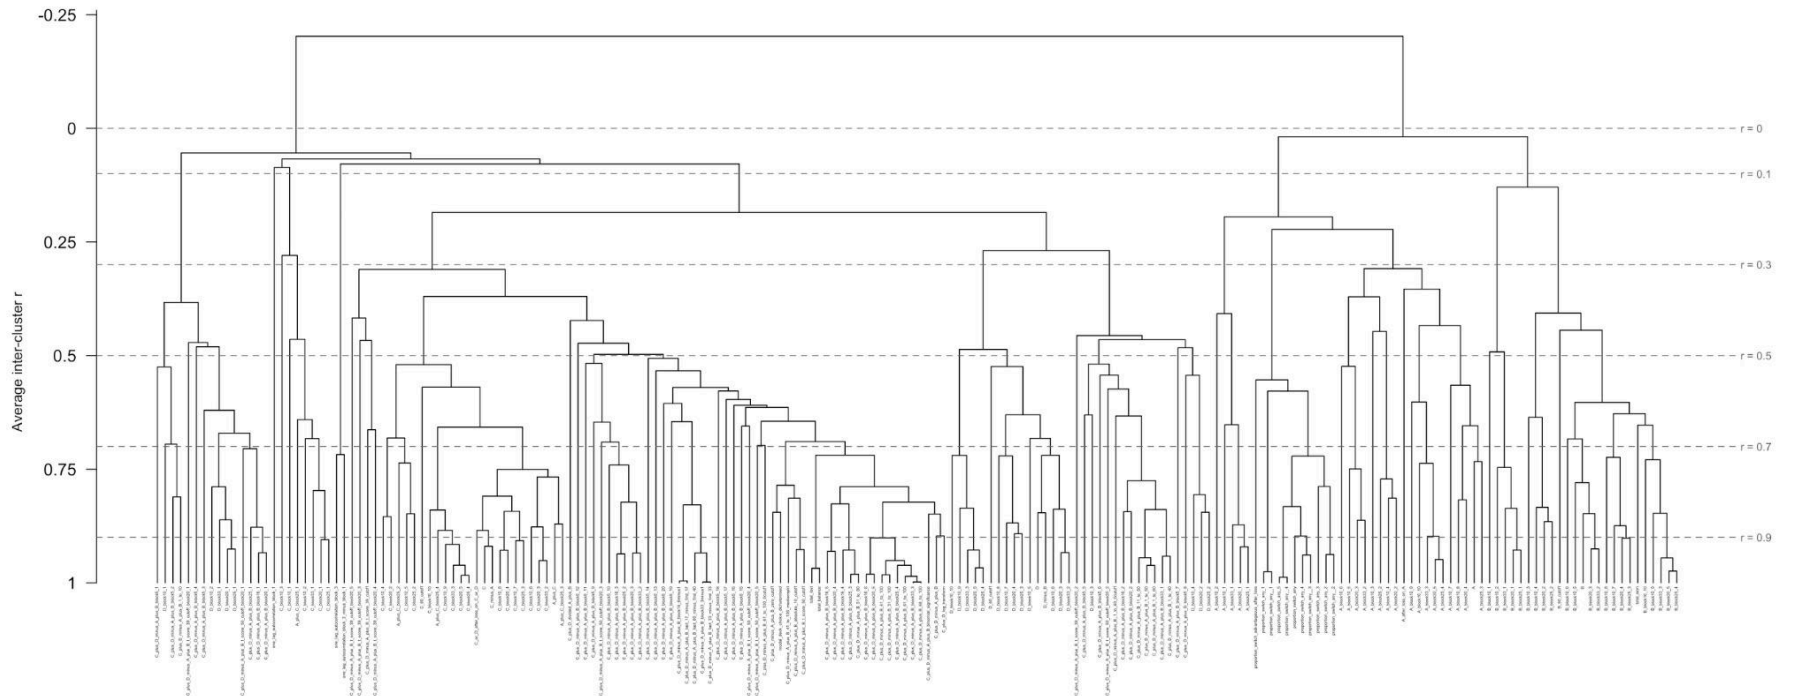


Note. Dendrogram of 196 IGT scoring methods derived from 503 participants, clustered using average linkage on distance = $1 - r$.

The y-axis shows the average Pearson correlation between the two groups joined at each merge step; higher branches reflect less similar groupings. Dashed horizontal lines mark reference thresholds at $r = 0.0, 0.1, 0.3, 0.5, 0.7$, and 0.9 .

Figure S2.

Dynamic Hybrid Cut cluster assignments overlaid on the average-linkage dendrogram.

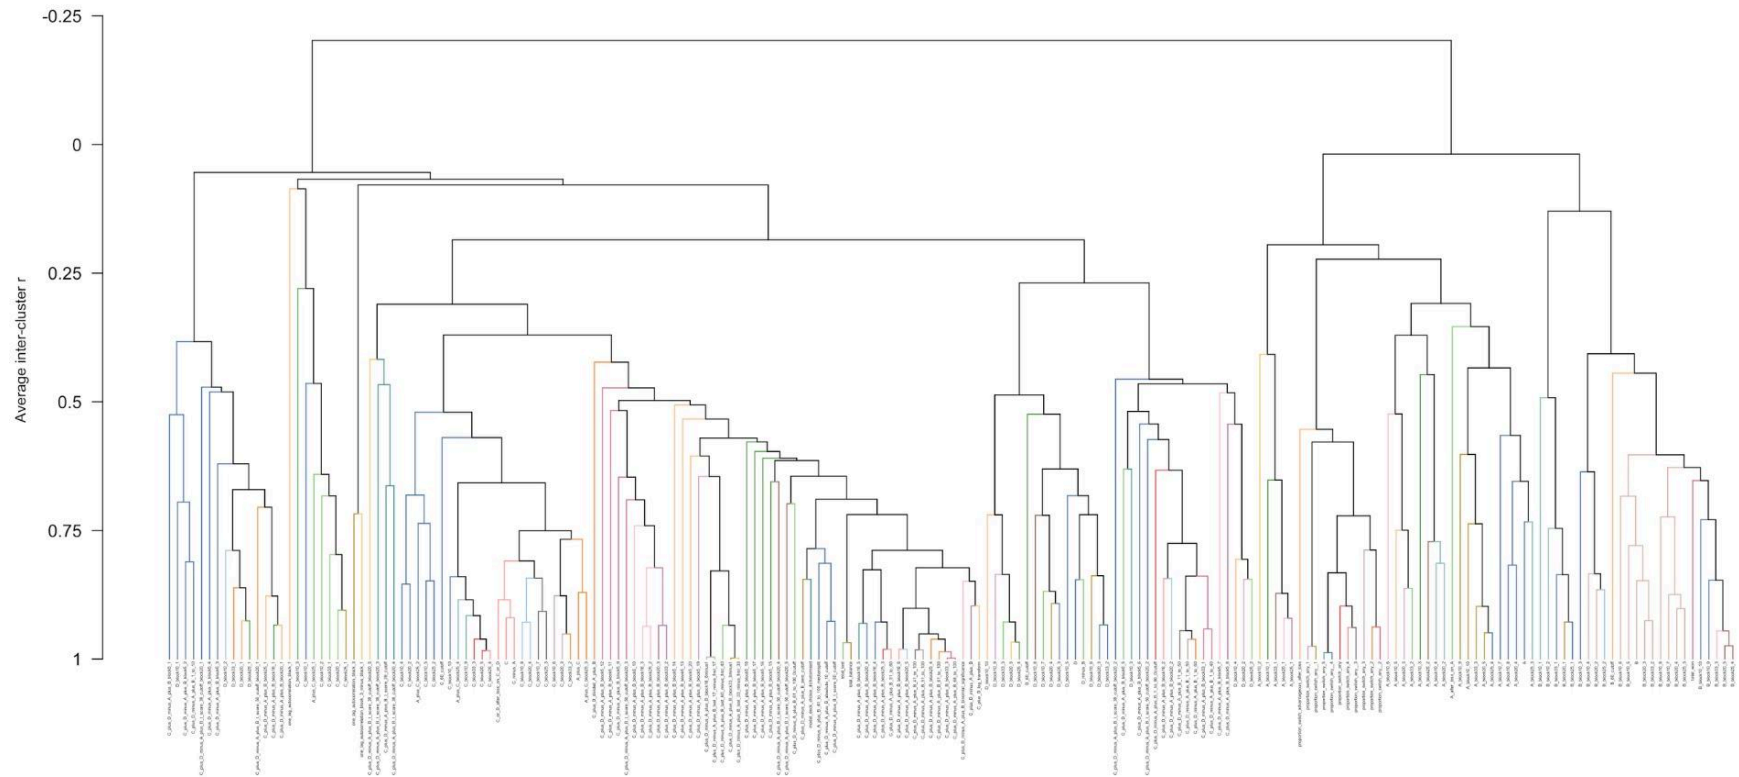

Note. The dendrogram structure is identical to Figure S1. Branch colours indicate cluster membership as identified by the Dynamic Hybrid Cut algorithm (deepSplit = 2, minClusterSize = 5). 20 clusters were identified; branches in gray were not assigned to any cluster.