



BFS Traversal

Step 1: Start at A (Seeking target node K (Eager Short-Circuit))

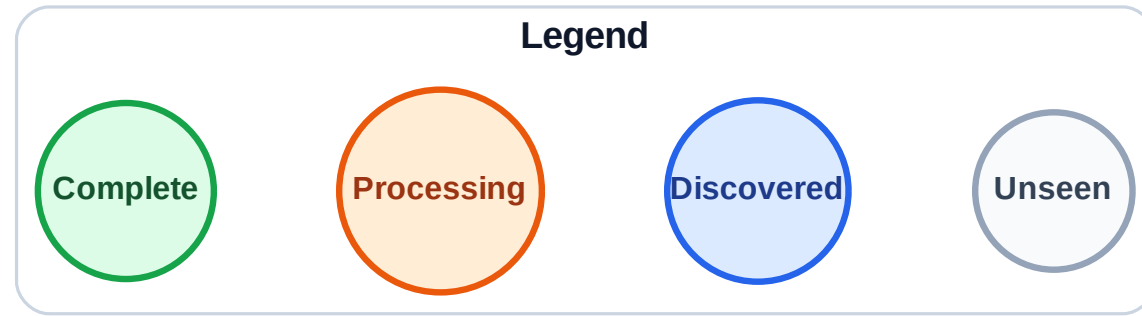

Queue: A
Visited: (none)

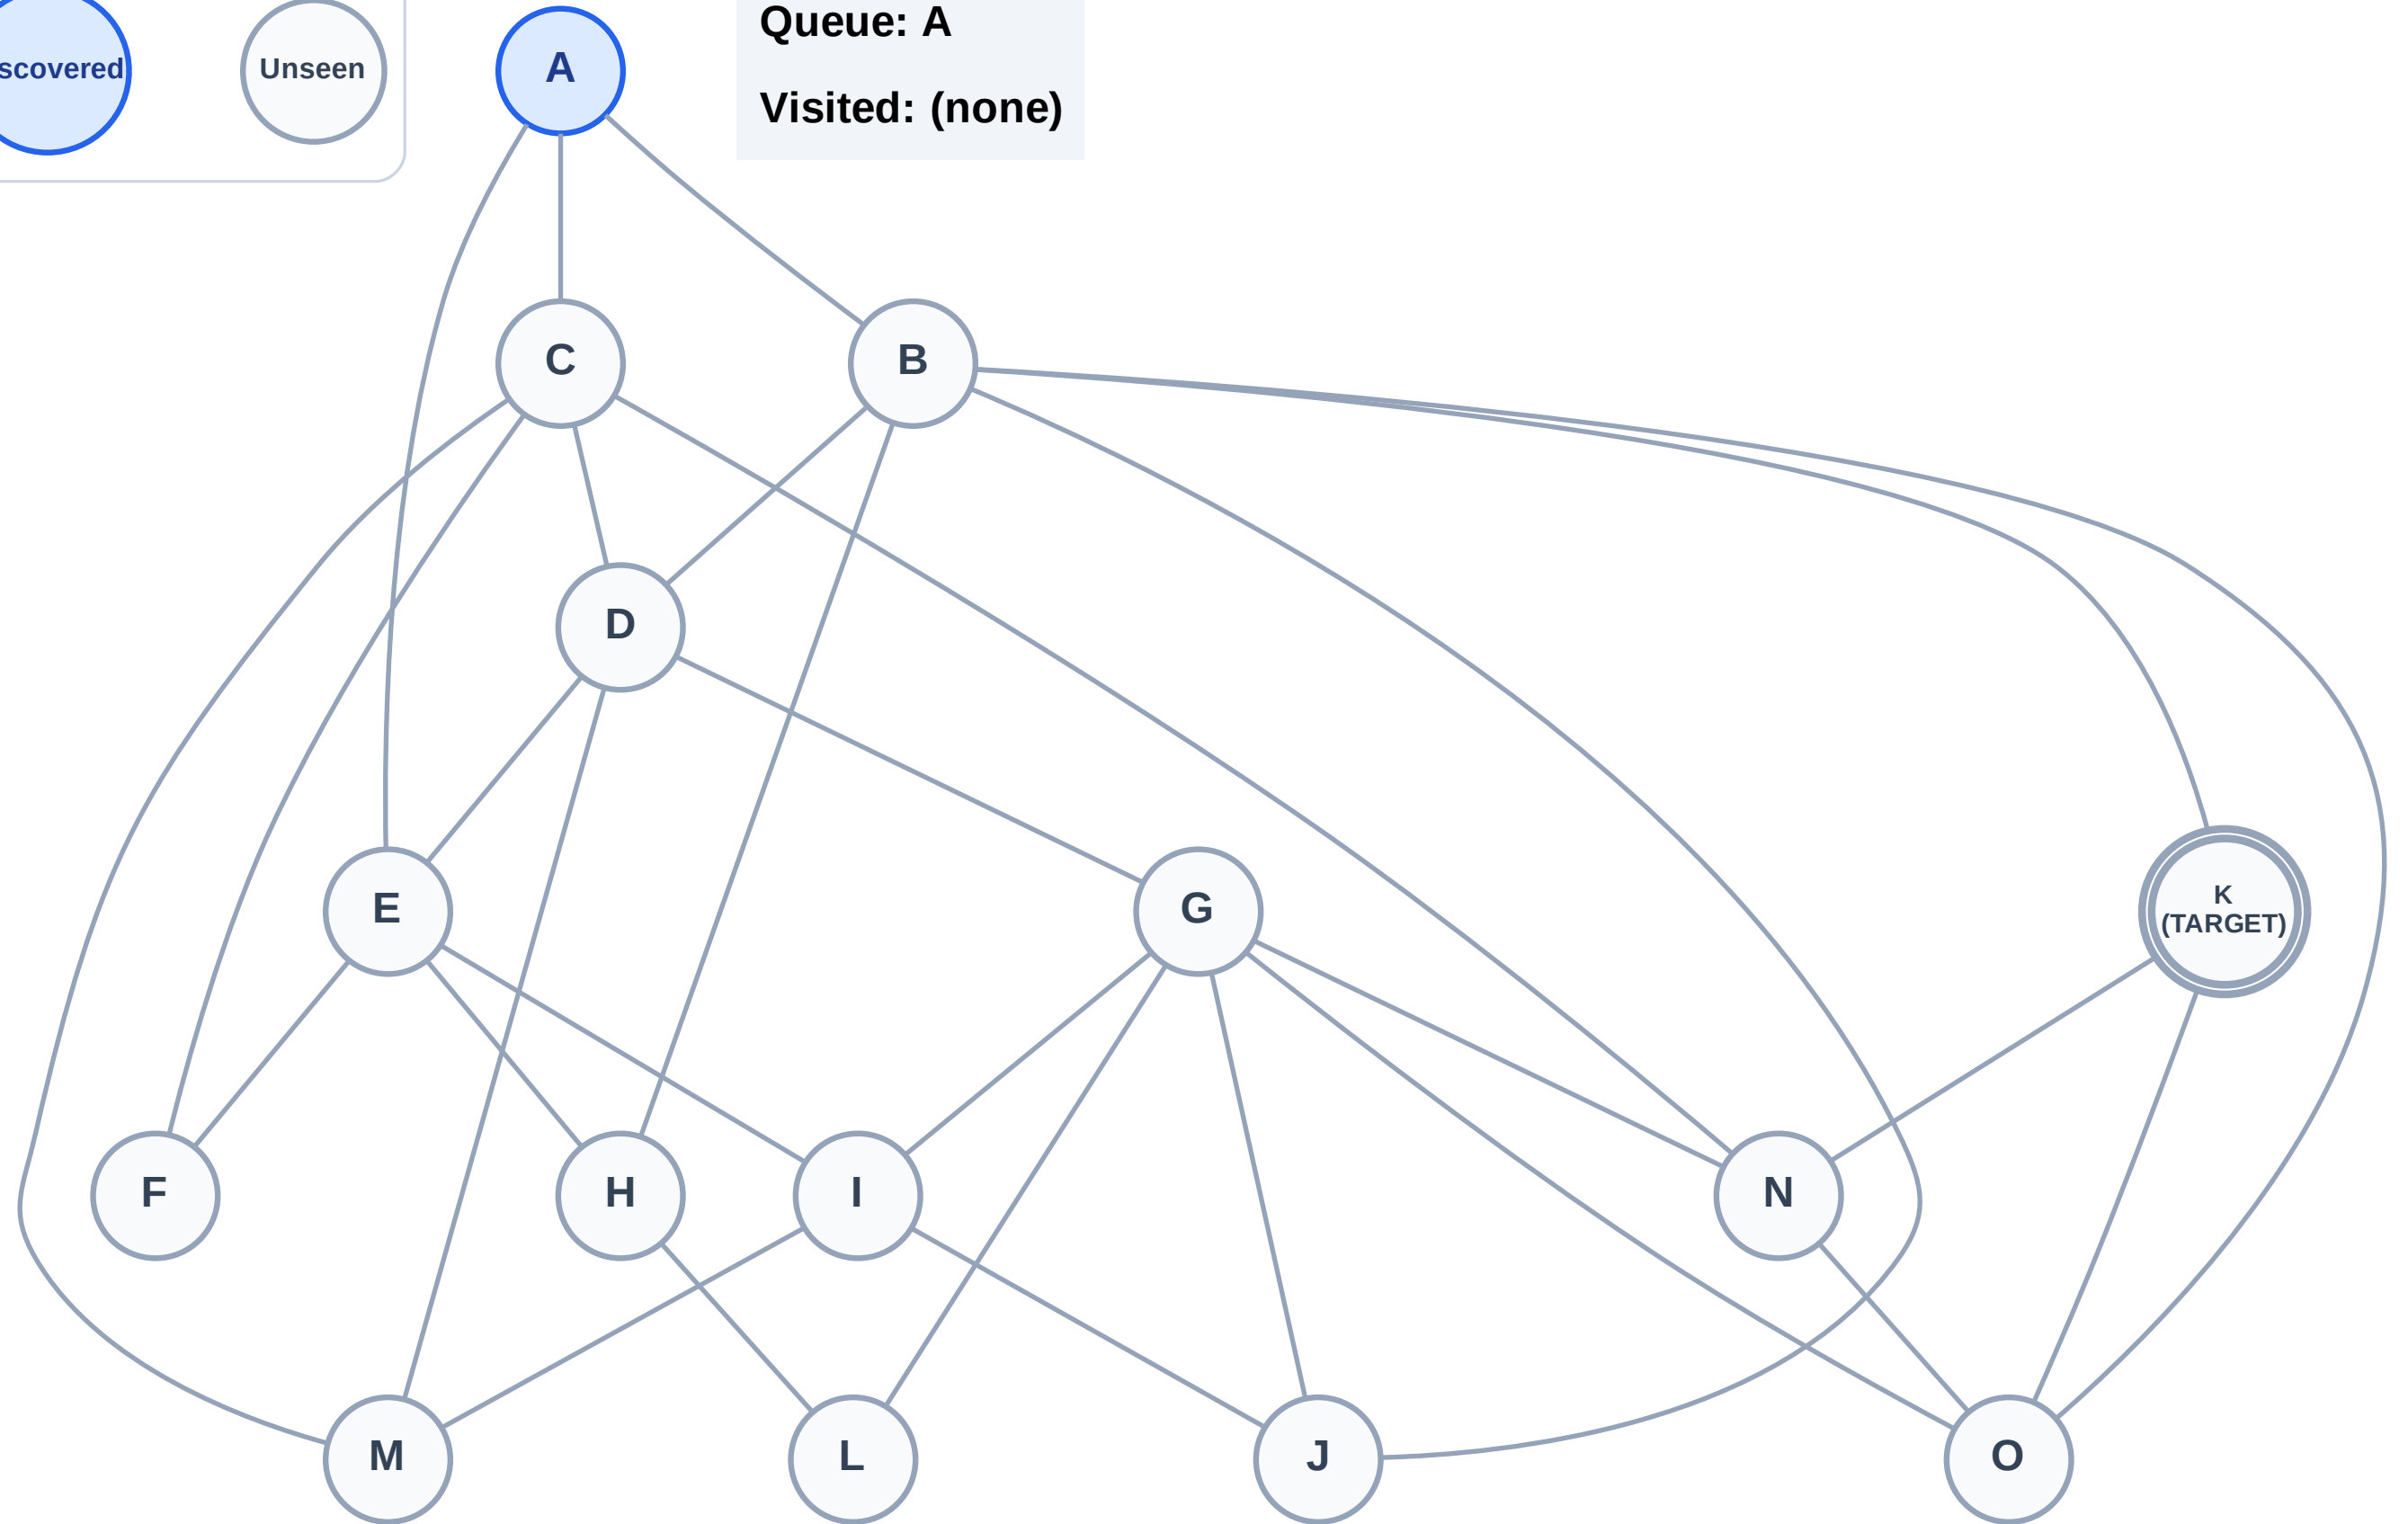

BFS Traversal

Step 2: Process node A

Legend


Complete

Processing

Discovered


Unseen

Queue: (empty)
Visited: (none)

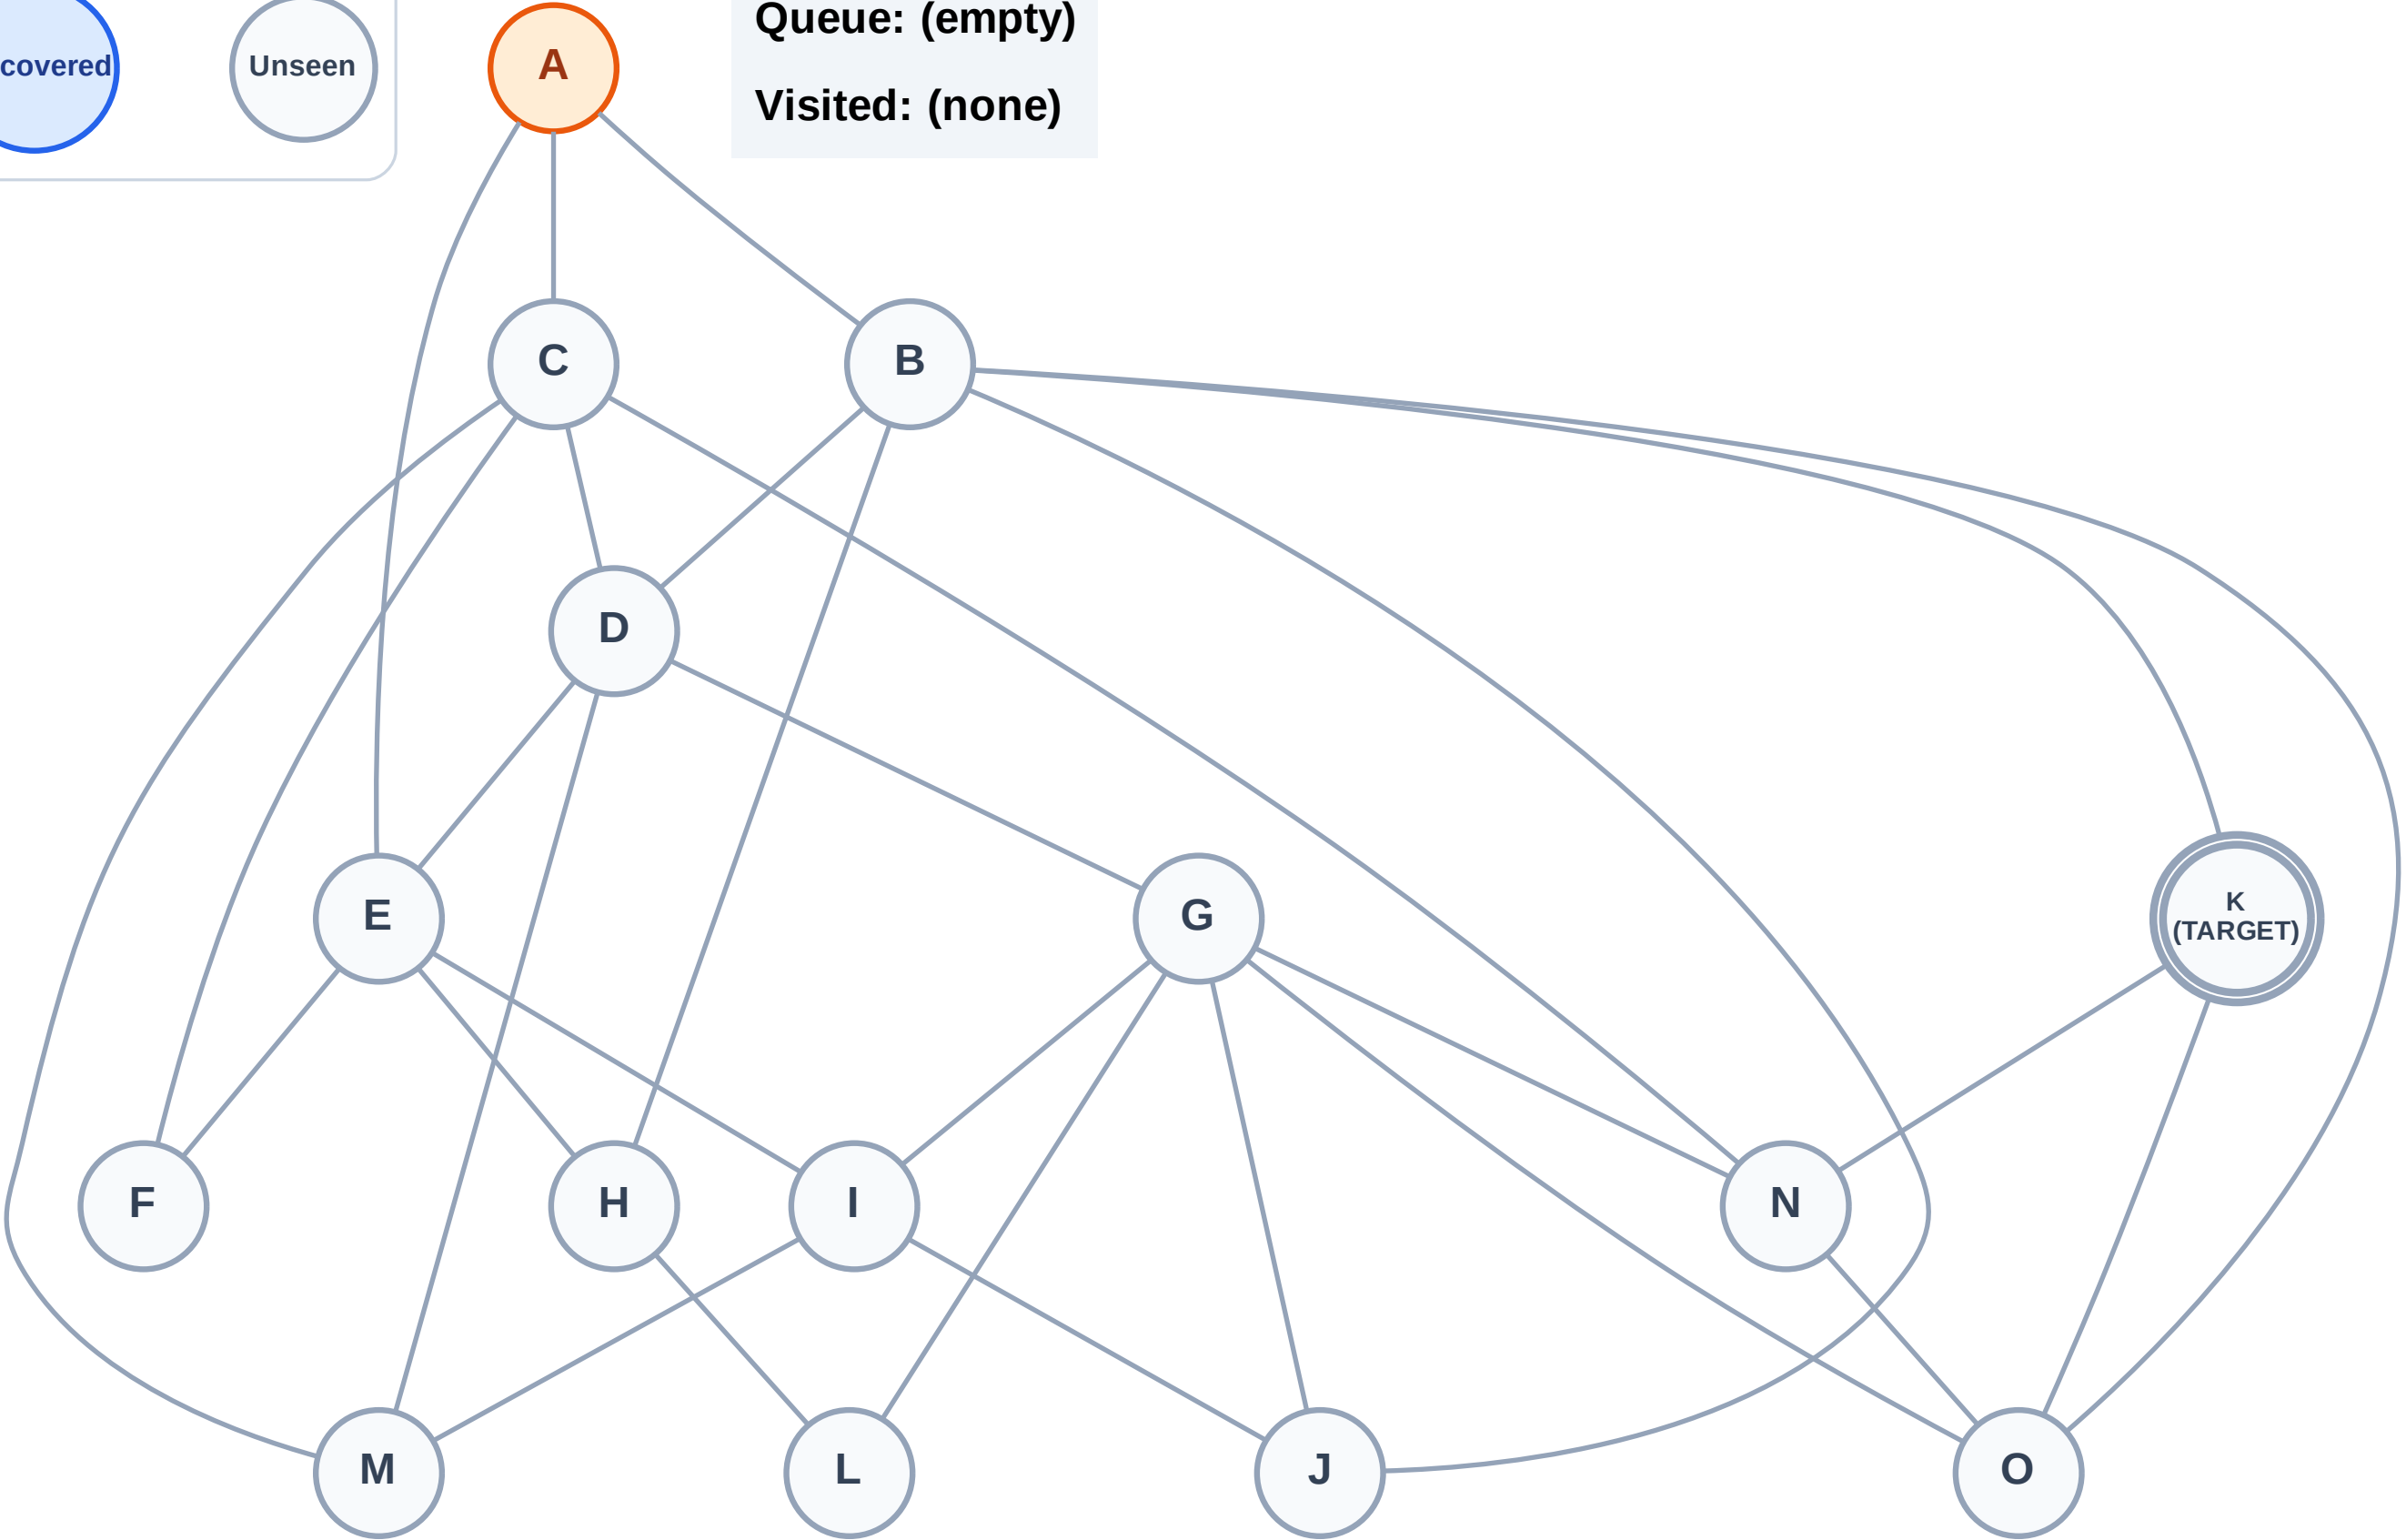


BFS Traversal

Step 3: Discover B, C, E from A

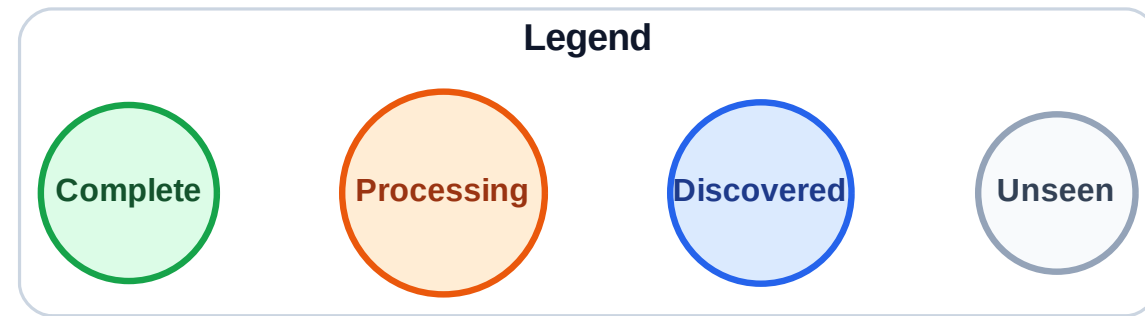


Queue: B → C → E
Visited: A

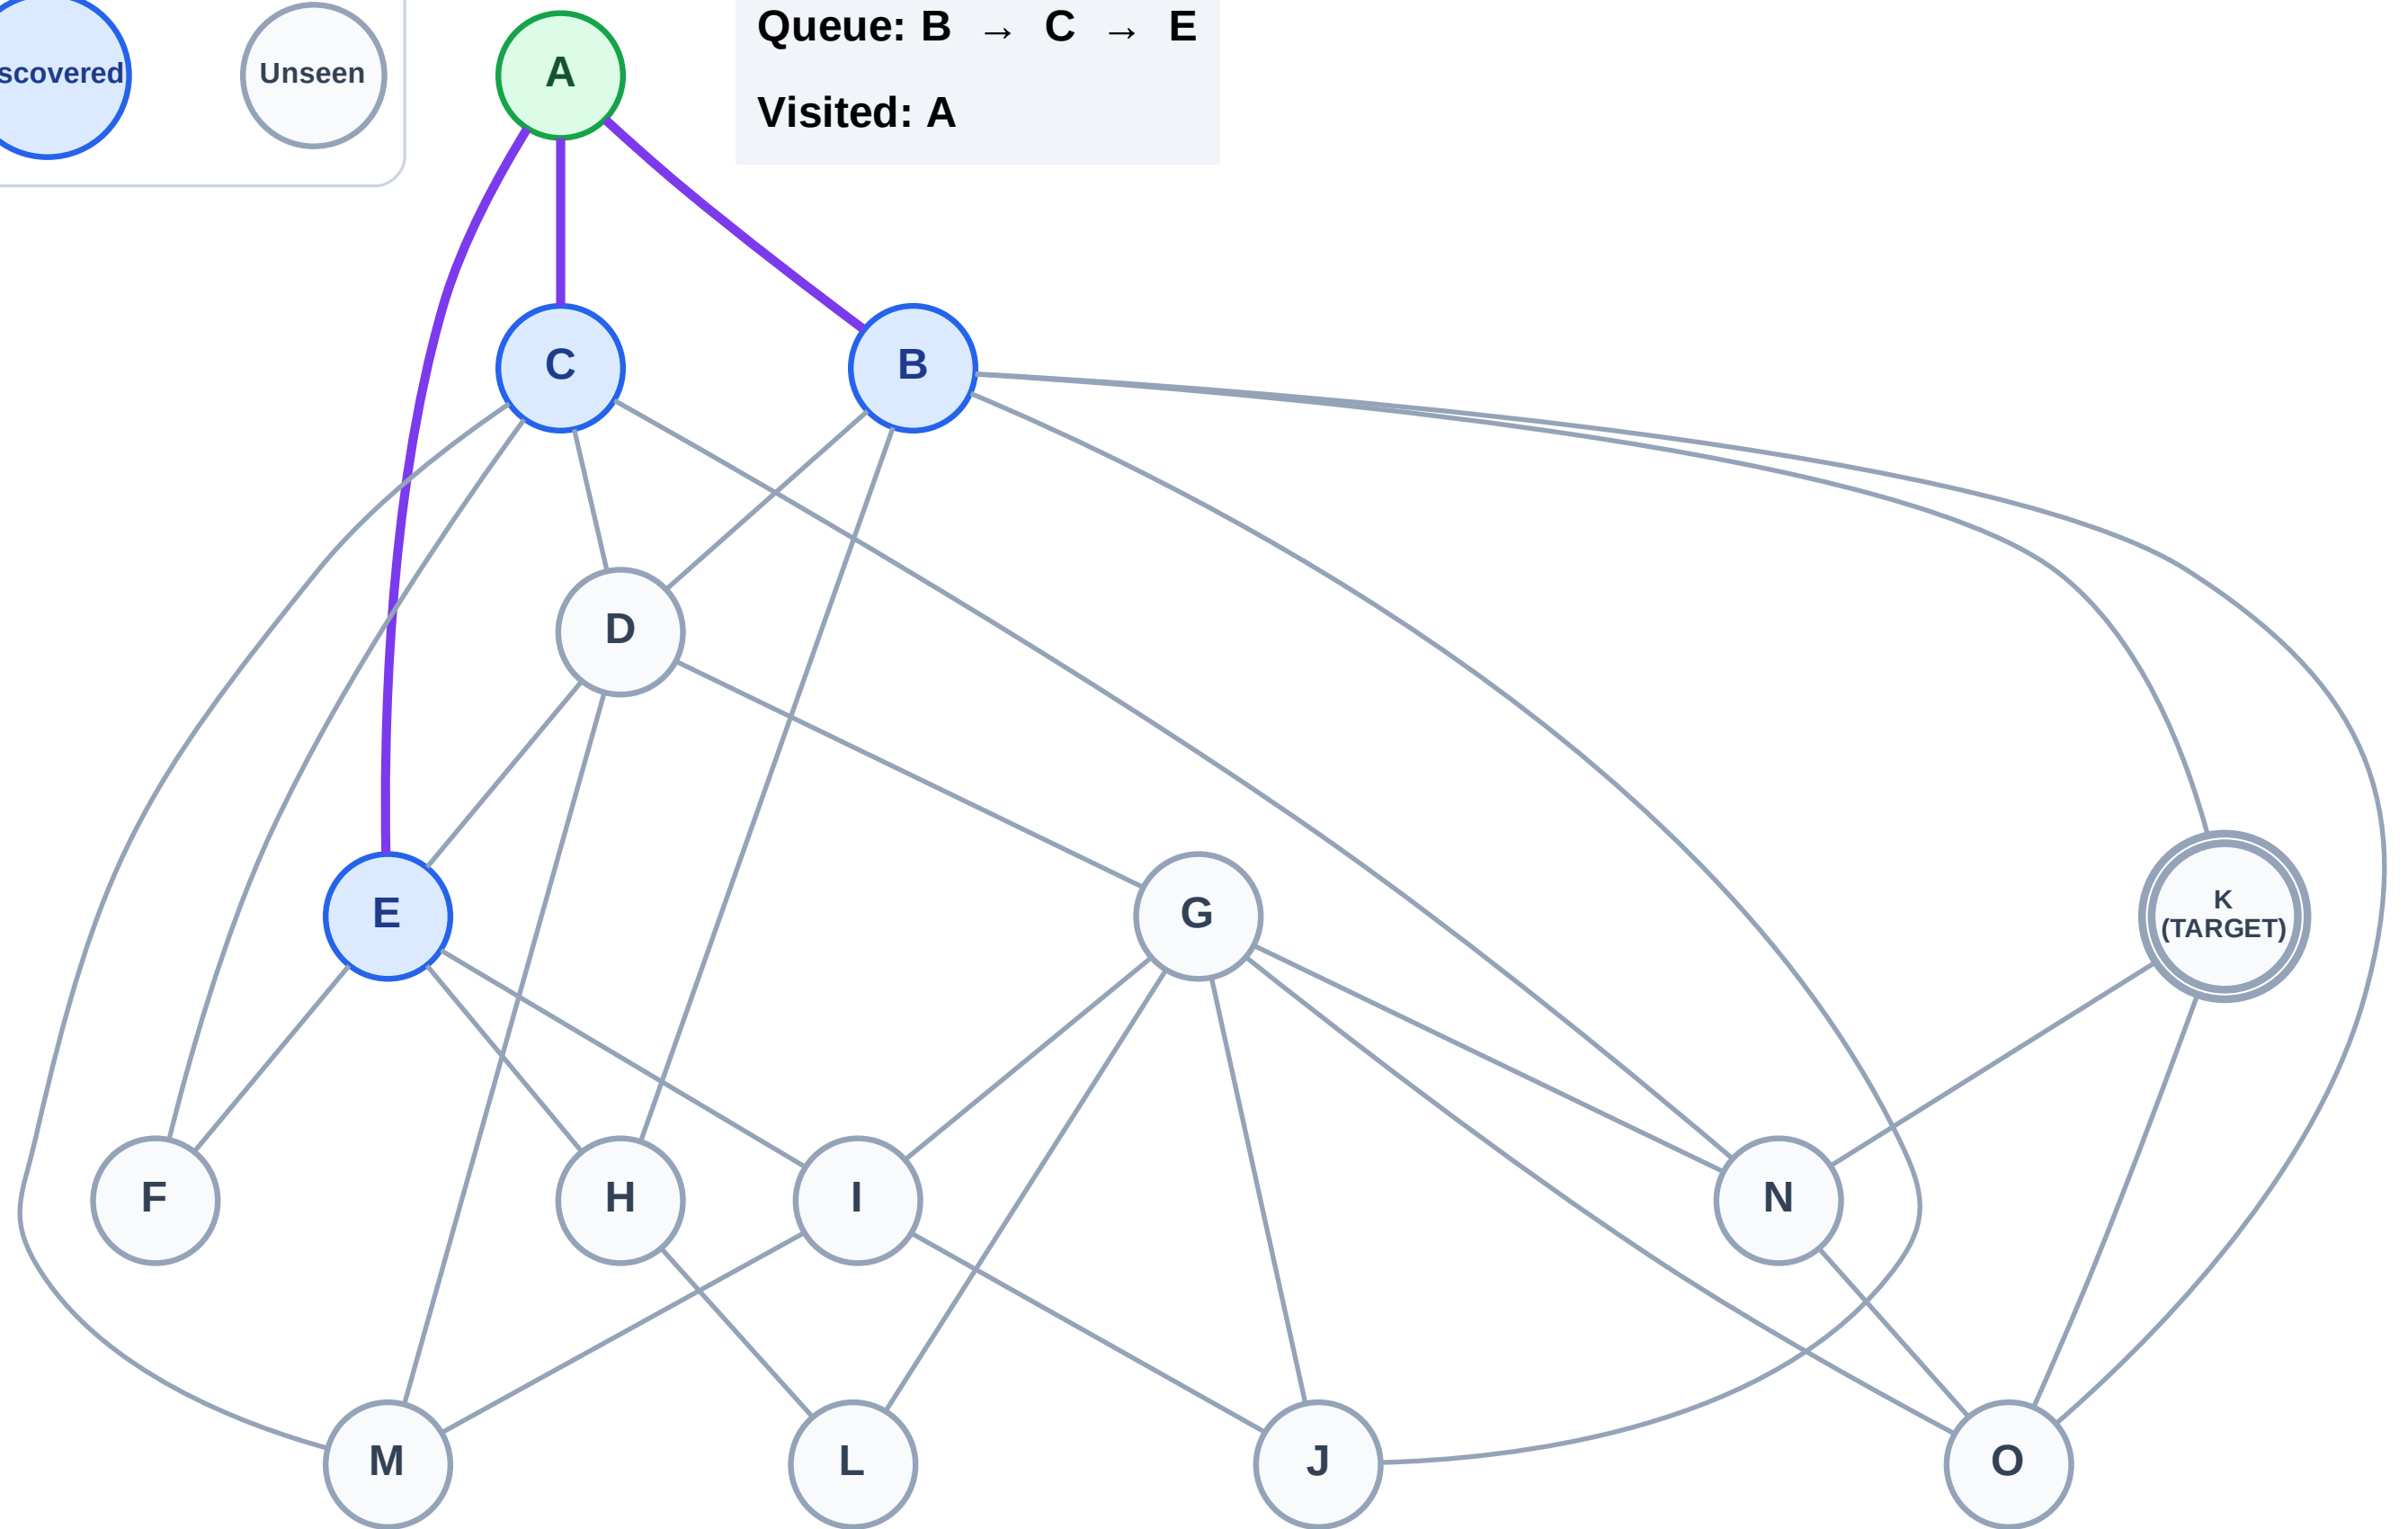


BFS Traversal

Step 4: Process node B

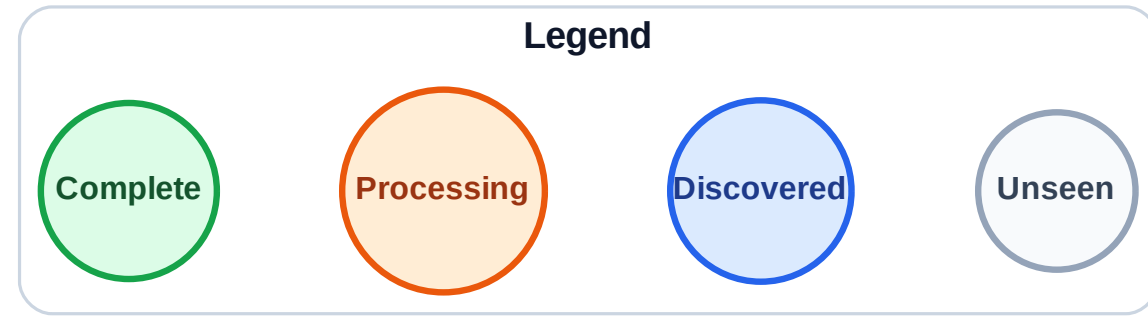


Queue: C → E
Visited: A

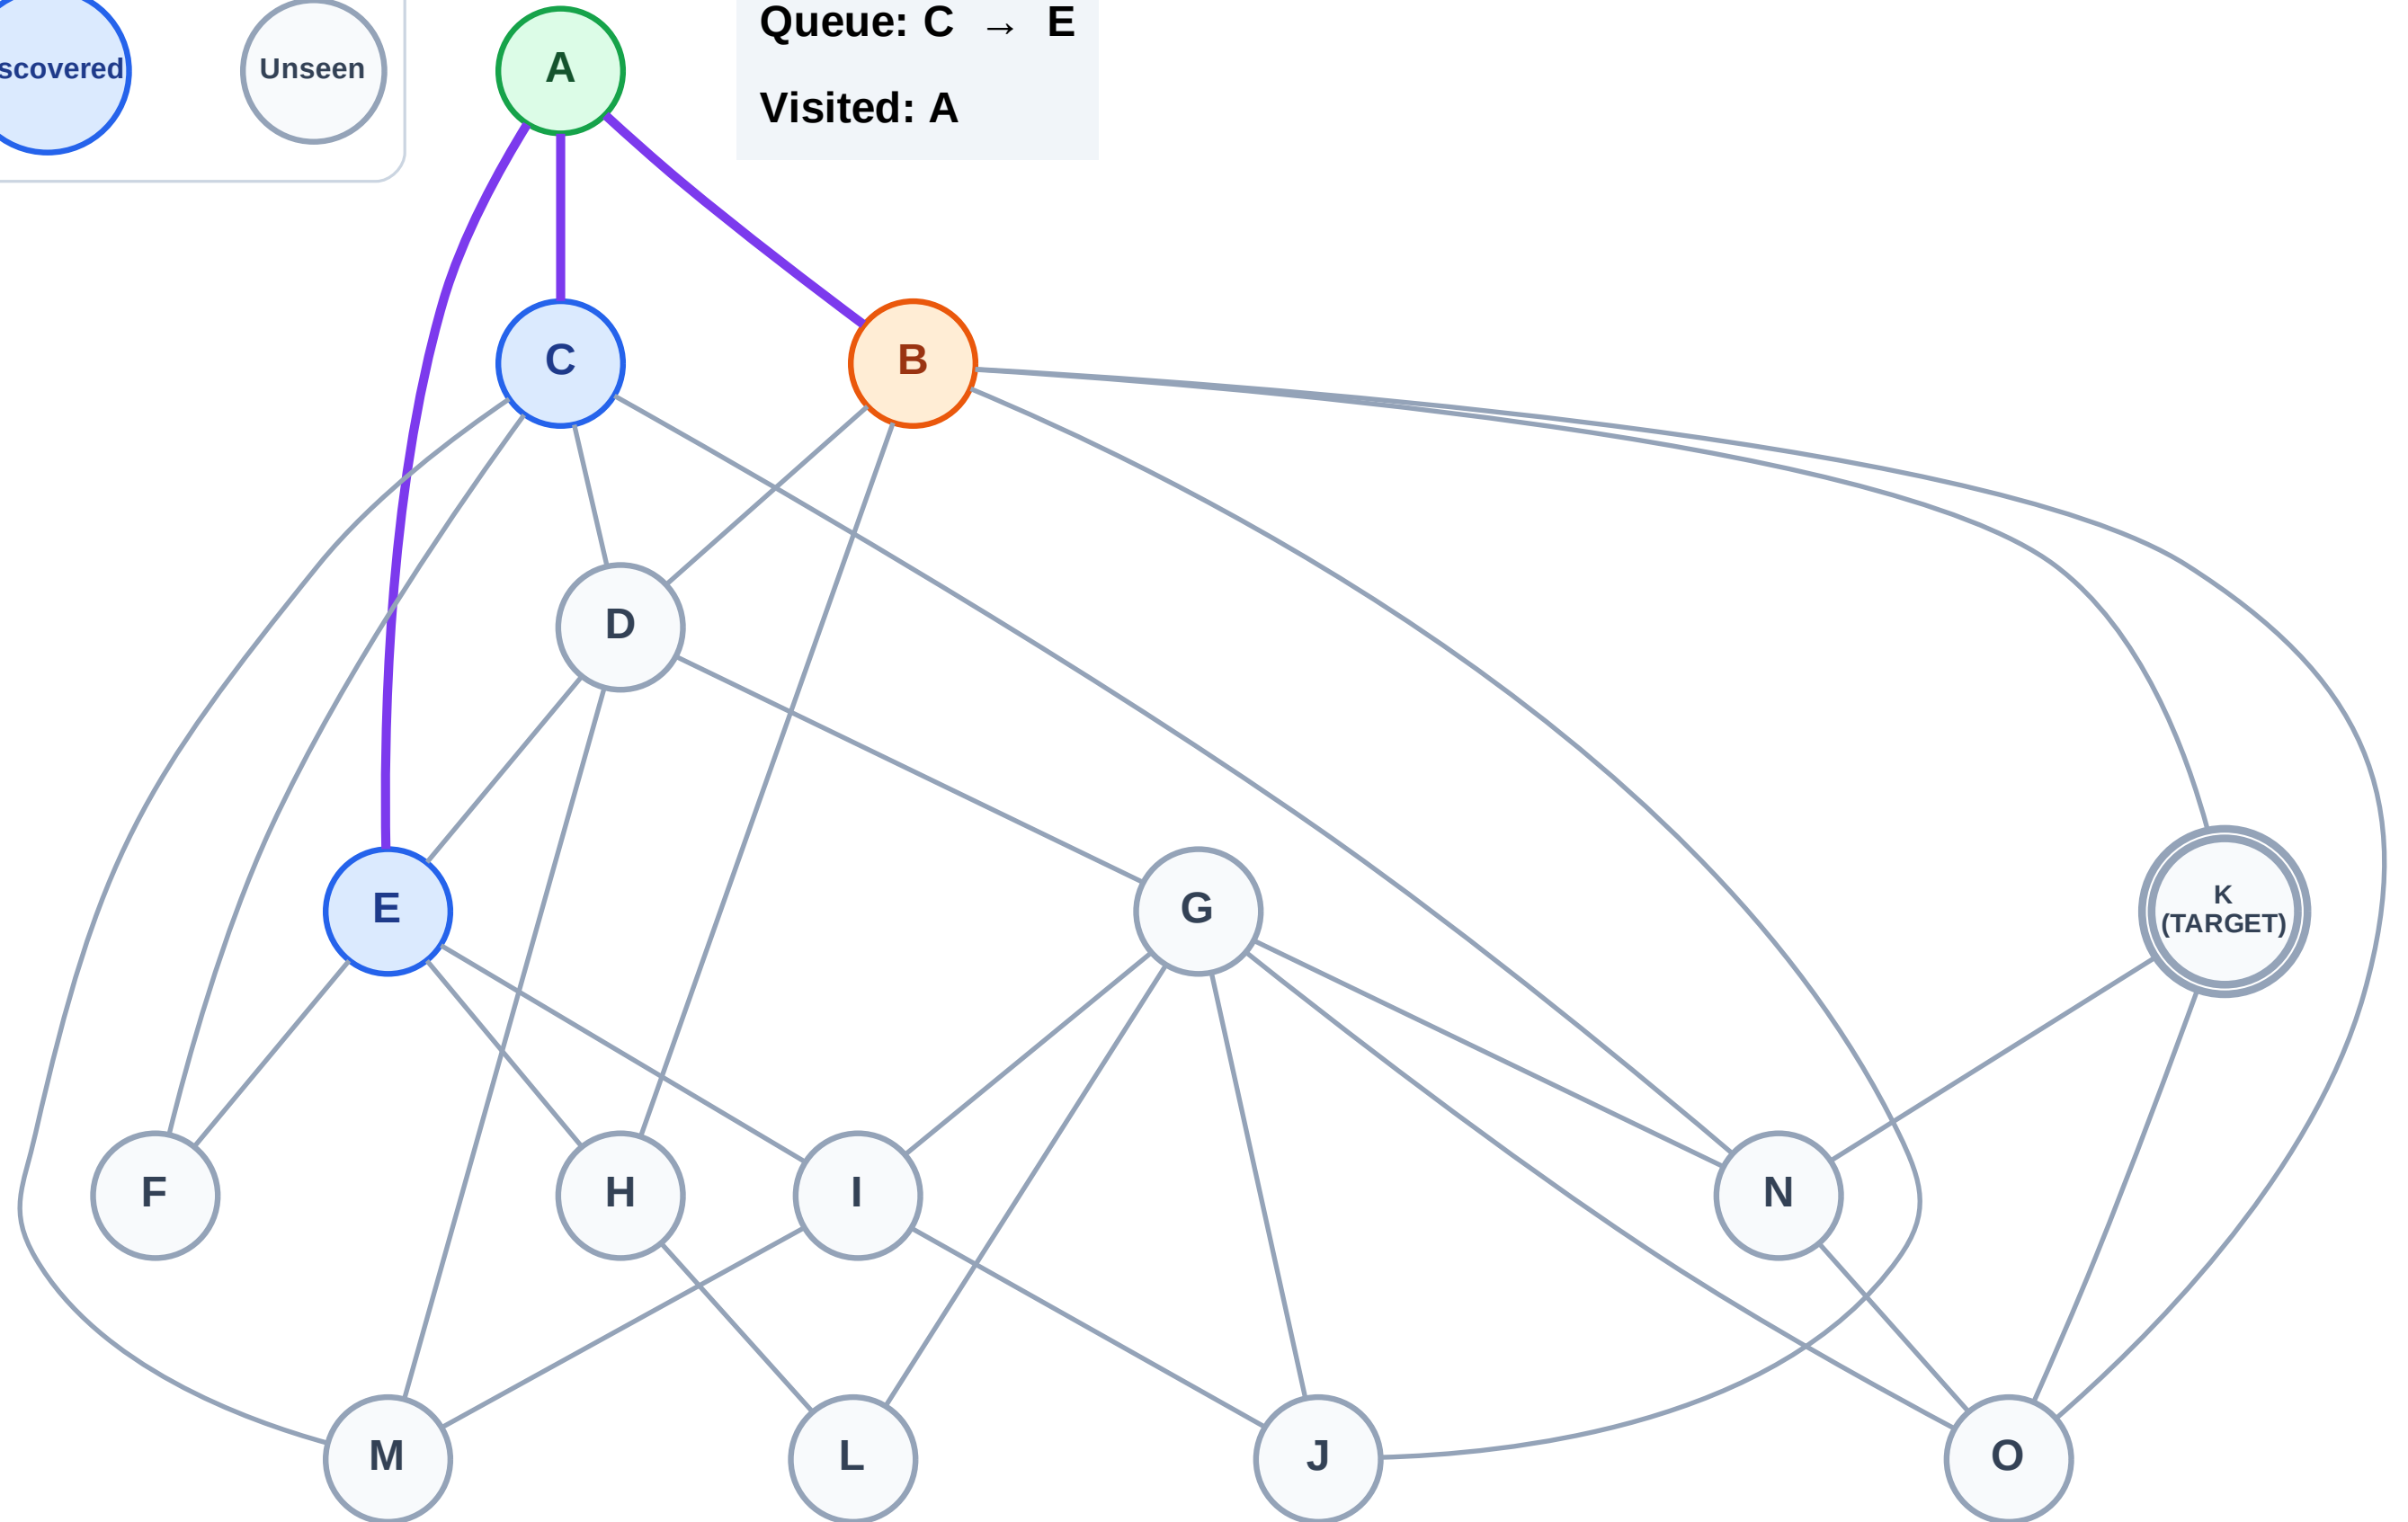


BFS Traversal

Step 5: TARGET NODE K FOUND (SHORT-CIRCUITED)! Path (2 hops): A → B → K

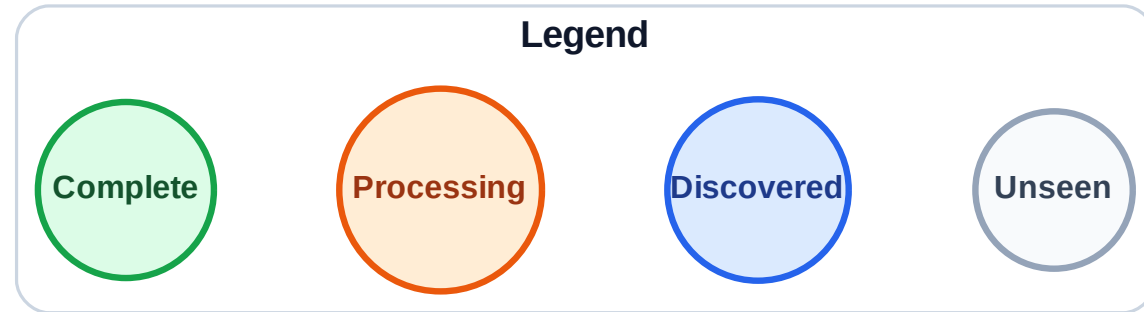


Queue: C → E → D → H → J
Visited: A, B, K

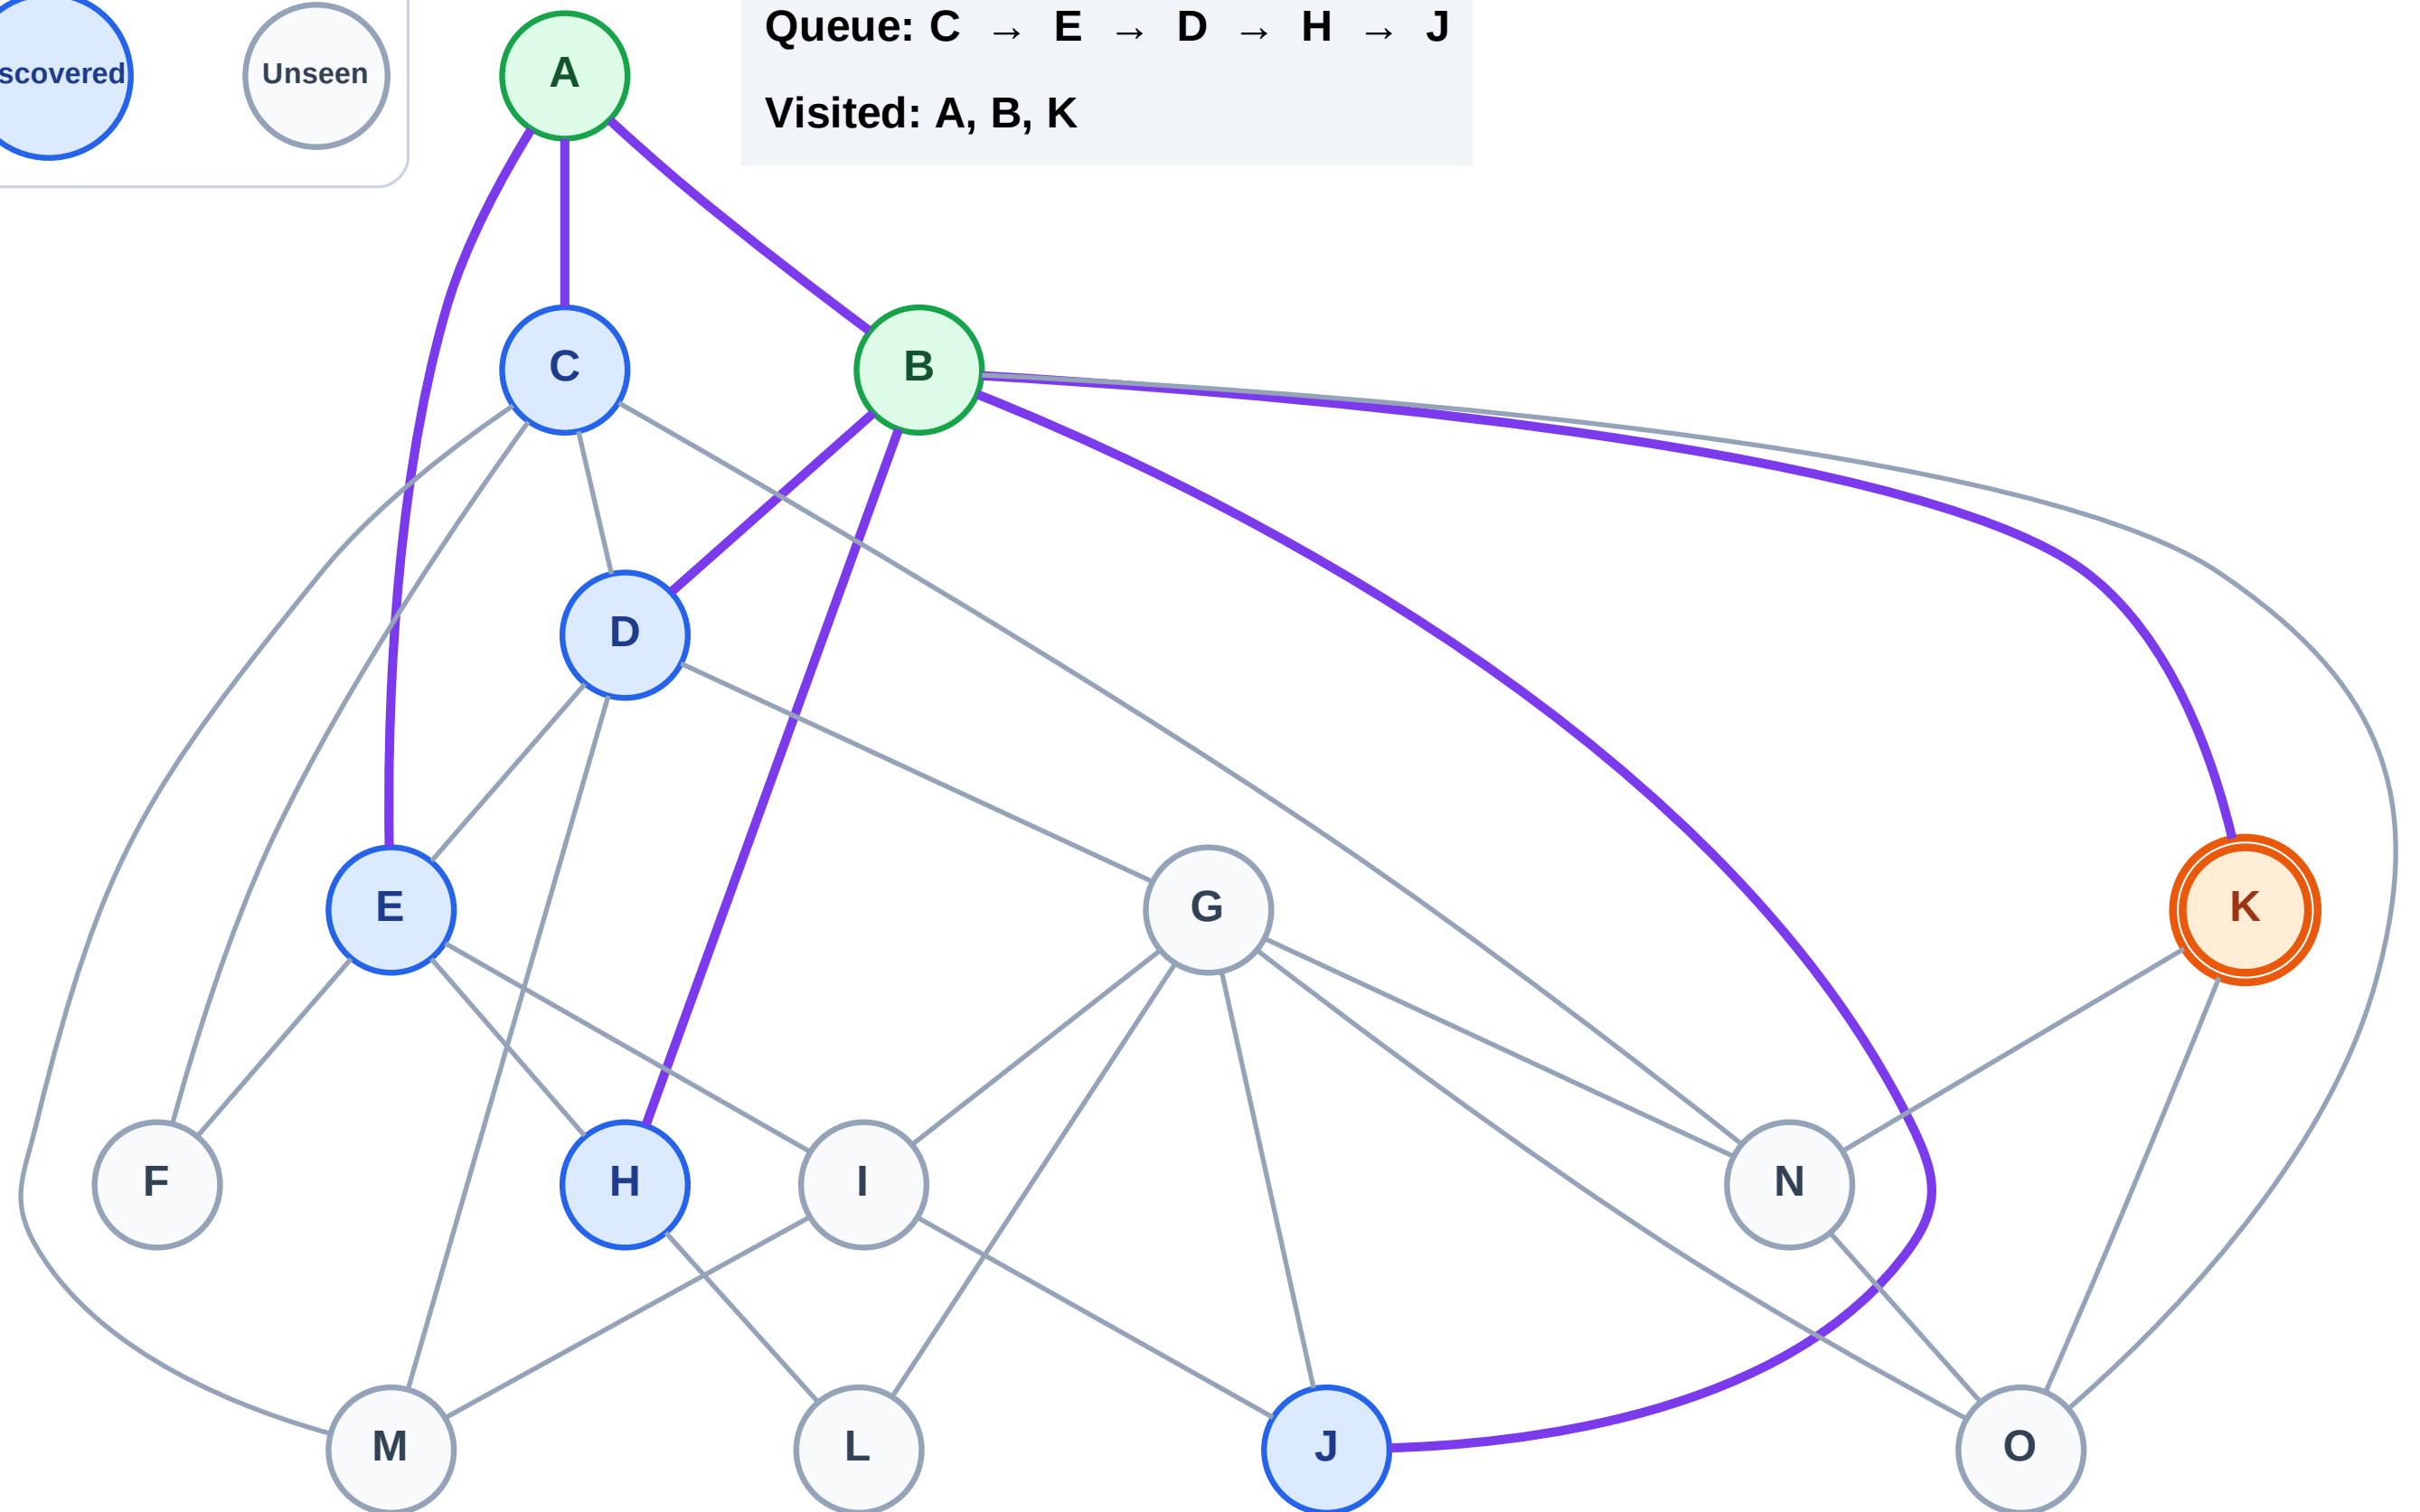


DFS Traversal

Step 1: Start at A (Seeking target node K (Eager Short-Circuit))

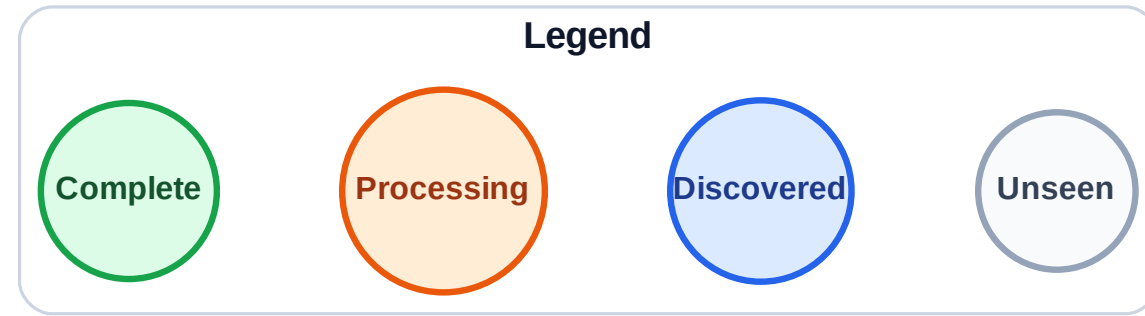

Stack (top at right): A
Visited: (none)

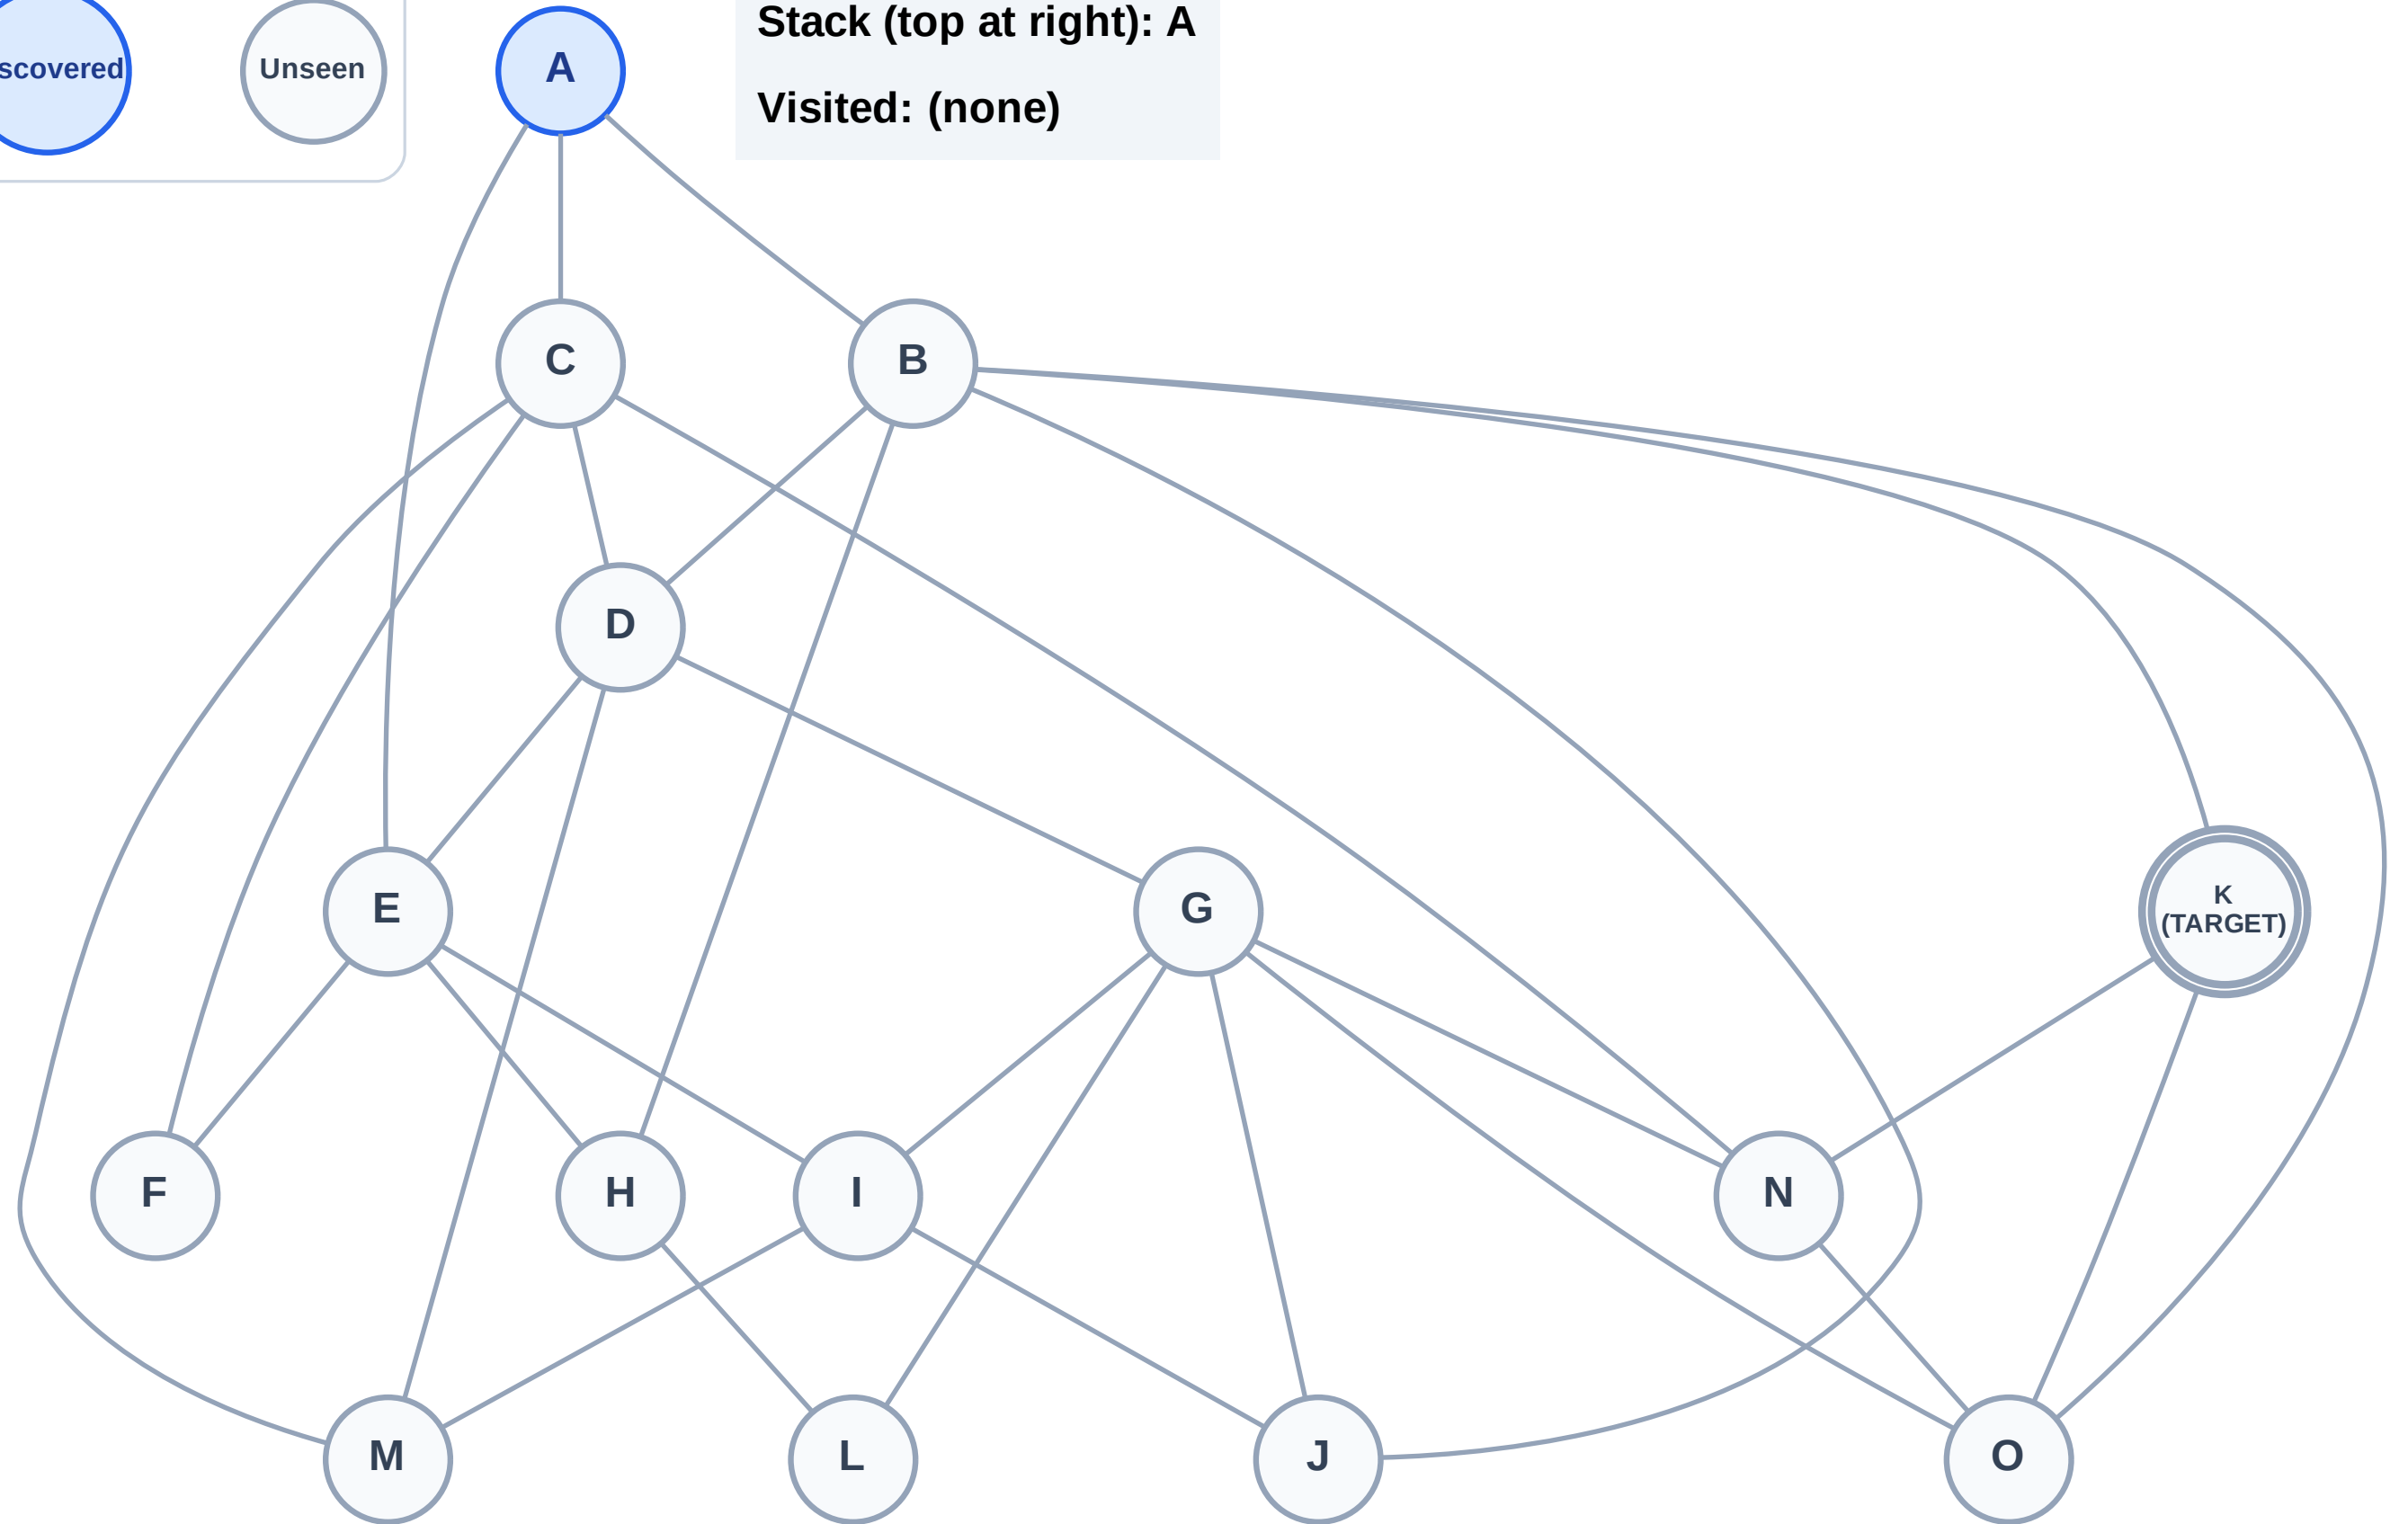

DFS Traversal

Step 2: Process node A

Legend


Complete

Processing

Discovered

Unseen

Stack (top at right): (empty)
Visited: (none)

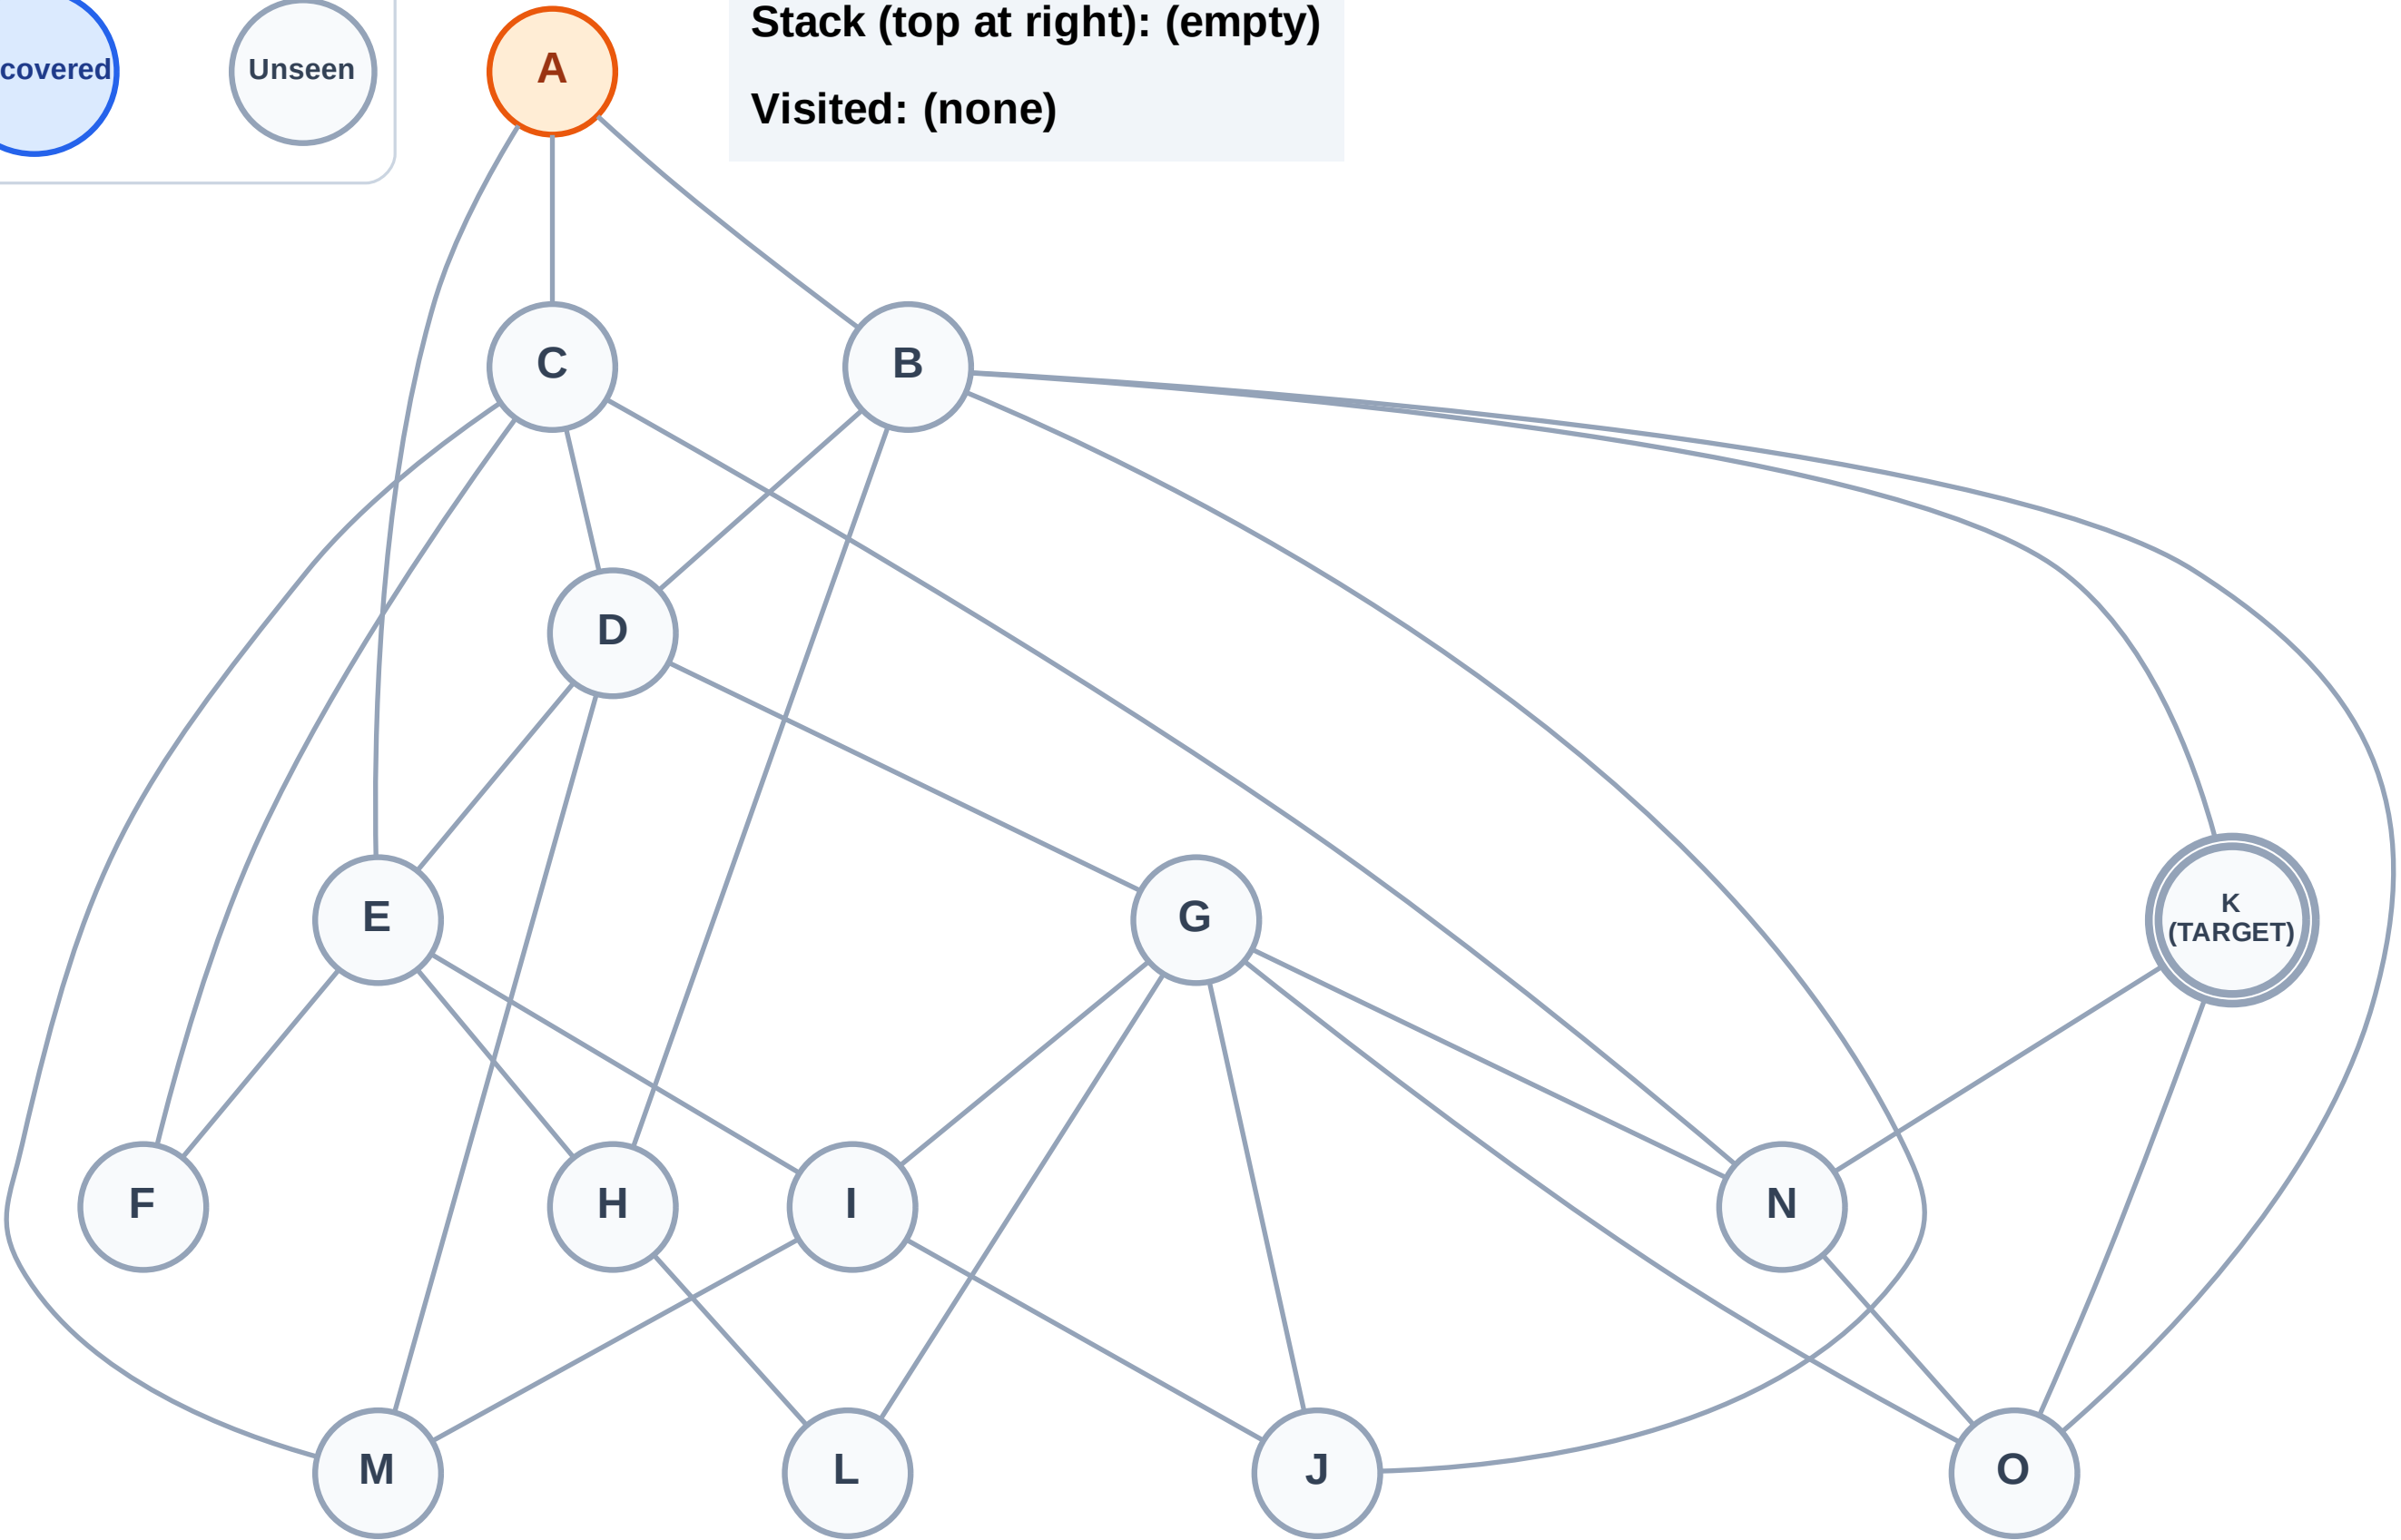

DFS Traversal

Step 3: Discover E, C, B from A

Legend

Complete


Processing

Discovered

Unseen

Stack (top at right): E | C | B

Visited: A

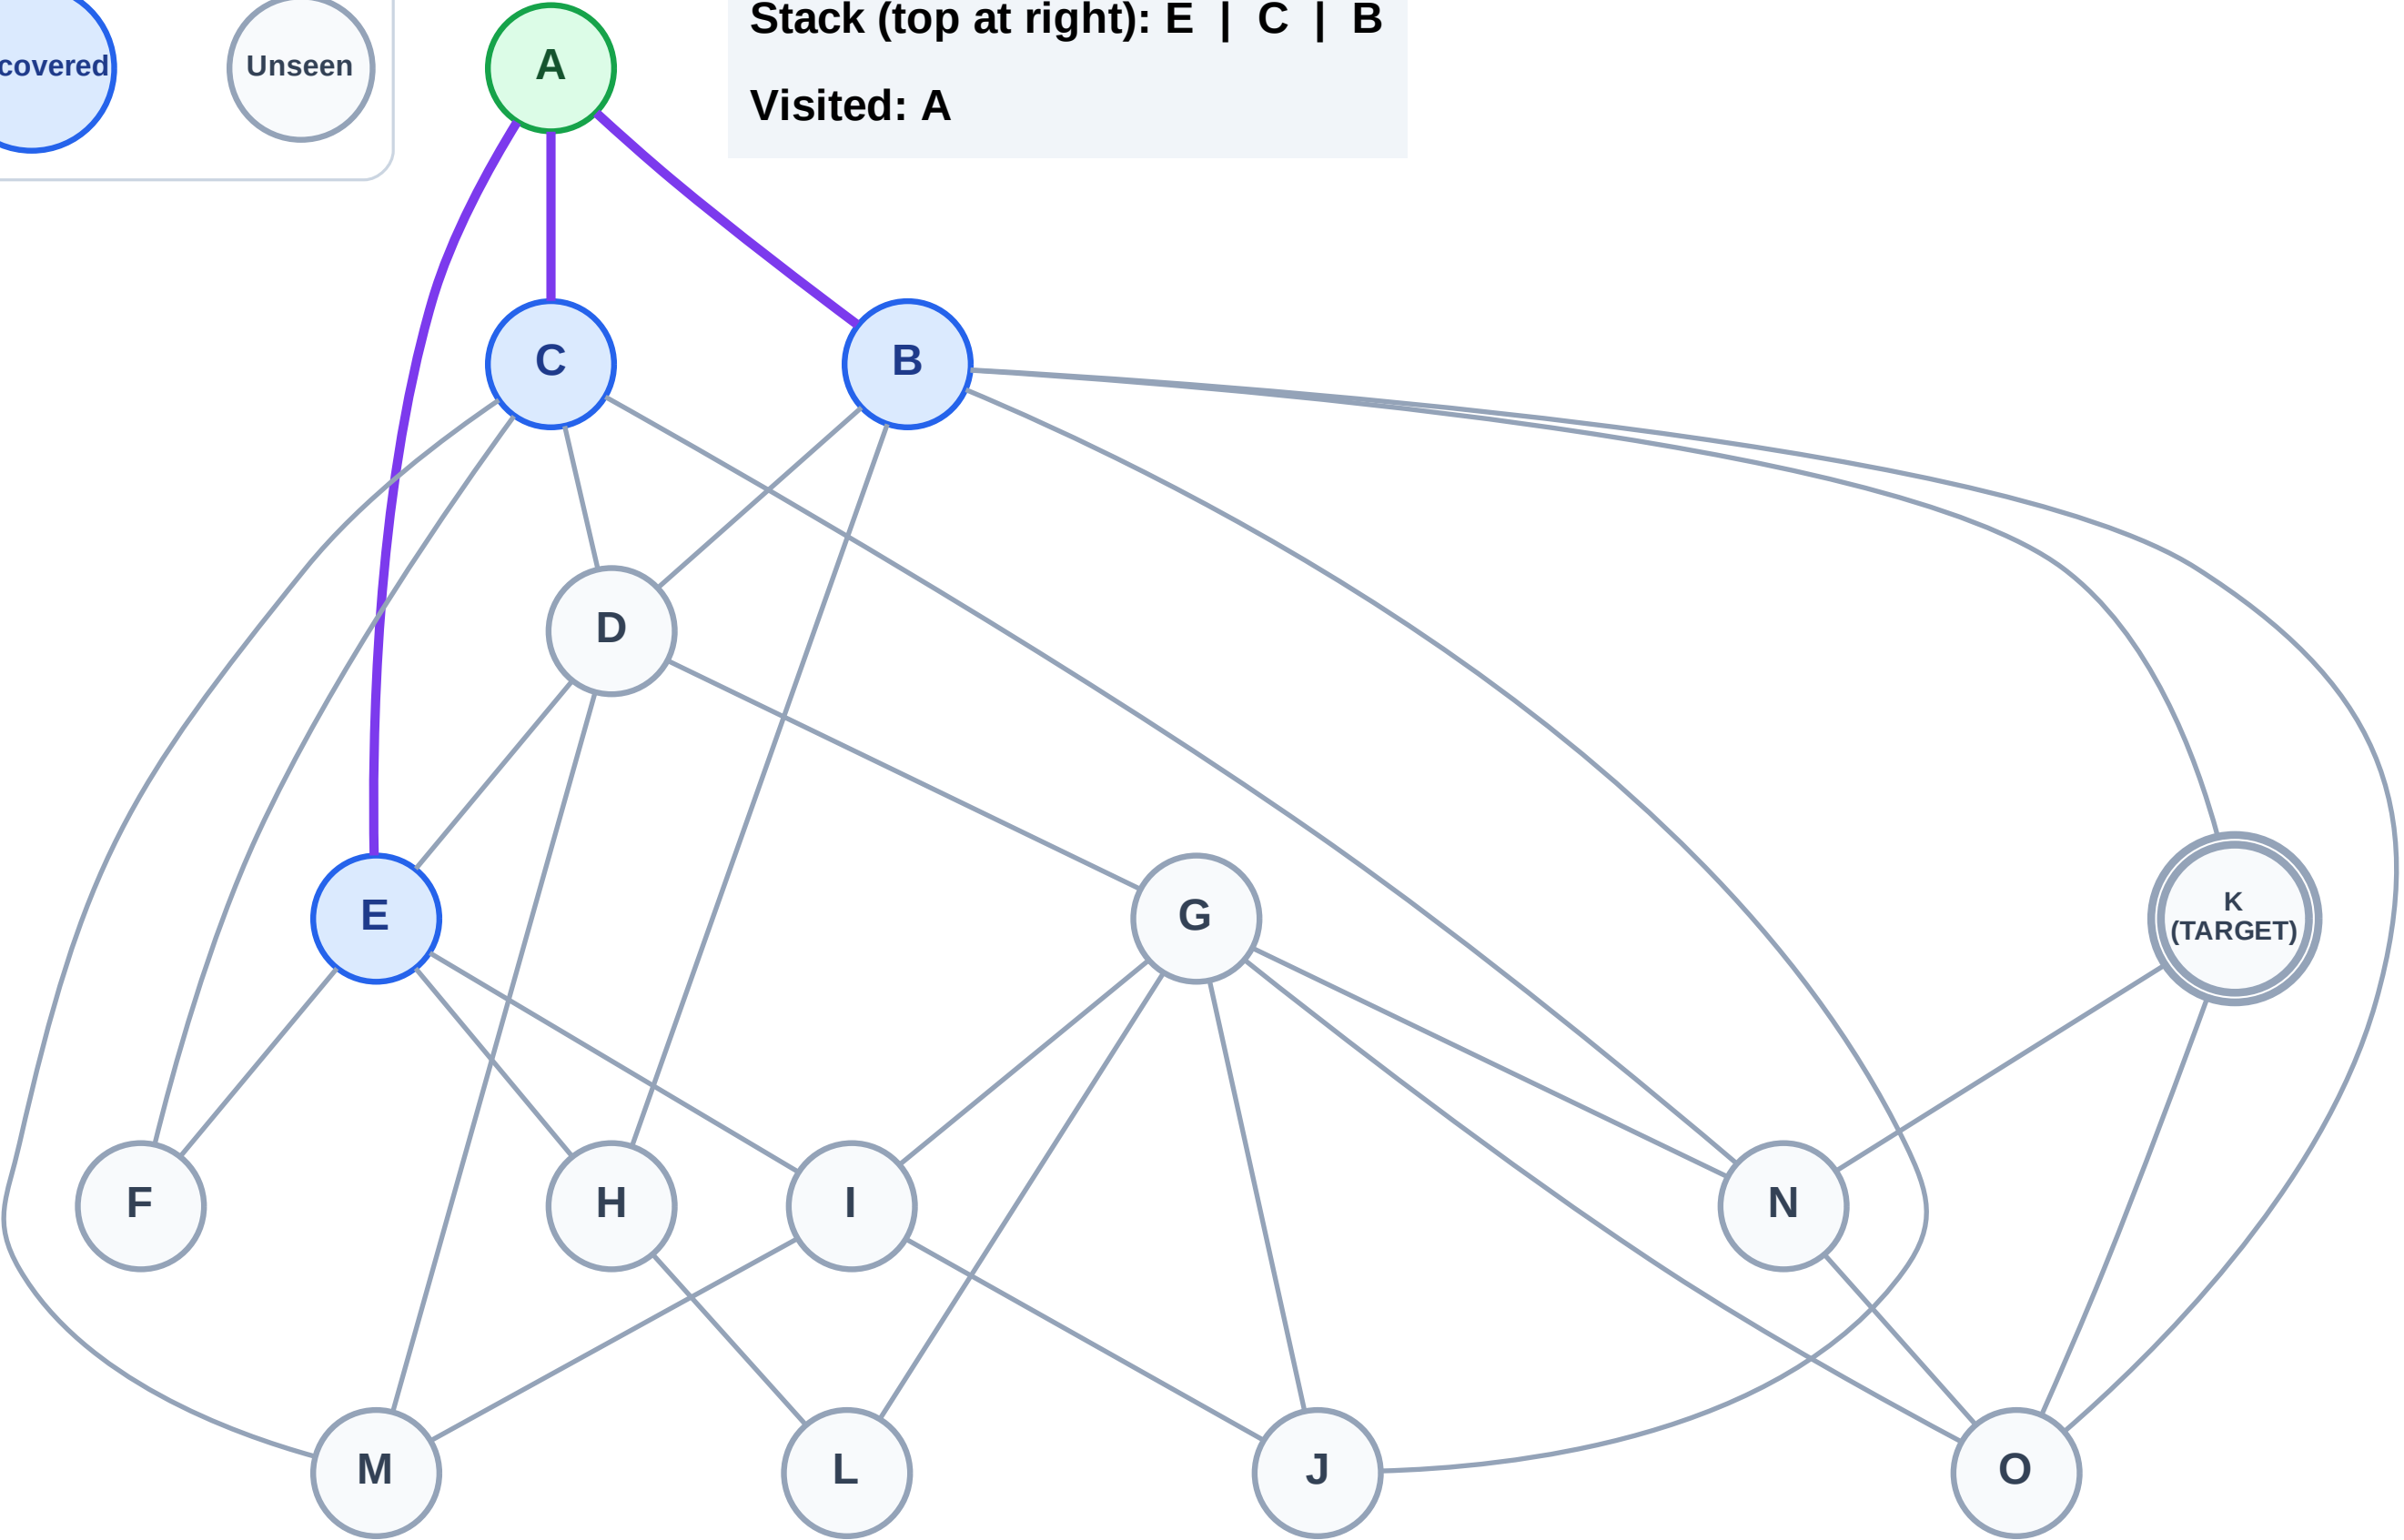

DFS Traversal

Step 4: Process node B

Legend


Complete

Processing

Discovered

Unseen


Stack (top at right): E | C
Visited: A

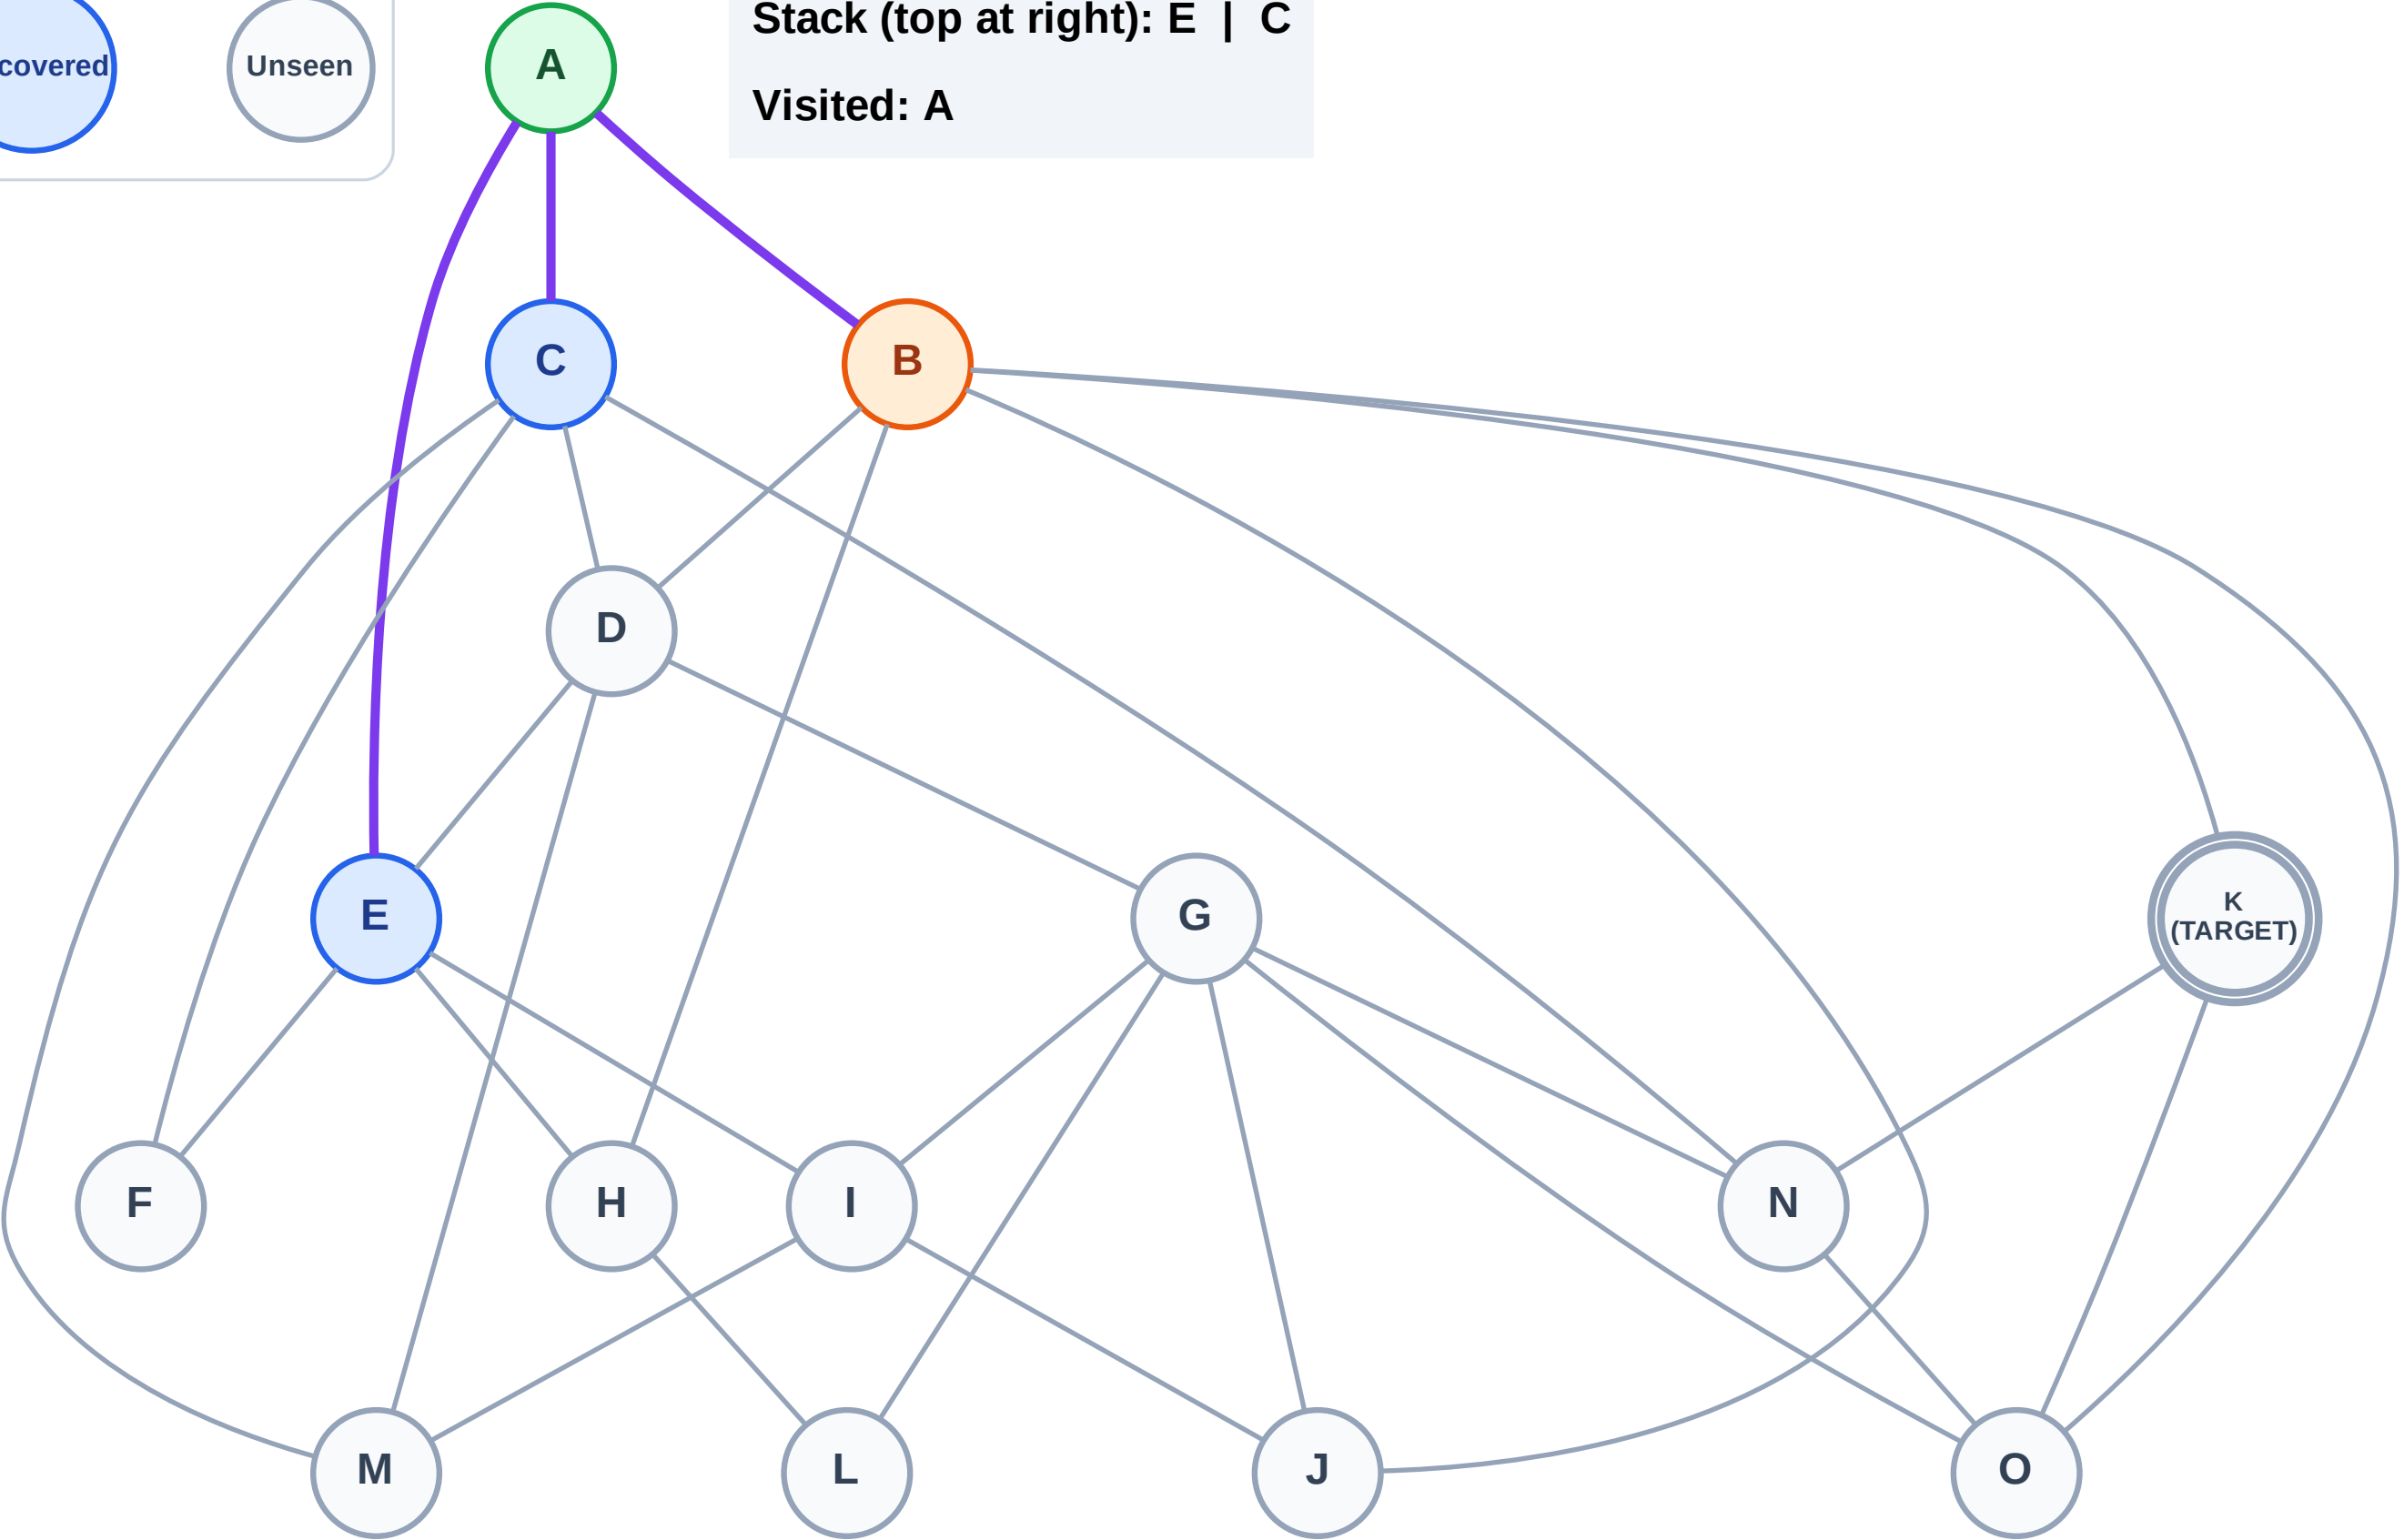

DFS Traversal

Step 5: TARGET NODE K FOUND (SHORT-CIRCUITED)! Path (2 hops): A → B → K

Legend



Stack (top at right): E | C | O

Visited: A, B, K

