



BFS Traversal

Step 1: Start at A (Seeking target node K (Eager Short-Circuit))

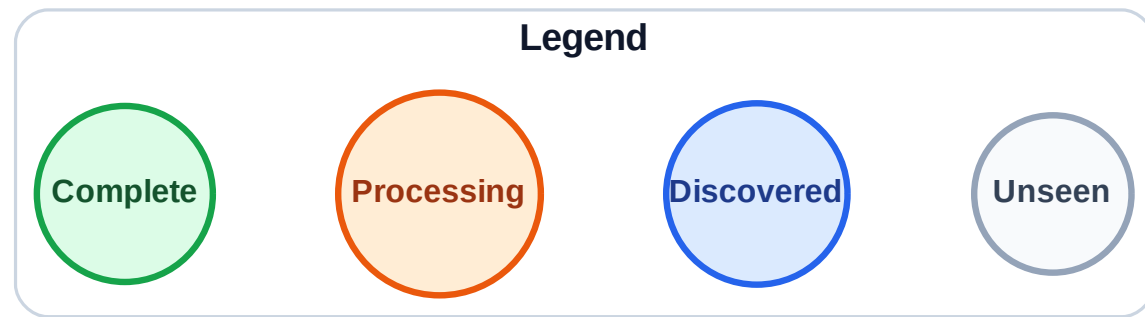


Queue: A

Visited: (none)

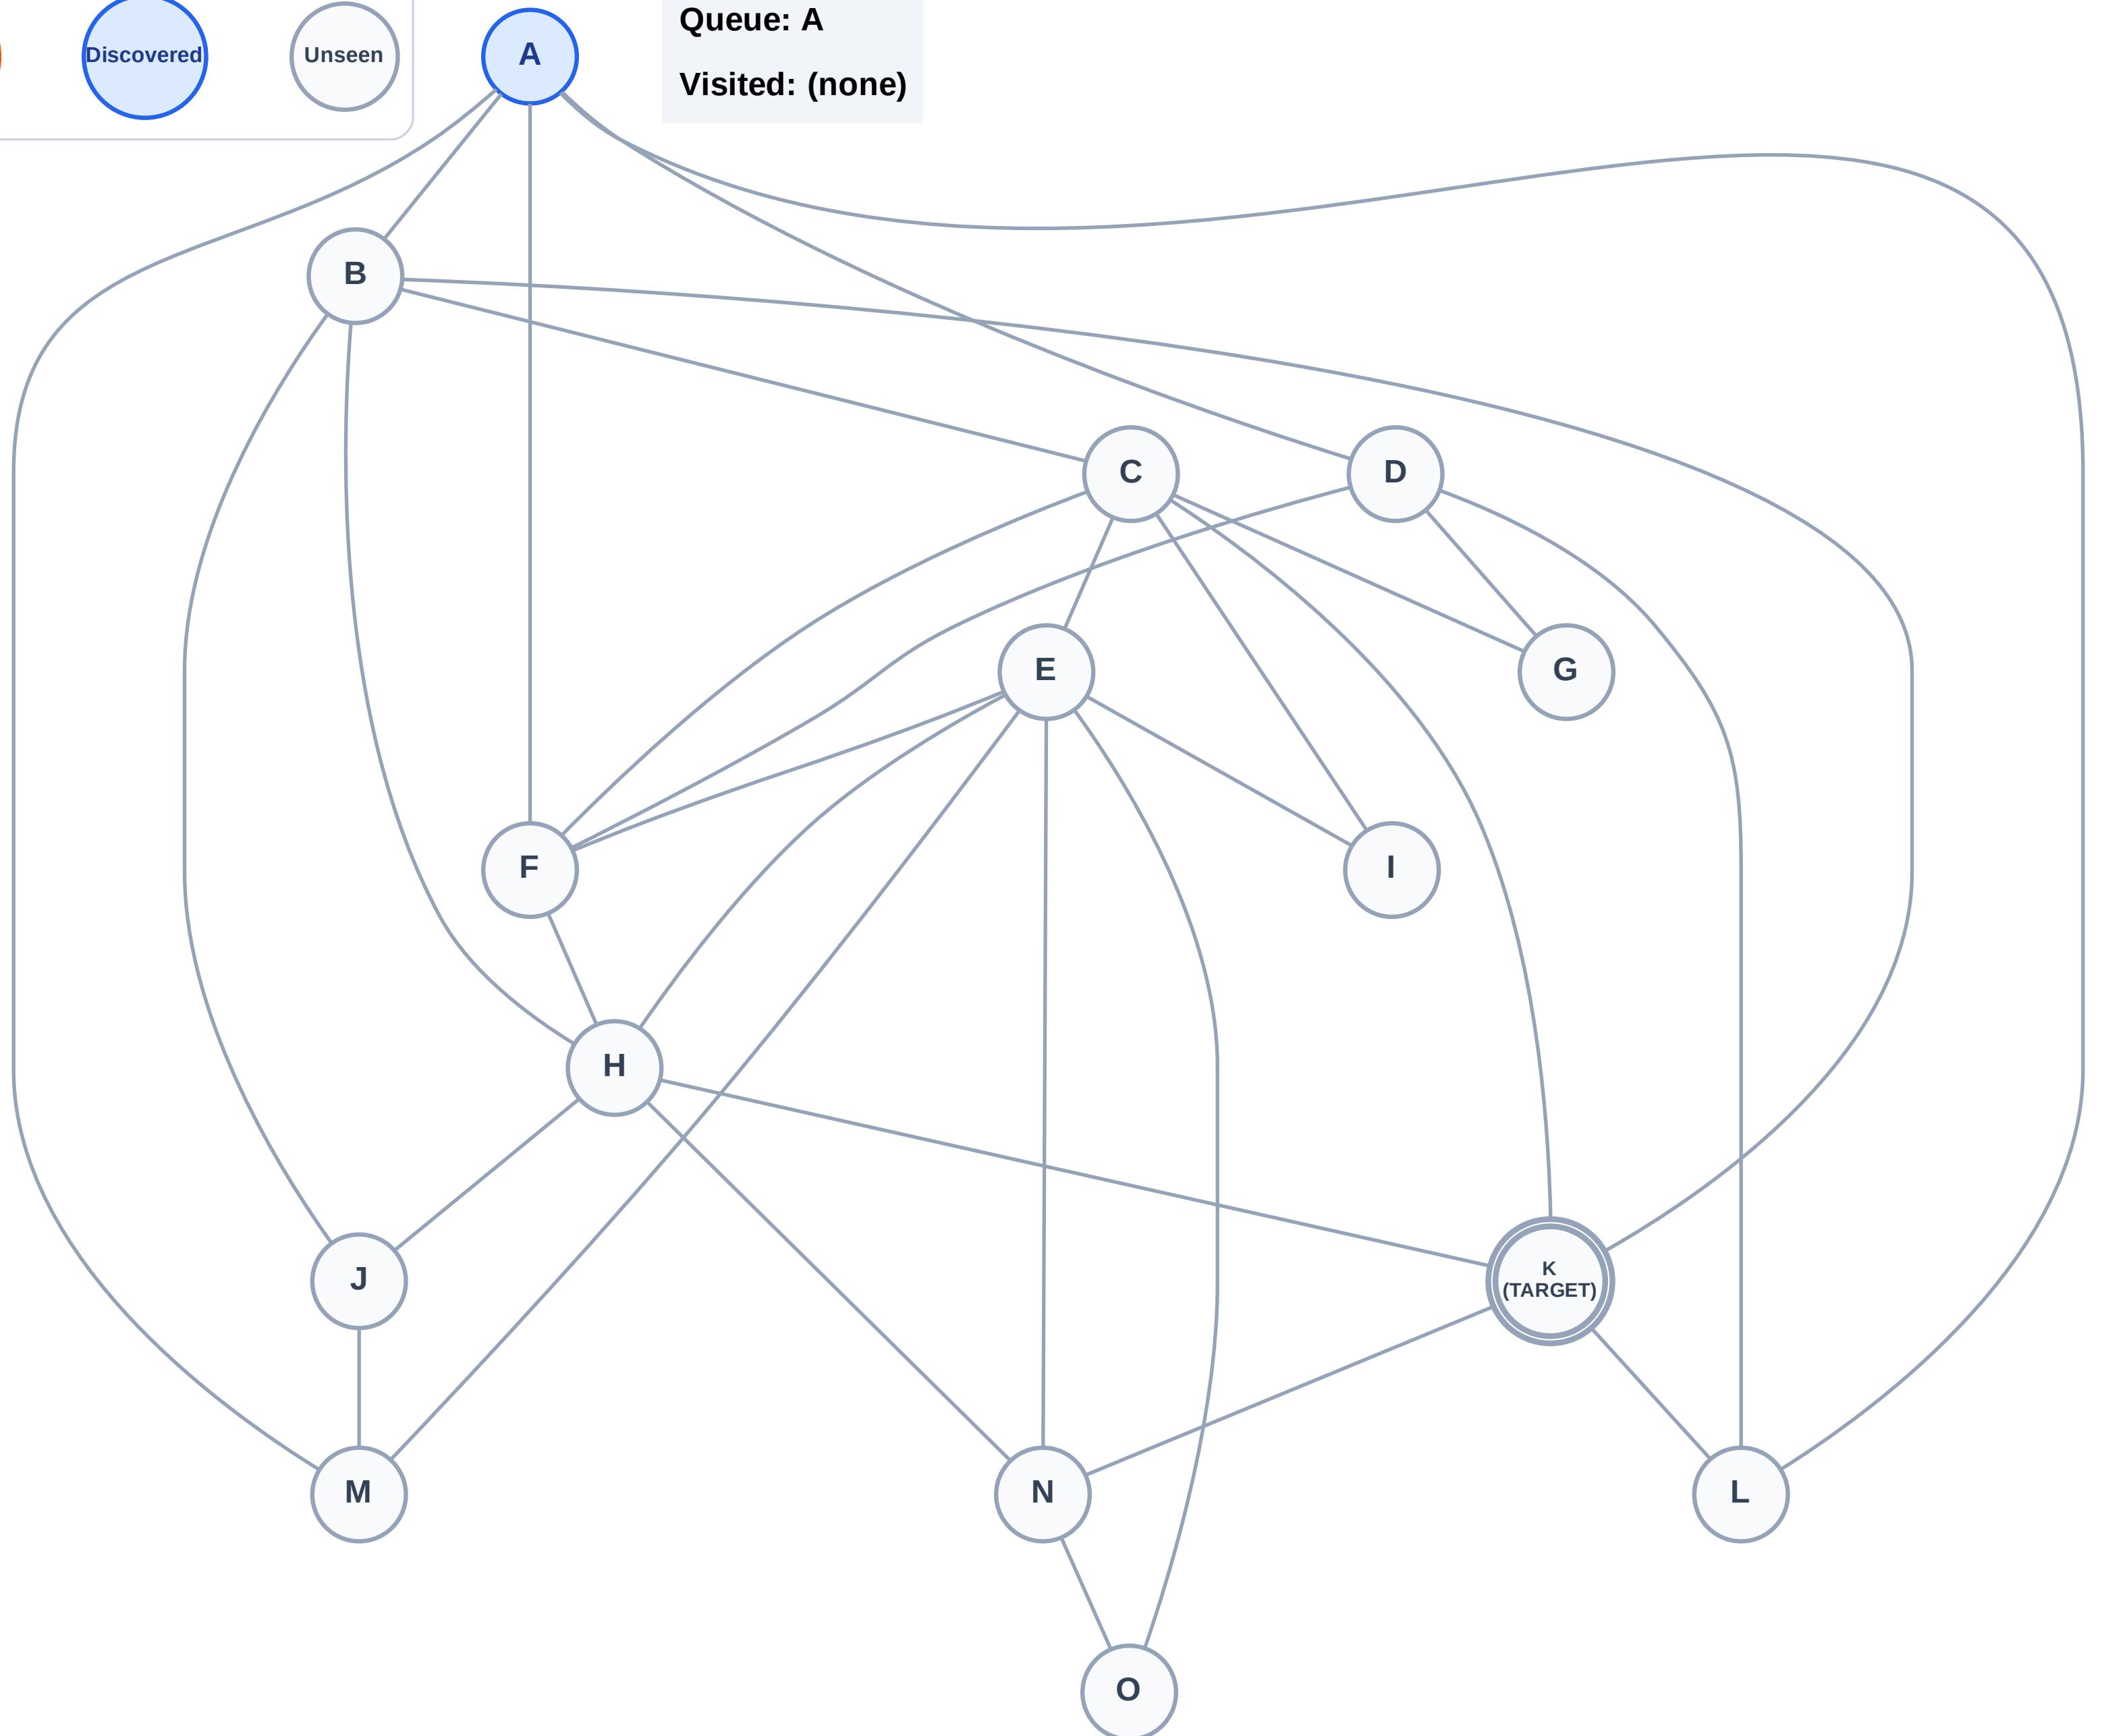


BFS Traversal

Step 2: Process node A

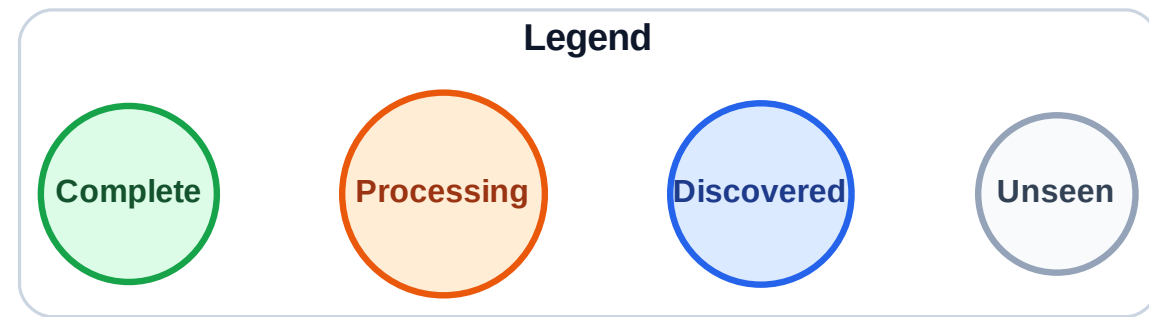


Queue: (empty)
Visited: (none)

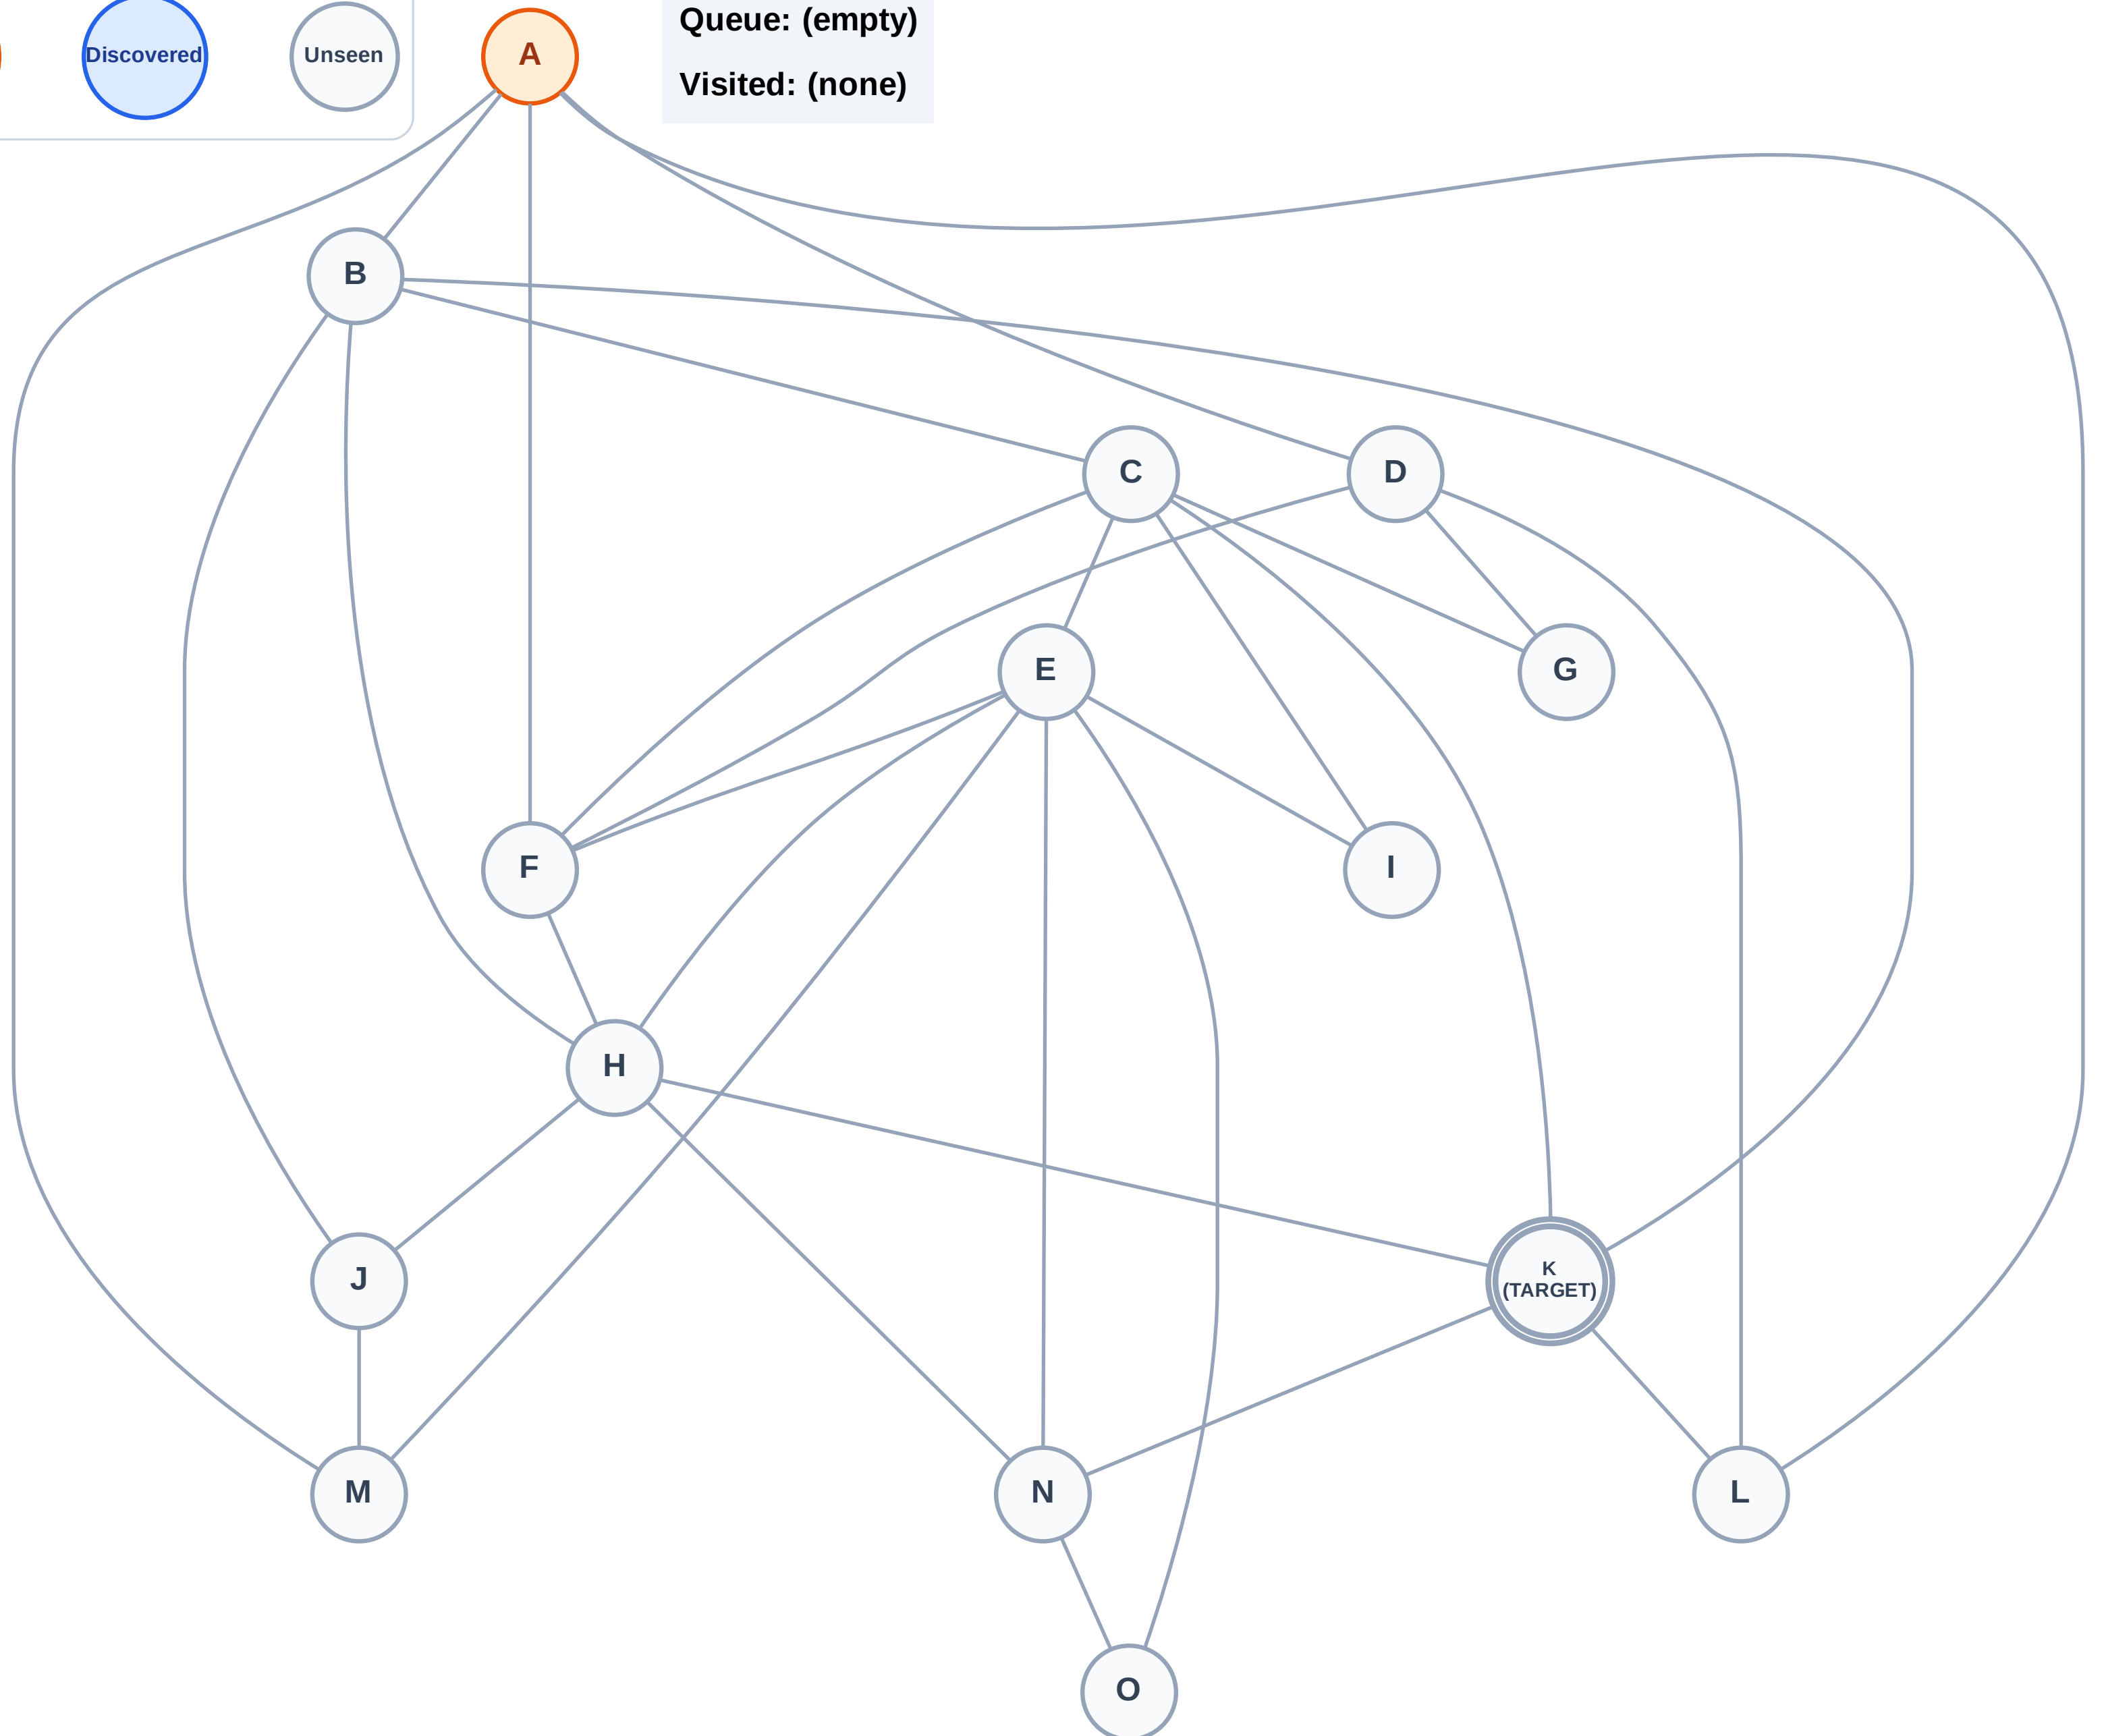


BFS Traversal

Step 3: Discover B, D, F, L, M from A

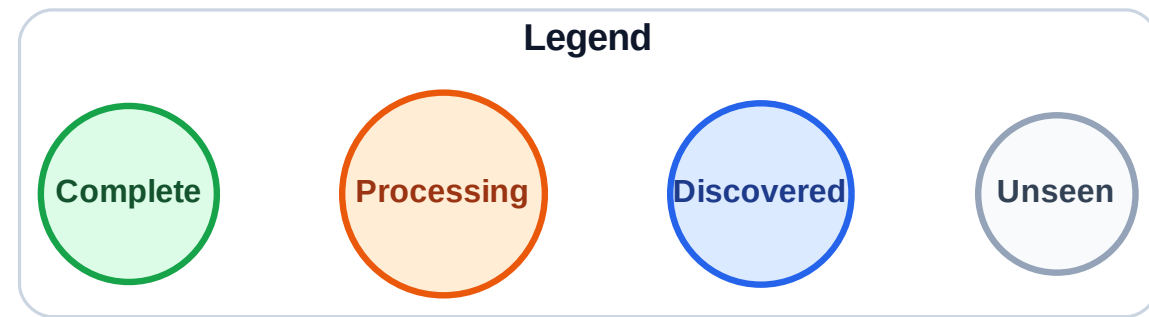


Queue: B → D → F → L → M

Visited: A

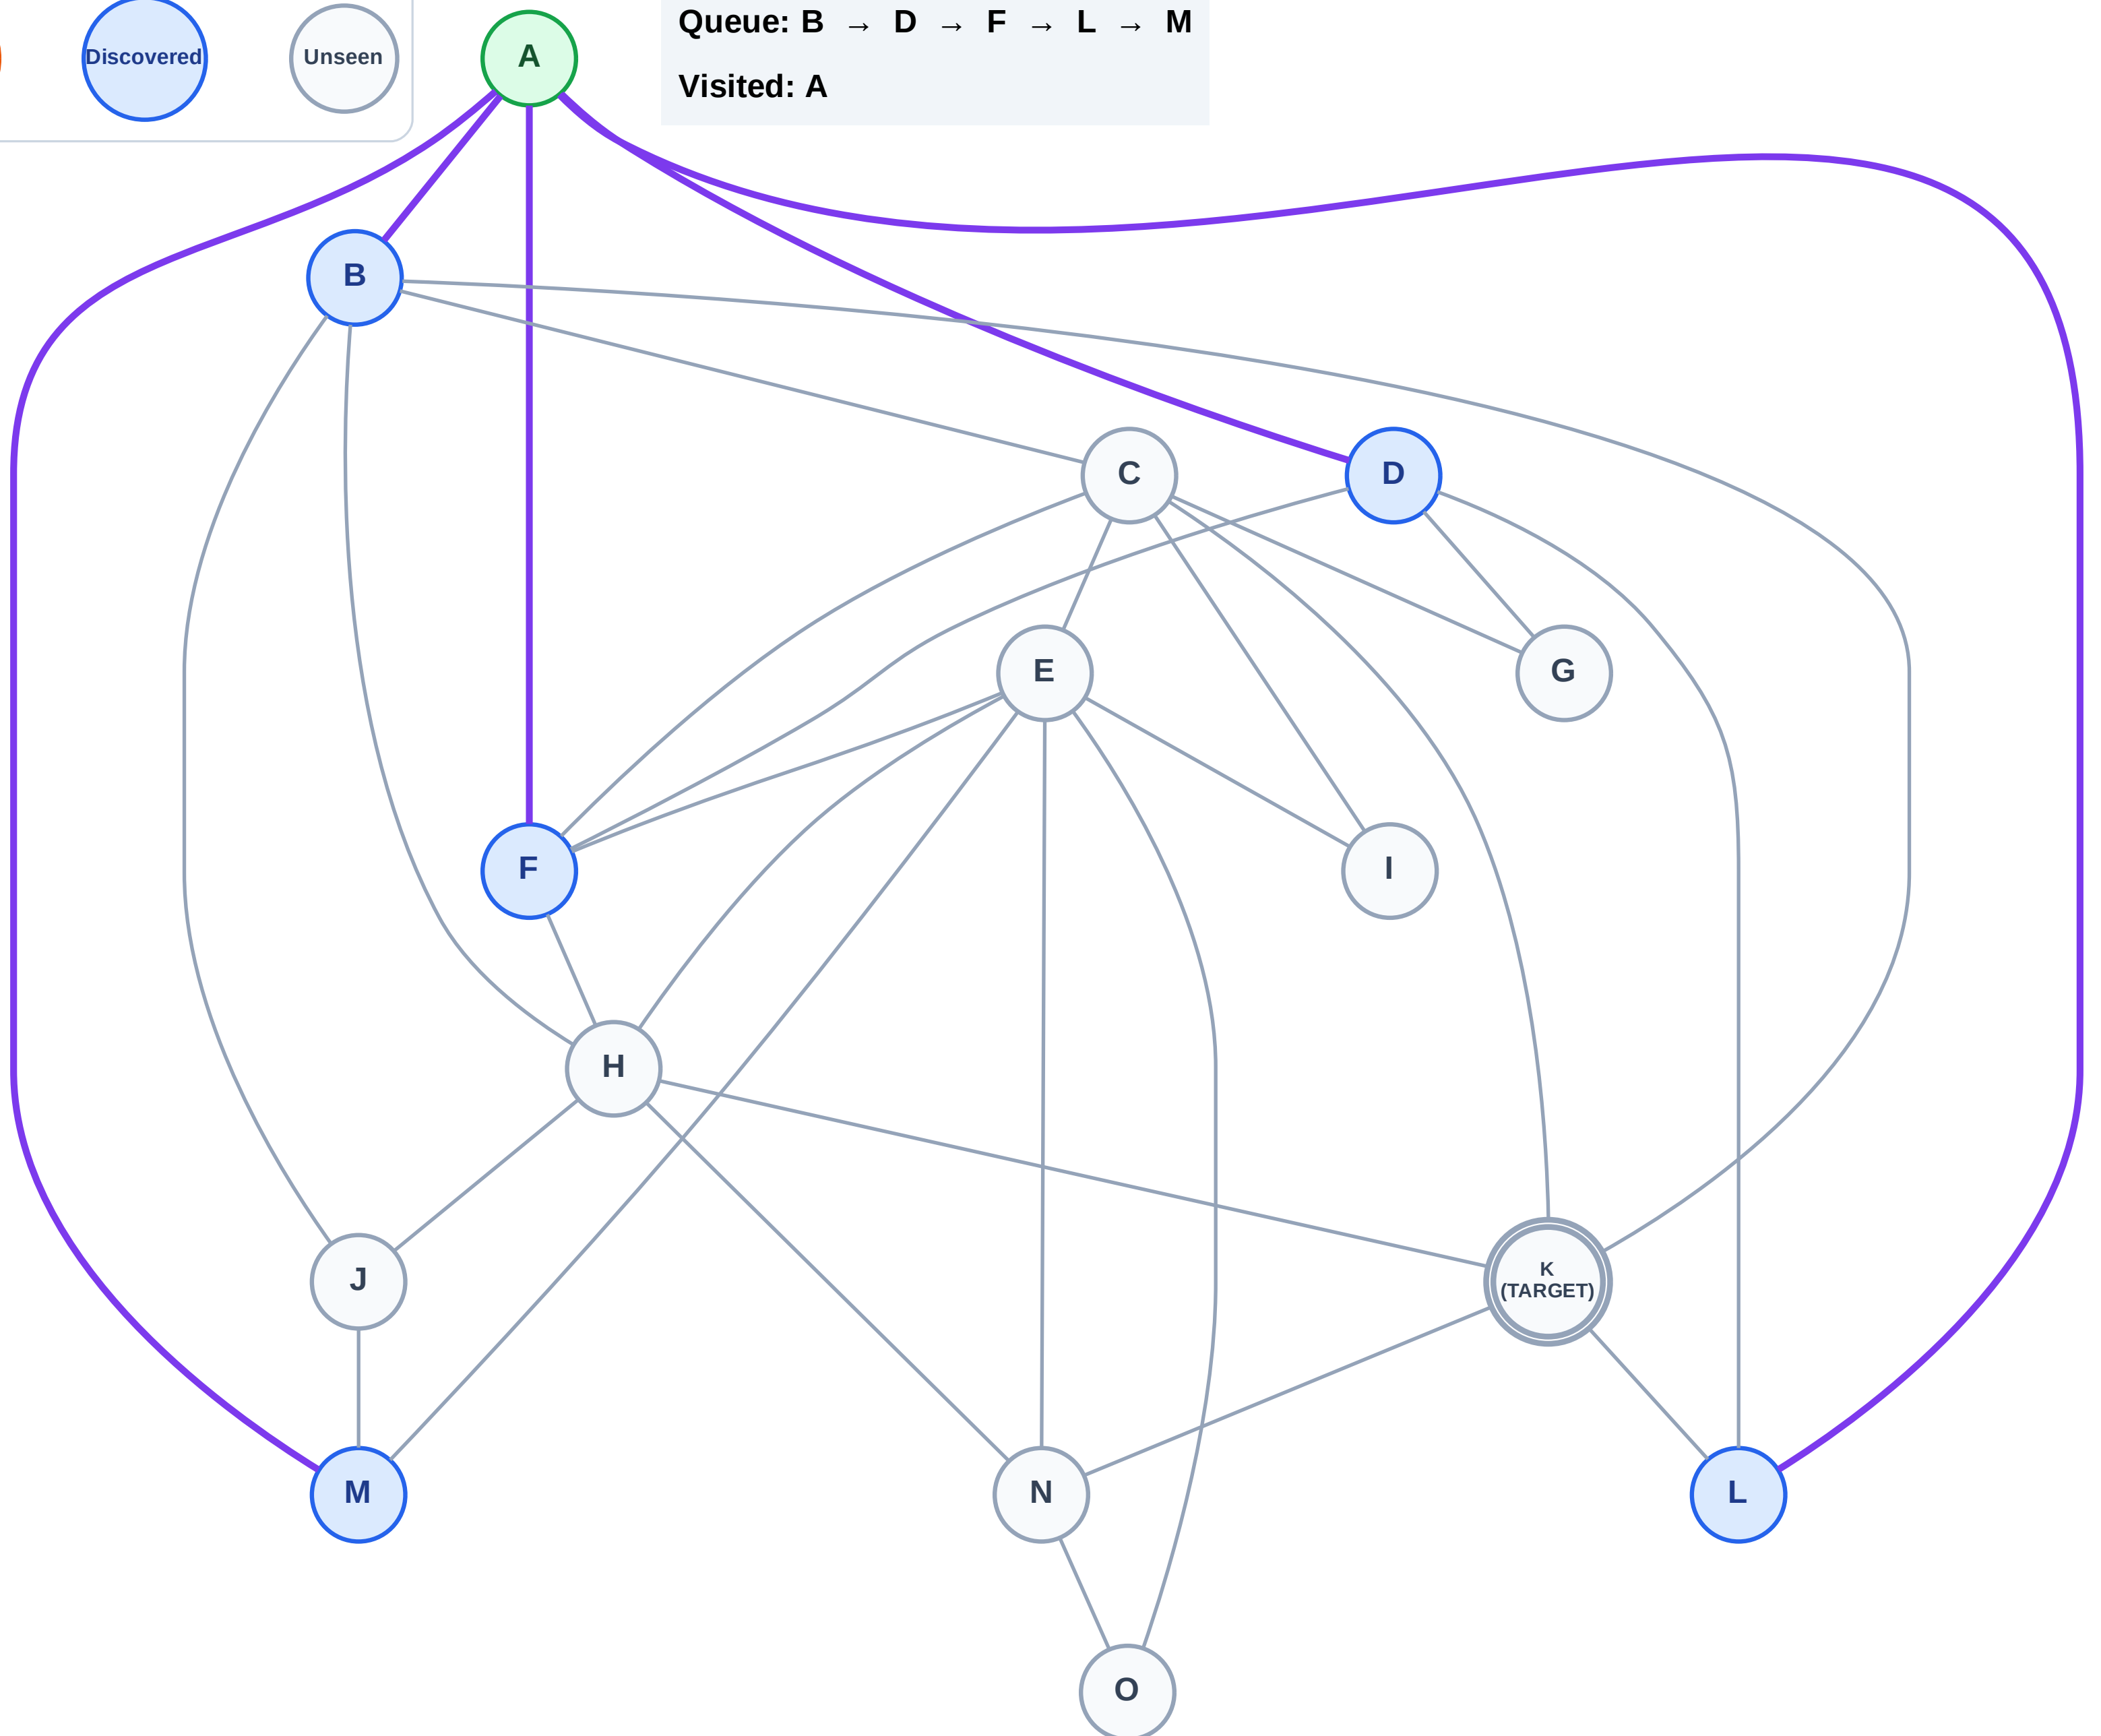


BFS Traversal

Step 4: Process node B

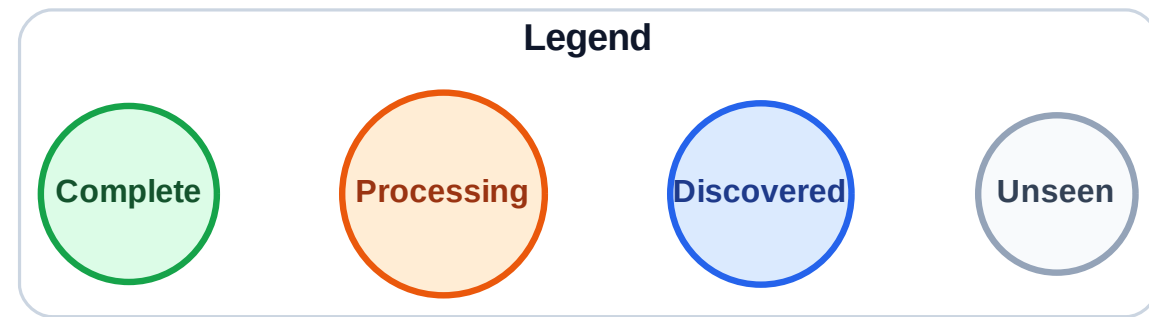


Queue: D → F → L → M

Visited: A

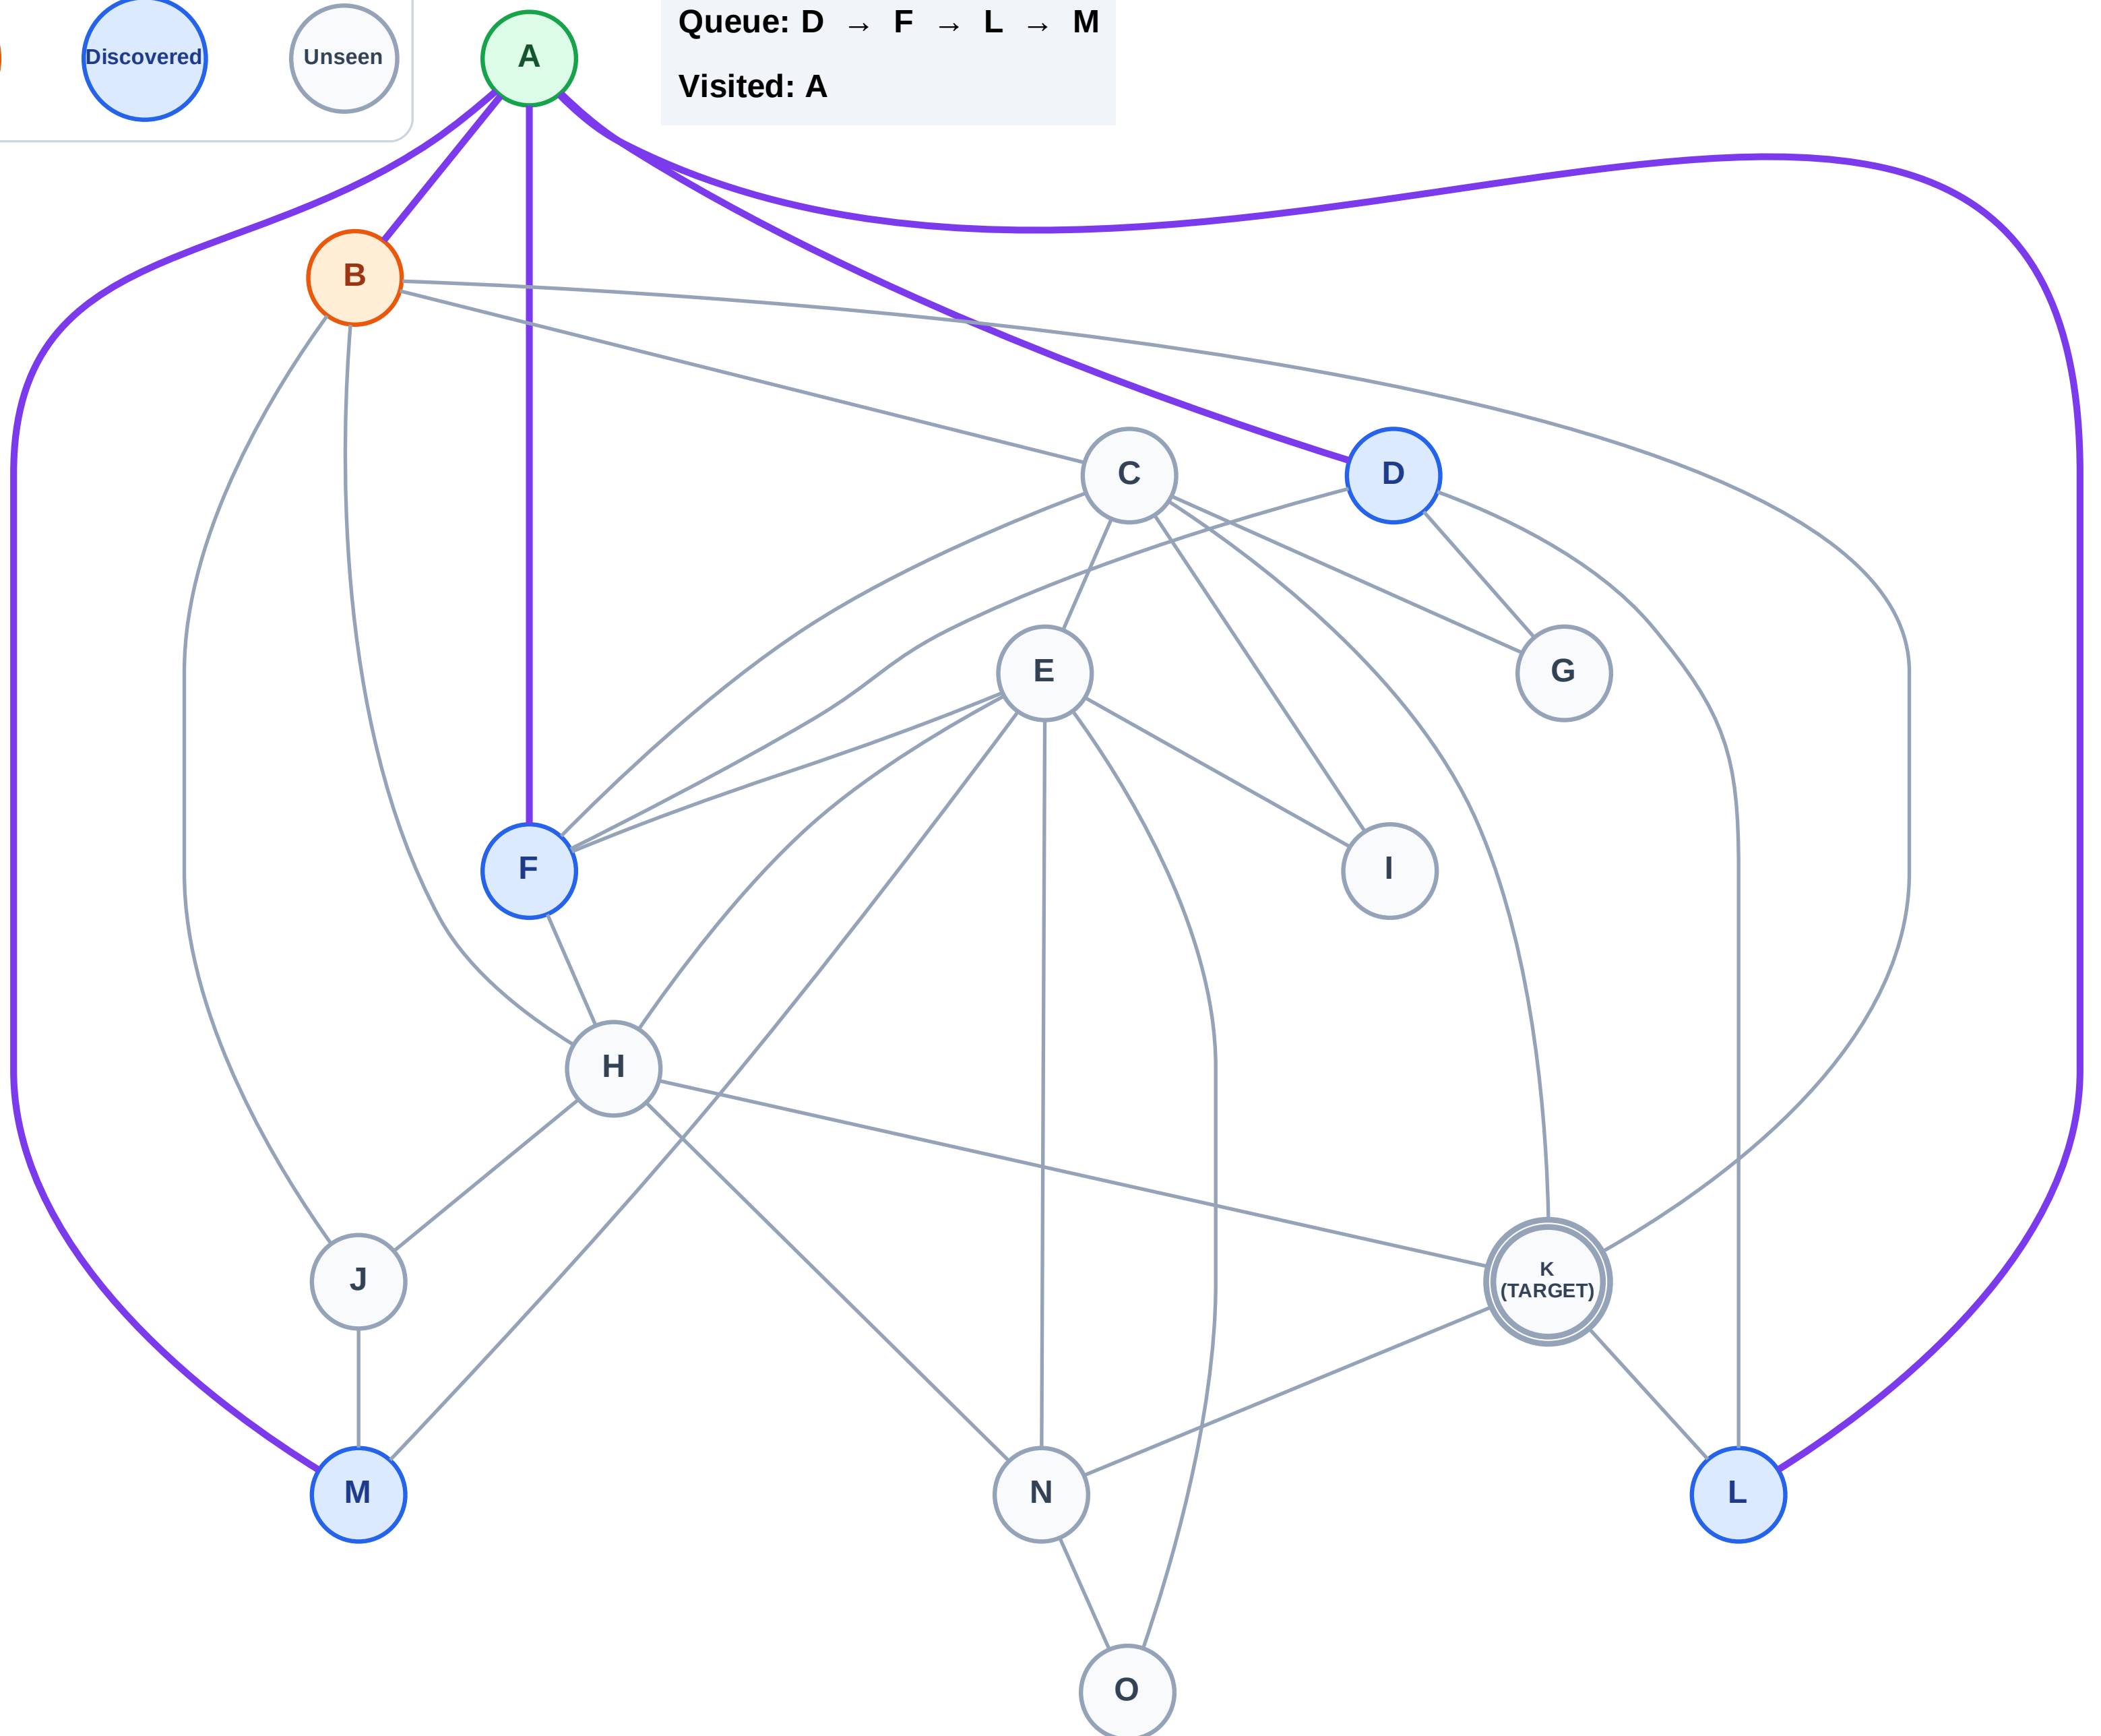


BFS Traversal

Step 5: TARGET NODE K FOUND (SHORT-CIRCUITED)! Path (2 hops): A → B → K

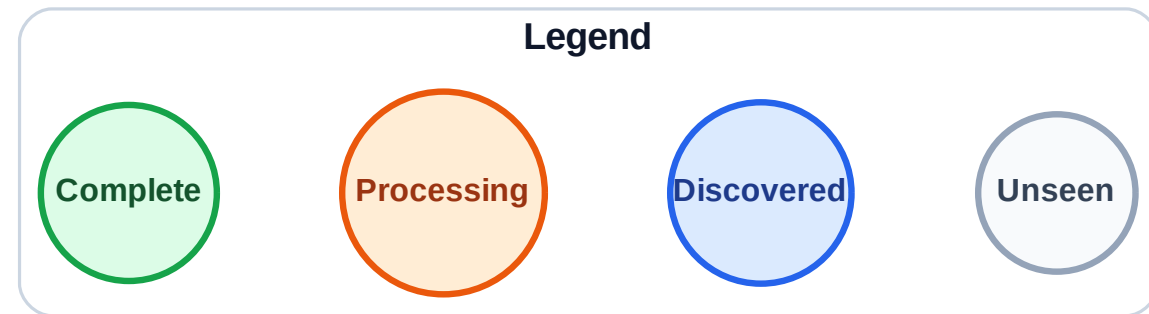


Queue: D → F → L → M → C → H → J

Visited: A, B, K

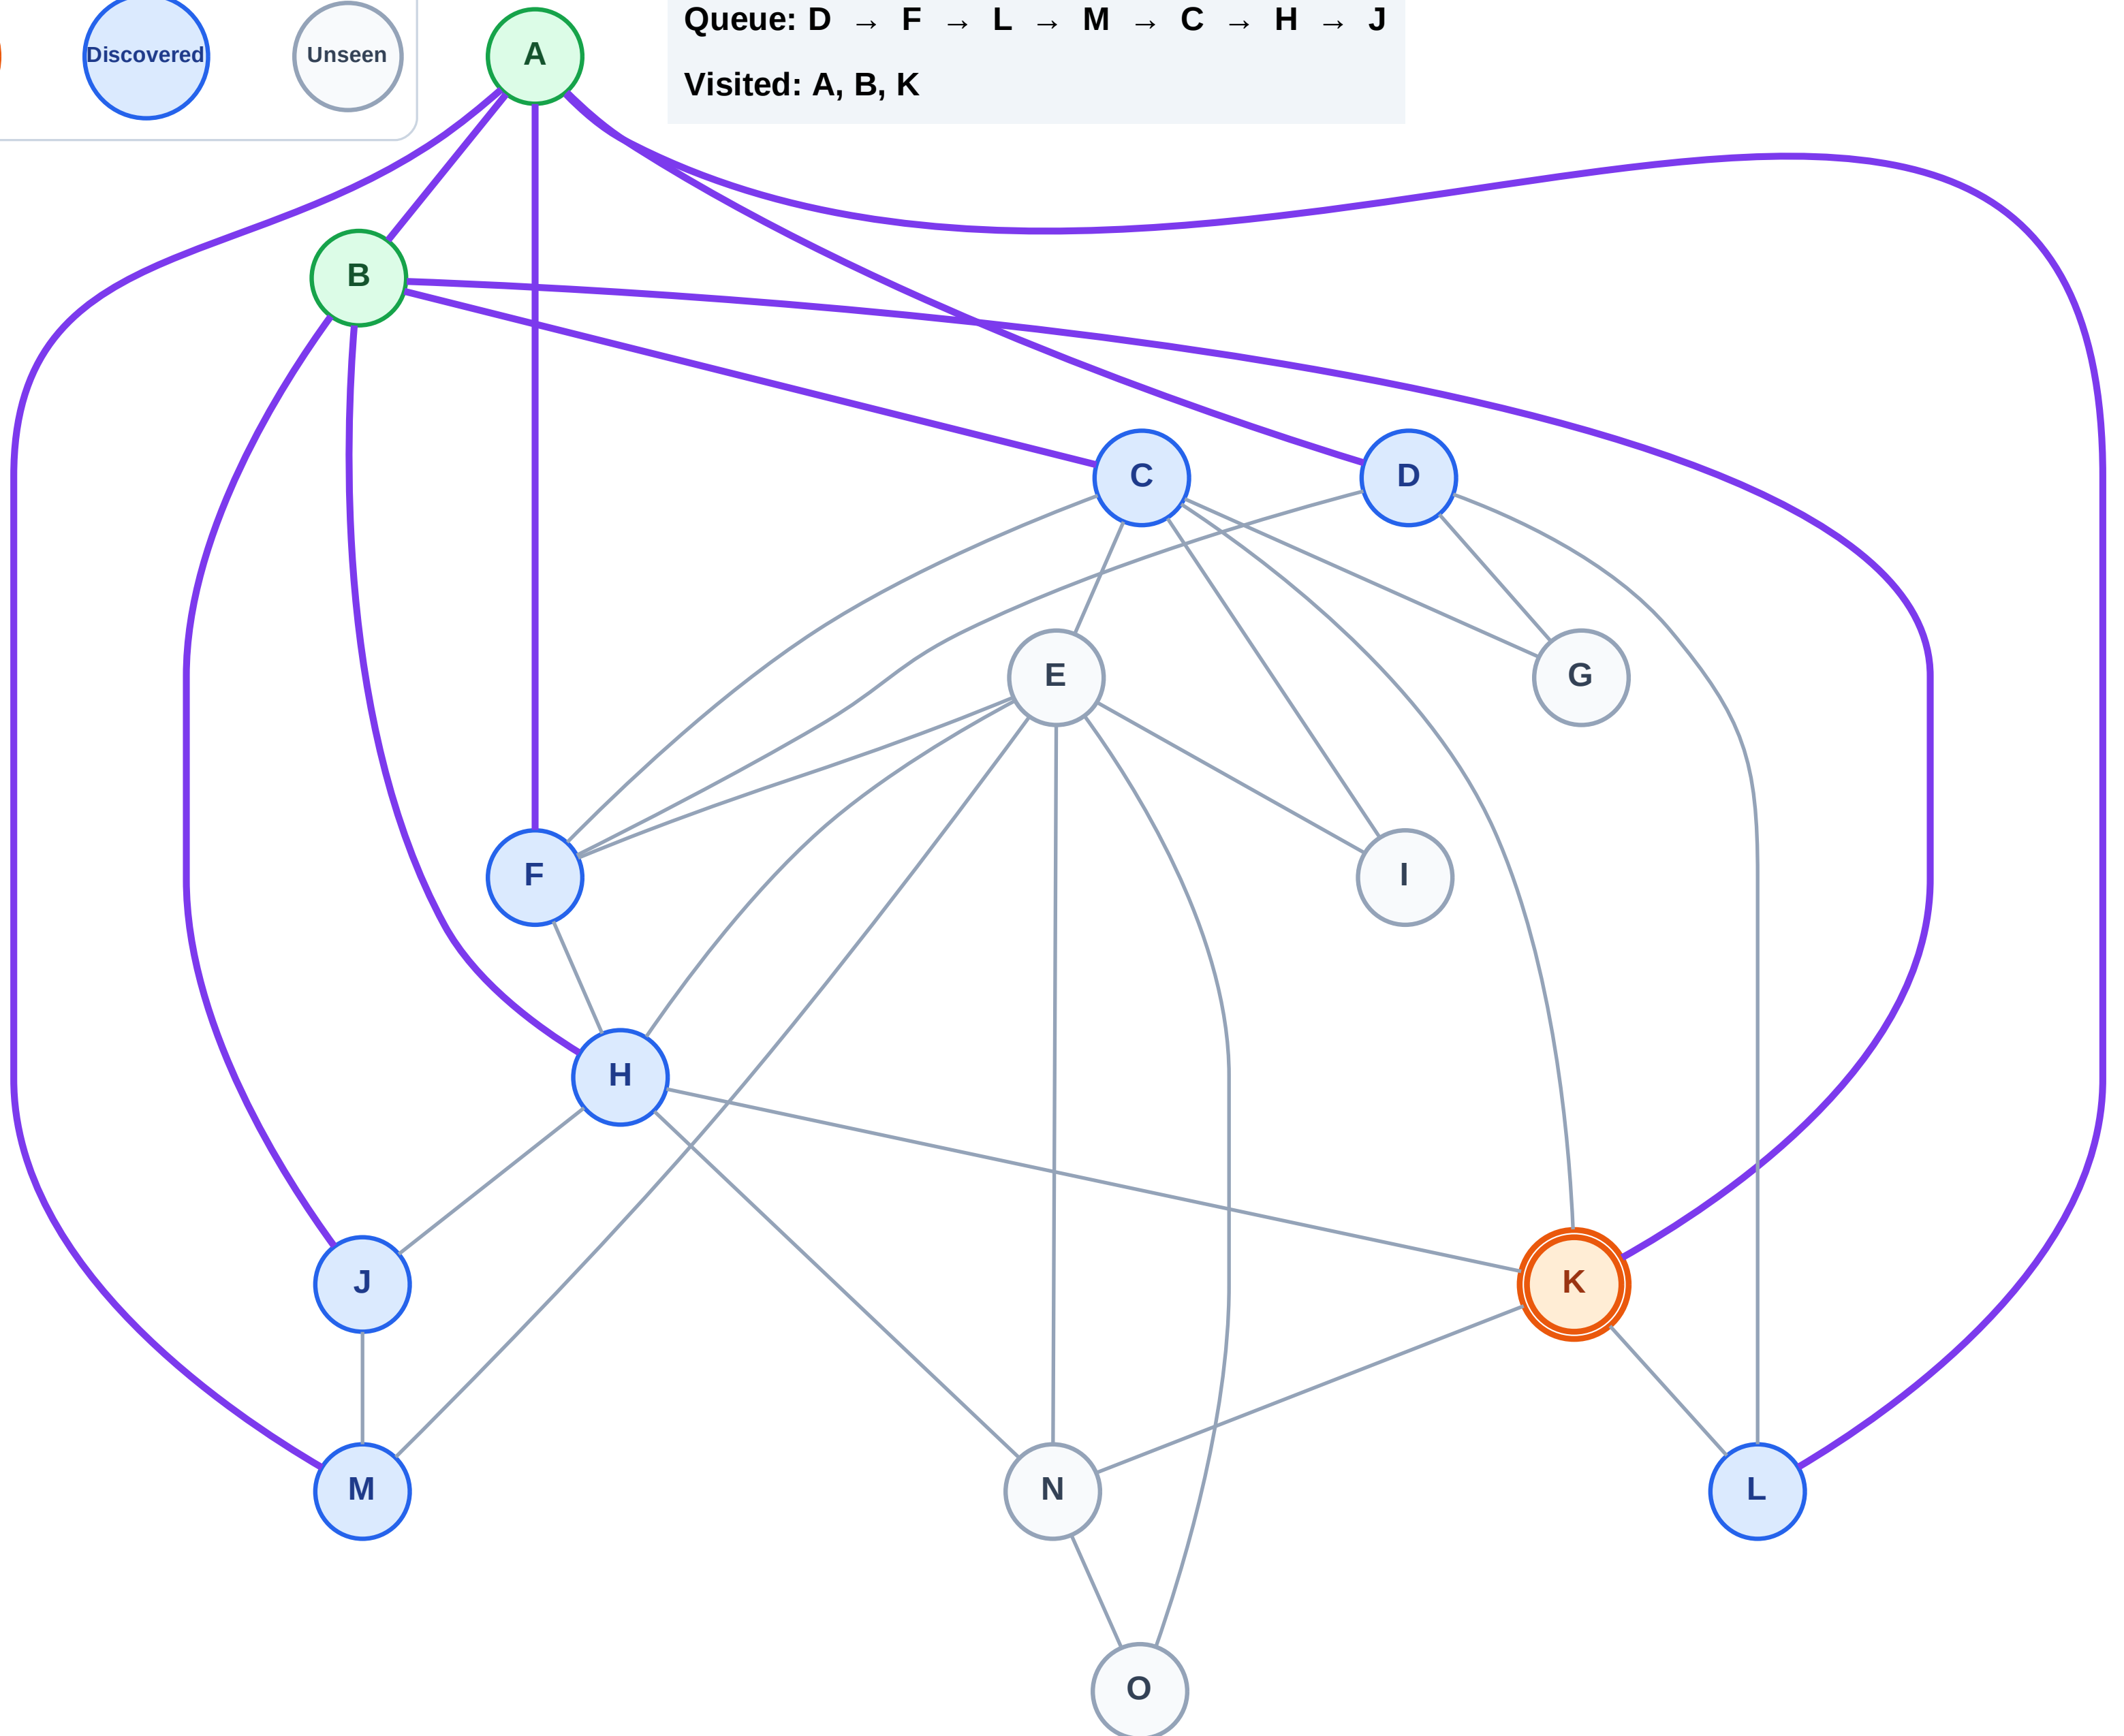


DFS Traversal

Step 1: Start at A (Seeking target node K (Eager Short-Circuit))

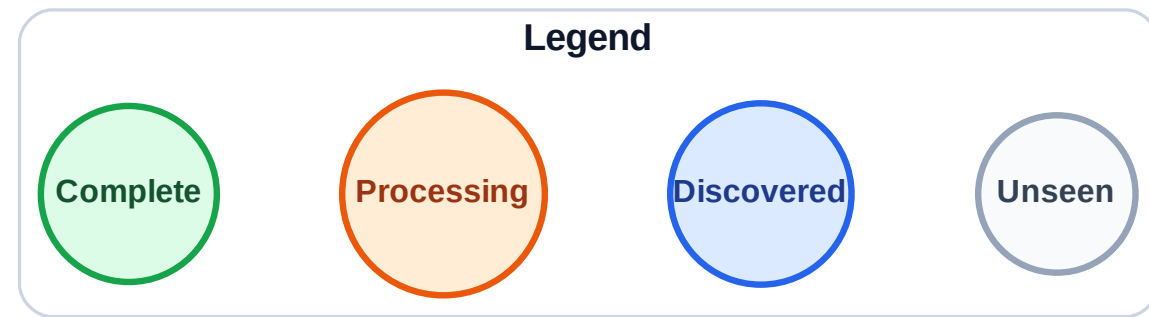

Stack (top at right): A
Visited: (none)

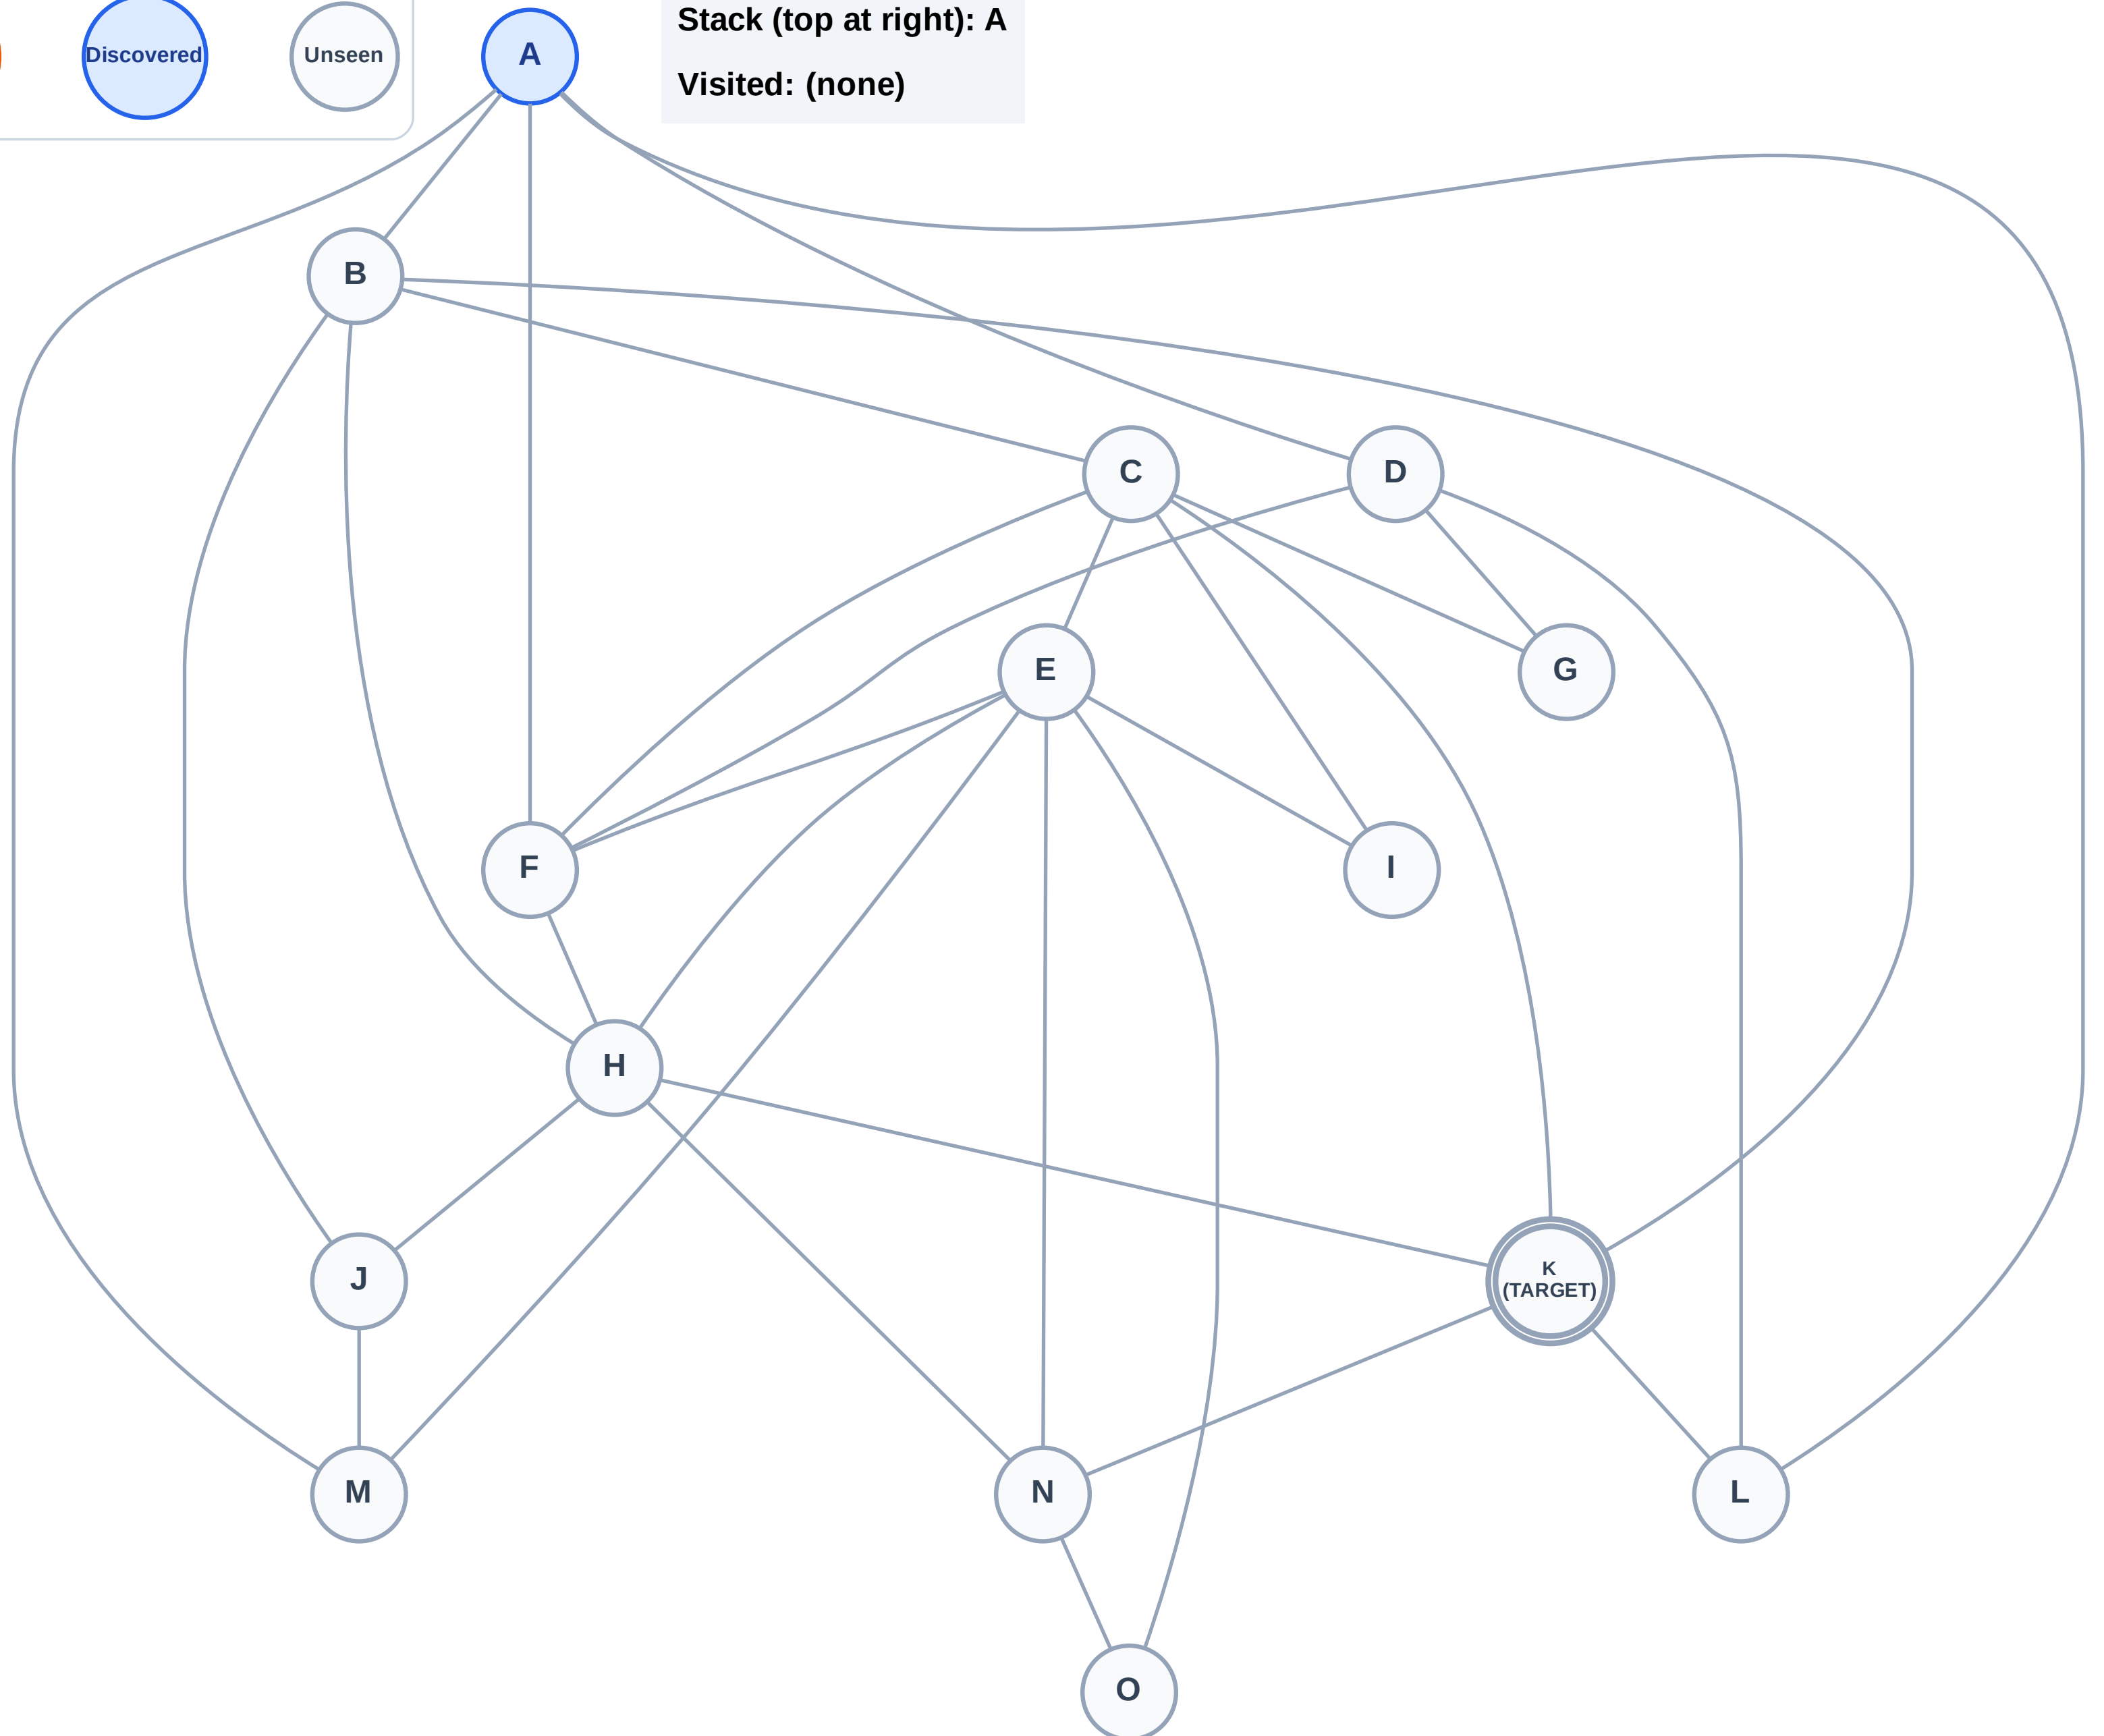

DFS Traversal


Step 2: Process node A

Legend




Stack (top at right): (empty)

Visited: (none)

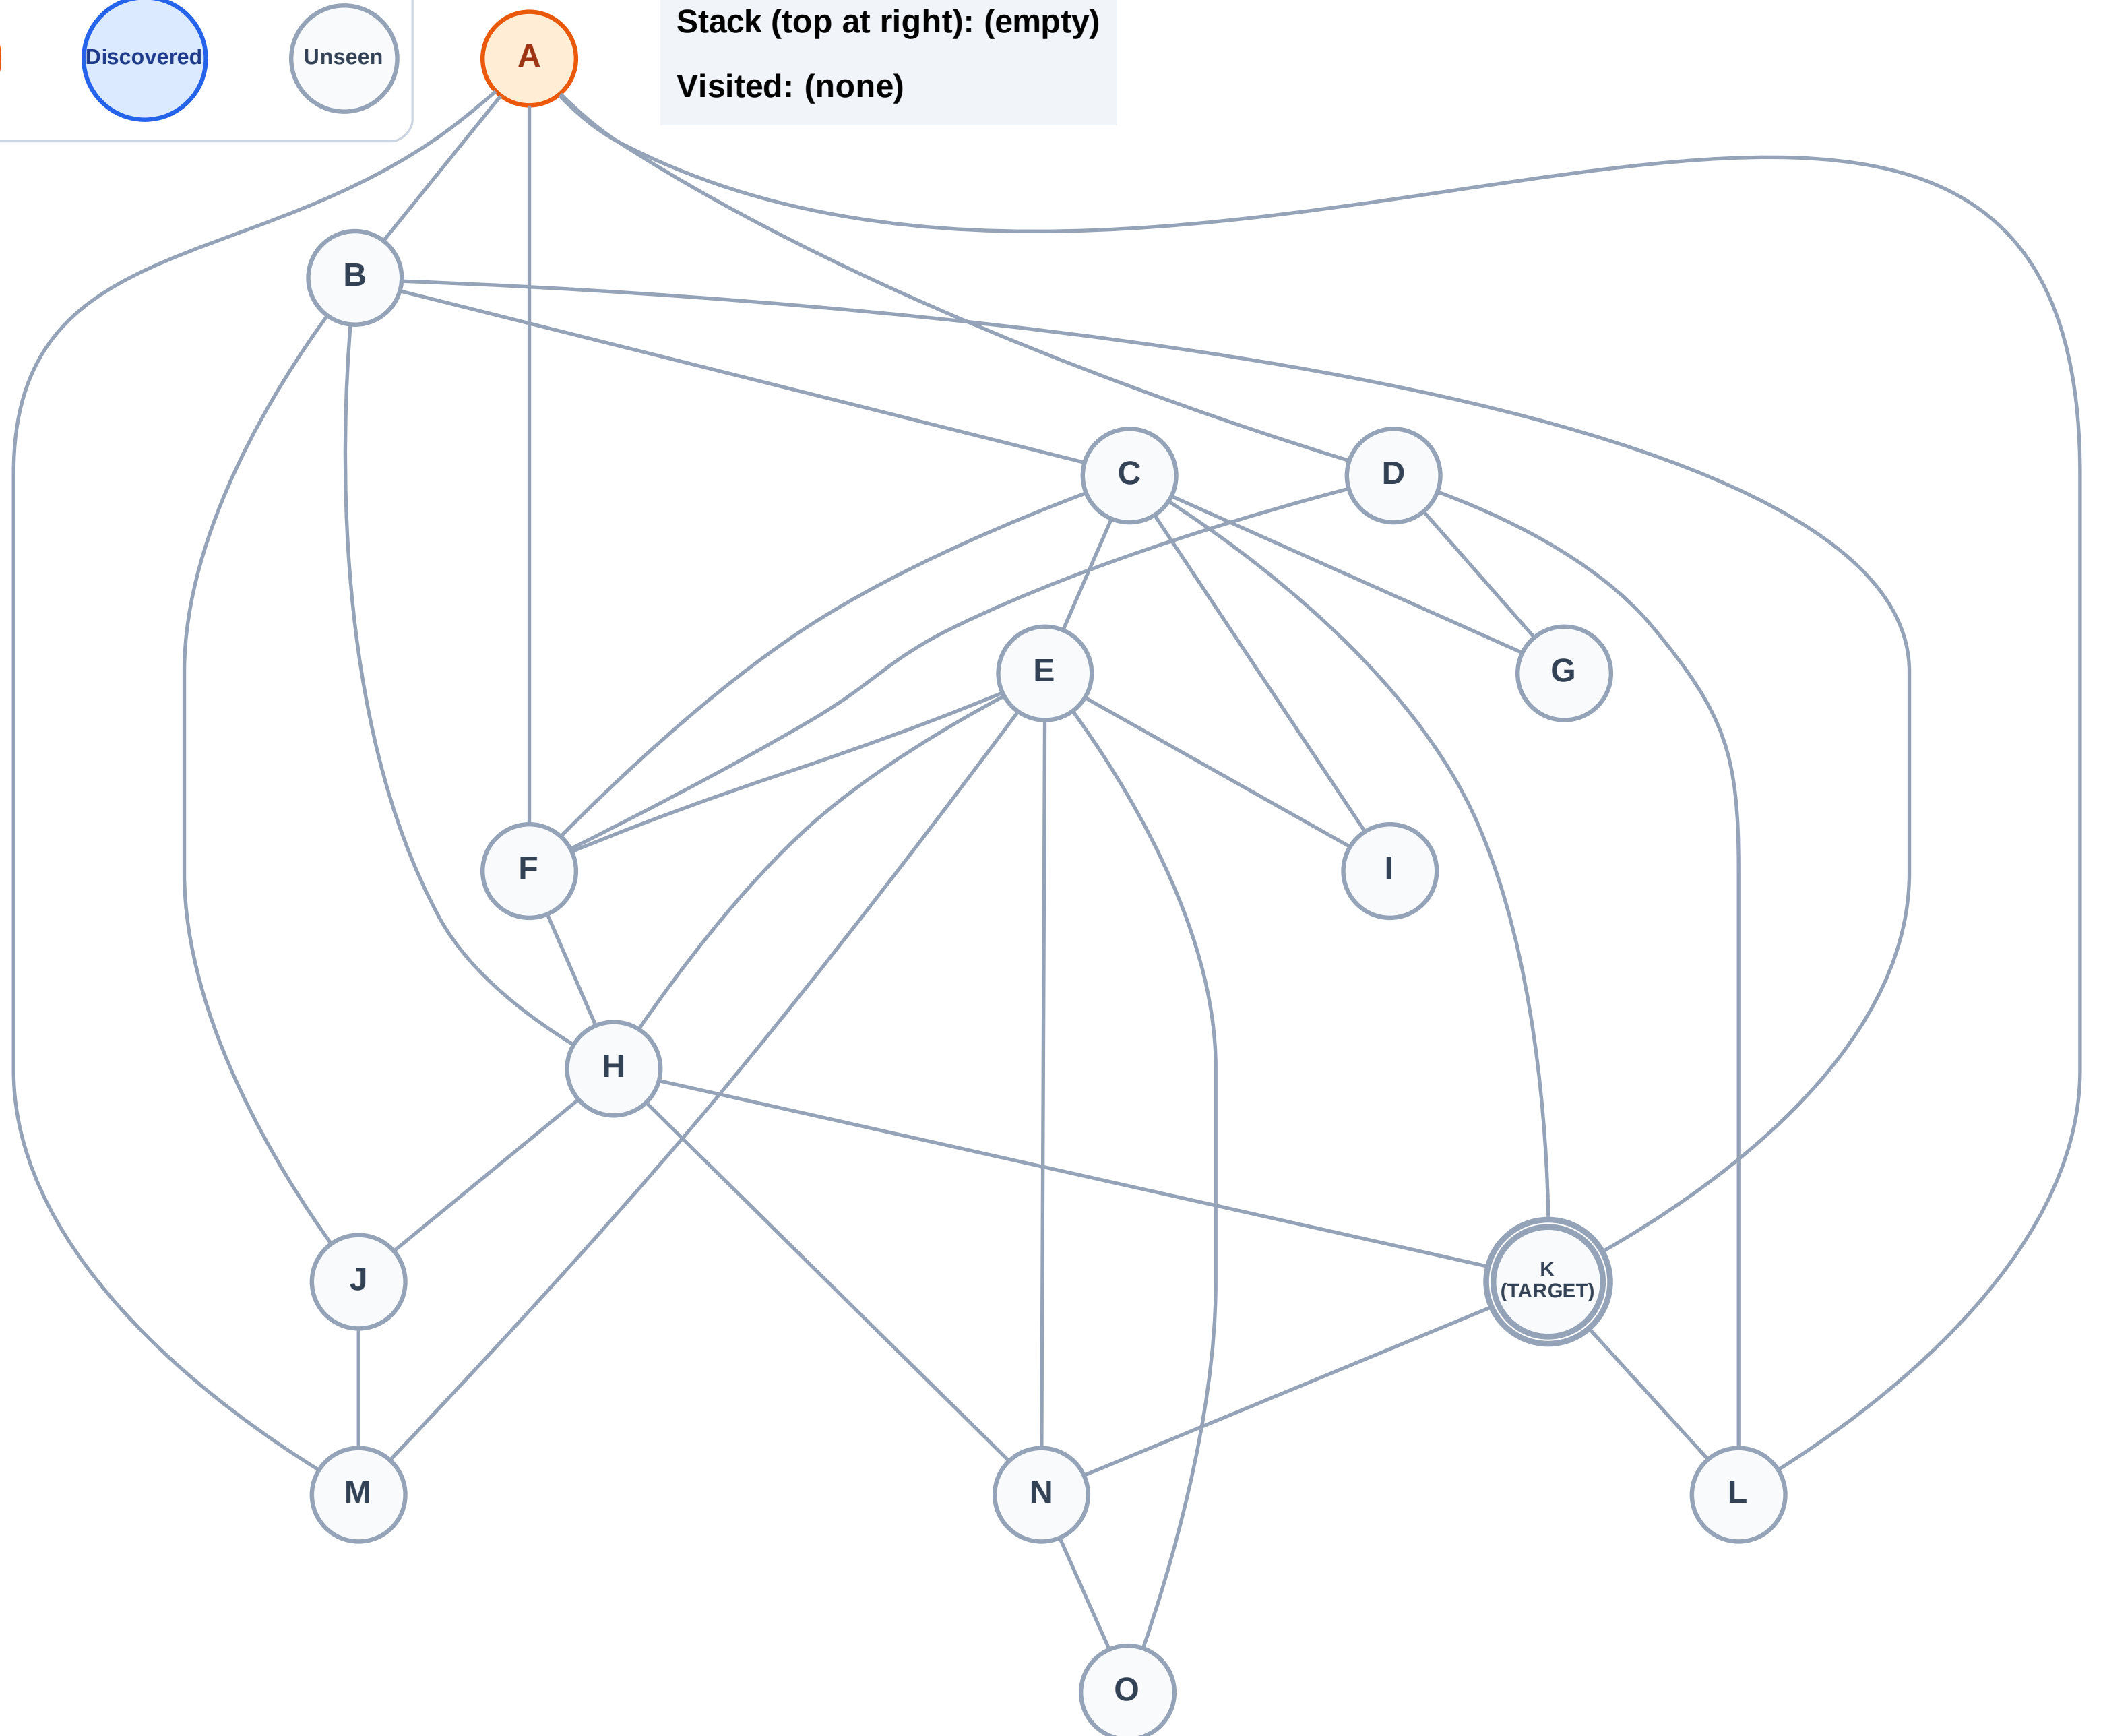


DFS Traversal

Step 3: Discover M, L, F, D, B from A

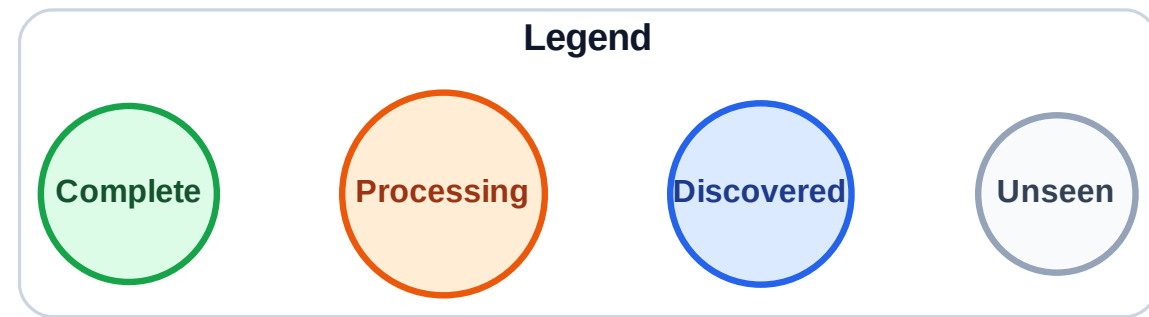

Stack (top at right): M | L | F | D | B

Visited: A

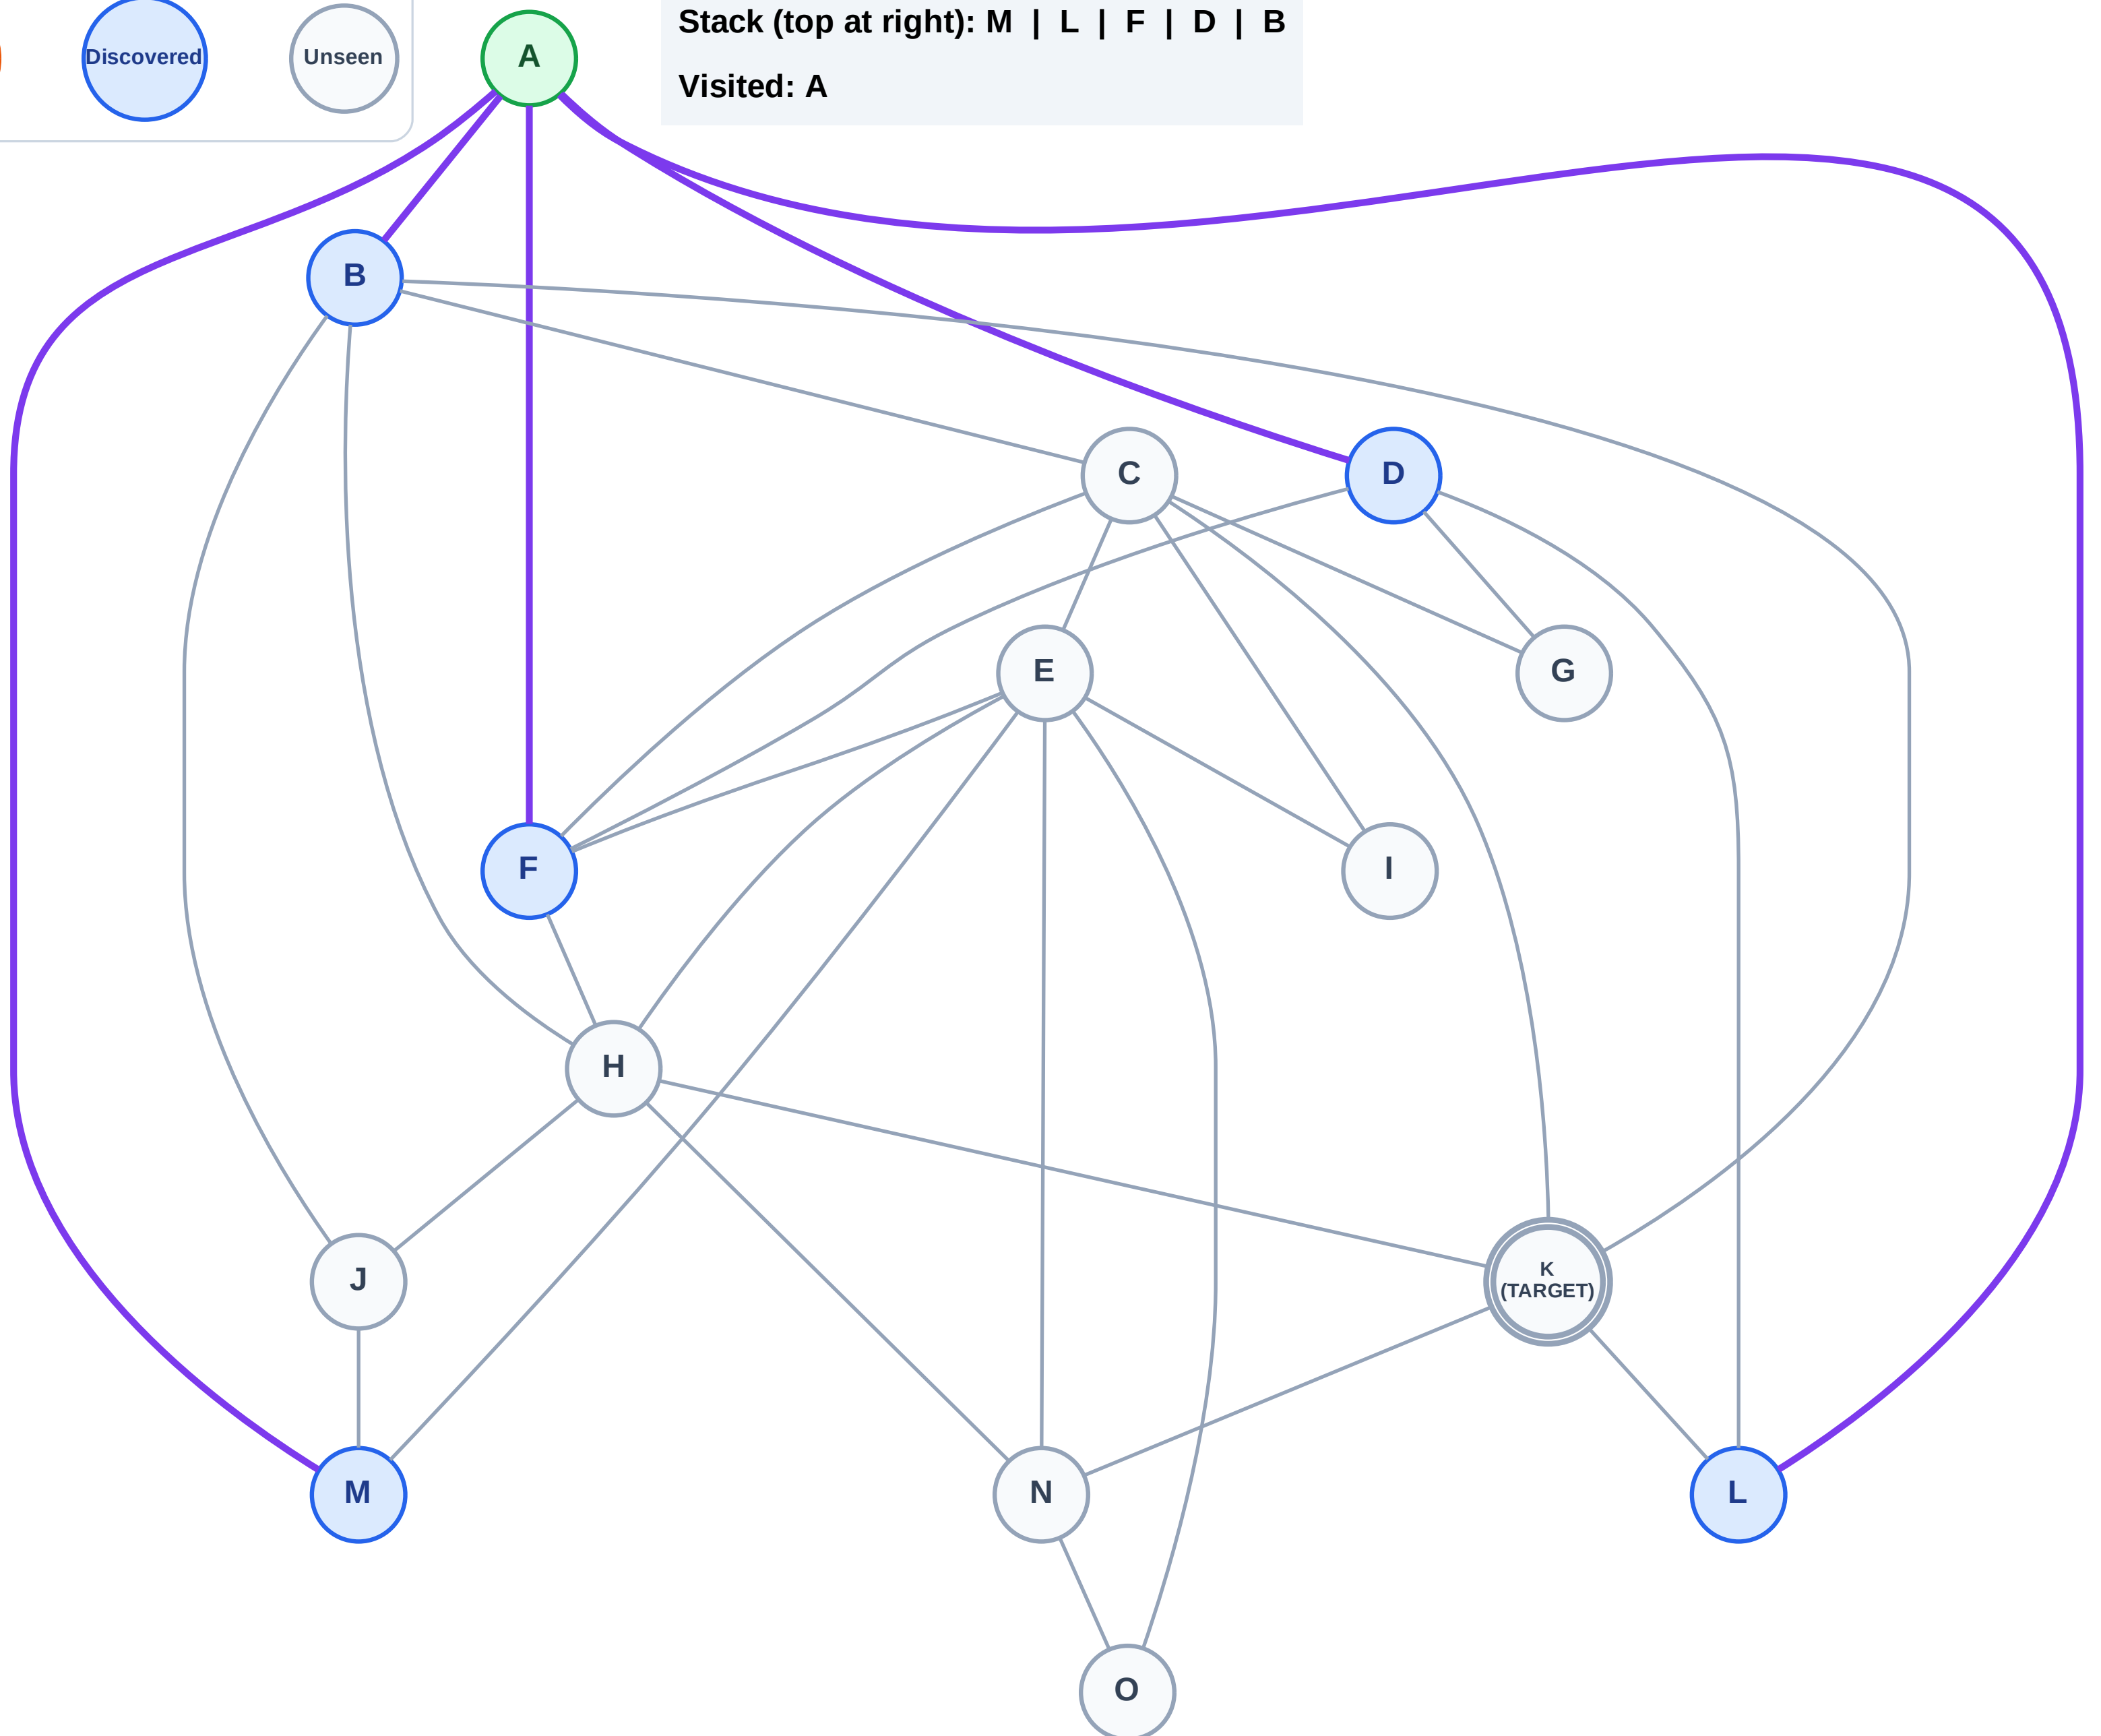

DFS Traversal

Step 4: Process node B

Legend

Complete


Processing

Discovered

Unseen


Stack (top at right): M | L | F | D

Visited: A

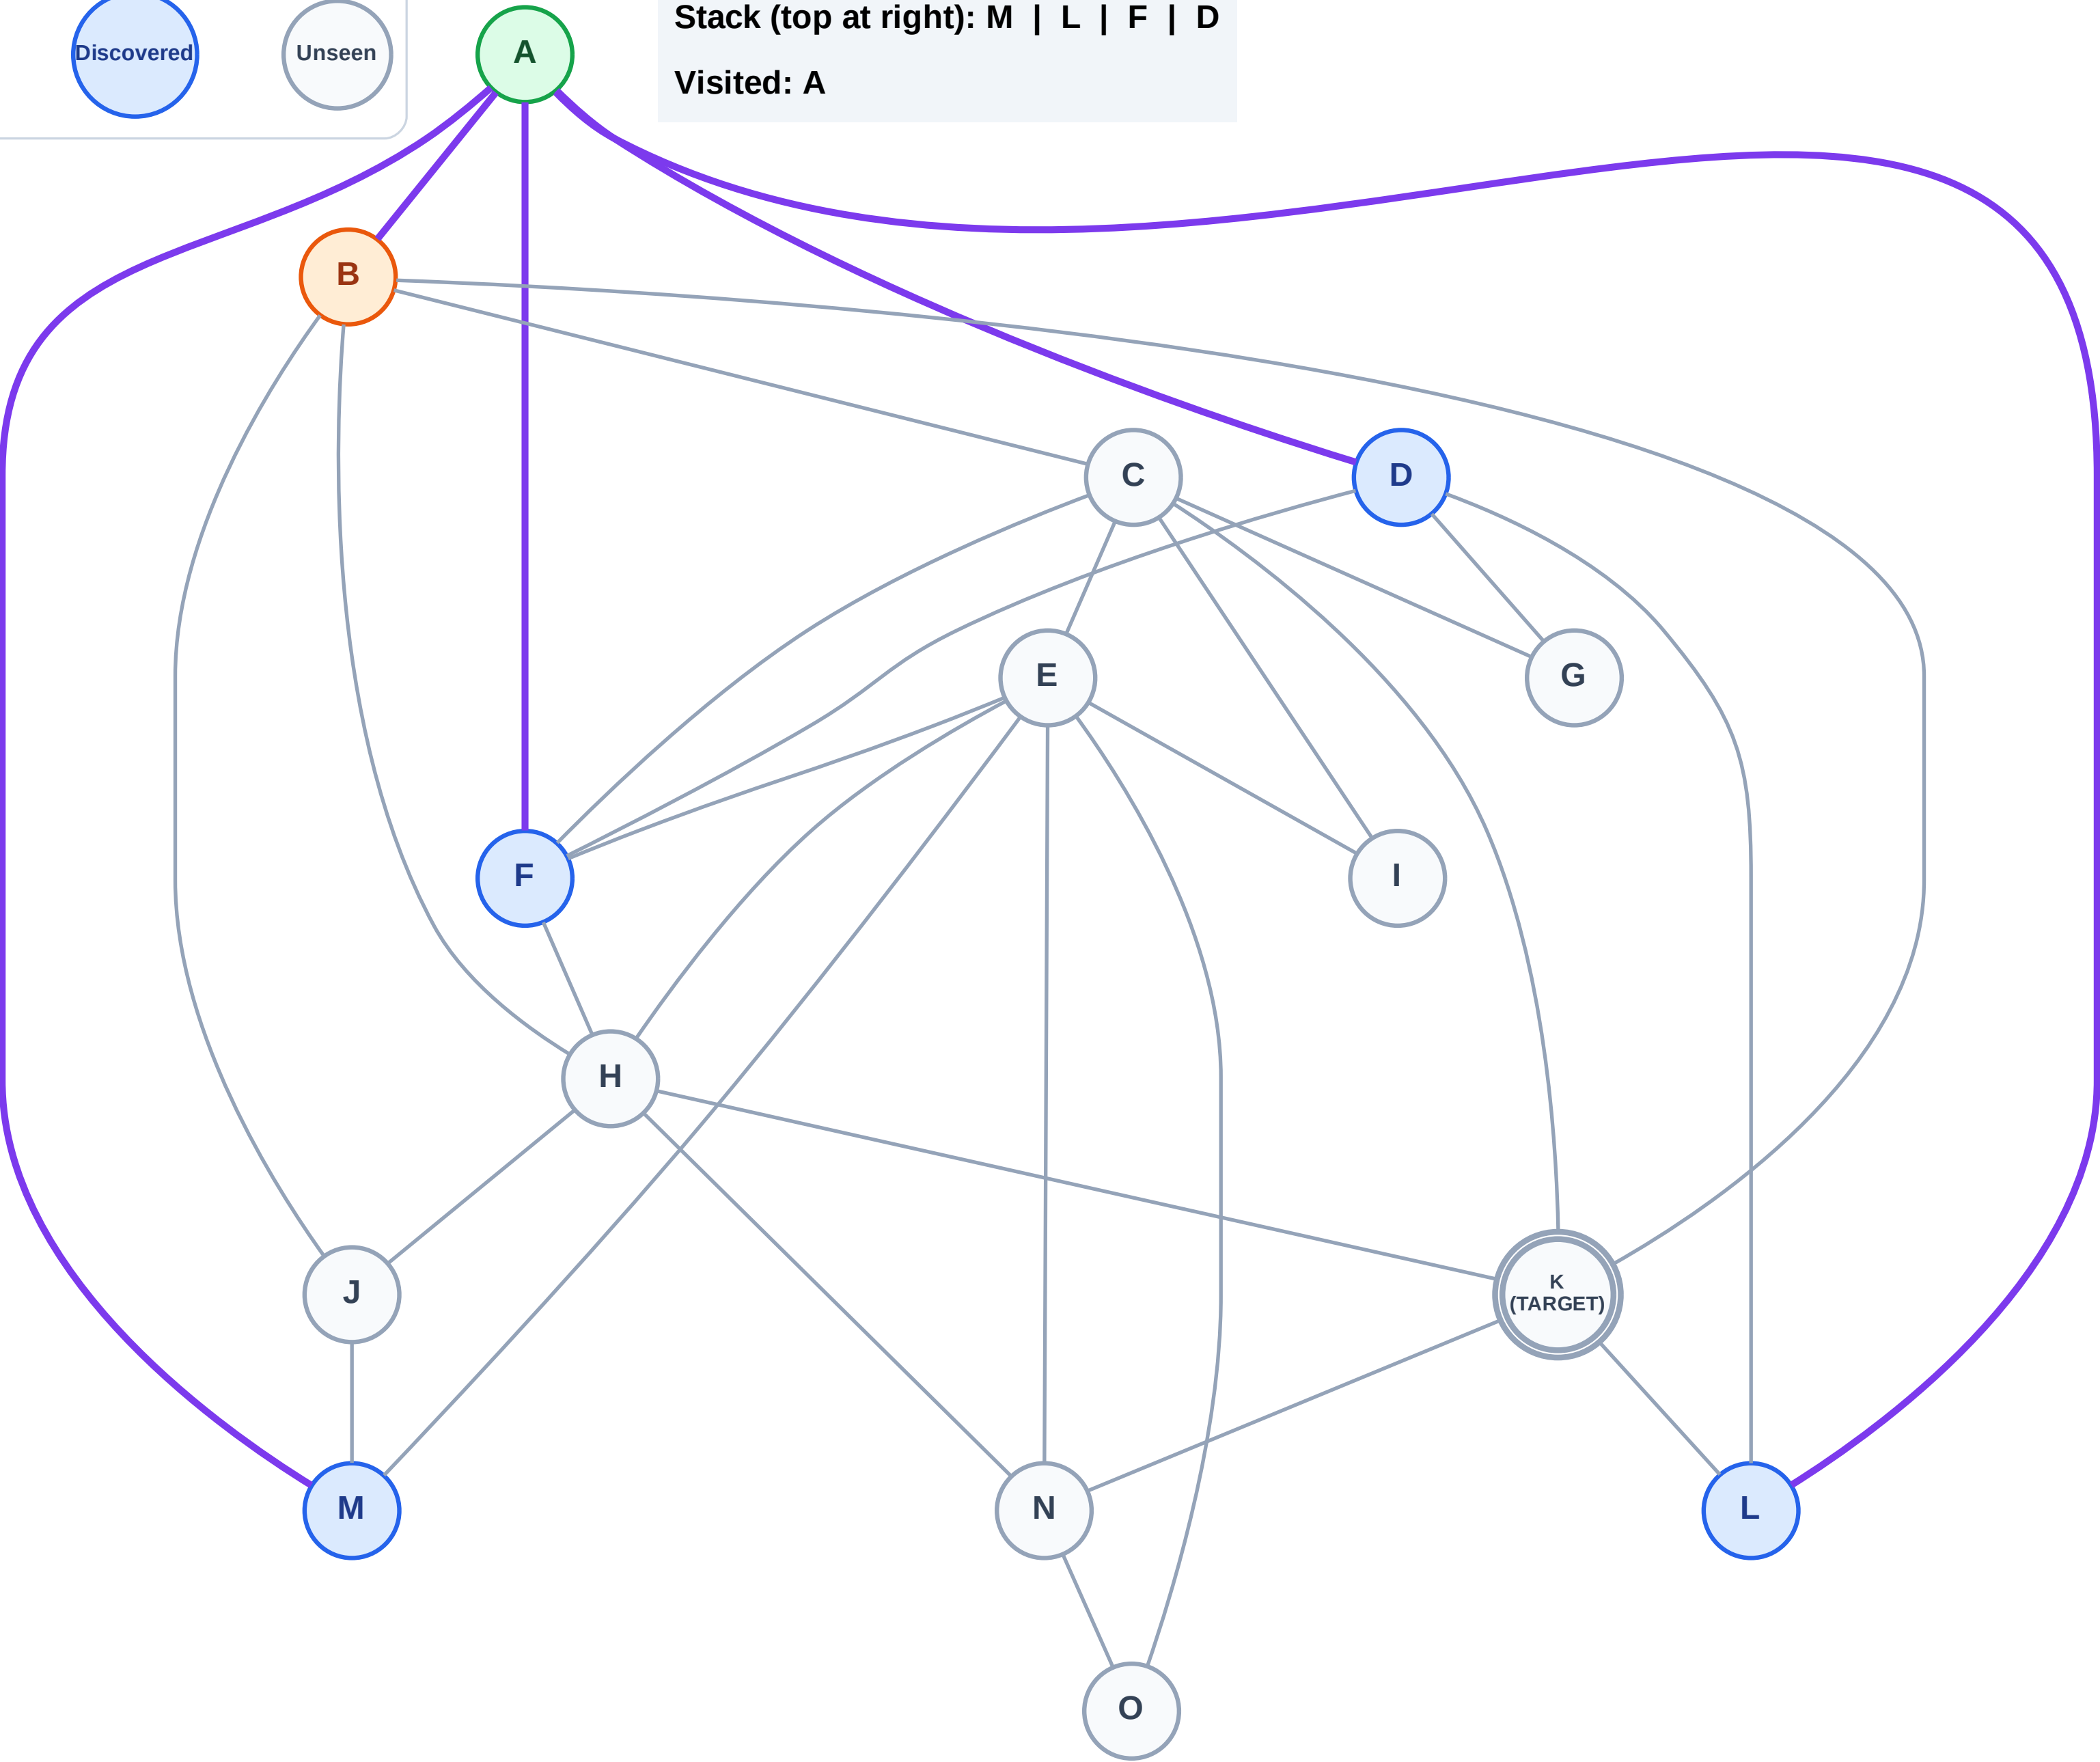

DFS Traversal

Step 5: TARGET NODE K FOUND (SHORT-CIRCUITED)! Path (2 hops): A → B → K

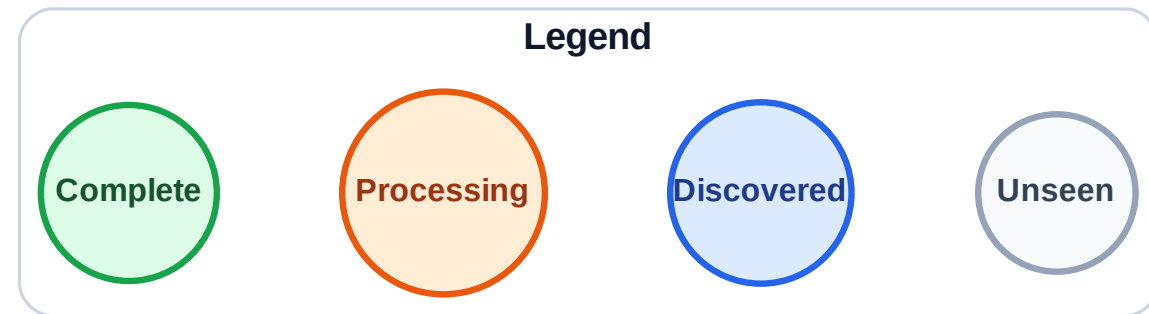

Stack (top at right): M | L | F | D

Visited: A, B, K

