ARGOS PM


UI reference manual

Names for pages, controls and interface patterns

Version 1.4.0 • 20 October 2026

A practical visual dictionary for naming the pages, regions, fields, controls and interaction patterns in ARGOS PM. Use it when writing requirements, reporting issues or discussing design changes.

Based on the real ARGOS PM v1.4.0 application on 20 October 2026: all 12 workspace module pages, the launcher and New Project screen, plus expanded and feedback states. The guide contains 85 terminology entries, 16 reference chapters and 42 unique screenshots.

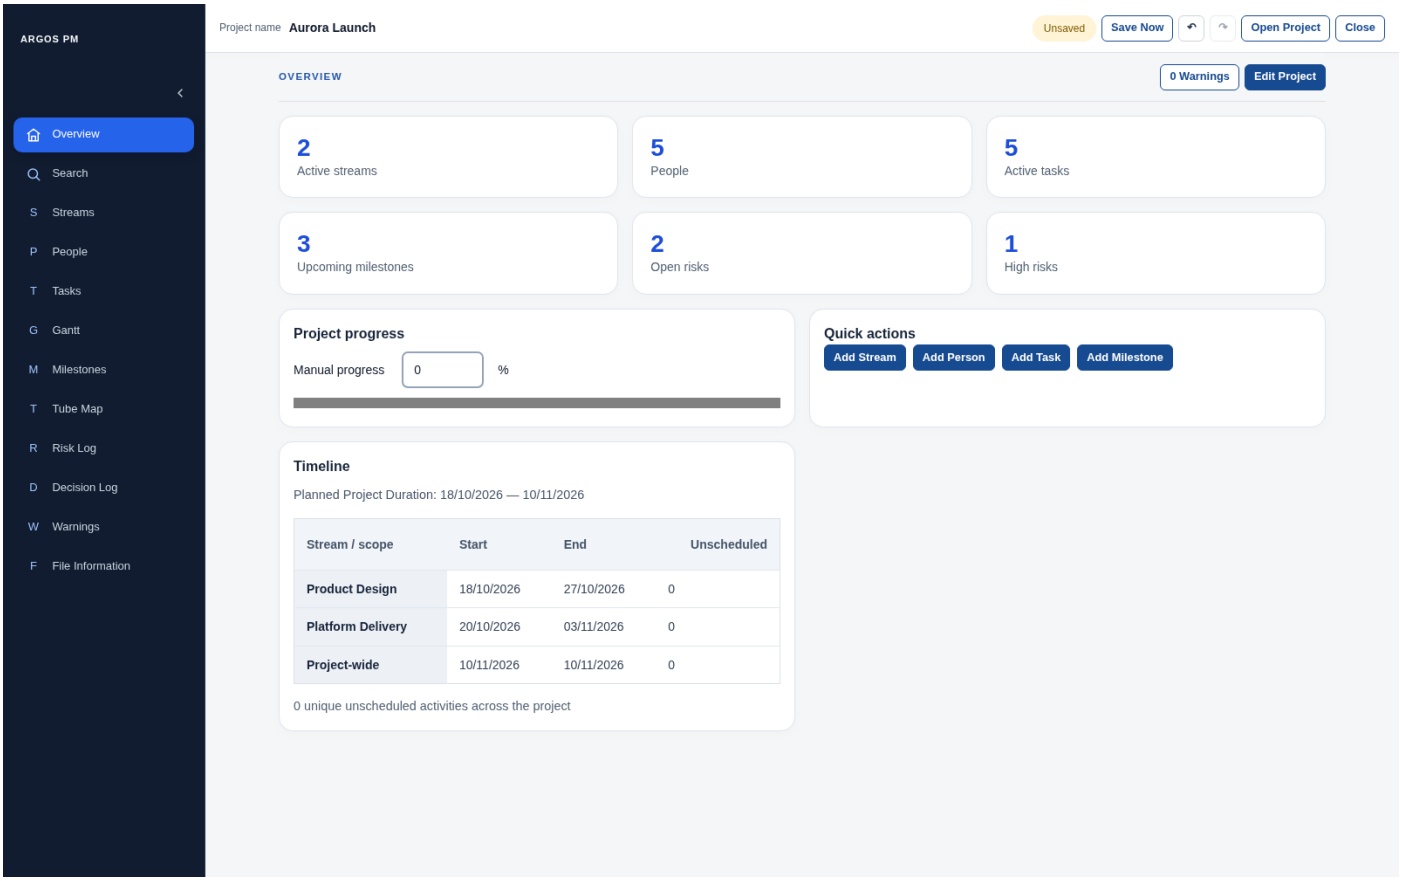

A shared vocabulary for product discussions, requirements and issue reports.

How to use this guide

Step	What to do
Choose the page	Name the module/page first: “On the Milestones page…”
Name the region	Specify the page header, table, row, panel or popover.
Name the control	Use the visible label and the UI term: “the Owner select control”.
Name the record	Use a human-readable ID such as TASK-002, not only its editable name.
Describe the behaviour	State the trigger and expected result: “after correcting Start Date, the warning should clear”.

Use the pattern: page → region → record → control → expected behaviour.

Common distinctions

Terms	How to distinguish them
Module / page / section / control	Risk Log is a module; its displayed screen is the page; Risk actions is a section/panel; Add action is a button.
Heading / label / placeholder / value	RISK LOG is a page heading. Risk title is a field label. Optional role is a placeholder. Maya Chen is a stored value.
Sidebar / navigation rail / tab	The expanded navigation area is a sidebar; its collapsed form is a rail. Its entries are navigation items, not browser tabs.
Select / menu / disclosure	Status is a single-select dropdown. Predecessors expands a multi-select list. Actions opens a row panel; it is not a command menu.
Badge / pill / count	Active and High are badges; Project-wide is a scope pill; Warnings (1) includes a count indicator.
Dialog / popover / inline panel	Project Details is modal. Gantt quick edit is an anchored popover. Decision context is an inline edit panel.
Status / State / save status	Task Status is lifecycle data; People State is Active/Deleted; Saved is the global file save status.
Risk action / row action	A Risk action is a mitigation item. A row action is a UI command such as Duplicate or Delete.

Contents

How to use this guide 2

Terminology glossary 4

Application shell and global controls 8

Launcher 10

New Project 11

Overview 12

Search 15

Streams 17

People 19

Tasks 21

Gantt 24

Milestones 26

Tube Map 29

Risk Log 31

Decision Log 35

Warnings 38

File Information 41

Shared dialogs, alerts and feedback 44

Writing requests and reporting issues 46

Keyboard and interaction reference 47

Capture scope and limitations 47

Terminology glossary

Recommended terms are defined below. Their page-by-page applications follow the glossary.

UI term	Meaning	ARGOS PM example
Application / web app	The complete software product running in the browser.	ARGOS PM
Application shell	The persistent layout surrounding the current page.	Navigation sidebar, application header and main content area
Module	A functional area of the application.	Tasks, People, Risk Log
Page / screen	The user-facing screen currently displayed. In this app the workspace pages are module views within one web application, not separate websites.	The Milestones page
View	A particular way to present information; especially useful for visual plans.	Gantt view; Tube Map view
Navigation sidebar	The persistent navigation area on the left.	Overview through File Information
Navigation item	A control that changes the displayed module. It is not a browser tab.	People in the sidebar
Active navigation item	The item representing the page currently open.	The blue Risk Log item
Navigation rail	The compact sidebar showing icons or letters instead of full labels.	Collapsed sidebar
Sidebar collapse / expand button	The chevron button that switches between sidebar and rail.	Collapse sidebar
Brand / home button	The product name control that returns to the overview.	ARGOS PM at the top of the sidebar
Application header	The persistent horizontal area above the workspace.	Project name and global commands
Global toolbar	Commands that apply to the active project rather than one record.	Save Now, Undo, Redo, Open Project, Close
Page header	The heading and page-specific controls at the top of a module.	Risk Log, Add Risk, Level and Show Deleted
Heading	Text naming a page, section or dialog. Use a prefix to identify its level.	Page heading: MILESTONES; section heading: Risk actions
Section	A meaningful group of content within a page.	The risk matrix section
Panel / card	A visually grouped content container. A panel often holds a larger group; a card a compact summary.	Project file card; decision context panel
Main content area / workspace	The area where the current module is displayed.	The area to the right of the sidebar and below the header
Data table	Records arranged in rows and columns.	The Tasks table
Table header / column header	The header row names the columns; an individual heading is a column header.	Owner column header
Sortable column header	A column header containing a sort control; an arrow indicates direction.	Owner with an up or down arrow

UI term	Meaning	ARGOS PM example
Table row / record	A row is the visual representation; a record is the underlying data item.	The row for TASK-002
Table cell	The intersection of one row and one column; it can contain text, fields or buttons.	TASK-002 Owner cell
Record identifier / human-readable ID	The stable visible reference used to identify a record. It is not the record title.	TASK-001; PERSON-001; RISK-001
Inline editing	Changing a record directly in its table row rather than opening a separate screen.	Editing a Person name
Form	A set of inputs and actions used to enter or edit information.	New Project form
Inline creation form	An add-record form inserted into the current page.	The form revealed by Add Risk
Text field / text input	A single-line typing control.	Risk title; Role
Text area	A multi-line typing control.	Notes; Additional information
Number input	A field for numeric values, sometimes with increment controls.	Task Progress
Field label	Text identifying what an input represents.	New action description
Placeholder text	A hint inside an empty input; it is not a saved value or a field label.	Optional role; ID or title
Select control / dropdown	A control for choosing one value from a list.	Status, Owner, Probability, Impact
Selected option	The choice currently displayed by a select control.	Planned; Maya Chen
Dropdown menu	A popup list of commands. Do not use this name for every expanding control.	Risk Actions is an expander button, not a command dropdown menu
Date field / date picker	A date input with an associated calendar chooser.	Milestone Date
Checkbox	A square control used to check or uncheck an option.	Show Deleted; Include Deleted
Checkbox group	Several related checkboxes allowing multiple selections.	Streams in Decision context
Radio option	A mutually exclusive choice within a selection set.	Project-wide inside the Milestone scope selector
Filter	A control that narrows the displayed data. It does not change the records themselves.	Risk Level; Decision Log Filter
Button	A control that performs an action.	Add Risk; Duplicate
Primary action button	The visually emphasised main action for a form or area.	Add Person; Save
Secondary action button	A supporting action with lower visual emphasis.	Cancel; Duplicate
Destructive action button	A command that removes data or discards work.	Delete; Discard
Submit button	A button that submits the values in a form. The same caption can also appear on the button that opens the form.	Add Risk inside the creation form

UI term	Meaning	ARGOS PM example
Icon button	A button represented primarily by an icon, with an accessible name.	Undo; Redo; dialog close
Row actions	Commands applying to one table record.	Duplicate and Delete beside a milestone
Disabled control	A control that is unavailable in the current state.	Save Now when saved; Add action when the description is blank
Status badge / chip	A compact visual indicator showing a state or category; not automatically an input.	Active; Low; Medium; High
Scope pill	A rounded label displaying the scope of an item. The containing selector provides the interaction.	Project-wide; Product Design
Count indicator	A number describing the quantity of related items.	Warnings (1); Actions (2); 1 predecessor
Save-status indicator	The persistent project save state in the application header; it is not a toast.	Saved; Unsaved; Save failed
Disclosure / expander	A control that reveals or hides additional content; often includes a triangle or chevron.	Dependencies summary; Actions (2)
Expandable multi-select selector	A disclosure containing choices that can select several related items.	Milestone scope and predecessor selectors
Expandable row details panel	Additional content revealed below a table row.	Risk actions
Inline edit panel	A larger editor shown within the page or table.	Decision context
Popover	A small floating panel anchored to the item that opened it; it does not dim the whole page.	Gantt Quick edit task
Modal dialog	An overlay that dims the background and requires the user to deal with it before returning to the page.	Project Details; Discard unsaved changes?
Dialog backdrop	The dimmed layer behind a modal dialog.	The grey overlay behind Project Details
Alert / inline alert	An important message placed within the page flow, often with recovery actions.	Save failed with Retry
Inline status message	Feedback shown near the affected control or item.	Action deleted with Undo
Toast	A transient floating notification. Do not call a persistent save indicator or inline alert a toast.	No toast is shown in this guide
Empty state	An explanatory area shown when no records or results are available.	No project warnings; No results
Tooltip	Short explanatory text displayed on hover or focus when provided by the control/browser.	The sidebar item title
Focus indicator	The outline or highlight showing which control is ready for keyboard interaction.	The blue outline around a focused text field
Hover state	A temporary visual change while the pointer is over a control; distinct from the active page.	A shaded inactive navigation item
KPI / summary card	A compact metric summarising the project. Some cards here also navigate to their module.	5 Active tasks

UI term	Meaning	ARGOS PM example
Progress bar	A visual representation of completion, distinct from the numeric input controlling a percentage.	Project progress
Risk matrix / matrix cell	A probability-by-impact grid; each cell shows severity and count.	High probability / High impact
Timeline / date axis	The time scale used to position work or checkpoints.	Gantt dates; Tube Map Monday date axis
Lane / group	A horizontal grouping of planned work by stream or project scope.	Product Design lane
Task bar / milestone marker	A duration bar for a task; a point marker for a milestone.	Blue Gantt bar; milestone diamond
Dependency connector / predecessor	A connector shows a relationship; a predecessor is the earlier item that another item depends on.	TASK-001 before TASK-002
Today line	A line marking the current date in a visual plan.	The vertical line in Gantt and Tube Map
Targeted row / navigation highlight	The highlighted record reached through Search, Warnings or another view.	TASK-002 after opening a warning
Scroll area / sticky toolbar	A region whose content scrolls; a sticky toolbar remains visible while its related content moves.	Workspace and module controls
Audit history / audit viewer	The recorded change data and the UI used to inspect it.	File Information change table
CSV export	A downloadable table-data file, distinct from a project save.	Export CSV in File Information
File picker	The browser/operating-system dialog used to choose a local file. It is outside the app page.	Open Project or Choose File & Create
Title versus heading	A record title is a data value. A heading names an area of the interface. The browser tab title is separate again.	Risk title field versus RISK LOG page heading
Eyebrow / introductory label	A short context label above a heading.	Local project workspace on the launcher
Field validation message	Feedback next to a field explaining missing or invalid input.	A required project name or invalid date range
Bulk action	A command applied to several selected records.	Delete selected (n) in Tasks
Page action toolbar	The group of controls for the current page, usually in its page header.	Add Risk, Level and Show Deleted
Drawer	A panel sliding in from an edge. Do not use it for the persistent navigation sidebar or an inline table editor.	No drawer is shown in these captured pages

Application shell and global controls

These elements remain in place while the main content changes. Use application header for the top project area and page header for the controls belonging to one module.

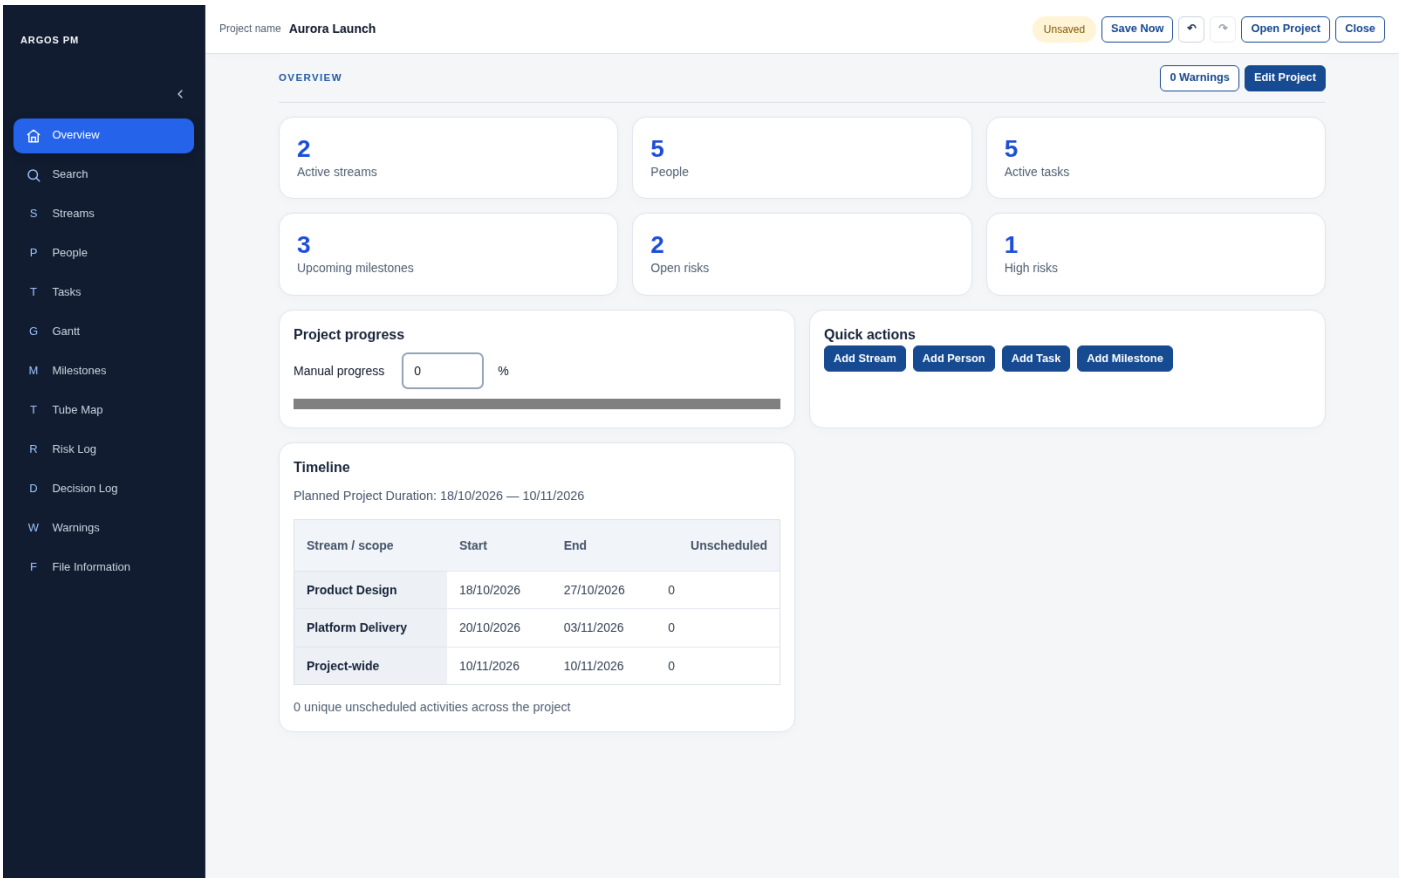


Figure 1. Expanded navigation sidebar, application header and main content area. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
ARGOS PM	Brand / home button	Returns to Overview.
Left navigation area	Navigation sidebar	Contains the 12 module navigation items.
Blue navigation item	Active navigation item	Identifies the current page; a hover highlight is different.
Chevron	Sidebar collapse / expand button	Switches between sidebar and compact navigation rail.
Project name + Aurora Launch	Field label + project name display	Identifies the open project; this header display is not a name-edit field.
Saved / Unsaved / Save failed	Save-status indicator	Persistent feedback about the project file.
Save Now	Global action button	Saves dirty project data; disabled when there is nothing to save.
Undo and Redo icons	Icon buttons	Operate on project edit history; may be disabled.
Open Project and Close	Global action buttons	Open a local project or return to the launcher.
Right-hand workspace	Main content area	Holds the current module page and may scroll.

Usage note: Say “application header” rather than “top title bar”; “page header” rather than “second header”.

Usage note: The module views live inside the same web application. Sidebar items are navigation items, not tabs.

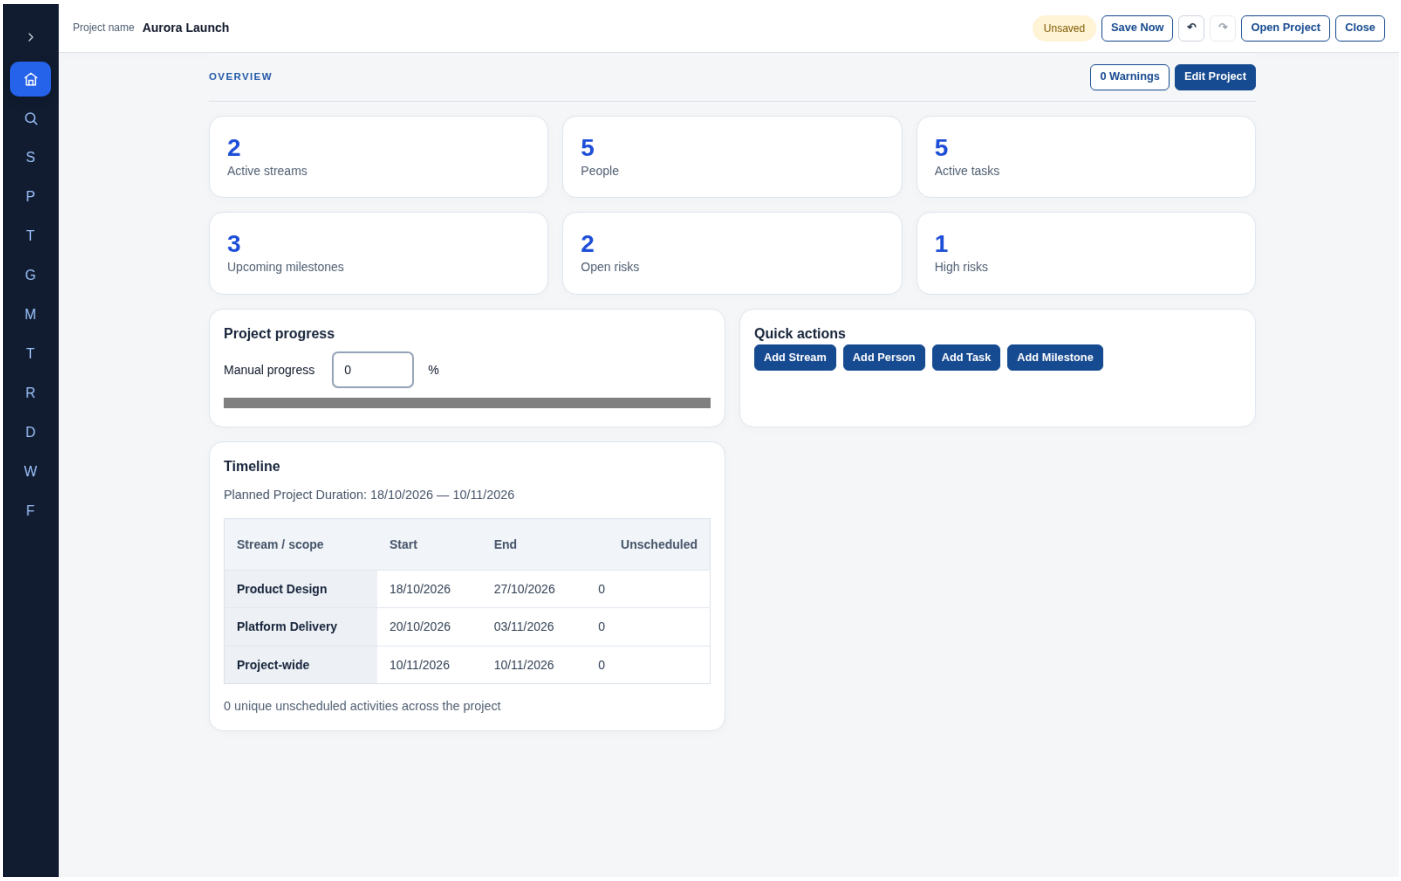


Figure 2. Compact navigation rail after collapsing the sidebar. (1600 × 1000; zoom for field detail.)

Launcher

The entry screen before a project is active. The current v1.4.0 launcher heading says Project Manager; the workspace uses ARGOS PM branding.

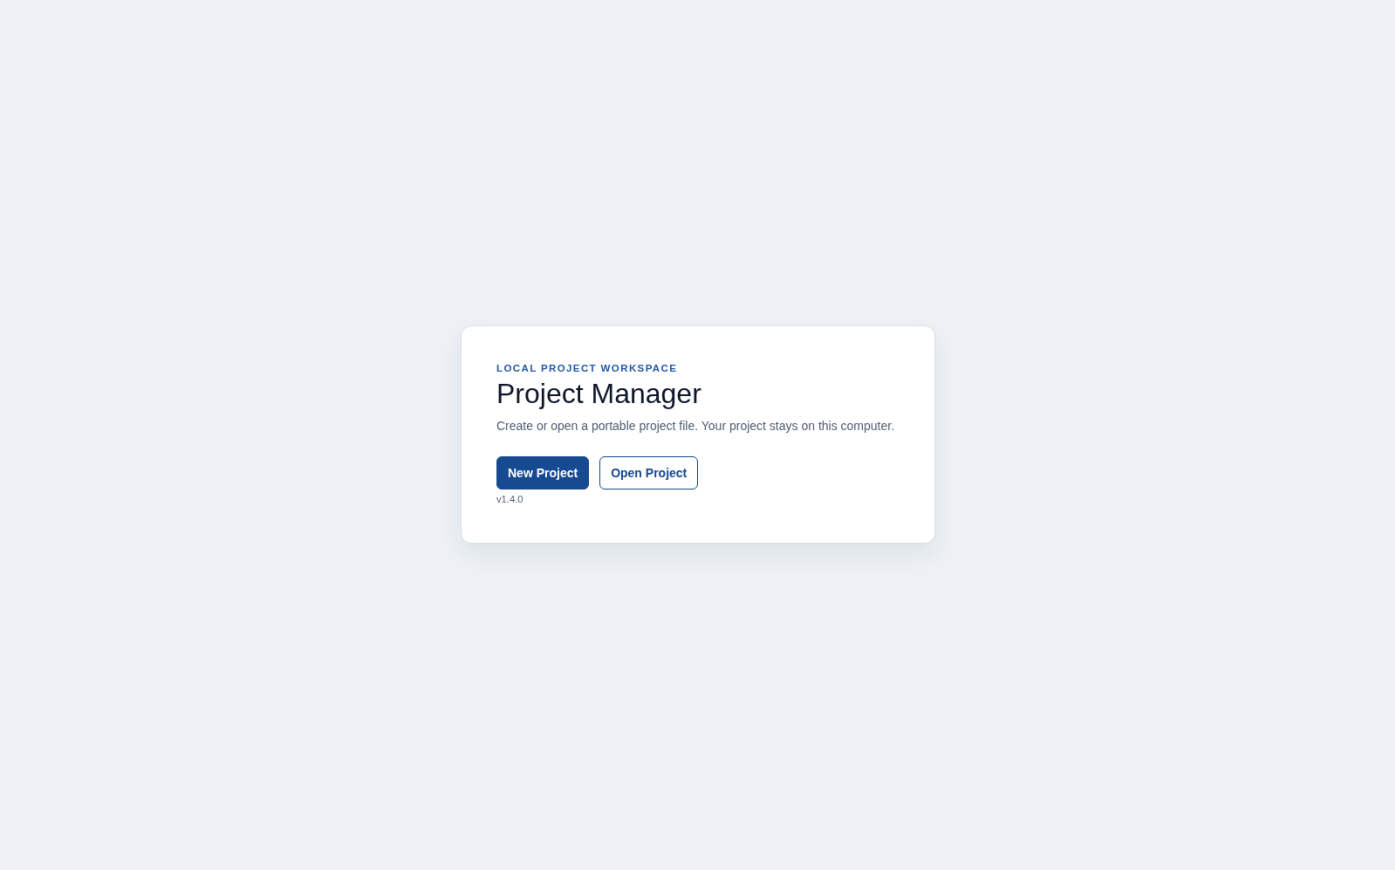


Figure 3. Launcher with project commands and application version. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
Project Manager	Screen heading	Names the entry screen in this build.
Local project workspace	Eyebrow / introductory label	Short context above the main heading.
Explanatory paragraph	Supporting text	Explains local project files.
New Project	Primary action button	Opens the project creation screen.
Open Project	Secondary action button	Invokes the file picker for an existing PMP file.
v1.4.0	Version label	Identifies the runtime version.

New Project

A standalone creation screen, rather than a table-based inline creation form.

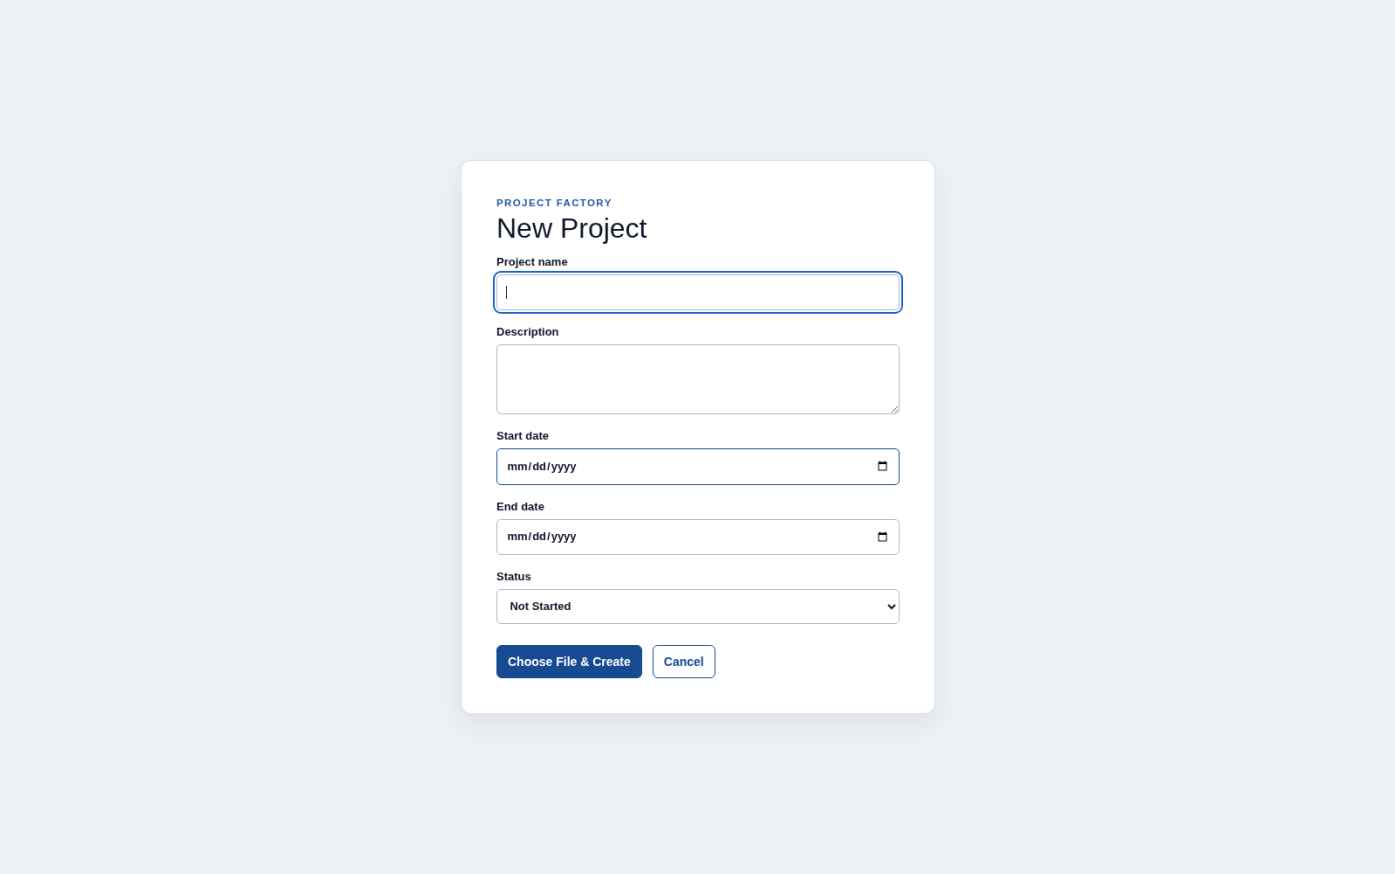


Figure 4. Project creation form before a file is selected. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
New Project	Page heading	Names the screen.
Project name	Required text field	The name used for the new project.
Description	Text area	Optional multi-line project description.
Start date and End date	Date fields / date pickers	Define the planned project date range.
Status	Select control	Choose one project lifecycle status.
Choose File & Create	Submit button	Validates the draft, requests a local file and creates the project.
Cancel	Secondary action button	Returns to the launcher without creating a project.

Usage note: A validation message shown next to a field is a field validation message, not a notification or a tooltip.

Usage note: The native file picker is not a page of ARGOS PM and is not pictured here.

Overview

The project summary page combines metrics, quick actions, progress and a timeline.

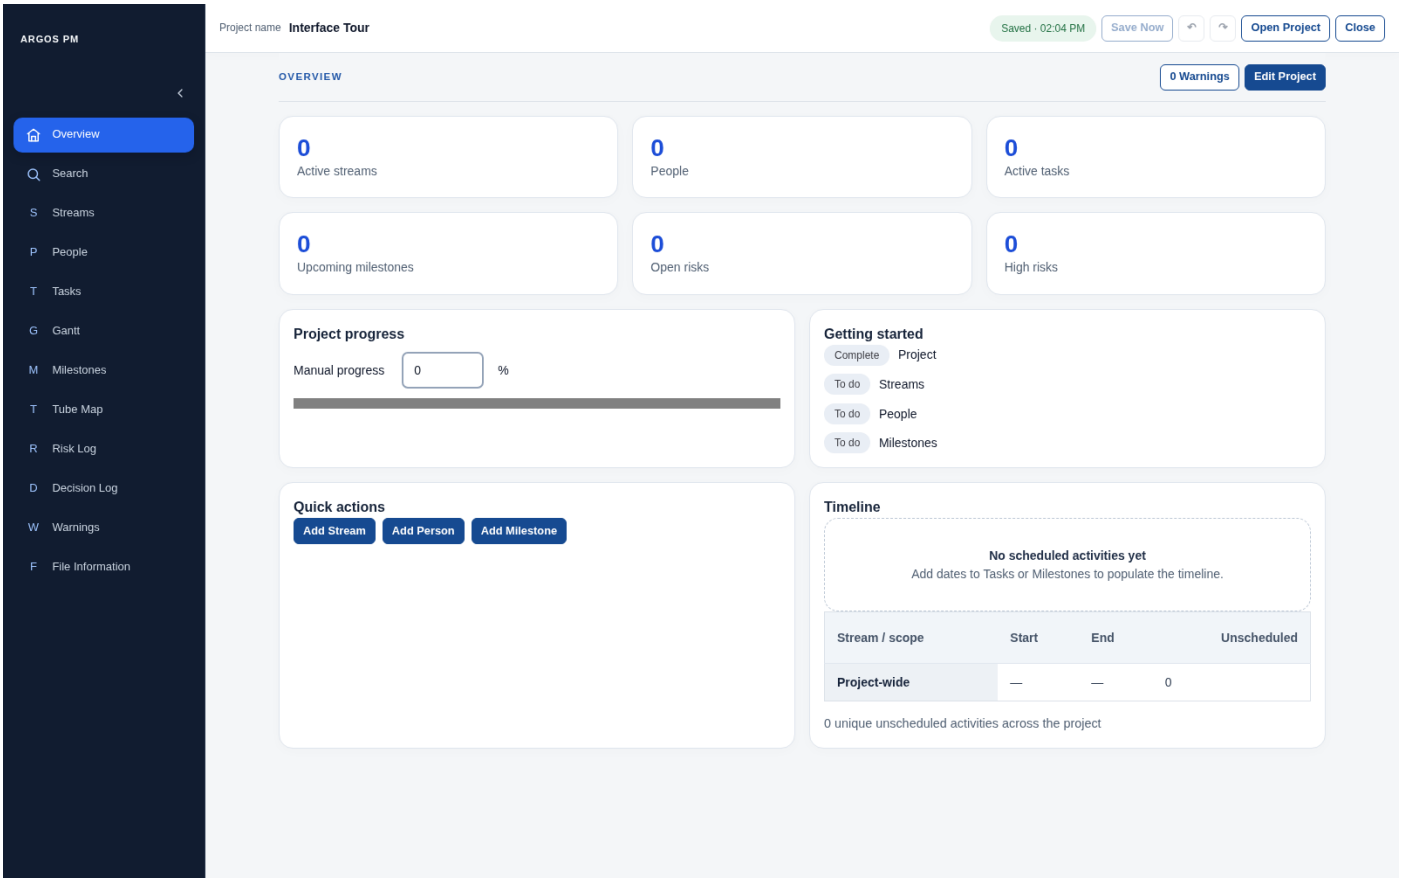


Figure 5. New-project Overview with the Getting started checklist. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
OVERVIEW	Page heading	Names the active page.
0 Warnings / 1 Warning	Count-bearing navigation button	Opens the Warnings page.
Edit Project	Page action button	Opens Project Details as a modal dialog.
Active streams, People, Active tasks, Upcoming milestones, Open risks, High risks	KPI / summary cards	Display project counts and navigate to the related module.
Project progress	Section heading	Introduces progress controls.
Manual progress percentage	Number input	Edits the project percentage.
Horizontal completion indicator	Progress bar	Displays completion visually.
Getting started	Checklist section	Appears while the new project is incomplete; items show readiness states.
Quick actions	Action group	Provides shortcuts to record creation.
Timeline	Summary table section	Shows the planned range, scoped rows and unscheduled counts.

What you see	UI term	Meaning / behaviour
Project Details	Modal dialog	Contains project fields and the Show progress information checkbox.

Usage note: Project Details uses a modal dialog with a backdrop and a close icon. Its Close/Done path commits valid edits; it is not a discard action.

Usage note: Do not call the KPI cards table cells. Do not confuse the percentage input with its progress bar.

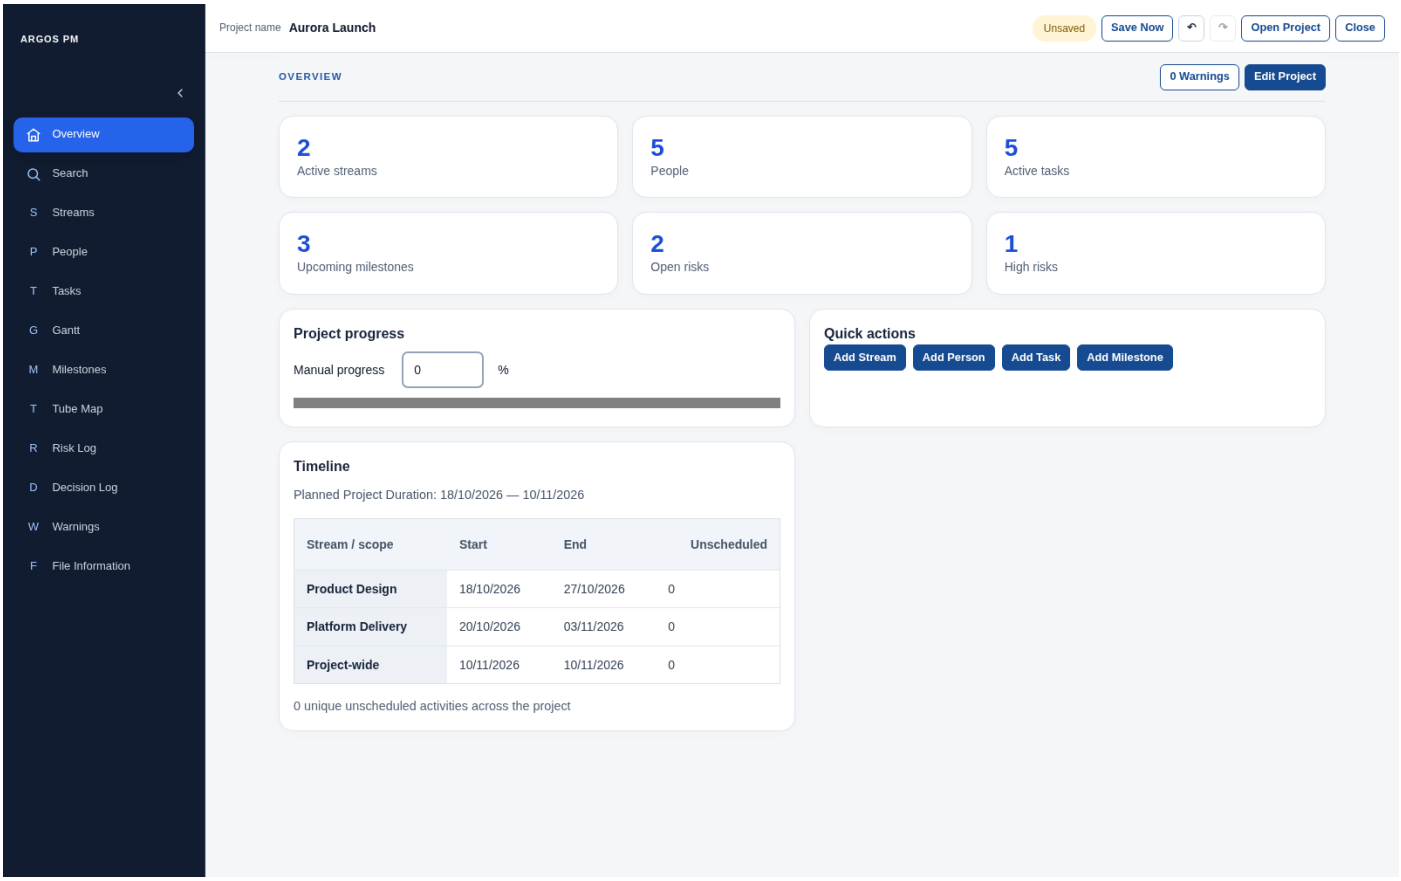


Figure 6. Populated Overview with summary cards and the timeline. (1600 × 1000; zoom for field detail.)

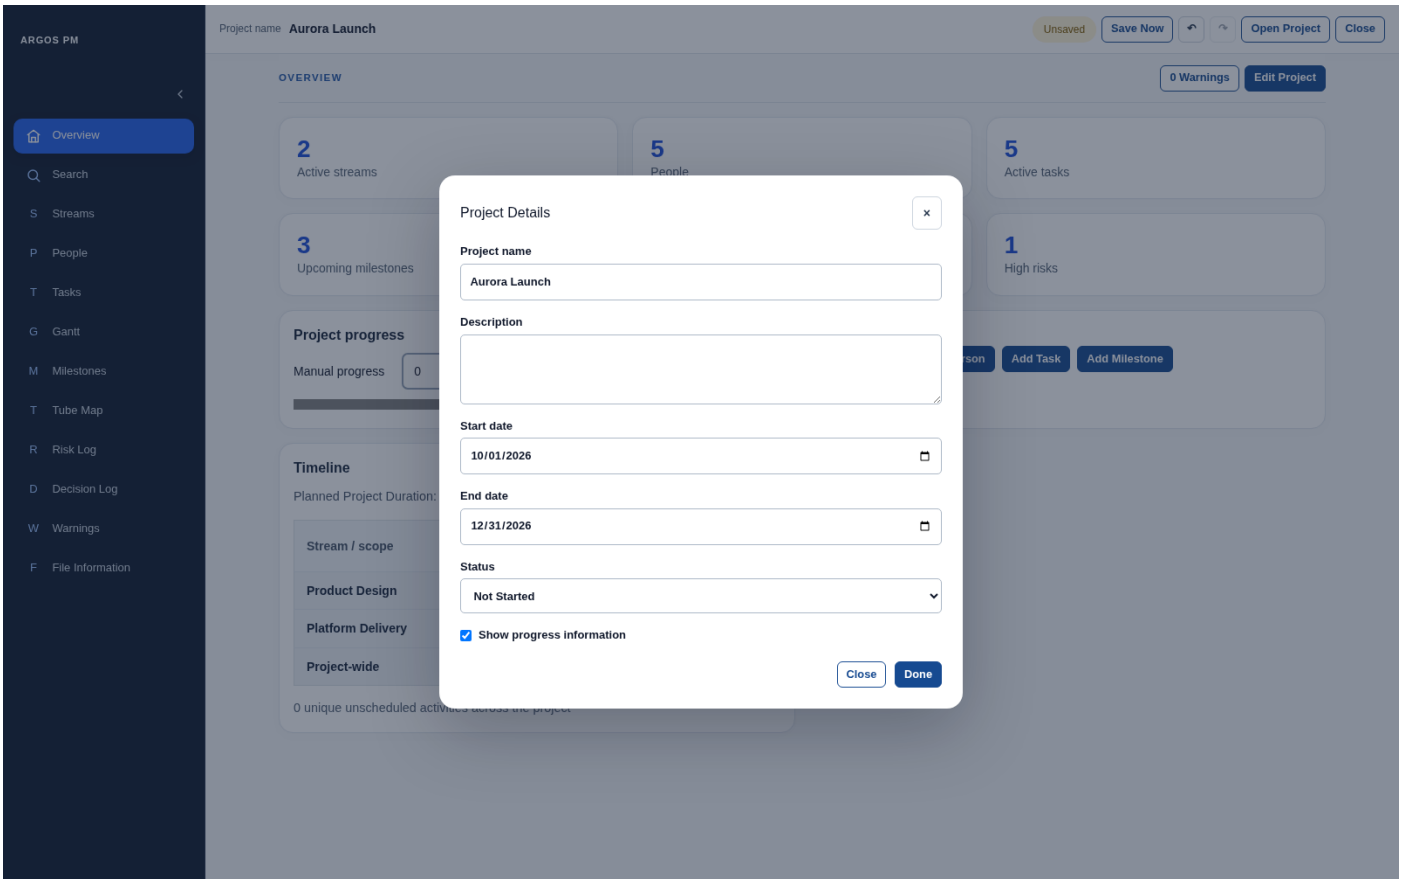


Figure 7. Project Details modal opened with Edit Project. (1600 × 1000; zoom for field detail.)

Search

Project-wide search finds records by their name, title or visible ID.

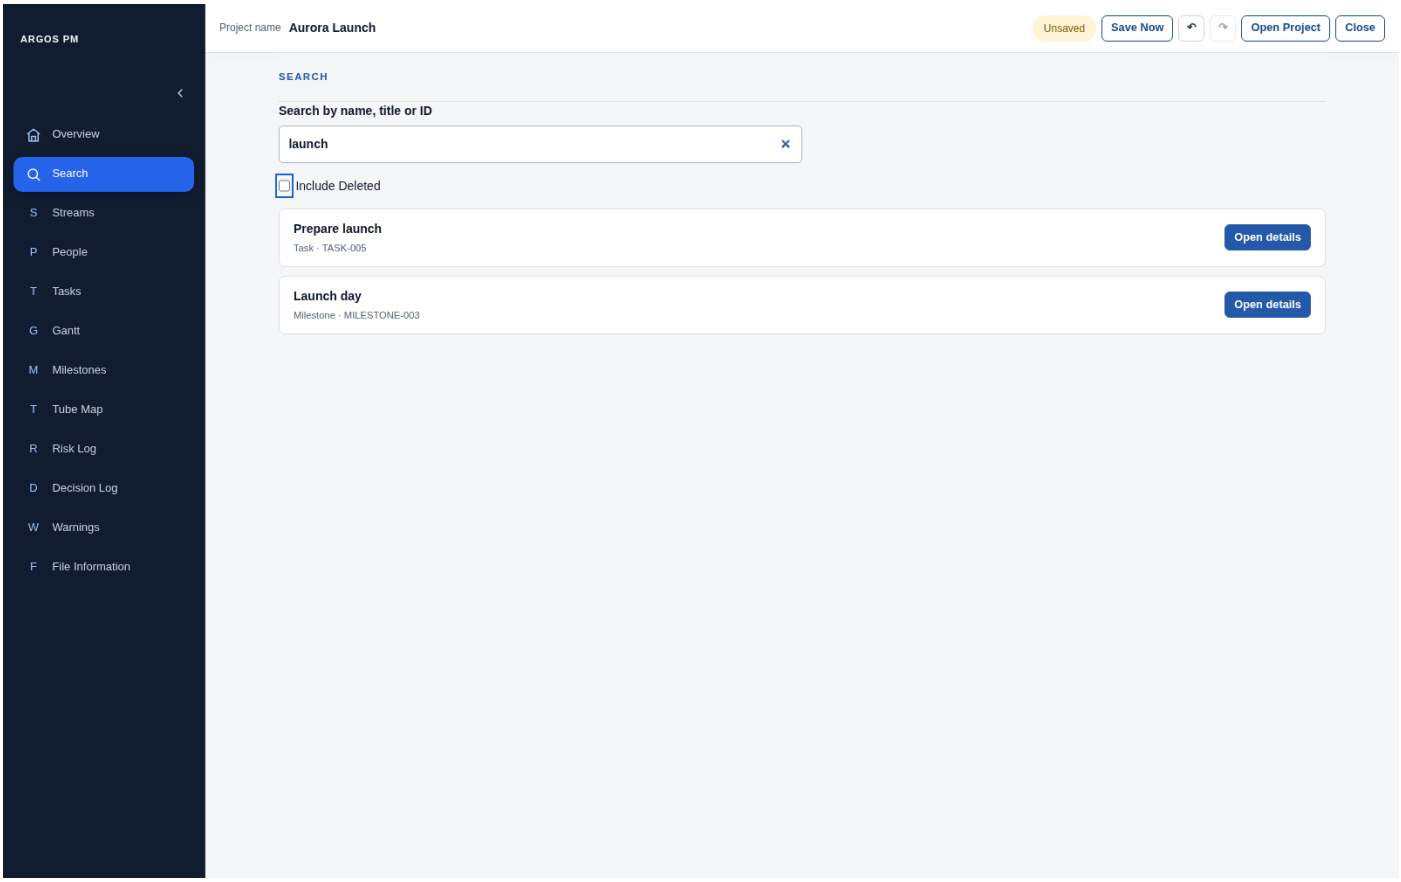


Figure 8. Search results for launch. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
SEARCH	Page heading	Names the module view.
Search by name, title or ID	Field label	Describes the project-wide search field.
For example TASK-001	Placeholder text	An example, not a saved search value.
Search input	Search field	Filters results as text changes.
Include Deleted	Checkbox	Allows soft-deleted records to appear.
Result name with type and ID	Search result summary	Identifies the matching entity.
Open details	Navigation action button	Opens the relevant page and targets the record.
Deleted	Status badge	Marks a soft-deleted result.
Restore	Record action button	Restores a deleted result.
No results / Find anything in this project	Empty state	Explains an empty query or no matching records.

Usage note: Search is cross-module. The Decision Log Filter field only filters decisions.

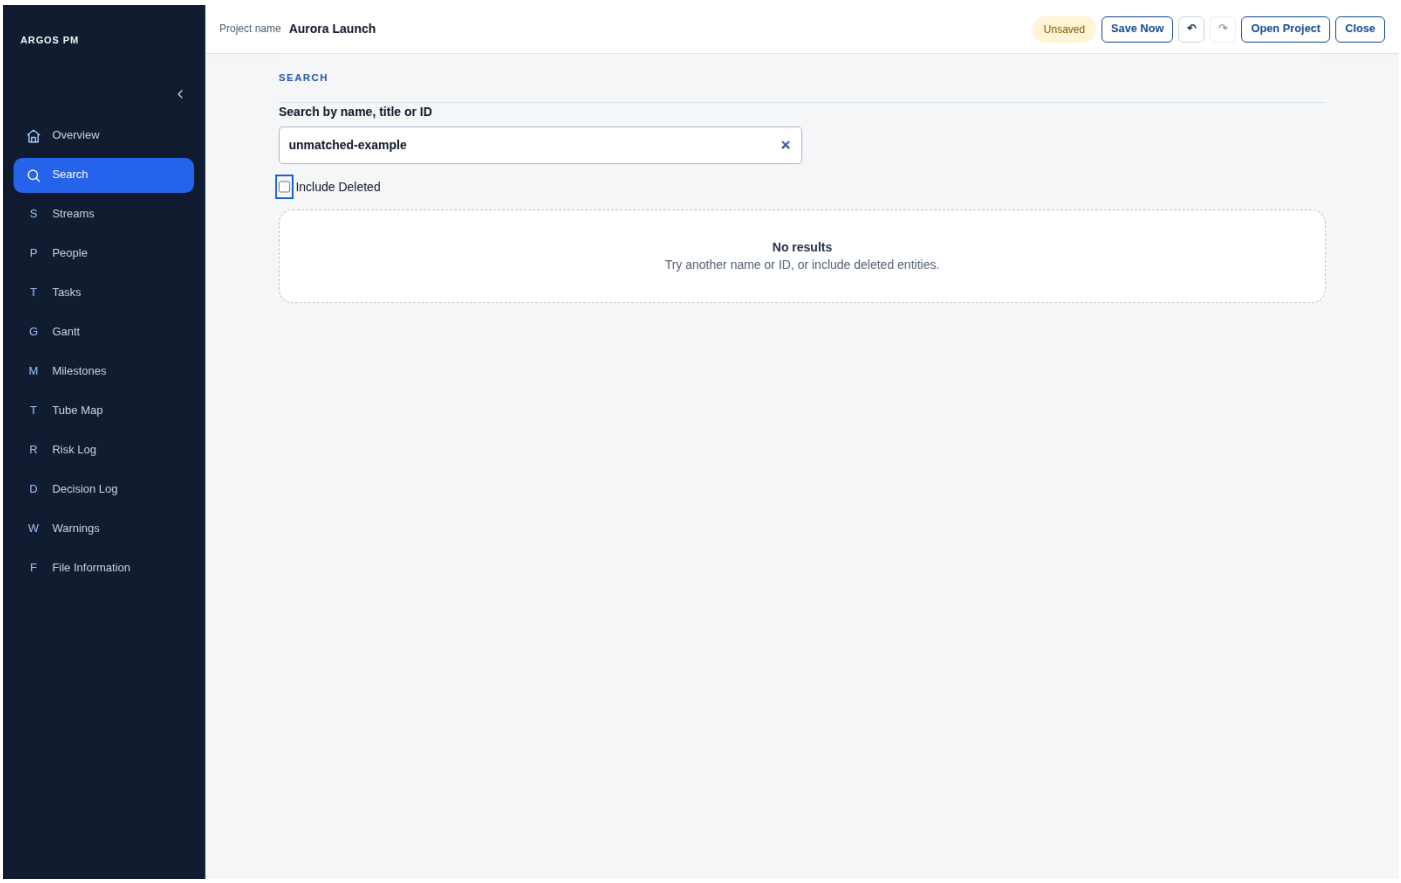


Figure 9. No-results empty state. (1600 × 1000; zoom for field detail.)

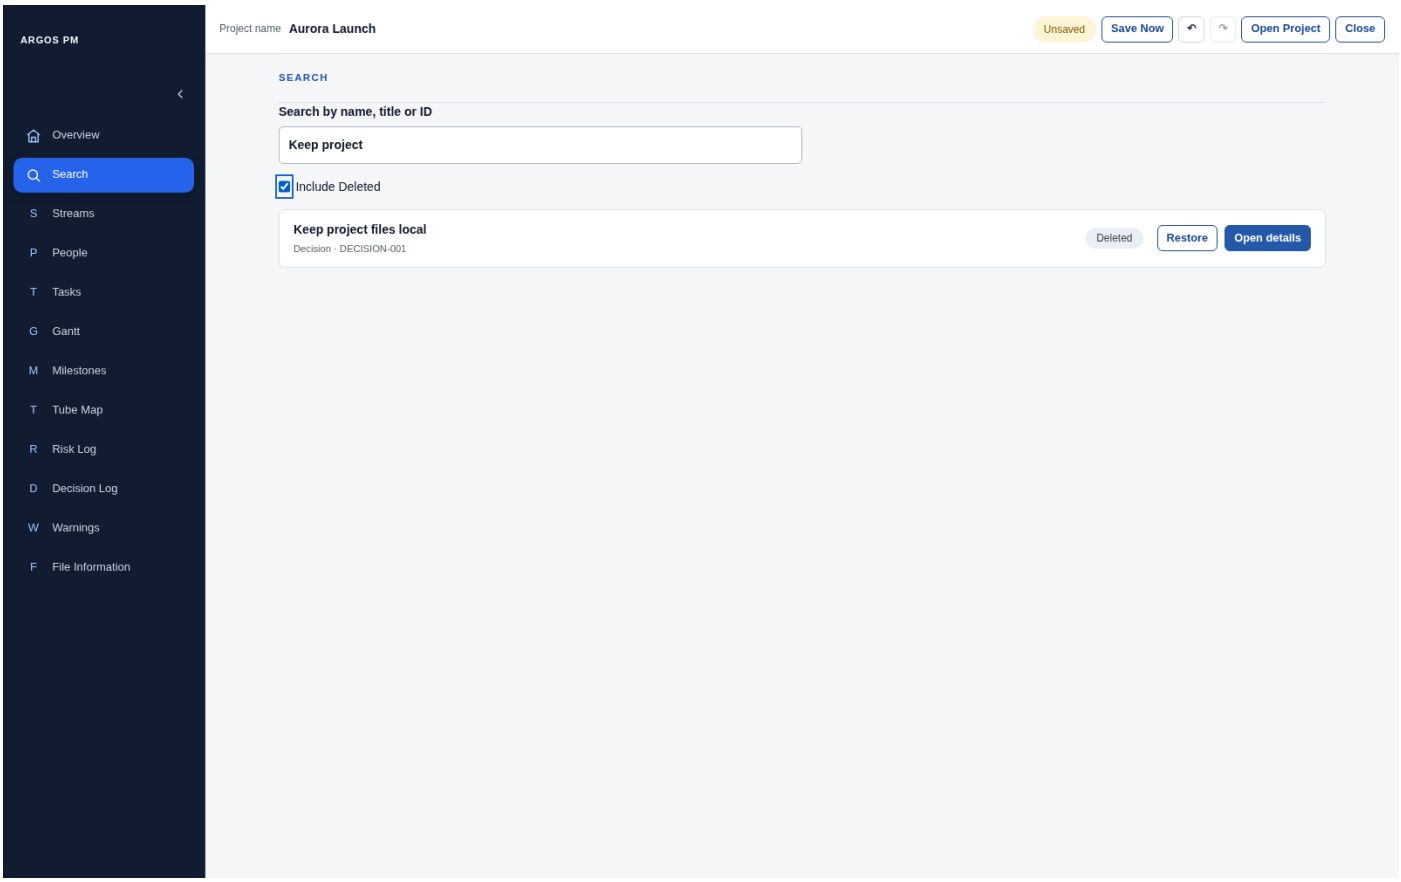


Figure 10. Deleted result included explicitly, with Deleted badge and Restore action. (1600 × 1000; zoom for field detail.)

Streams

Streams organise project work into delivery groups. Most table fields support inline editing.

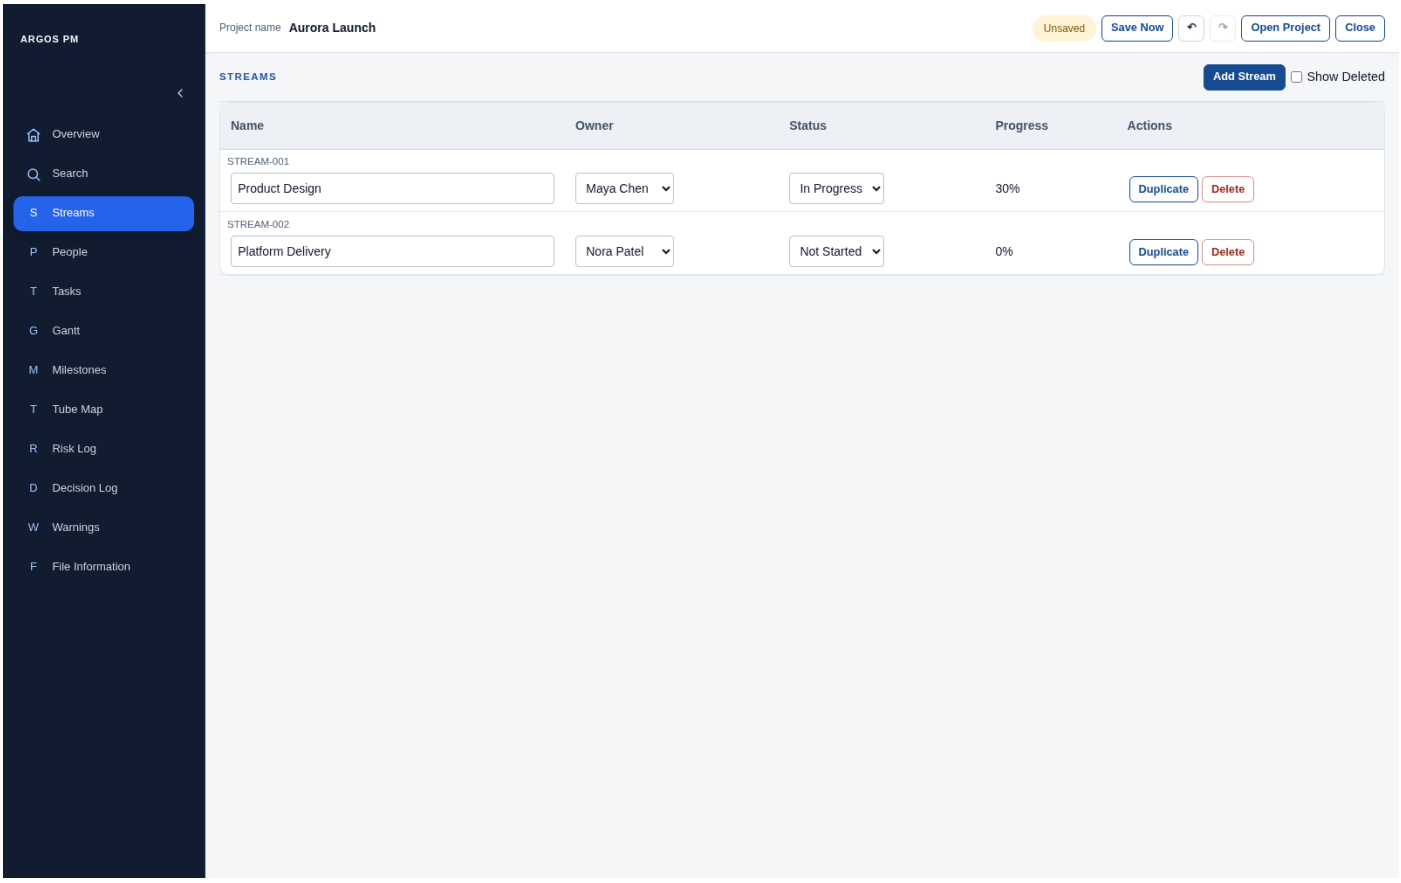


Figure 11. Streams table with owners, lifecycle status and calculated progress. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
STREAMS and Add Stream	Page heading and create action	The top button reveals the creation form.
Show Deleted	Checkbox filter	Includes soft-deleted Streams.
Name, Owner, Status, Progress	Column headers / sort controls	Identify the table columns; meaningful sortable headers change row order.
STREAM-001	Record identifier	Identifies the Stream independently of its name.
Stream name	Inline text field	Edits the record name.
Owner	Select control	Assigns one active Person or Unassigned.
Status	Select control	Edits the Stream lifecycle status.
Progress percentage	Calculated value	Derived from tasks; not a manual percentage field in this table.
Duplicate / Delete / Restore	Row actions	Copy, soft-delete or restore the record.
Stream name + Add Stream + Cancel above table	Inline creation form	Its Add Stream button submits the draft; Cancel closes it.

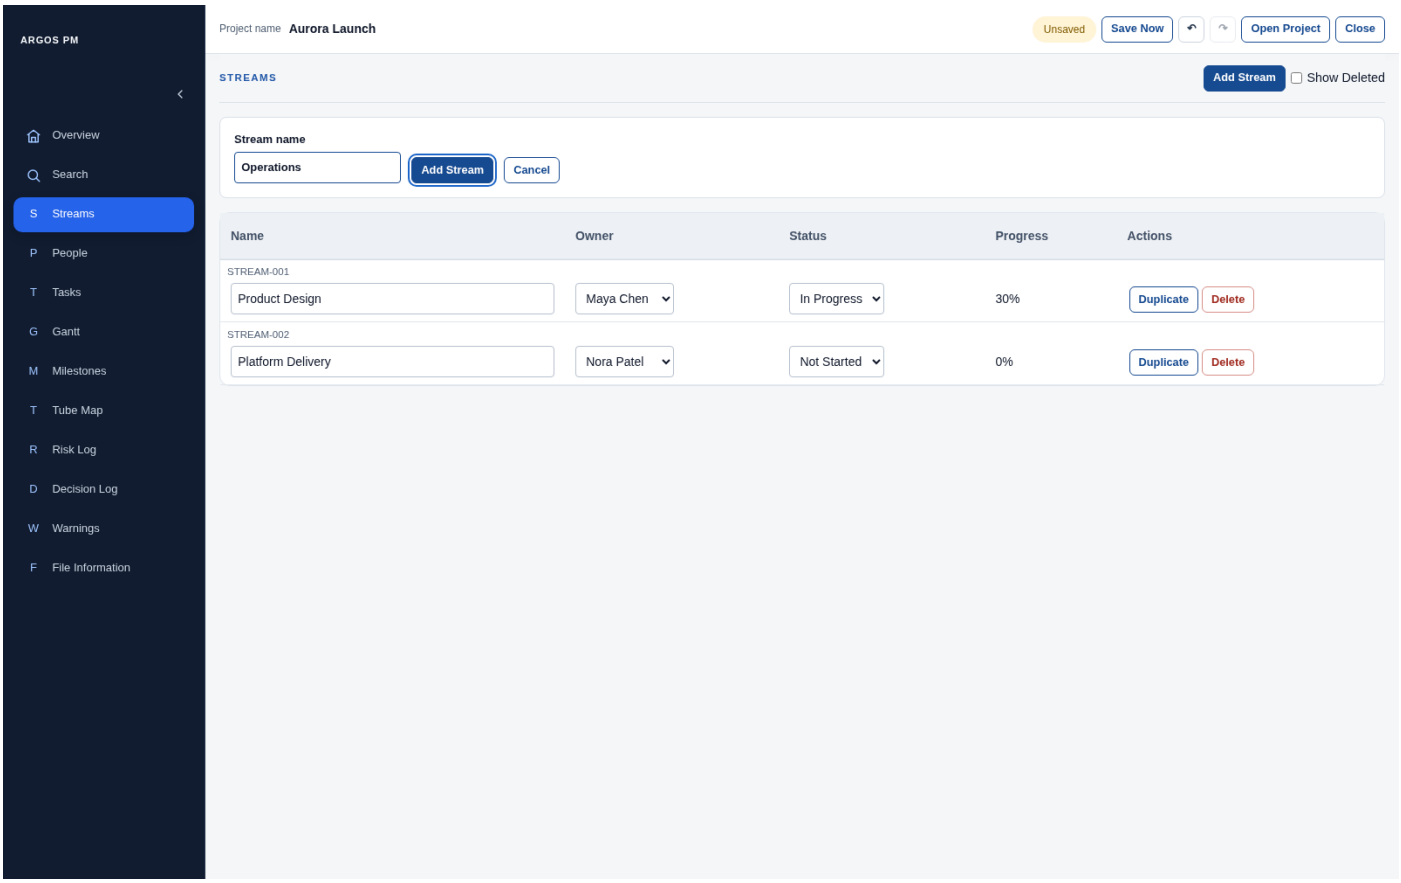


Figure 12. Add Stream opens an inline creation form above the table. (1600 × 1000; zoom for field detail.)

People

People are project records used for ownership, not user accounts or login identities.

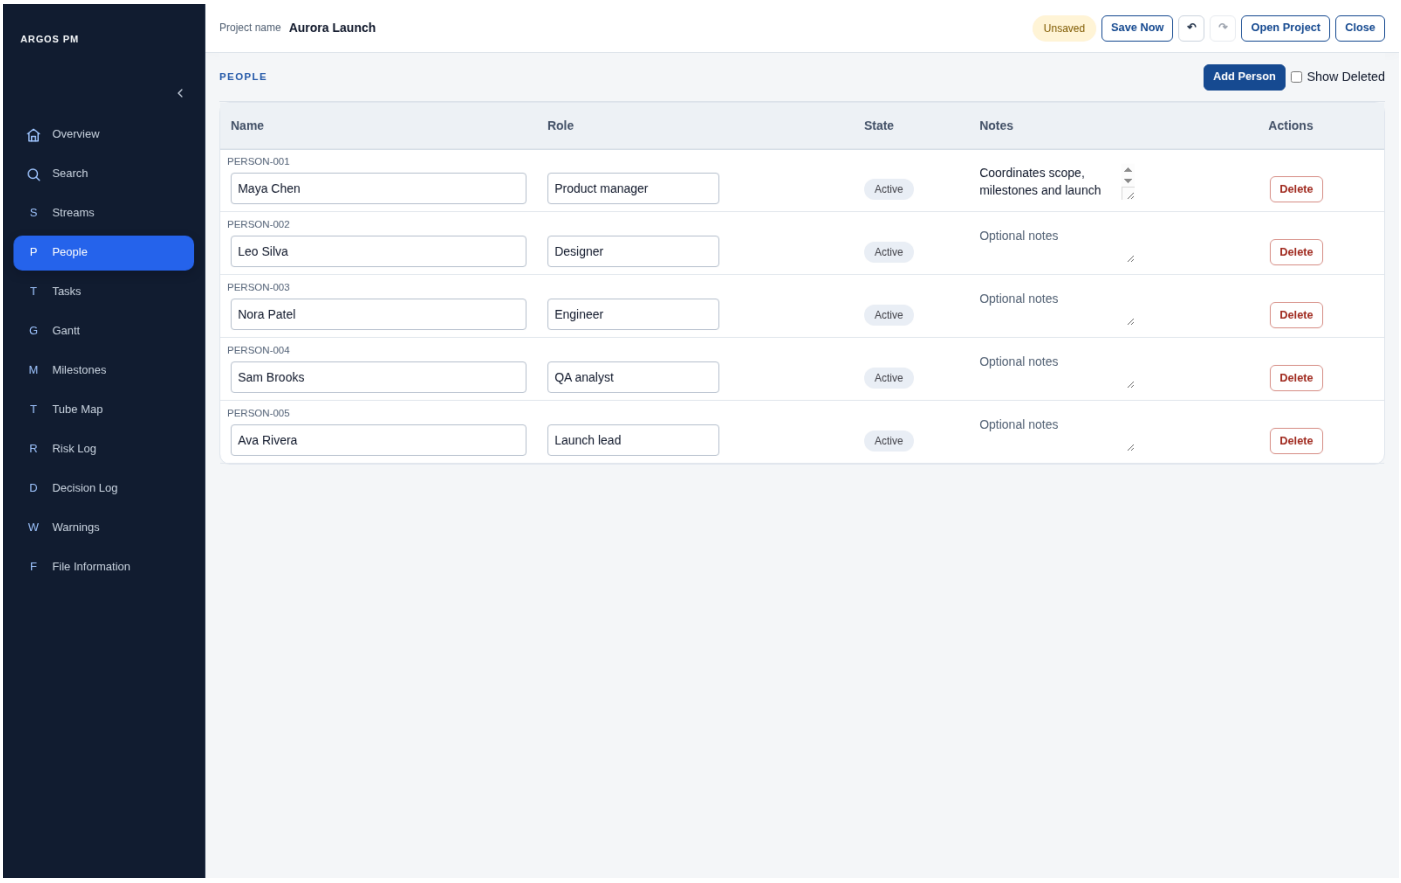


Figure 13. People table with optional roles and notes. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
PEOPLE and Add Person	Page heading and create action	Opens an inline creation form.
Show Deleted	Checkbox filter	Includes deleted Person records.
Name, Role, State, Notes, Actions	Table column headers	State describes Active/Deleted record state, not project lifecycle status.
PERSON-001	Record identifier	A stable human-readable Person ID.
Name and Role	Inline text fields	Edit the Person name and optional role.
Optional role	Placeholder text	Visible when Role is empty.
Notes	Text area	Multi-line inline notes.
Active / Deleted	Status badge	Shows record state; it is not a dropdown.
Delete / Restore	Row actions	Change the record deletion state.
Person name, Add Person, Cancel	Inline creation form controls	The form submit action creates the Person.

Usage note: Name, Role and Notes commit on leaving the field. There is no per-row Save button here.

Usage note: Use “Person record” rather than “account” when discussing this module.

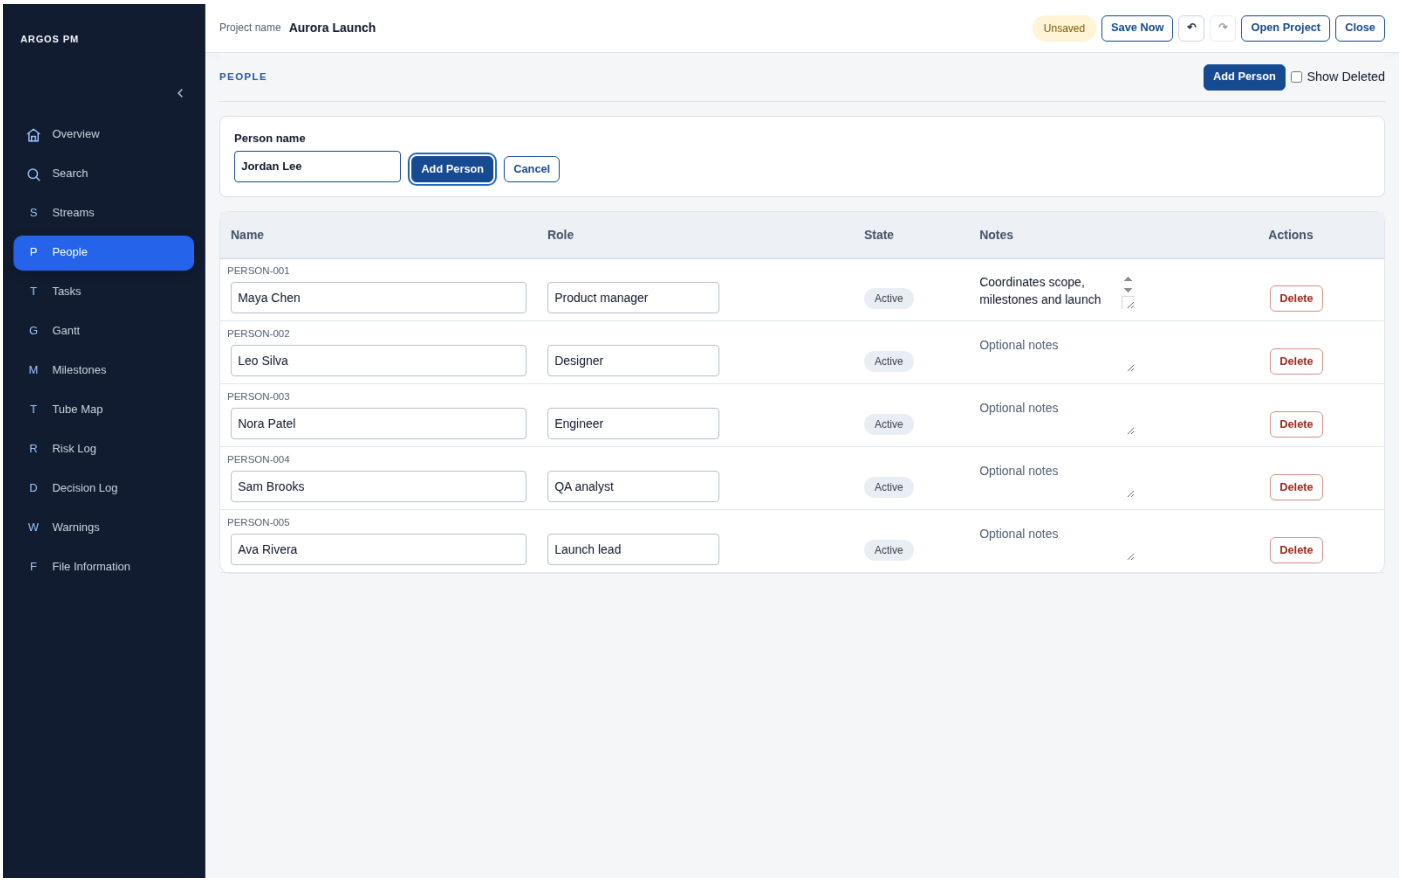


Figure 14. Person creation form. (1600 × 1000; zoom for field detail.)

Tasks

Tasks combine editable work records, single scope, ownership, dates and predecessor relationships.

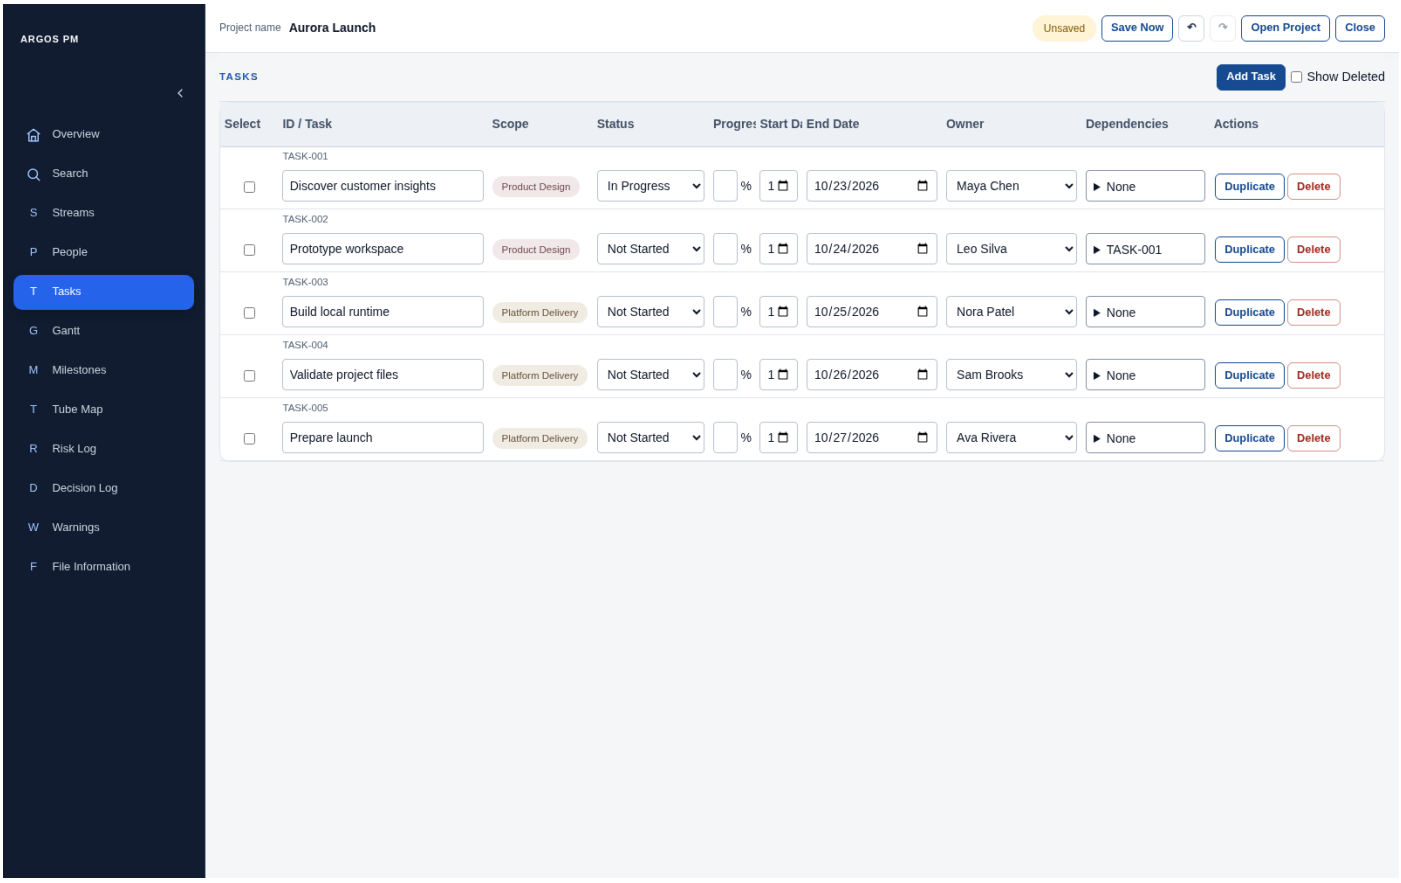


Figure 15. Tasks table with scope pills, progress and ownership. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
TASKS, Add Task, Show Deleted	Page header controls	Create a record or include deleted ones.
Select checkbox per row	Row selection checkbox	Selects Tasks for a bulk action; it does not set completion.
ID / Task	Combined identifier/name column	Contains a record ID and inline task-name field.
Scope pill	Scope display	Shows Project-wide or the assigned Stream; the row pill is not an editable dropdown.
Status	Select control	Sets the Task lifecycle status.
Progress	Number input with unit suffix	Edits a percentage when the Task permits manual progress.
Start Date and End Date	Date fields	Edit the Task date range; invalid ranges show a validation message.
Owner	Select control and sortable column	Assigns one Person; sort resolves displayed Person names and keeps unassigned values last.
Dependencies / None / TASK-001	Predecessor selector	An expandable checkbox list for Finish-to-Start relationships.

What you see	UI term	Meaning / behaviour
Duplicate / Delete / Restore	Row actions	Operate on one Task.
Delete selected (n)	Bulk action button	Appears when rows are selected; applies to those Tasks.
Task name, Scope, Owner and Predecessor Tasks (optional)	Creation form controls	Scope and Owner are single-selects; predecessors use multiple checkbox selections.

Usage note: A predecessor selector is not an action menu. It contains record choices, not commands.

Usage note: Task name commits on blur/Enter. Dates, selects and percentages update through their controls. Inline table edits do not have a Cancel button; use project Undo where appropriate.

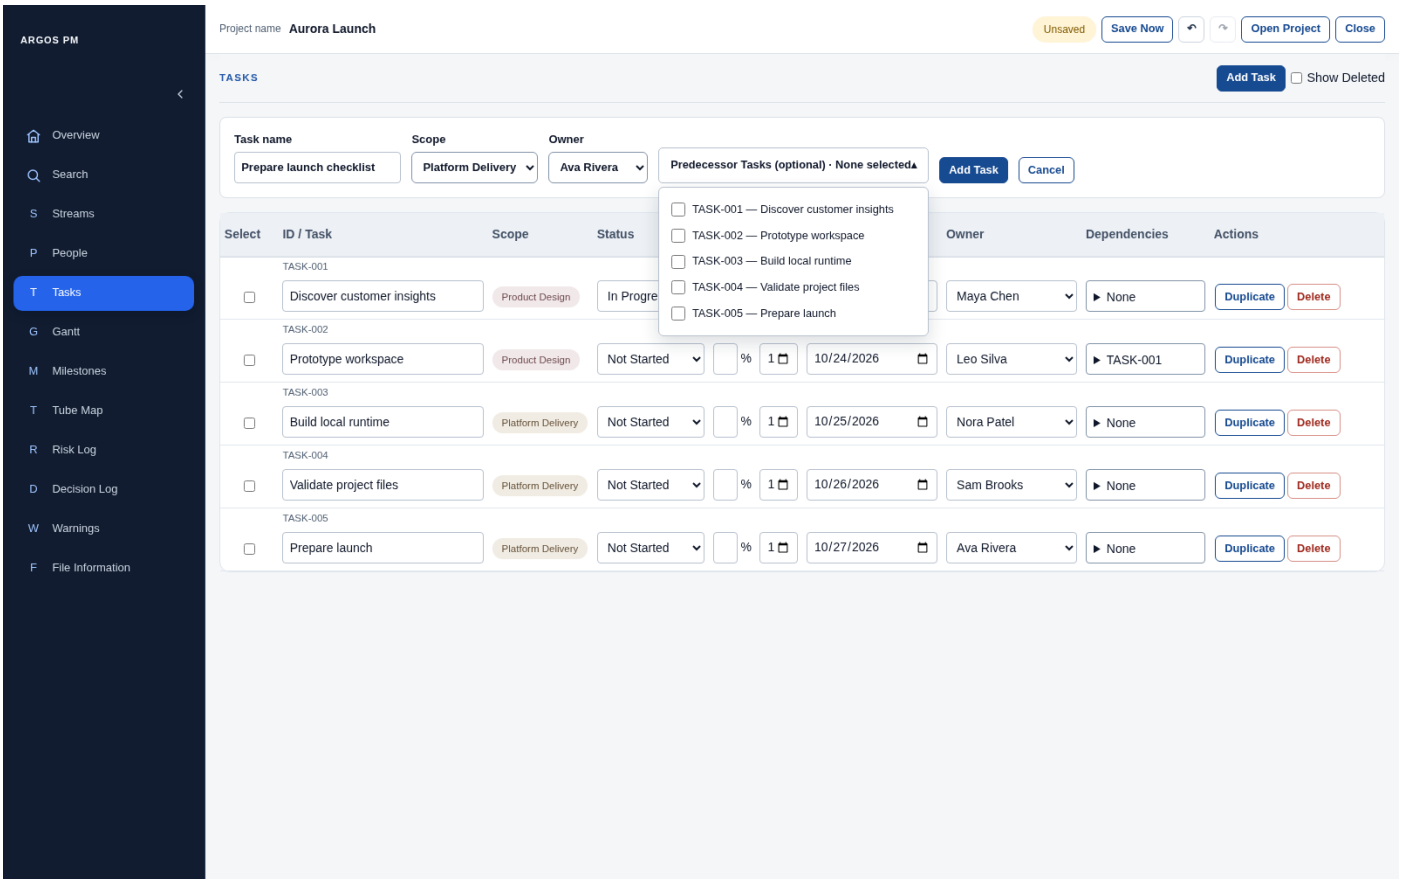


Figure 16. Task creation form with its optional predecessor selector expanded. (1600 × 1000; zoom for field detail.)

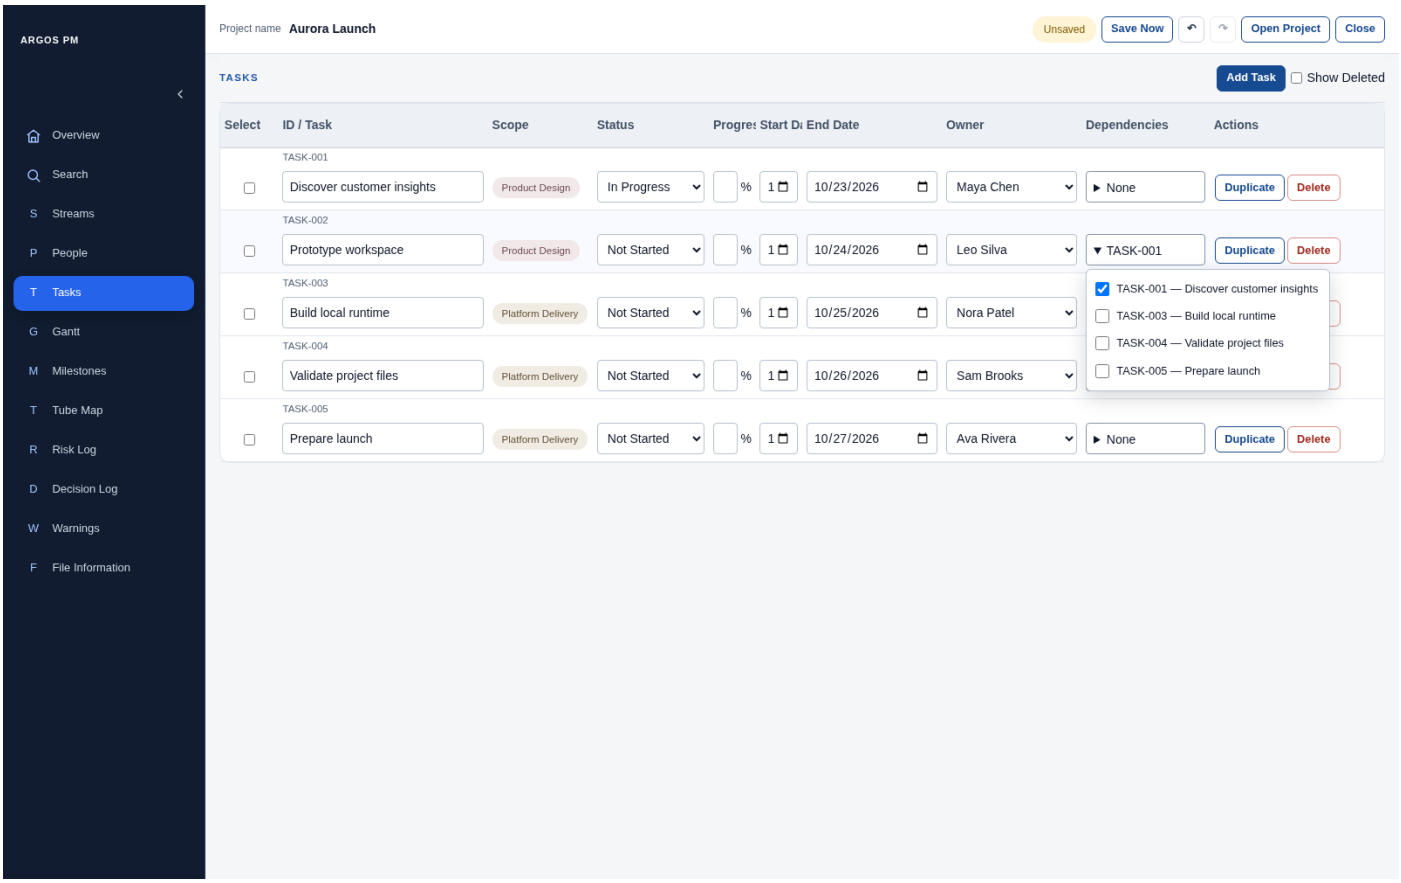


Figure 17. Existing Task predecessor selector expanded. (1600 × 1000; zoom for field detail.)

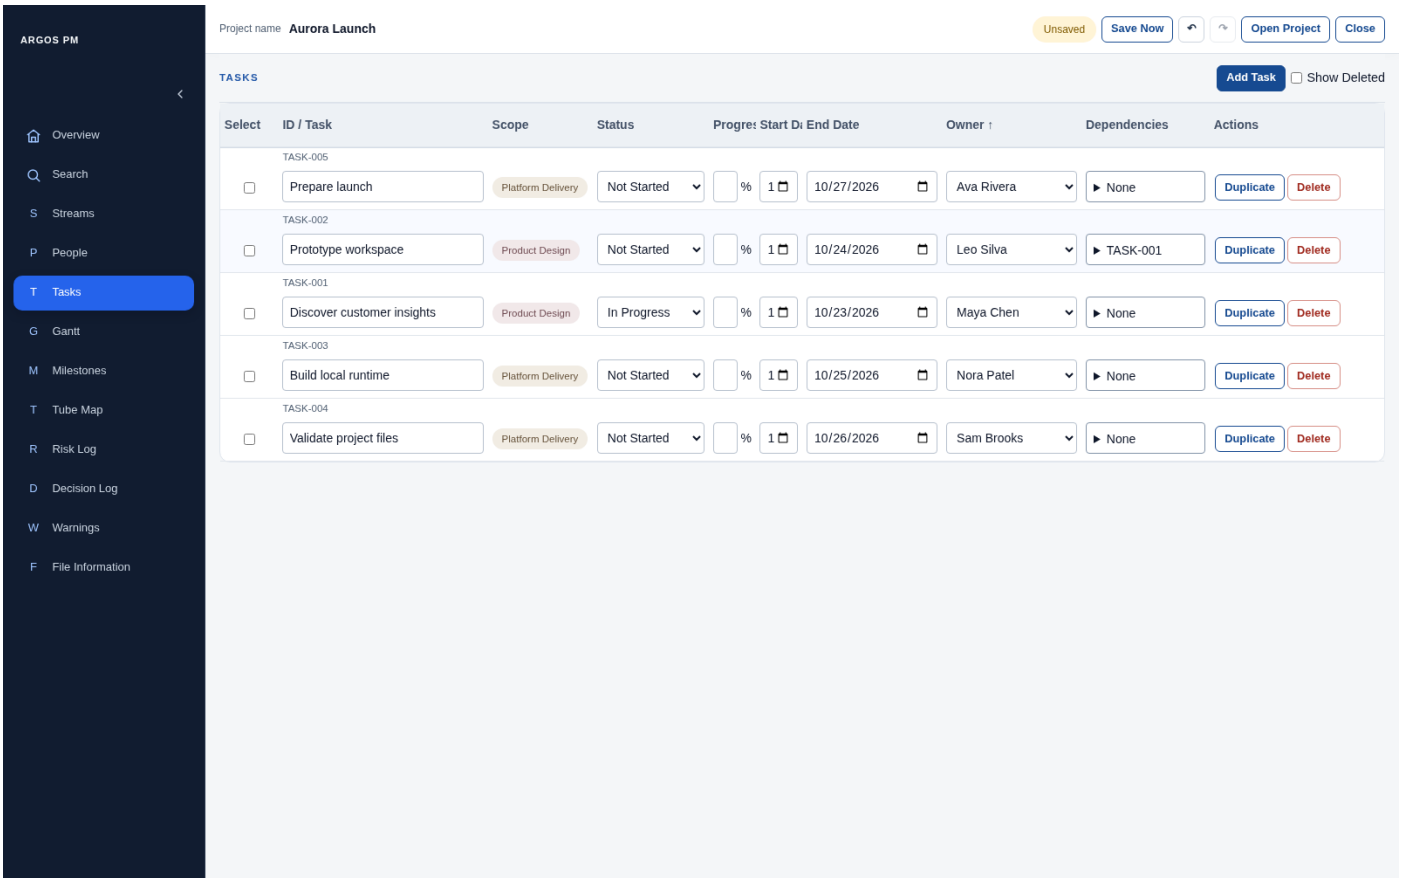


Figure 18. Owner column sorted in ascending order. (1600 × 1000; zoom for field detail.)

Gantt

A timeline view of work grouped by scope. Use view for the visual presentation, lane/group for its horizontal structure, and bar/marker for work items.

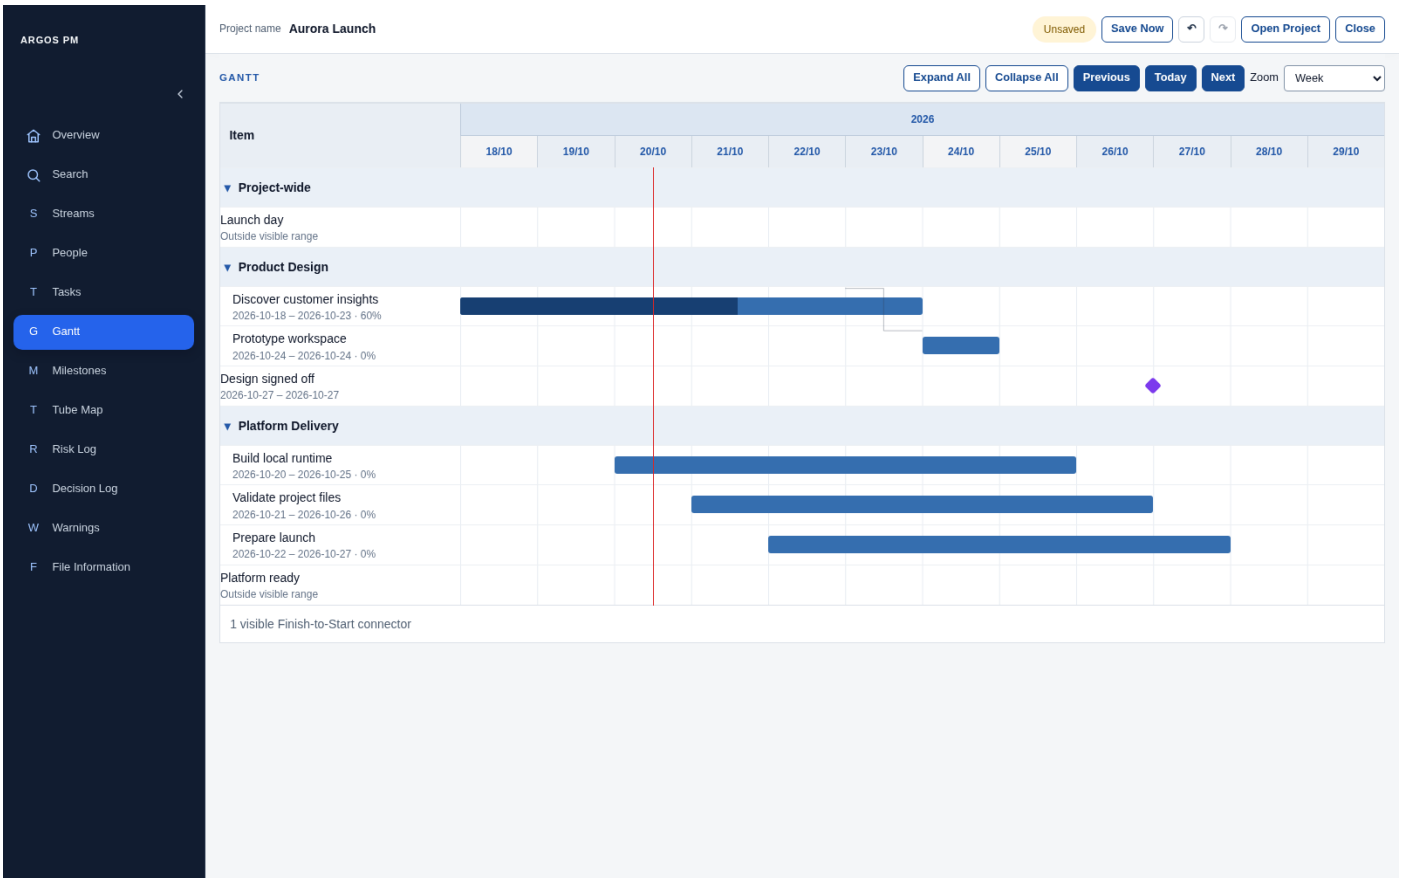


Figure 19. Gantt lanes, task bars, milestone markers, connector and Today line. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
GANTT	Page heading	Names the visual view.
Expand All / Collapse All	Group expansion controls	Show or hide items in all groups.
Triangle beside a group	Disclosure button	Expands or collapses one group.
Stream group label	Navigation button	Opens that Stream in Streams; Project-wide is a scope group.
Previous / Today / Next	Timeline navigation buttons	Change or reset the visible date window.
Zoom	Select control	Chooses Week, Month or Quarter time granularity.
Year and date labels	Timeline / date axis	Explain the visible time scale.
Blue horizontal shape	Task bar	Represents a scheduled Task duration; internal fill can show progress.
Milestone point	Milestone marker	Shows a checkpoint date when within the visible range.
Vertical date line	Today line	Marks the current date.

What you see	UI term	Meaning / behaviour
Item header	Stream sort control	Sorts the Stream groups, rather than moving records between scopes.
Unscheduled / Outside visible range	Schedule annotation	Distinguishes missing dates from items outside the current window.
Arrow between task bars	Dependency connector	Displays a Finish-to-Start relationship.
Quick edit task	Anchored popover	Contains Name, Start date, End date and Save / Open Task / Cancel.

Usage note: Save applies the quick-edit draft; Cancel closes the popover without applying that draft. Open Task navigates to the underlying record.

Usage note: This floating editor is a popover, not a modal dialog: there is no dimmed full-page backdrop.

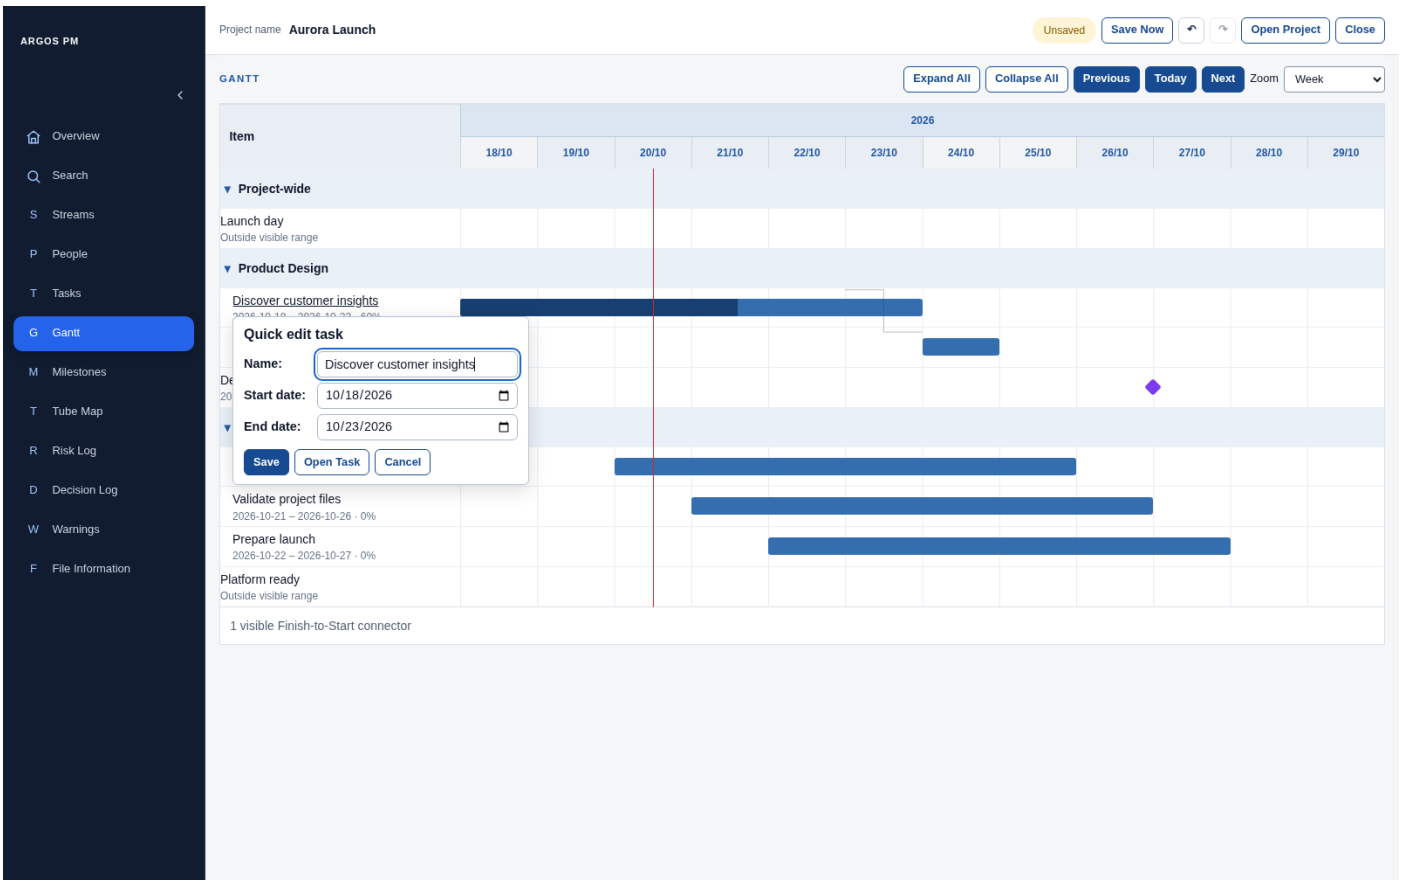


Figure 20. Quick edit task popover anchored to the clicked item. (1600 × 1000; zoom for field detail.)

Milestones

Milestones are dated checkpoints with scope, ownership and predecessor relationships.

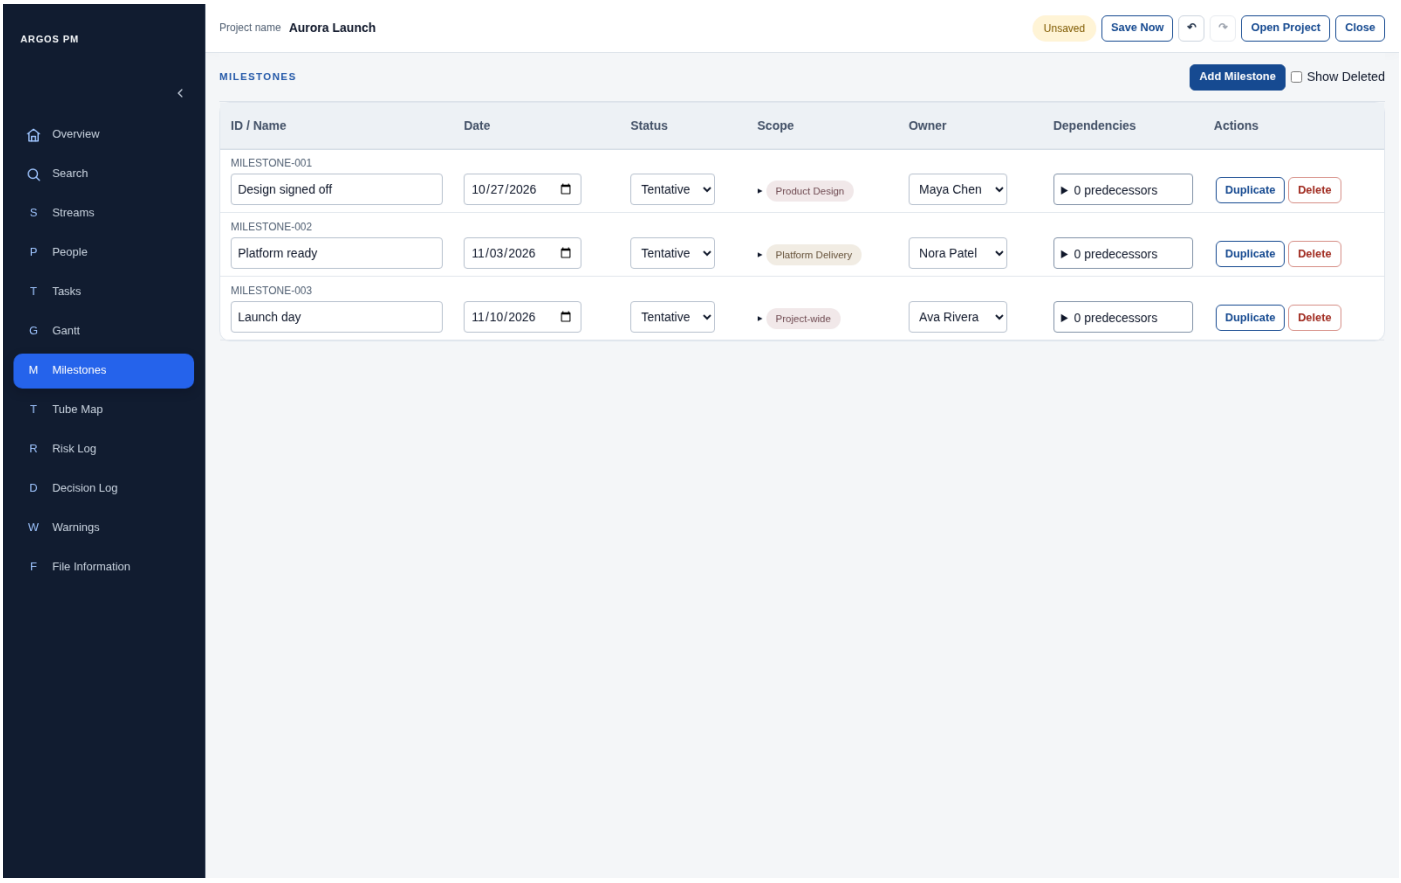


Figure 21. Milestones table with stream and Project-wide scope pills. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
MILESTONES, Add Milestone, Show Deleted	Page header controls	Create or include deleted records.
ID / Name	Identifier and inline text field	Names the checkpoint and displays its ID.
Date	Date field / date picker	Sets the planned milestone date.
Status	Select control	Sets the milestone lifecycle status.
Scope	Expandable scope selector	Its summary displays scope pills.
Project-wide inside scope choices	Radio option	Selects the exclusive whole-project scope.
Stream choices inside scope	Checkbox group	Select one or more Streams.
Owner	Select control	Assigns one Person.
Dependencies / n predecessors	Predecessor selector	Can select active Tasks and other Milestones as predecessors.
Dependency warning indicator, when present	Warning disclosure	Reveals scheduling or predecessor issues for that milestone.
Duplicate / Delete / Restore	Row actions	Operate on the selected record.

What you see	UI term	Meaning / behaviour
Name, Date, Predecessors (optional), Add Milestone, Cancel	Inline creation form	Creates a checkpoint; scope and owner can then be edited in the row.

Usage note: Say “scope selector” for the whole interactive control and “scope pill” for the rounded displayed value.

Usage note: Do not assume all dependency issues appear in the Warnings page: Milestone predecessor issues are also shown locally in Milestones/Gantt.

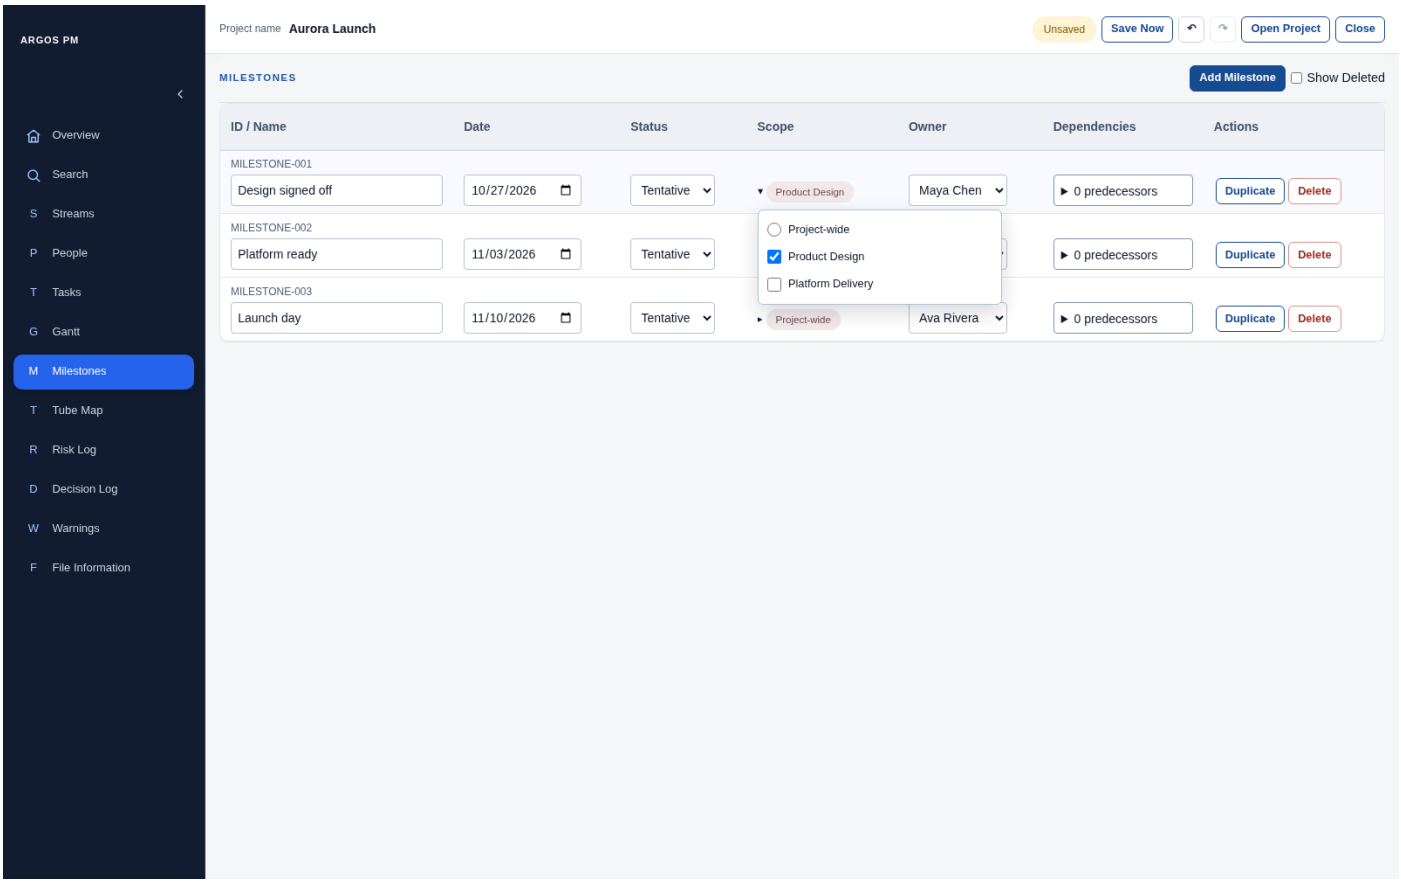


Figure 22. Expanded scope selector combines an exclusive Project-wide option and stream checkboxes. (1600 × 1000; zoom for field detail.)

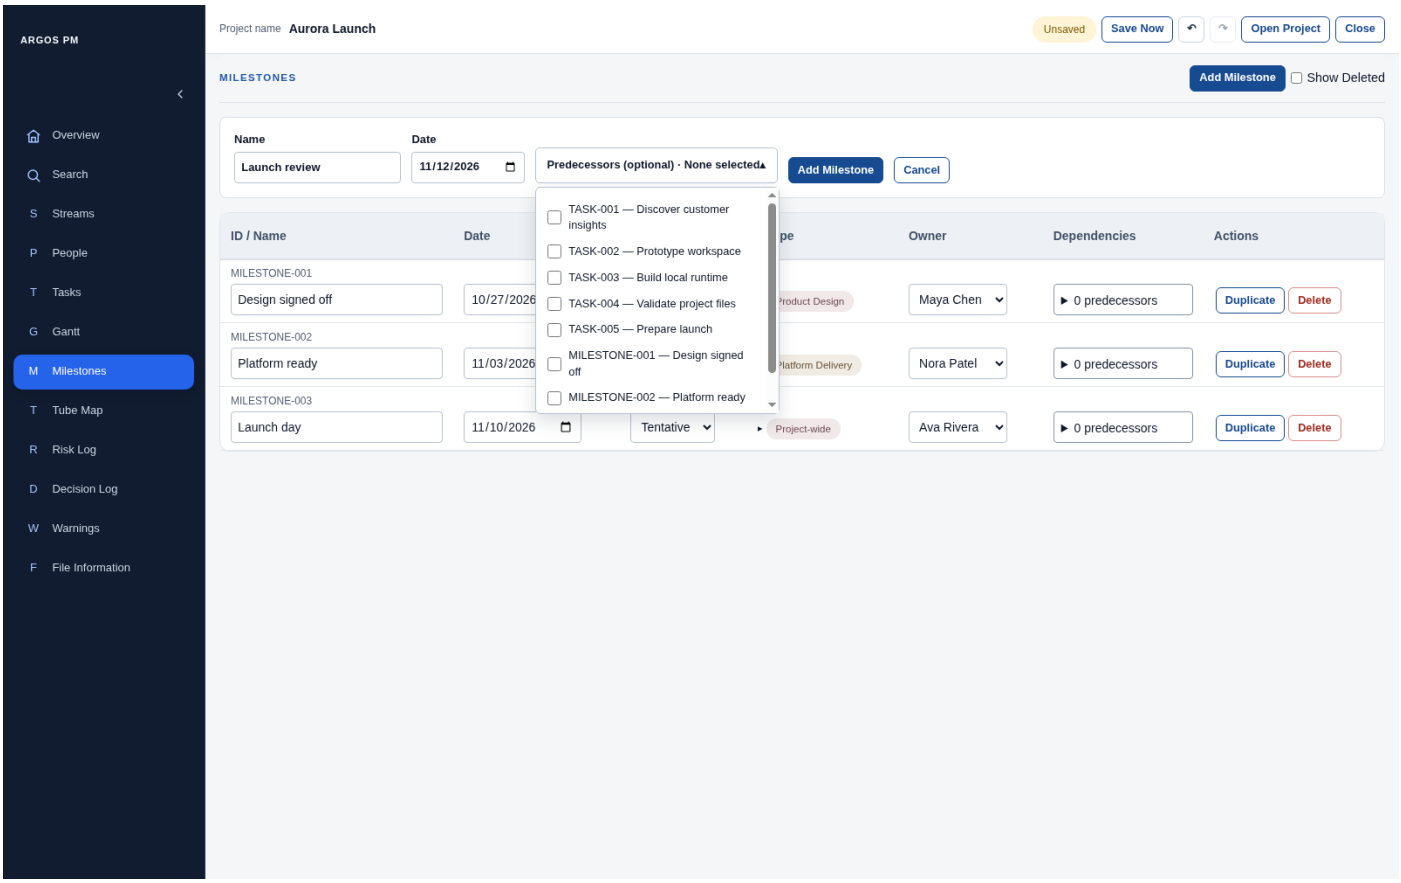


Figure 23. Milestone creation form with predecessor choices. (1600 × 1000; zoom for field detail.)

Tube Map

A roadmap-style view of Milestones on scope lanes, rather than a Task table.

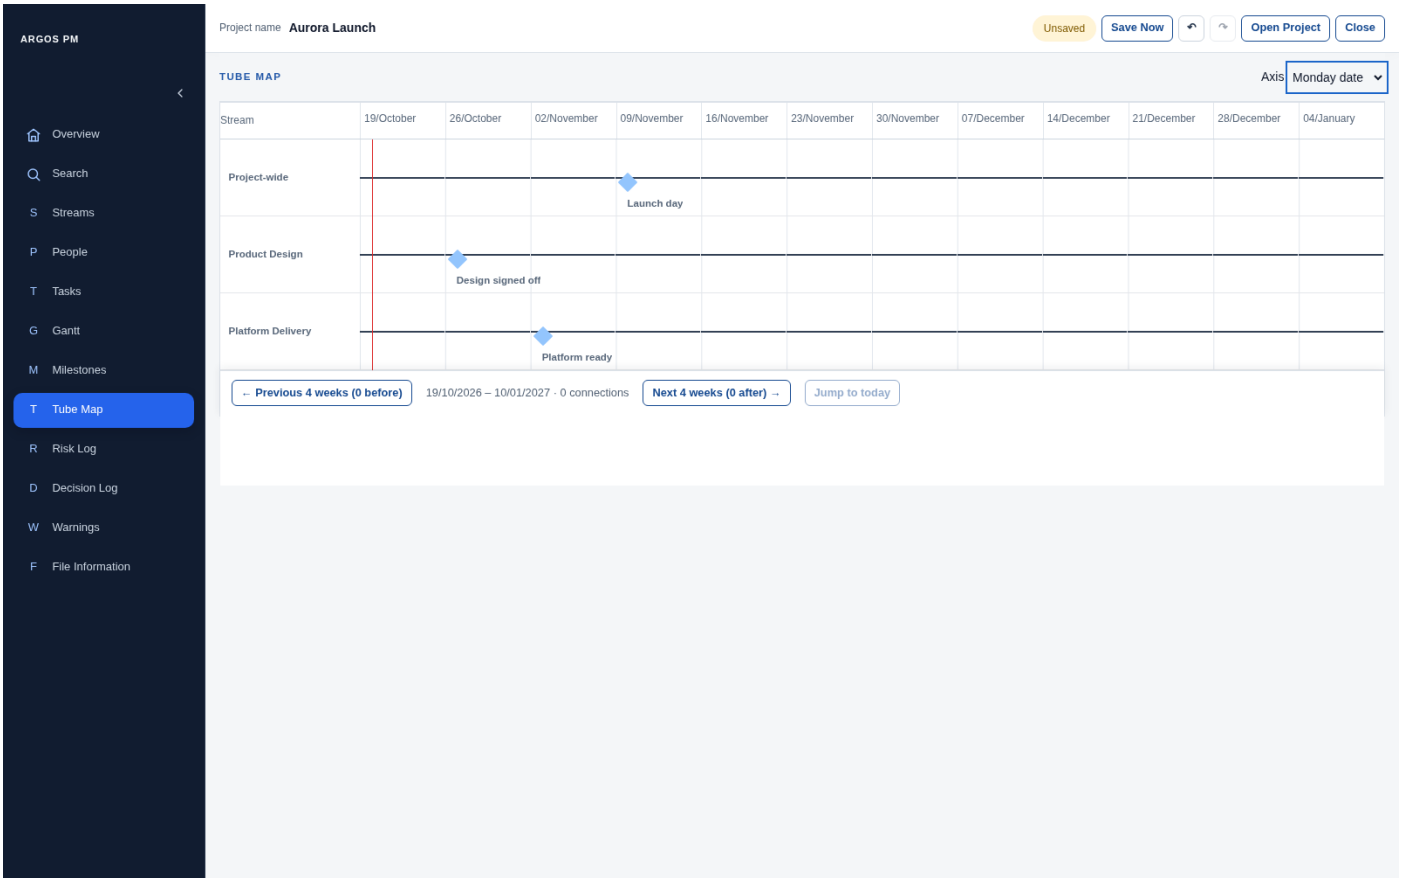


Figure 24. Tube Map using the Monday date axis. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
TUBE MAP	Page heading	Names the view.
Axis	Select control	Switches Week Number / Monday date labels.
Stream heading	Lane sort control	Changes Stream lane ordering.
Stream column and time labels	Lane heading and date axis	Identify scope lanes and the visible weeks.
Horizontal line	Roadmap lane	Represents a Stream or the Project-wide scope.
Diamond	Milestone marker / station	A clickable checkpoint; its text label can also open quick edit.
Line joining milestone points	Milestone connection	Displays a relationship when available.
Vertical line	Today line	Marks the current date window position.
Previous 4 weeks / Next 4 weeks / Jump to today	View navigation controls	Page the roadmap or reset its window; boundary counts show items outside it.
Date range and connection count	View summary	Describes the window and visible relationships.
Quick edit milestone	Anchored popover	Contains Name, Date and Save / Open Milestone / Cancel.

Usage note: The bottom navigation area belongs to the Tube Map view; call it the view navigation footer.

Usage note: A Milestone station is not a Task bar. A lane is not a data-table row, even though both run horizontally.

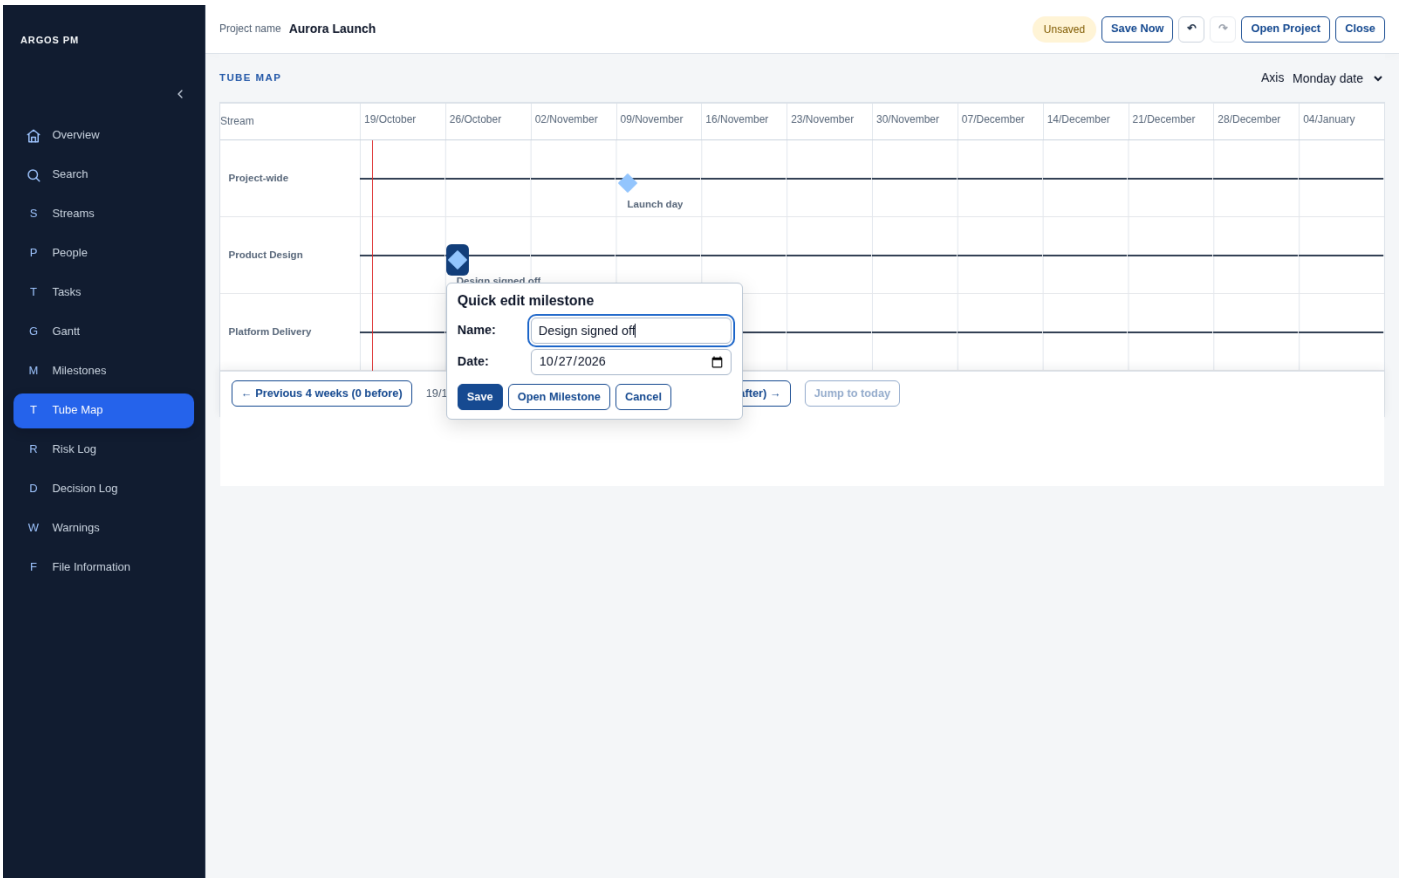


Figure 25. Milestone quick-edit popover opened from a diamond. (1600 × 1000; zoom for field detail.)

Risk Log

The page combines a matrix, a filter and an editable record table. Risk actions are separate mitigation items nested under a Risk.

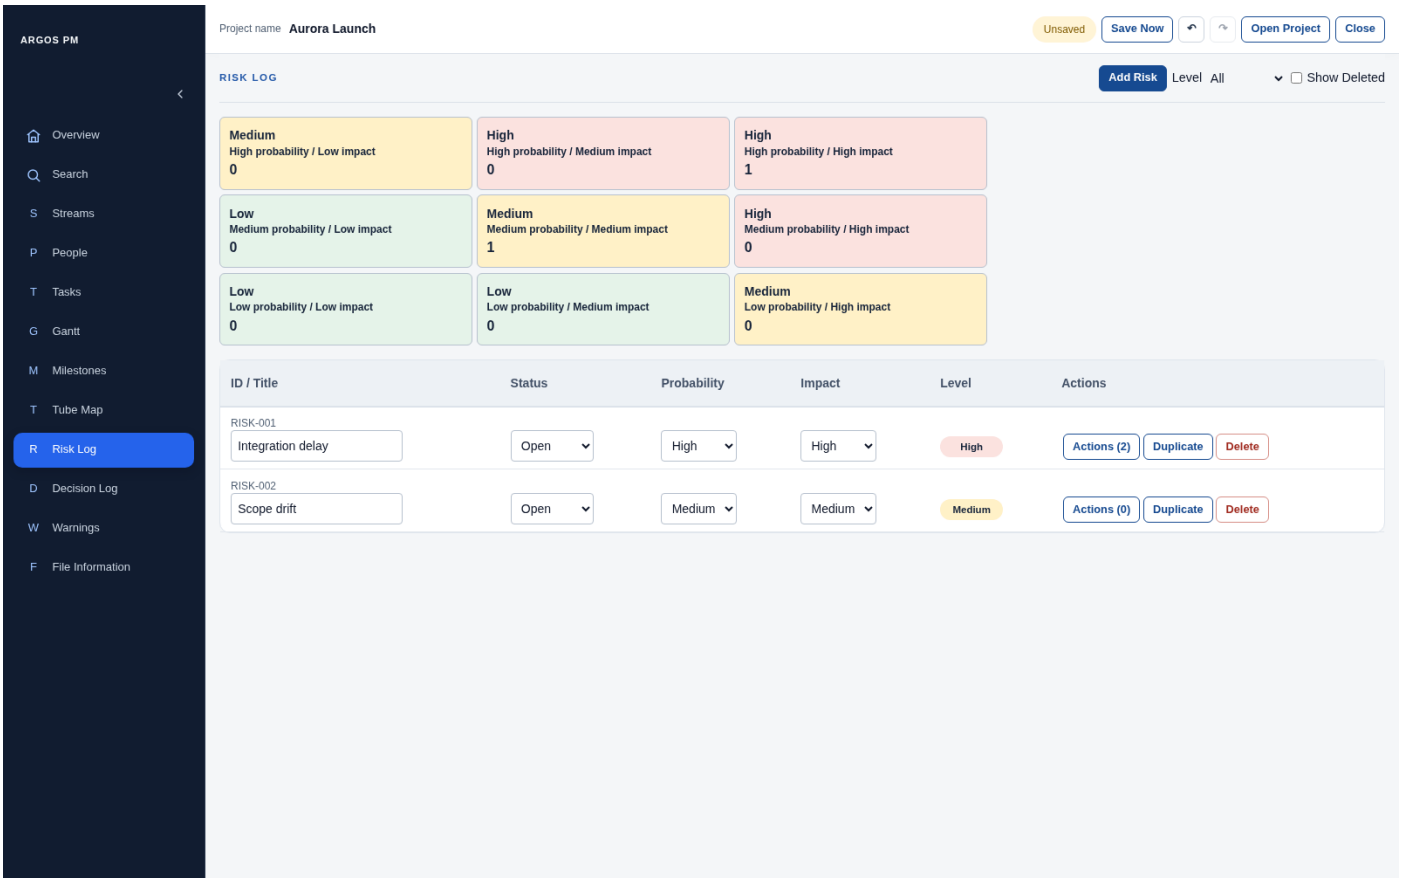


Figure 26. Risk matrix and editable Risk table. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
RISK LOG, Add Risk, Level, Show Deleted	Page header and filter controls	The top Add Risk button reveals the creation form.
Nine coloured boxes	Risk matrix	A 3 by 3 probability-by-impact grid.
One matrix cell	Interactive matrix cell	Displays probability, impact, calculated severity and a matching-record count.
Level	Severity filter / select control	Shows All, Low, Medium or High records.
ID / Title	Record ID and inline text field	Identifies and names the Risk.
Status, Probability and Impact	Select controls	Edit one value in each category.
Low / Medium / High in Level column	Risk-level badge	A calculated severity display, not a dropdown.
Actions (n)	Row expander button with count	Opens or closes Risk actions. It is not a dropdown menu.
Duplicate / Delete / Restore	Record row actions	Operate on the parent Risk record.
Risk actions	Expandable row details panel	Contains mitigation items and their creation form.

What you see	UI term	Meaning / behaviour
Action 1 / Action 2 description fields	Inline text fields	Edit mitigation descriptions; each has a Delete button.
New action description, Add action, Cancel	Nested creation form	Add action submits a mitigation item; disabled while the description is blank.
Action deleted. Undo	Inline status message and recovery action	Restores the just-removed mitigation item.

Usage note: Clicking a matrix cell currently sets the Level filter to that severity; it does not filter to only that exact probability/impact combination.

Usage note: Cancel in the nested new-action form clears its draft description; it does not close the whole Risk actions panel.

Usage note: A Risk action is a domain record (mitigation item). A row action is a UI command such as Duplicate or Delete. Prefix the word action to avoid ambiguity.

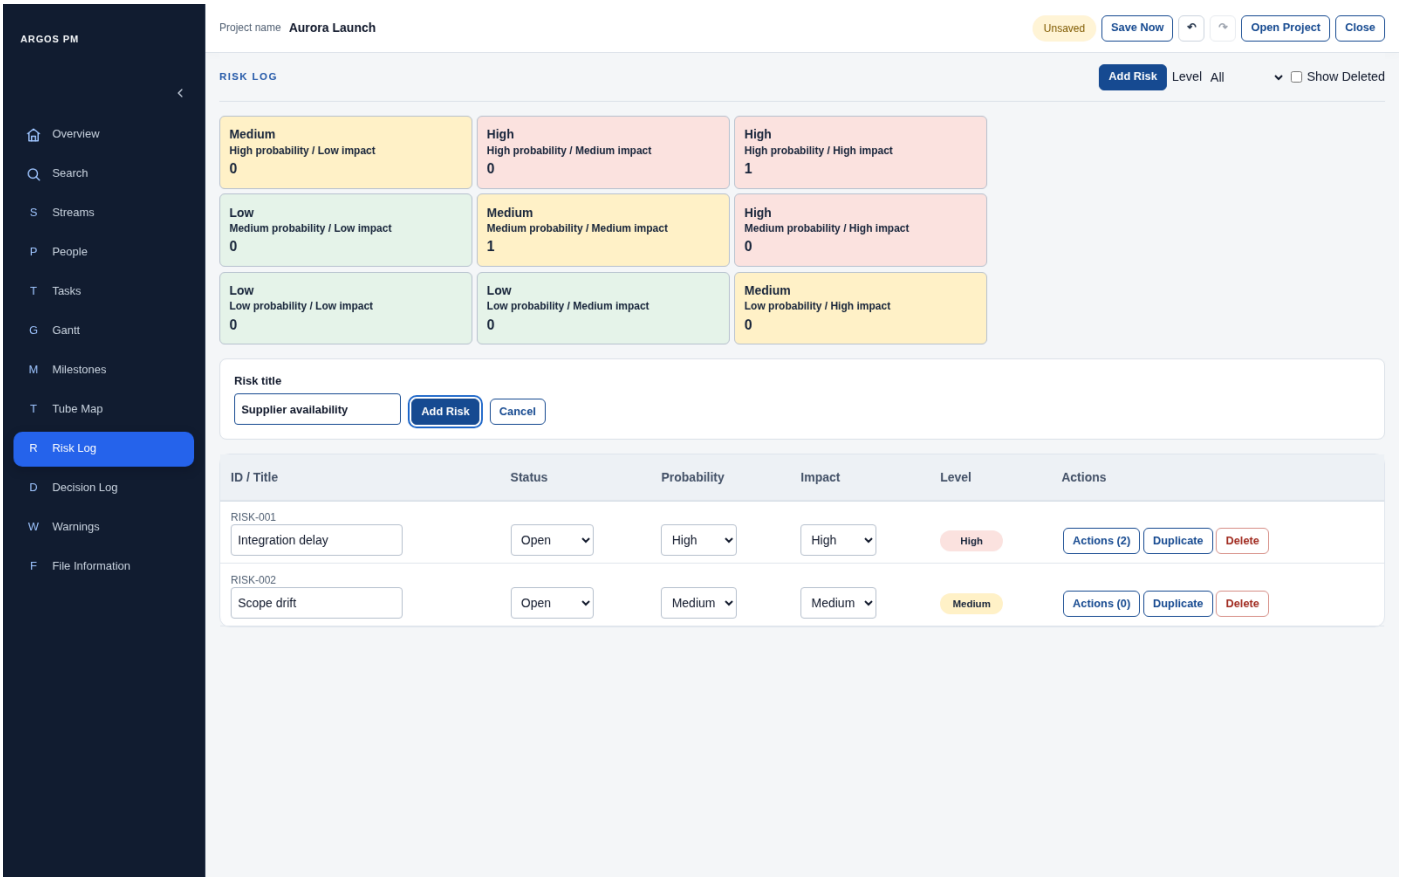


Figure 27. Risk creation form. (1600 × 1000; zoom for field detail.)

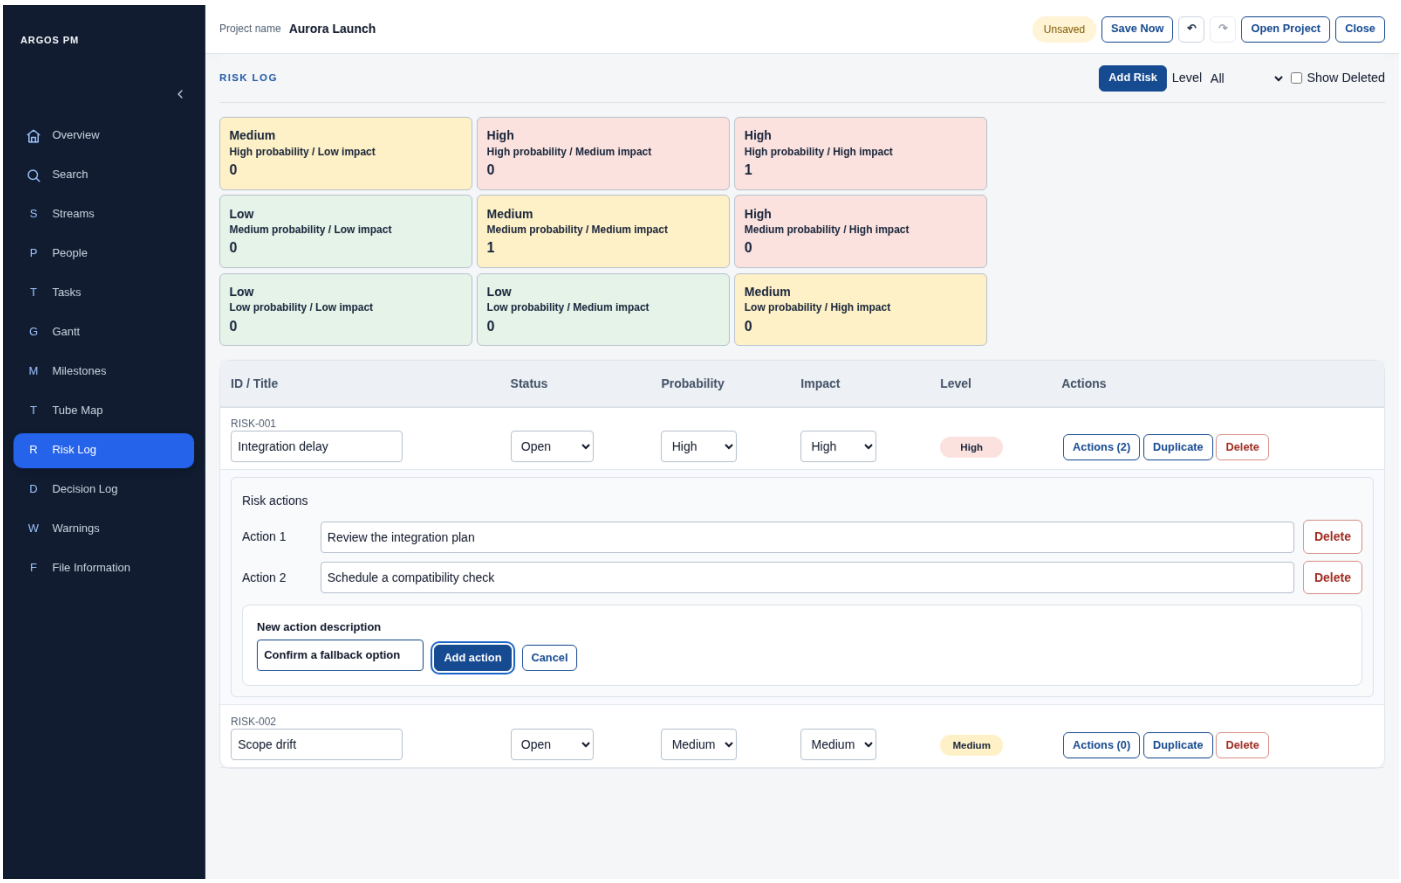


Figure 28. Risk actions expanded beneath the parent Risk row. (1600 × 1000; zoom for field detail.)

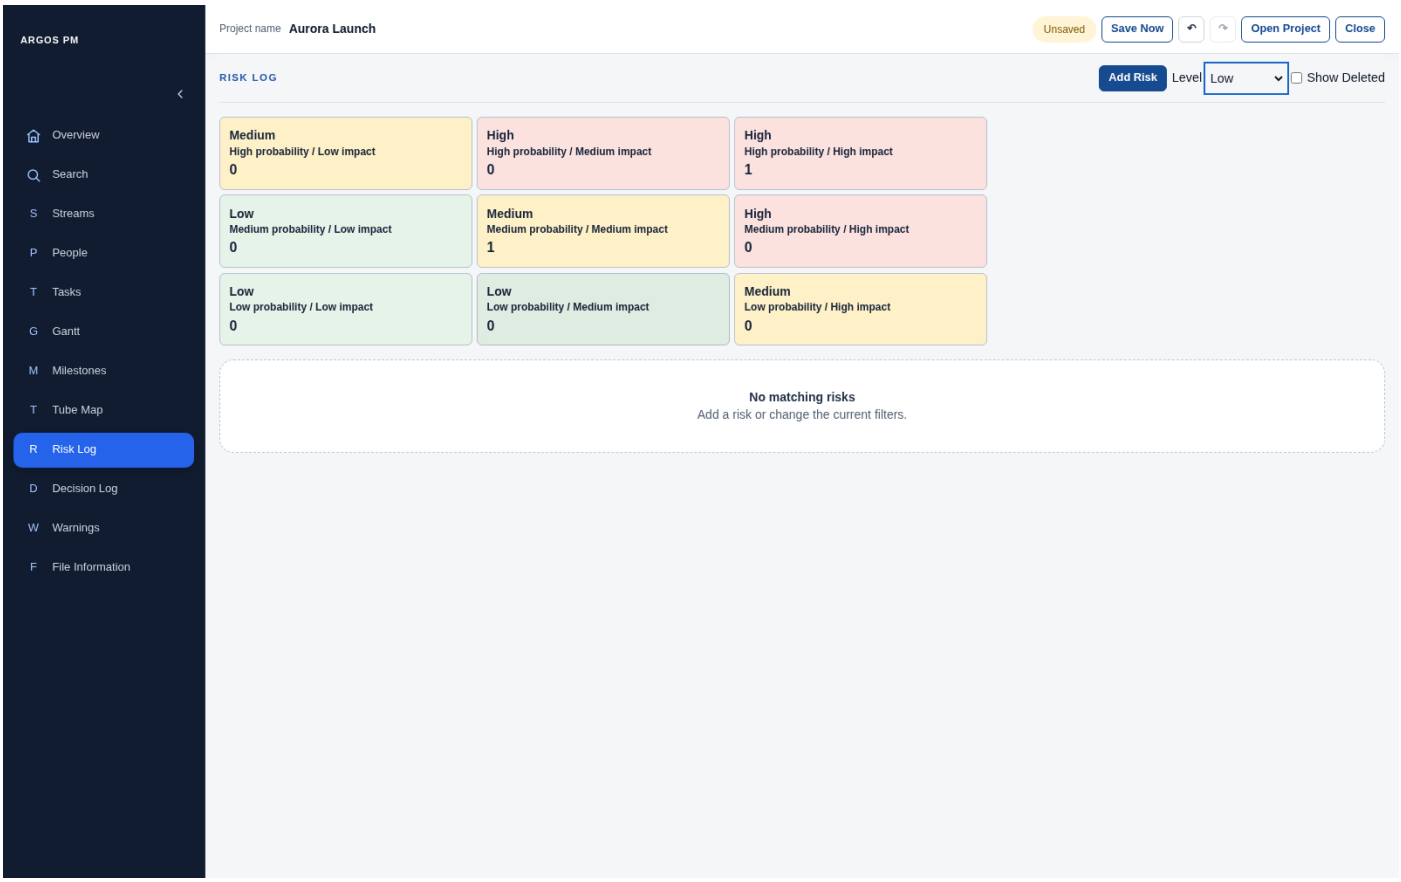


Figure 29. A Level filter with no matching records. (1600 × 1000; zoom for field detail.)

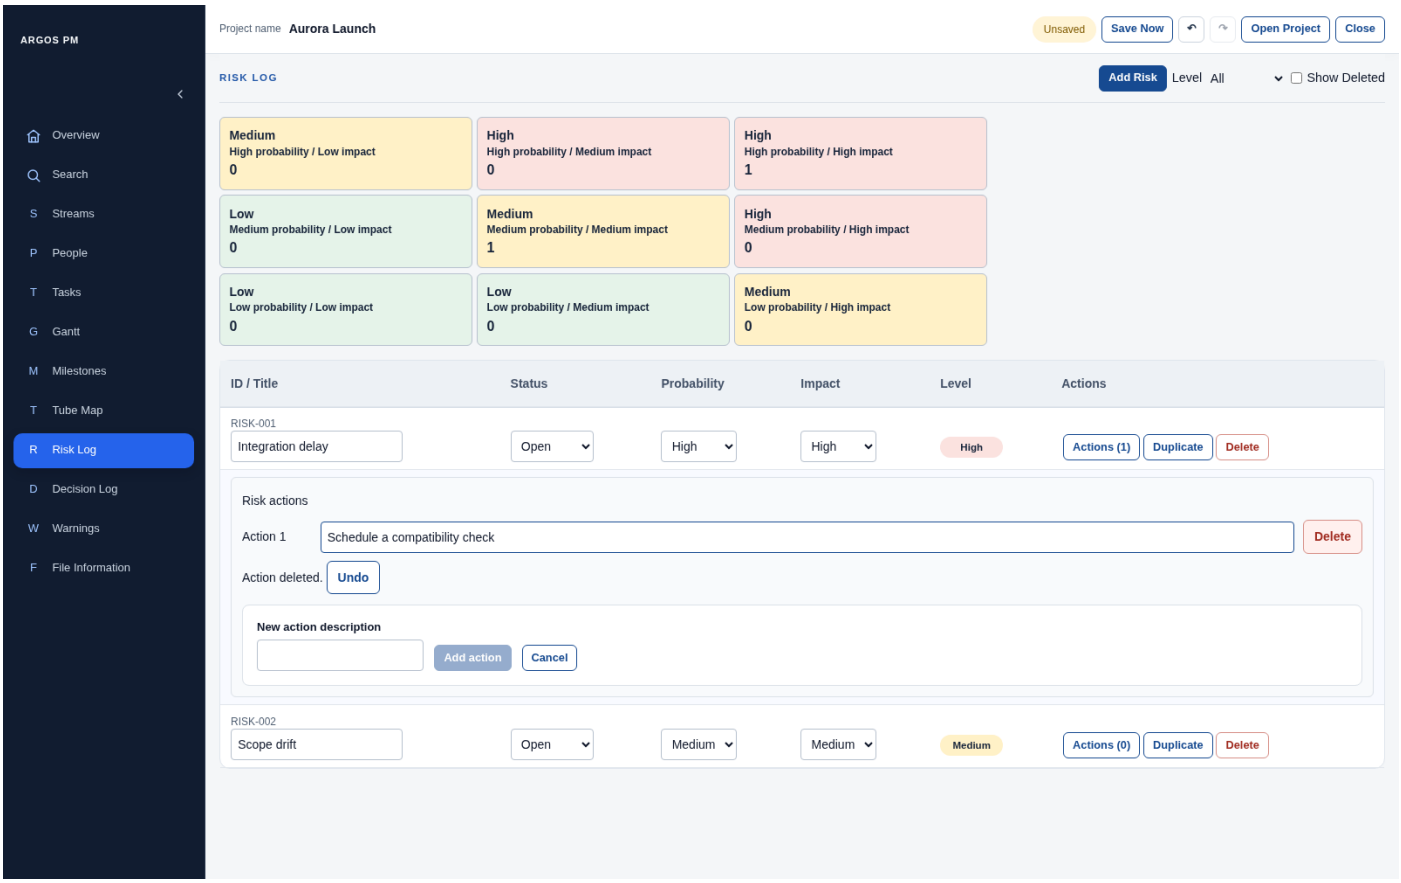


Figure 30. Inline deletion feedback with Undo for a removed mitigation action. (1600 × 1000; zoom for field detail.)

Decision Log

Decisions support an editable title/date/owner row and a larger inline editor for their context.

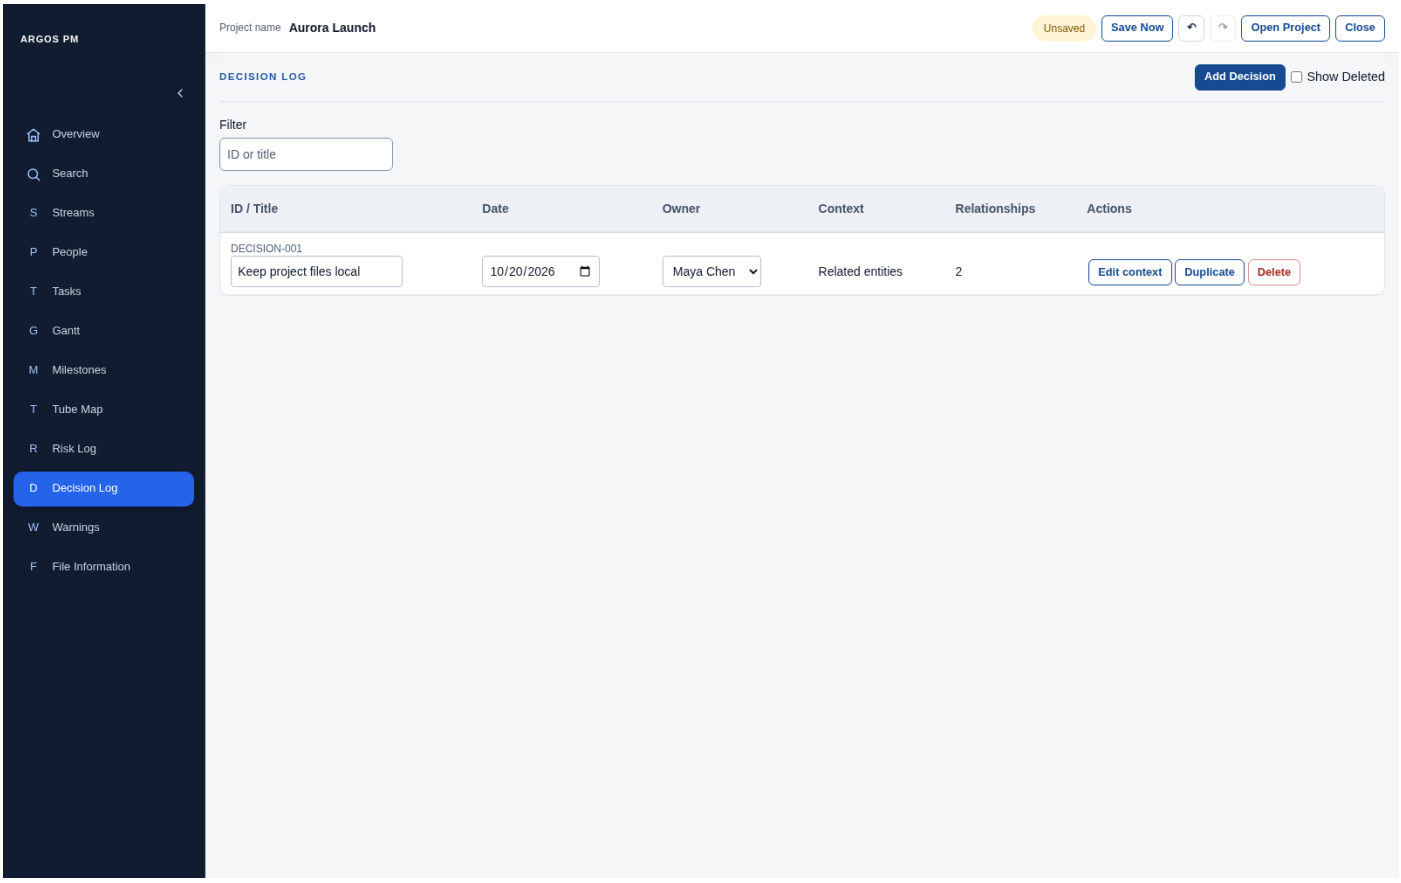


Figure 31. Decision Log table and text filter. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
DECISION LOG, Add Decision, Show Deleted	Page header controls	Create or include deleted records.
Filter with ID or title	Text filter and placeholder	Narrows the Decision table only.
ID / Title, Date, Owner	Editable record columns	Use a text field, date field and single-select Owner.
Context	Read-only context summary	Shows Project-wide, Related entities or Unassigned.
Relationships	Relationship count / summary	Counts linked Streams and Milestones, or displays Project-wide; it is not a link button.
Edit context	Row action button	Opens an inline edit panel underneath the row.
Decision context	Inline edit panel / section heading	Groups the relationship choices.
Project-wide (exclusive)	Checkbox with exclusive behaviour	Clears Stream and Milestone choices when selected; visually a checkbox, not a radio button.
Streams and Milestones	Checkbox groups	Select several related records when not Project-wide.
Additional information	Text area	Edits notes/background for the Decision.

What you see	UI term	Meaning / behaviour
Save / Cancel within context editor	Commit / discard draft buttons	Apply or discard the context draft.
Duplicate / Delete / Restore	Row actions	Copy, soft-delete or restore a Decision.

Usage note: The Decision context panel is not a modal dialog or a drawer; it is embedded in the table.

Usage note: Context choices are saved with the panel Save button. Direct edits to Title, Date and Owner are inline edits.

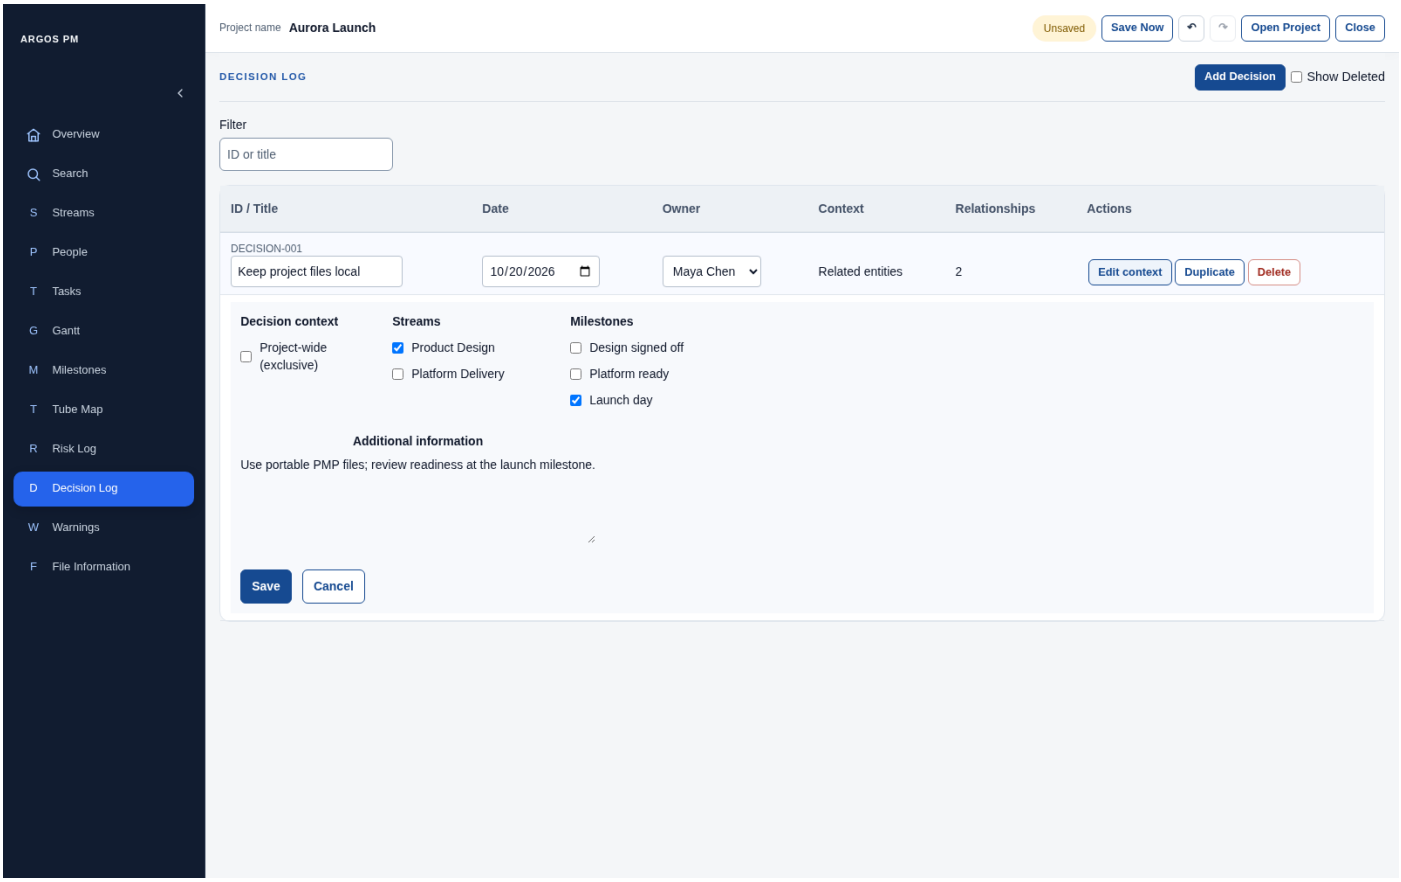


Figure 32. Inline Decision context editor with checkbox groups. (1600 × 1000; zoom for field detail.)

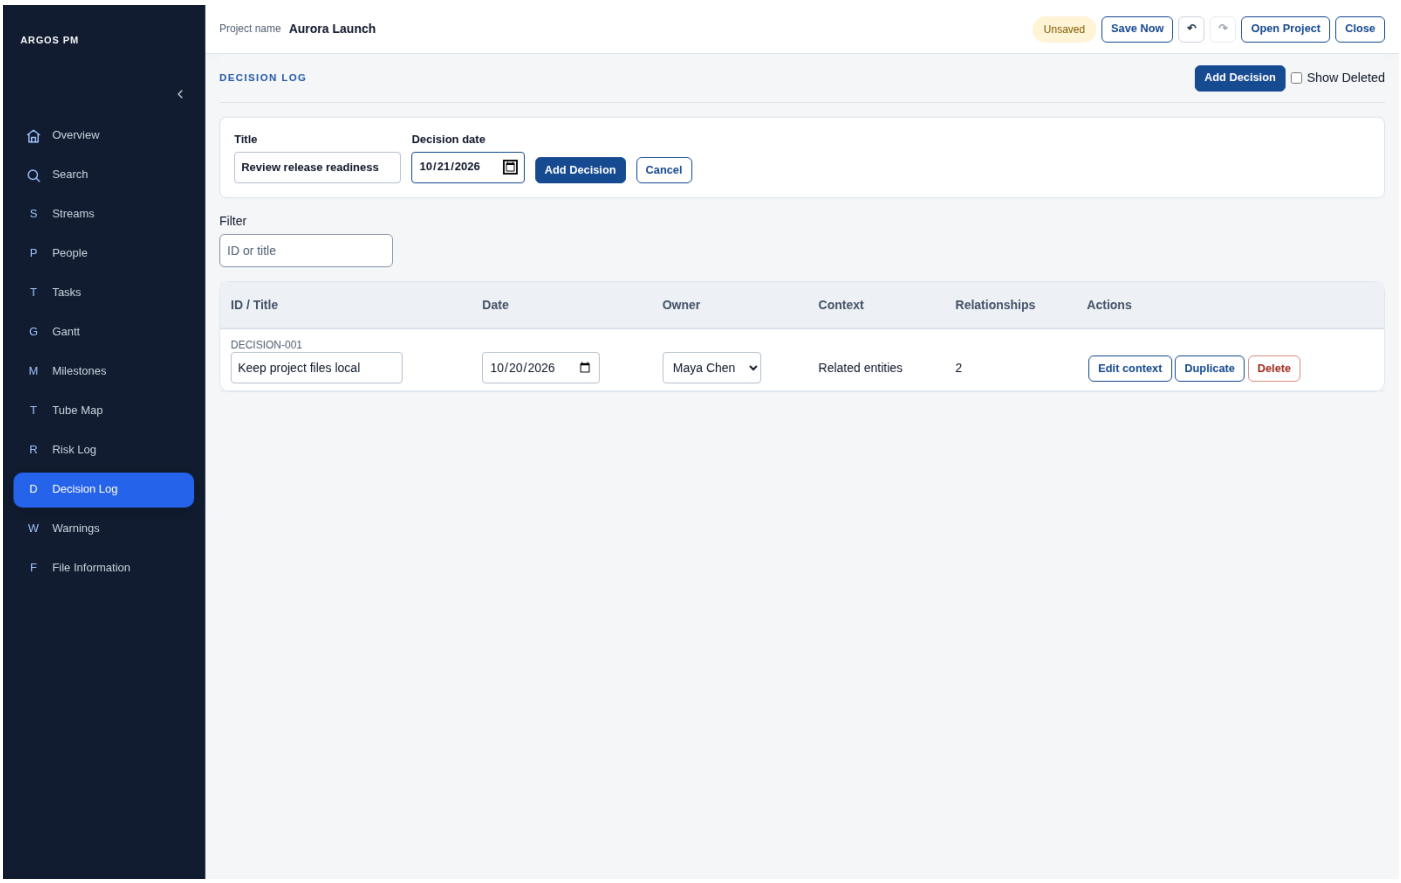


Figure 33. Decision creation form. (1600 × 1000; zoom for field detail.)

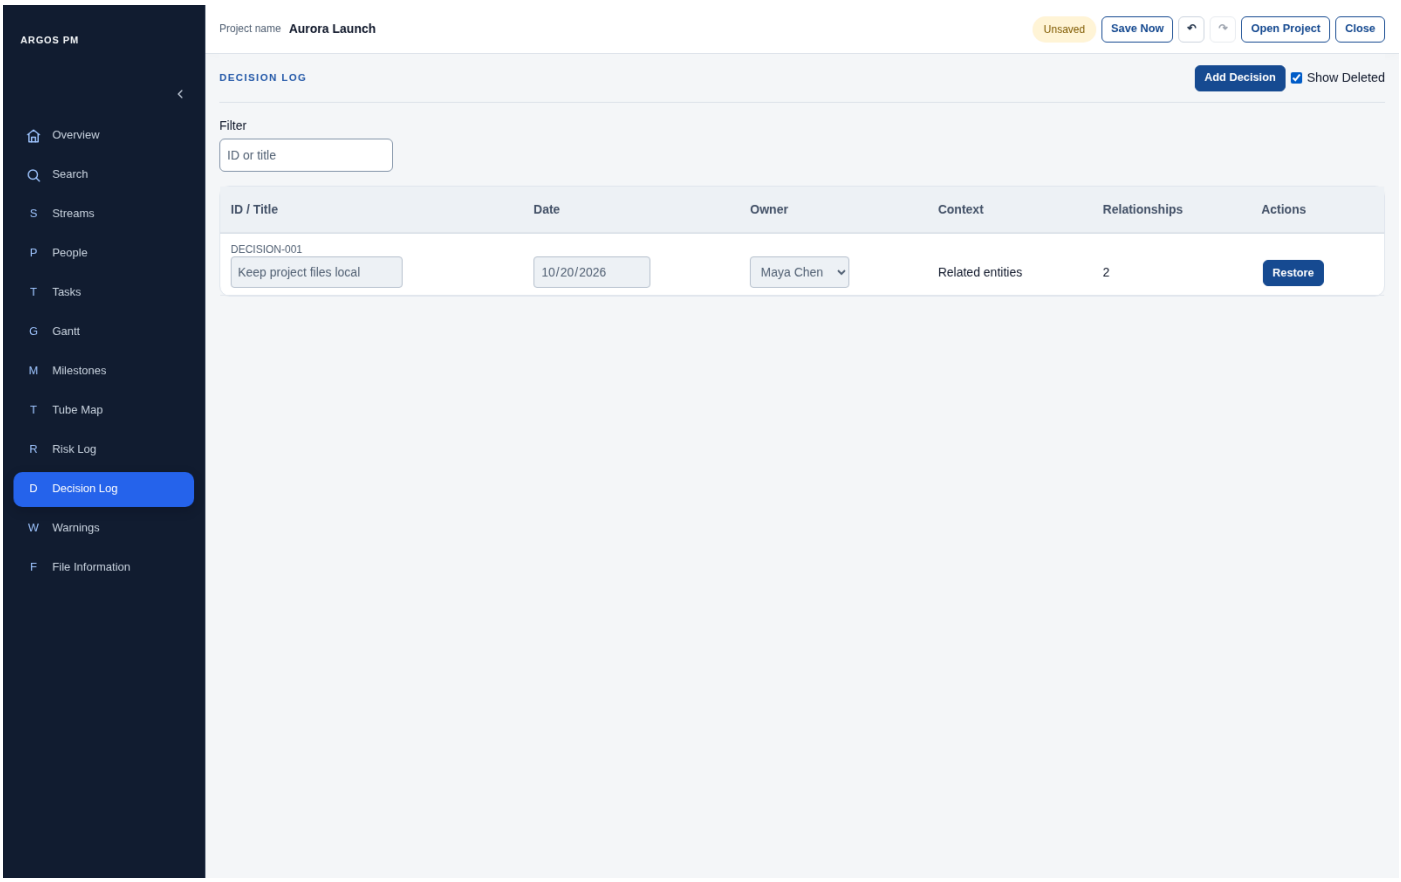


Figure 34. A soft-deleted record with Restore available. (1600 × 1000; zoom for field detail.)

Warnings

Warnings are derived from current project data. Correcting the underlying inconsistency removes the warning.

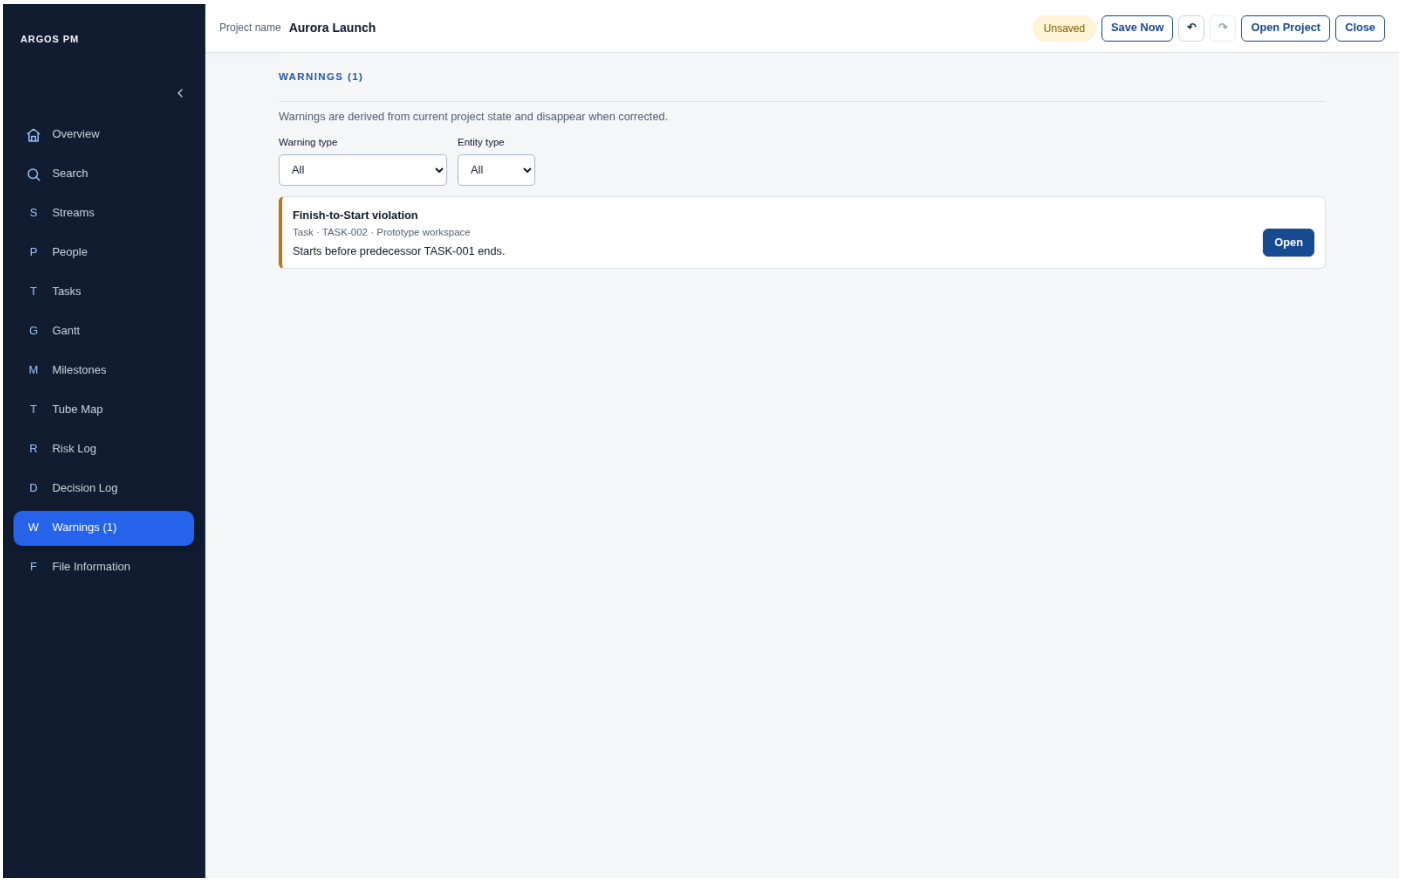


Figure 35. A genuine Finish-to-Start scheduling warning. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
WARNINGS (n)	Page heading with count	Shows the total active warning count.
Warnings (n) in navigation	Navigation count indicator	Surfaces the same project consistency count.
Warning type and Entity type	Filter selects	Narrow the warning list.
Finish-to-Start violation	Warning heading / type	Classifies the scheduling issue.
Task, TASK-002 and record name	Affected-record summary	Identifies the item requiring attention.
Explanatory sentence	Warning description	Explains the inconsistency.
Open	Navigation action button	Opens the appropriate module and targets the record.
Highlighted row	Navigation target highlight	Marks the record reached from the warning.
No project warnings / No matching warnings	Empty state	Distinguishes a clean project from a filter that matches nothing.
Remove dependency / Remove from milestone scope, when applicable	Corrective action button	Available for certain deleted-reference issues; not every warning has one.

Usage note: The example keeps TASK-001 as predecessor and corrects TASK-002 to start after TASK-001 finishes. The count then returns to zero.

Usage note: Do not call the navigation count a toast, or assume every warning is an error that blocks saving.

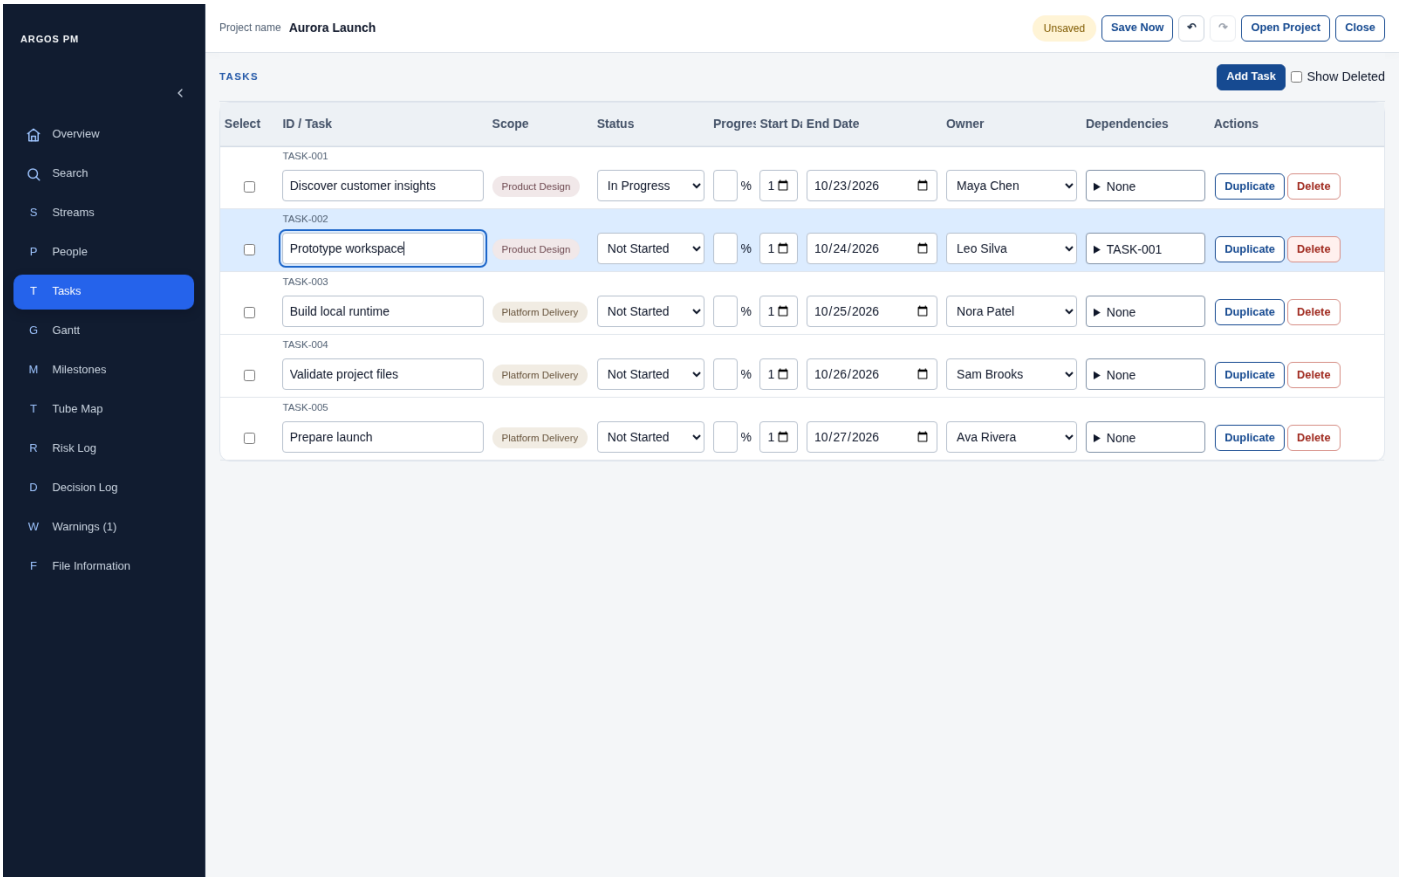


Figure 36. Open navigates to and highlights the affected Task row. (1600 × 1000; zoom for field detail.)

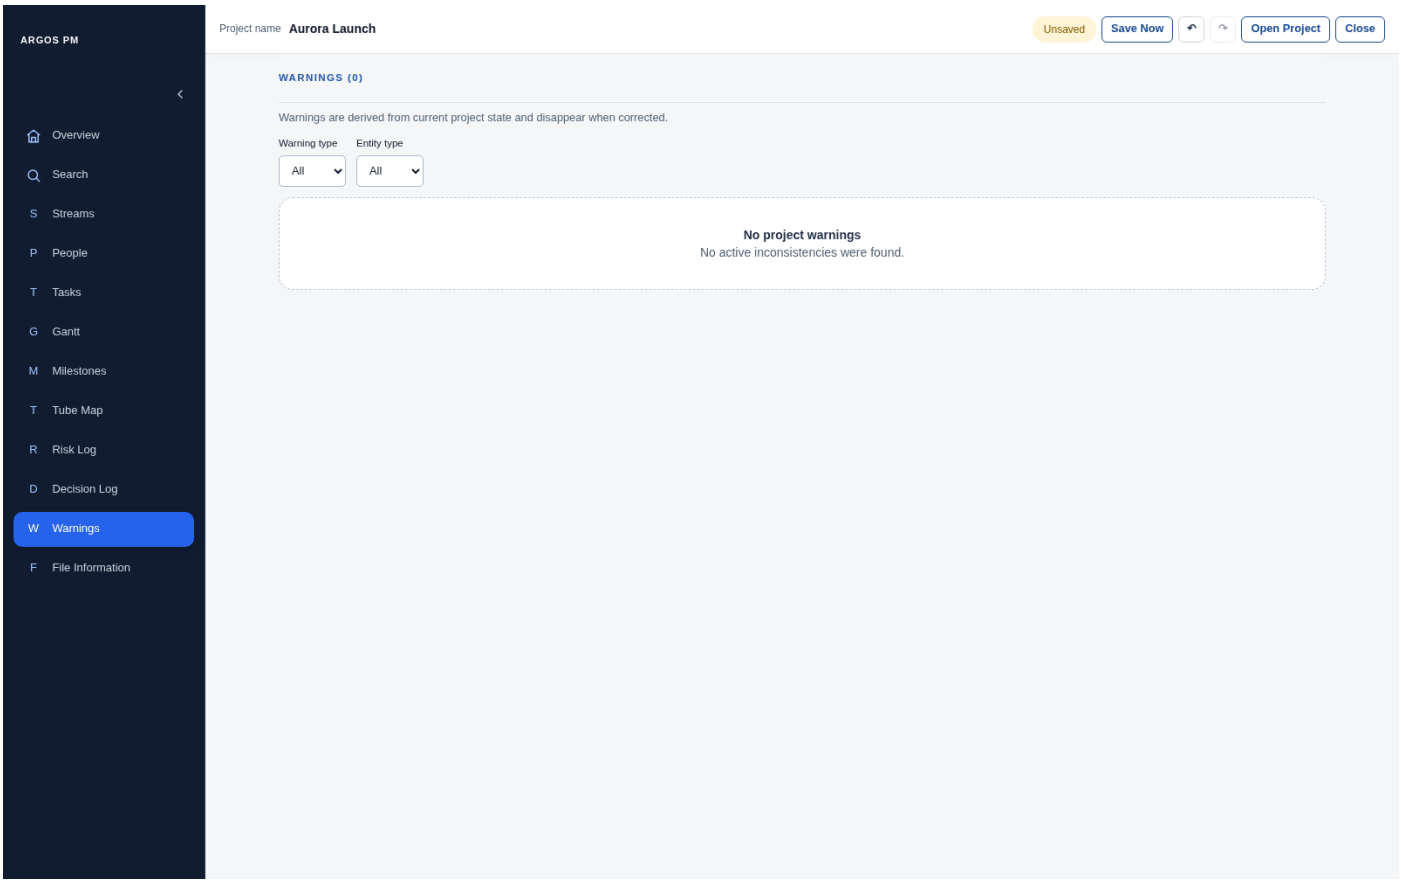


Figure 37. The empty state after the conflicting date is corrected. (1600 × 1000; zoom for field detail.)

File Information

This page describes the current local project file and the optional audit history stored inside it.

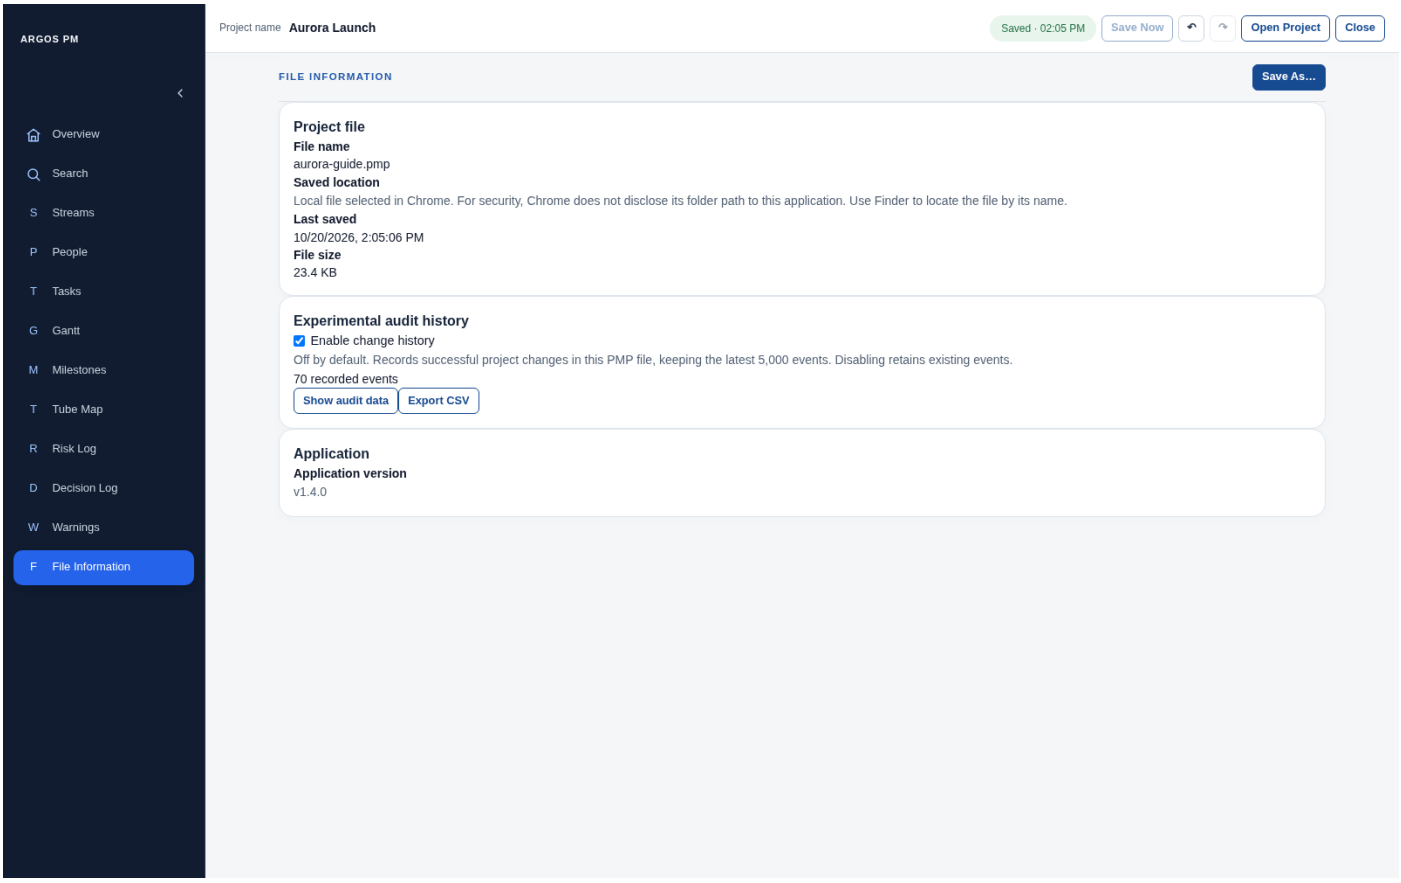


Figure 38. Project file metadata, audit controls and application version. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
FILE INFORMATION and Save As...	Page heading and file action	Save As requests another file through the browser picker.
Project file	Metadata card / section	Groups file name, saved location explanation, last saved time and size.
Experimental audit history	Optional feature section	Contains tracking and viewer controls.
Enable change history	Checkbox	Enables future recording of successful changes; off by default.
n recorded events	Count indicator	Number of retained events, not the number currently visible.
Show audit data / Hide audit data	Disclosure button	Opens or closes the viewer.
Export CSV	Export action button	Exports the full retained audit history, independent of the text filter.
Filter audit history	Text filter	Narrows displayed matching events.
Newest first / Oldest first	Sort-direction button	Changes chronological order.

What you see	UI term	Meaning / behaviour
Time, Change, Entity, Field, Before, After	Audit table column headers	Describe each recorded change.
Showing n of m matching events	Display-count summary	The viewer shows up to 50 matching events; the file retains up to 5,000.
Application / Application version	Metadata section and version value	Identifies the runtime version.

Usage note: The app does not disclose the full filesystem folder path. The Saved location text explains that browser boundary.

Usage note: Audit history is not the Undo/Redo stack. CSV export is not a PMP project save.

Usage note: Audit event Entity values can contain internal UUIDs as well as human-readable IDs; use the human-readable ID when reporting a UI issue.

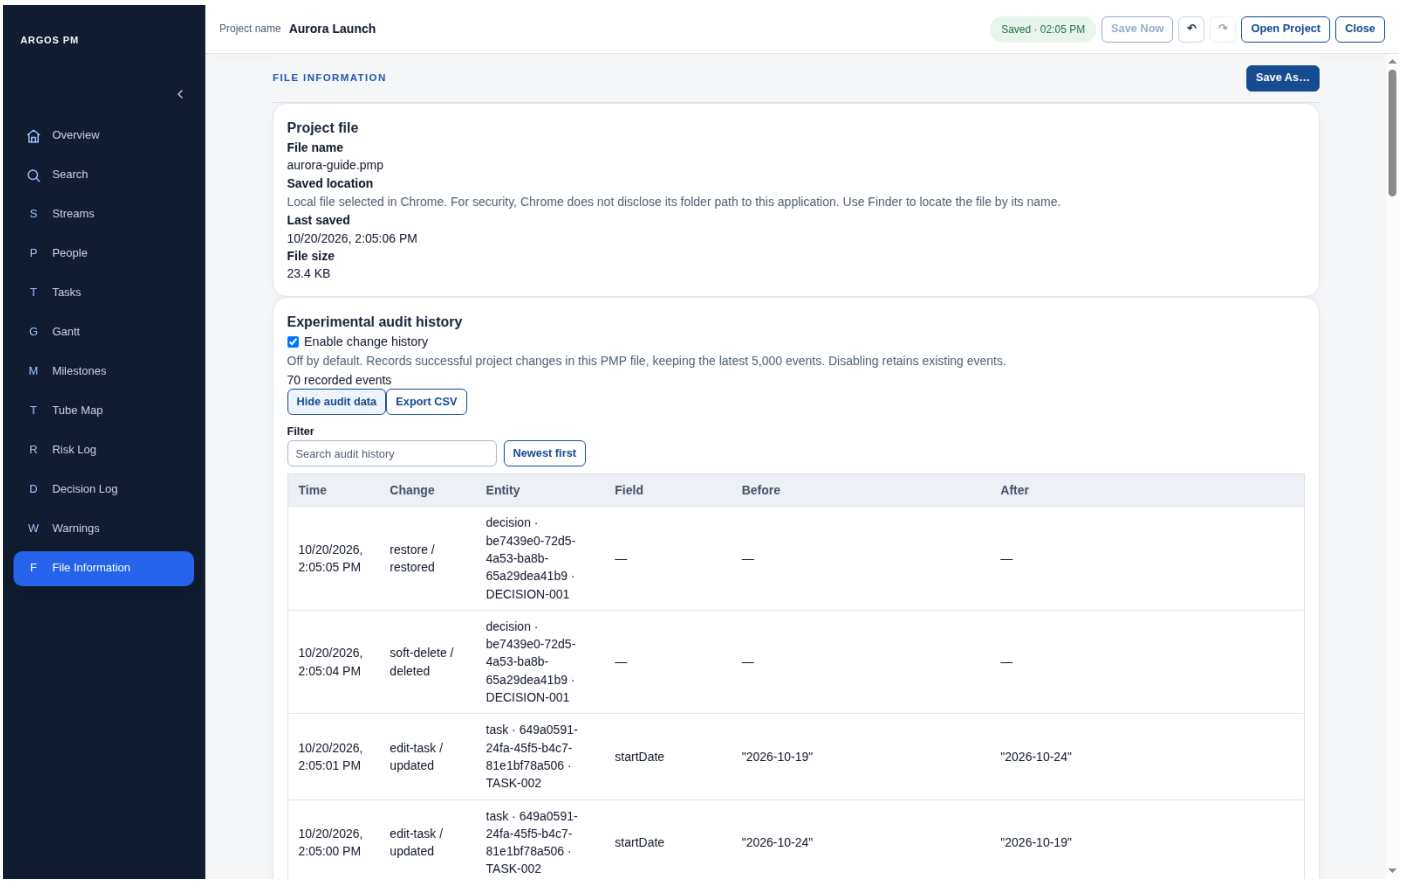


Figure 39. Audit history expanded at its top. (1600 × 1000; zoom for field detail.)

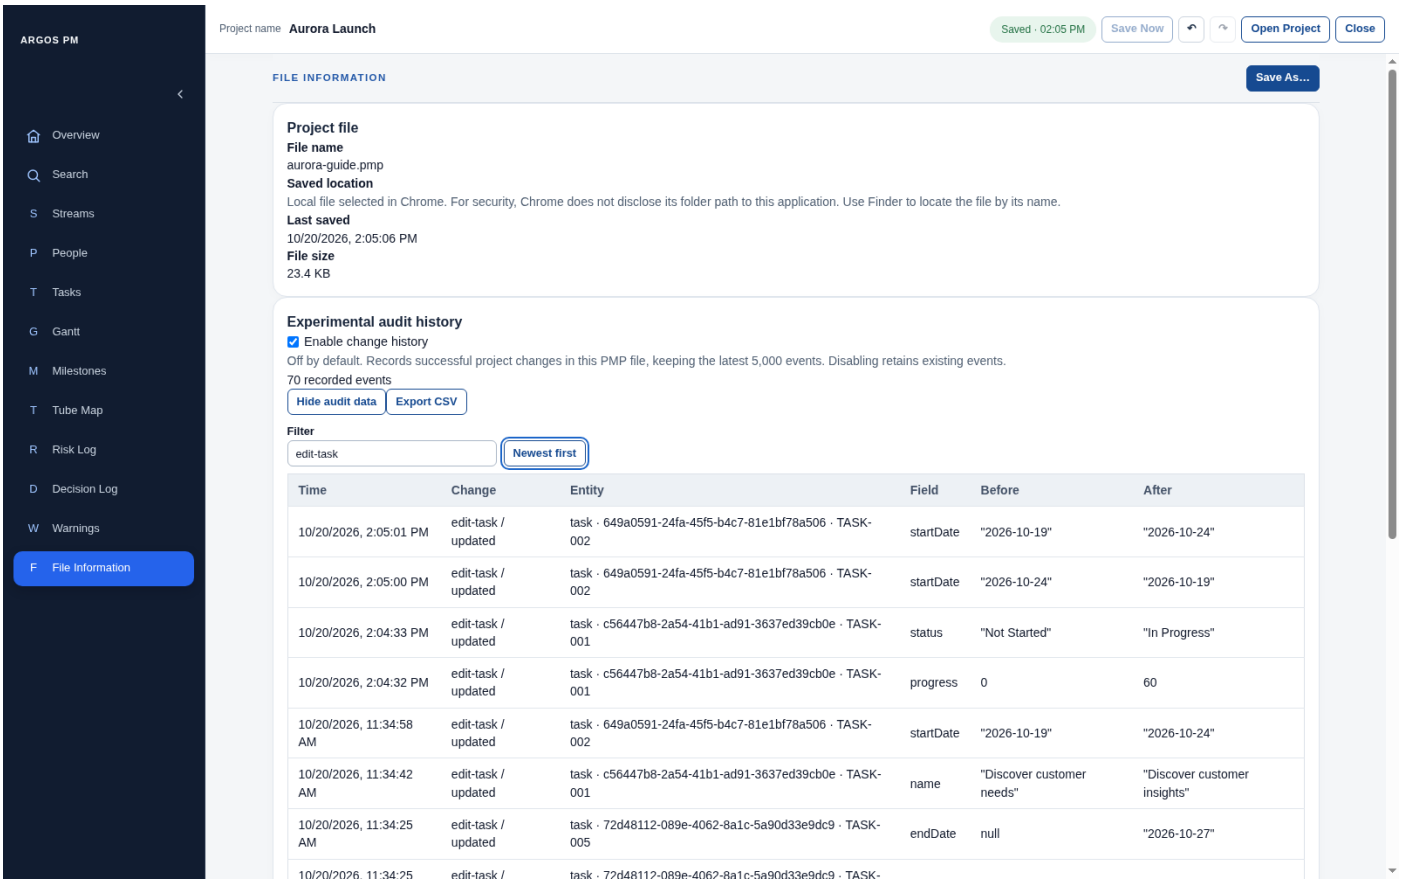


Figure 40. Audit viewer narrowed with the text filter. (1600 × 1000; zoom for field detail.)

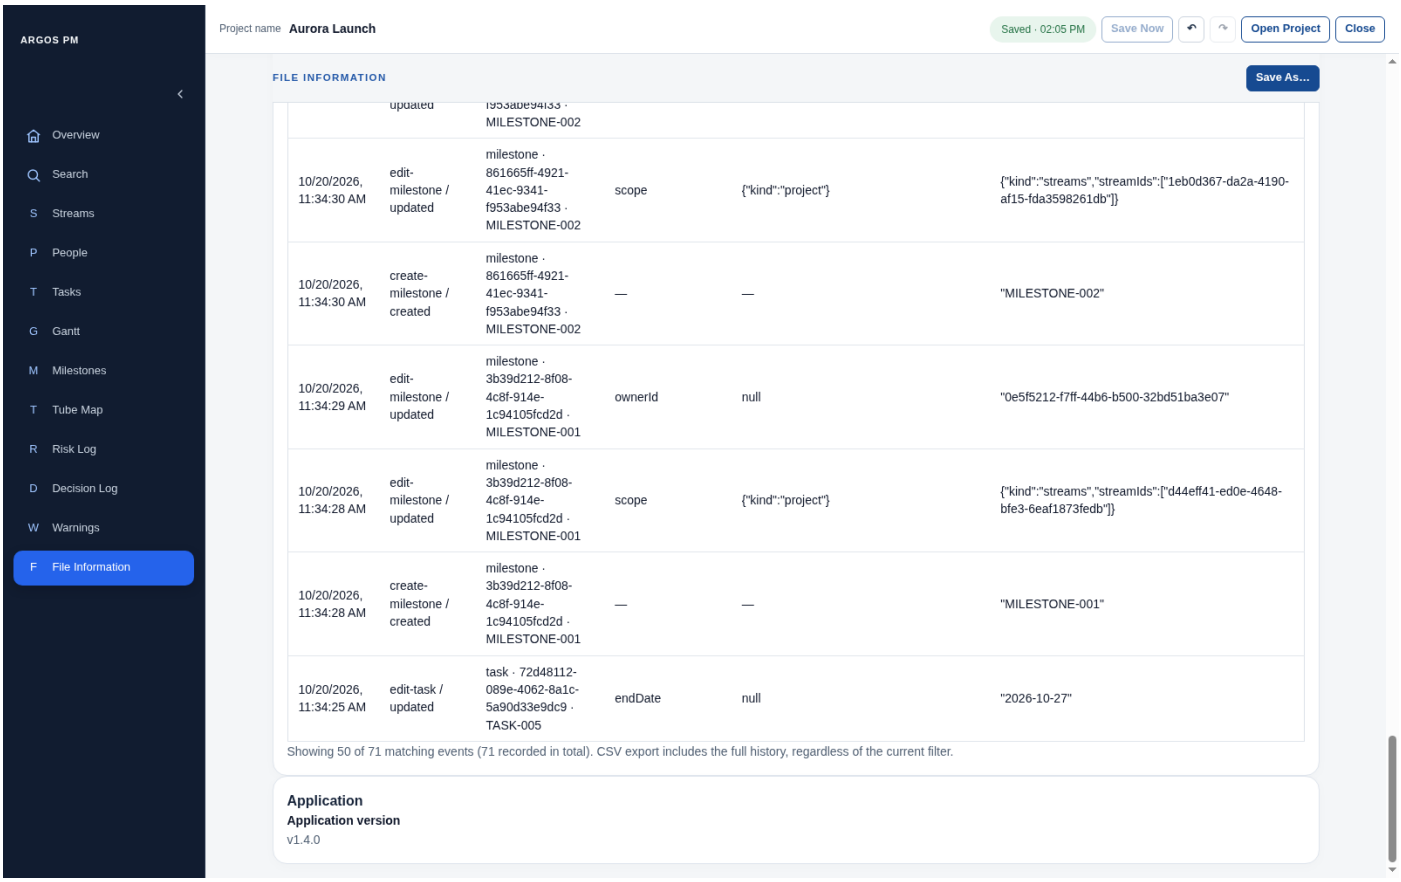


Figure 41. The audit display-count summary and application version at the bottom of the page. (1600 × 1000; zoom for field detail.)

Shared dialogs, alerts and feedback

Use the visual behaviour to name the component, rather than calling every message a popup.

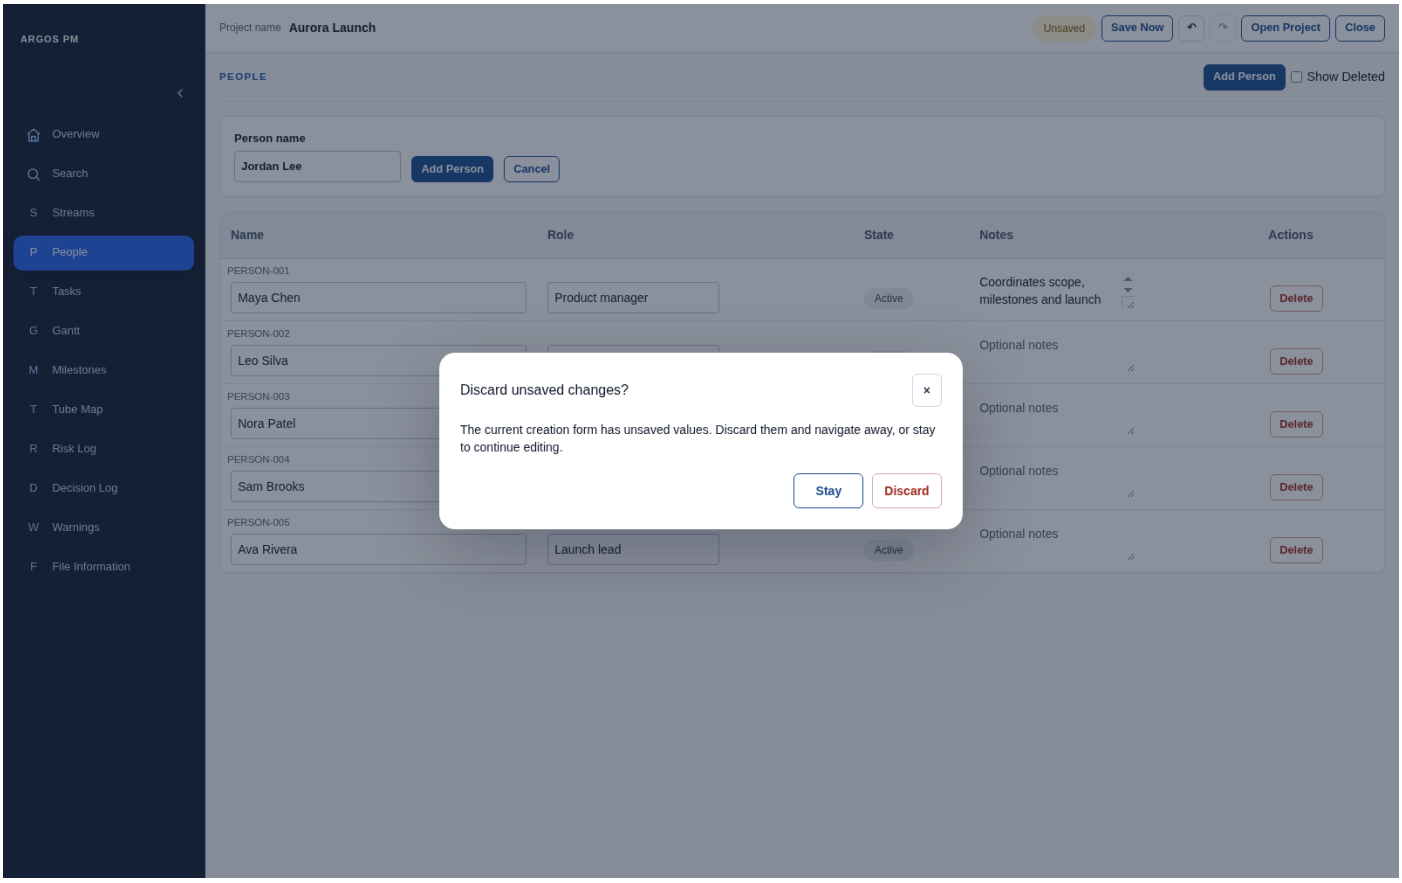


Figure 42. Modal confirmation shown when navigating away from a filled creation draft. (1600 × 1000; zoom for field detail.)

Terminology on this page

What you see	UI term	Meaning / behaviour
Discard unsaved changes?	Confirmation dialog	Blocks navigation until the user chooses what to do.
Stay	Secondary dialog action	Preserves the draft and remains on the page.
Discard	Destructive dialog action	Discards that creation draft and navigates to the requested page.
Dimmed background	Dialog backdrop	Distinguishes this modal from a small anchored popover.
Close icon	Dialog close button	Accessible name identifies the dialog it closes.
Save failed	Inline alert	Appears within the workspace, with recovery text.
Retry	Recovery action button	Attempts the project save again.
Save As, when shown after repeated failures	Recovery action button	Offers another file when the runtime exposes it.
Save failed in global header	Save-status indicator	Persistent state, distinct from the explanatory alert below it.

Usage note: The save-failure screenshot is an intentional test of the isolated fictional project. No user file was lost or overwritten.

Usage note: The guide does not force every browser/OS dialog or recovery condition. Uncaptured conditions such as external-file conflicts are not presented as photographed pages.

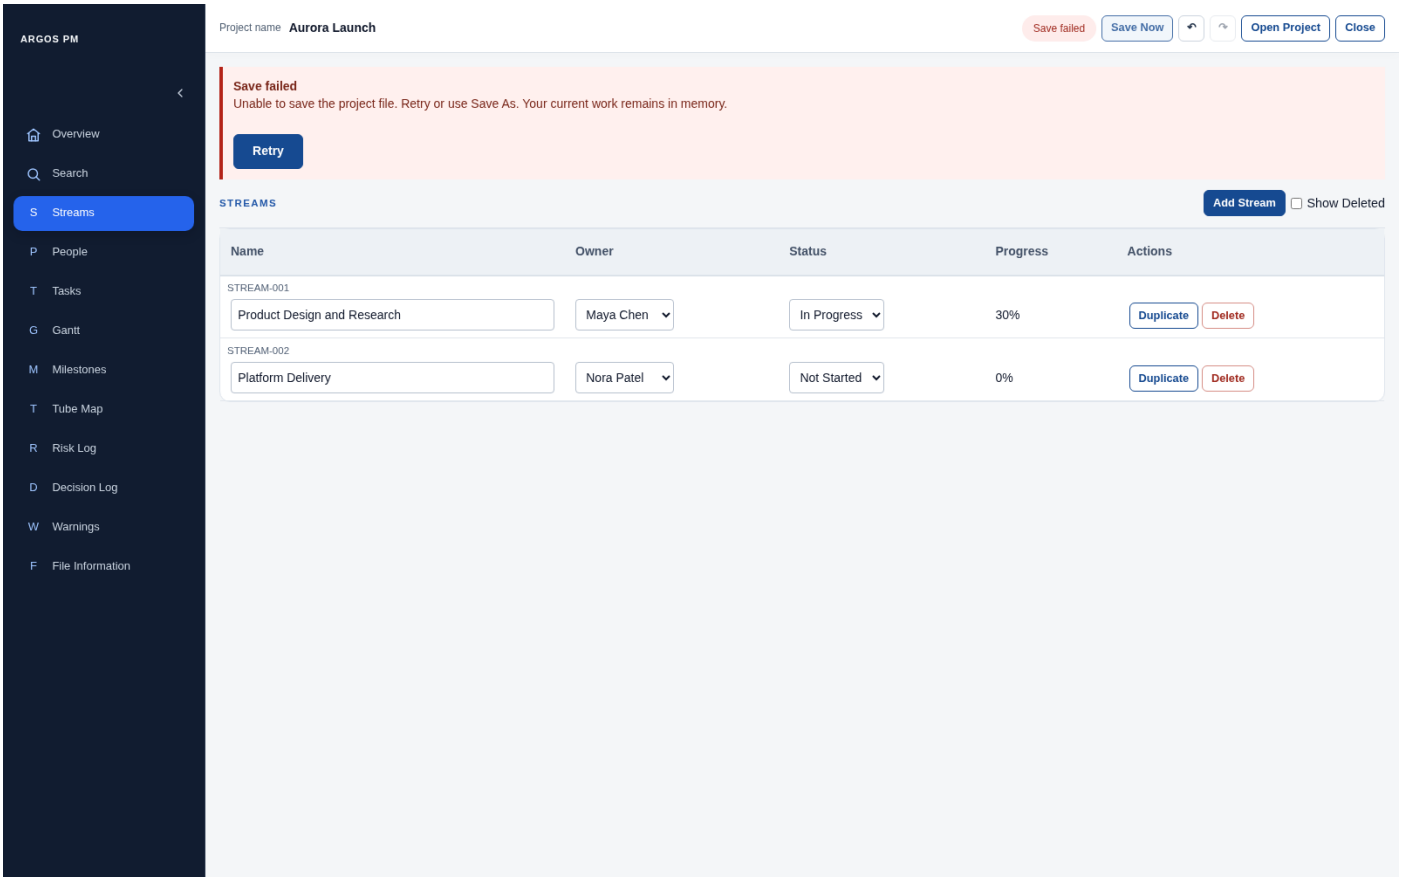


Figure 43. Real application save-failure alert generated through a controlled disposable file-handle failure. (1600 × 1000; zoom for field detail.)

Writing requests and reporting issues

Intention	Example request
Position a control	On the Risk Log page, move the Level filter into the page header beside Add Risk.
Change a field	In the People table, increase the height of the Notes text area for each record.
Change sorting	Make the Owner column header on the Tasks page sortable, with unassigned values last.
Describe expansion	On RISK-001, clicking the Actions expander should reveal the row details panel.
Describe a visual plan	In the Gantt view, keep the Today line visible when horizontal scrolling is used.
Describe an overlay	Anchor the Quick edit milestone popover to the clicked Tube Map diamond.
Describe a modal	In the Project Details dialog, place the close button in the dialog header.
Report a data issue	On the Warnings page, Open for TASK-002 should target the correct Task row.
Describe scope	In the Milestone scope selector, keep Project-wide exclusive and allow multiple Stream checkboxes.
Describe feedback	After Retry succeeds, clear the save-failure alert and update the save-status indicator.

For a bug report, include the record ID, current value, steps to reproduce and expected result. A screenshot helps distinguish hover, selection, focus and expanded states.

Keyboard and interaction reference

Shortcut / action	Behaviour
Ctrl/Cmd + S	Save the active project.
Ctrl/Cmd + K	Open Search.
Ctrl/Cmd + Z	Undo a project command when focus is outside a text editor; text fields can use native text undo.
Ctrl/Cmd + Shift + Z or Ctrl/Cmd + Y	Redo a project command when the app handles the shortcut.
Tab / Shift + Tab	Move keyboard focus; modal dialogs keep focus within the dialog.
Escape	Close supported dialogs or expanded selectors; closing Project Details follows its normal save-on-close behaviour.

Capture scope and limitations

• Captured against source commit 3d6318eddaa174c3284abb55c33f2cf6c8e1f194. Screenshots use a 1600 × 1000 desktop Chromium viewport and actual application controls; no interface screens were fabricated.

• All project names, people, tasks and notes are fictional, in disposable projects. No private user project was opened or overwritten.

• Native browser/OS file pickers are outside the application pages and are not pictured. The managed browser blocks filesystem pickers, so a separate in-memory picker test boundary supplied the fictional project; application forms, navigation, serialization and save/retry UI ran normally.

• The save-failure alert was exercised deliberately by making the disposable test file handle reject a write and then allowing Retry. It is not an incident involving a user file.

• The source files and captured DOM inventories were reviewed alongside the images. This is a terminology reference for visible v1.4.0 UI, not a promise that every possible error or browser-native dialog was photographed. Screenshot values and counts vary as the fictional walkthrough proceeds.

• Terms such as badge/chip and page/view overlap across design systems. This guide recommends one consistent vocabulary for ARGOS PM and calls out synonyms or misleading alternatives.